


Screwdriver

1421

- Phillips head, round shank
- DIN ISO 8764



KT NO.	No.	mm	inch	mm	g	
14210023	PH0	60	2-3/8	3.2	35	12 / 144
14210132	PH1	80	3-1/8	4.5	57	12 / 96
14210104	PH1	100	4	4.5	59	12 / 96
14210214	PH2	38	1-1/2	6.5	45	12 / 144
14210204	PH2	100	4	6.0	84	12 / 96
14210206	PH2	150	6	6.0	94	12 / 144
14210306	PH3	150	6	8.0	142	12 / 144

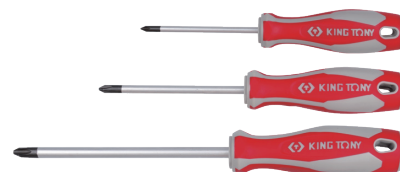

KT NO.	No.	mm	inch	mm	g	
14210112	PH1	300	12	4.5	85	12 / 96
14210212	PH2	300	12	6.0	129	
14210116	PH1	400	16	4.5	97	
14210216	PH2	400	16	6.0	151	



1421xx12
1421xx16

1422

- Slotted head, round shank
- DIN ISO 2380



KT NO.	mm	inch	mm	inch	mm	g	
14220303	3	1/8	0.5	75	3	3.2	38 12 / 144
14220404	4	5/32	0.8	100	4	4.0	56 12 / 96
14220503	5	3/16	0.8	75	3	5.0	59 12 / 96
14220504	5	3/16	0.8	100	4	5.0	63 12 / 96
14225503	5.5	7/32	1.0	75	3	5.0	71 12 / 96
14225504	5.5	7/32	1.0	100	4	5.0	75 12 / 96
14225505	5.5	7/32	1.0	125	5	5.0	79 12 / 144
14225506	5.5	7/32	1.0	150	6	5.0	83 12 / 144
14226514	6.5	1/4	1.2	38	1-1/2	6.5	46 12 / 144
14226504	6.5	1/4	1.2	100	4	6.0	83 12 / 96
14226506	6.5	1/4	1.2	150	6	6.0	95 12 / 144
14220806	8	5/16	1.2	150	6	8.0	141 12 / 144
14220807	8	5/16	1.2	175	7	8.0	153 12 / 144
14220808	8	5/16	1.2	200	8	8.0	163 12 / 144
14221008	10	3/8	1.6	200	8	10.0	214 12 / 72



KT NO.	mm	inch	mm	inch	mm	g	
14220512	5	3/16	0.8	300	12	5.0	94
14220516	5	3/16	0.8	400	16	5.0	109
14226512	6.5	1/4	1.2	300	12	6.0	129
14226516	6.5	1/4	1.2	400	16	6.0	150



1422xx12
1422xx16