QUALITY
INNOVATION
HEALTH
ENJOYMENT

KING TONY

ENJOY YOUR WORK



KING TONY

2024/25 CATALOGUE



New products

- Tools Storage & Tools System Sets
- Hand Sockets & Accessories
- Impact Sockets & Accessories
- Pneumatic Tools
- Torque Control & Multipliers
- Wrenches
- Pliers
- Pipe Tools
- Screwdrivers & L-wrenches & Bits
- VDE Insulated Tools
- Electronic & Electrical
- Hammers & Striking Tools
- Workshop Tools
- Lighting
- Automotive Tools
- ST Series Tools

N1

16
134
232
264
290
316
350
364
374
424
434
468
476
500
516
614



NEW

KING TONY

Company Profile

In 1976, amidst a lack of capital and technology in Taiwan, Mr. Charles Lai & Mr. Tony Lin founded a hot forge factory specializing in making hand tools for the DIY market. Eight years later, many other companies had followed their lead and although the market grew quickly, quality suffered. With pricing, costs and quality nearing a state of chaos it became clear to KING TONY's founders that they needed to seek a new direction.

Mr. Lai & Mr. Lin found their new direction; making professional quality hand tools built to compete with the best in the world. They set their standards high and in the years since, have consistently exceeded the requirements of the world's toughest standards. KING TONY tools don't just meet the DIN (German) standard and the ANSI (U.S.A.) standard, they routinely exceed them. In fact, we test every torque make to a standard 30% higher than that prescribed by DIN and our pneumatic impact tools to a 50% higher standard. That's true commitment to quality!

To further underscore our determination to compete with the best in the world we have achieved certification with ISO on three separate standards. First, in January 1998, ISO 9002, followed by ISO 9001 and more recently we have qualified for the environmental safety standard, ISO 14001. We believe that is our responsibility to the world and we will always dedicate to reduce the harm to the earth during our manufacturing process in the future.

You might sense that King Tony Tools is about much more than a world-class tool. The ideals of KING TONY's management are fulfilled daily by our hundreds of employee's at our branches and offices around the world. You will find KING TONY Tools and its branches in: France, Spain, Belgium, Mexico, China. Each of our local branch offices is tasked with insuring that you, our customer, are happy not just with our quality but with the experience of being a KING TONY customer.





KING TONY

VISION

KING TONY engaged in supplying professional tools for more than 38 years, we always focus on supplying quality tools to our customers to make sure the quality satisfies the working requirement. To finish a professional job is a dream and target for every mechanic, and to finish it more easily and perfectly is even a better achievement. Thus, every mechanic can really enjoy their work. From this motive we have a goal that is to make every mechanic know, when they use KING TONY professional tools, they will quickly, perfectly and easily finish their work. They may feel more of confidence and enjoy what they do. To achieve this goal, we will continue to supply tools that is easy to take, easy to use, save time and strength. Our future vision is to tell every mechanic who uses KING TONY tools "enjoy your work", which contains the meaning to use good tools to do good jobs and have real enjoyment in the process. Why not find your enjoyment from your job, take KING TONY professional tools and you will start to experience it.



1993
Super
Standard



1996
Close
Tolerance



1999
VDE
Safety
Grip



2007
Masters
of Torque



2012
Dual
Colors
Stripe

BE INSPIRED & MILESTONES

KING TONY

KING TONY

Enjoy your work



Distribution

Branches :

- **France :**
  3 Rue des imprimeurs, ZI République Nord, 86000 Poitiers, France
- **Spain :**
  Calle Valderribas, 14, Local Comercial Modo, 28007 Madrid, España
- **Belgium :**
  Avenue Louise 143, Boîte 4, 1050 Bruxelles
- **Mexico :**
  Av San Jose No. 15-A,Col. , Zona Industrial La Presa, C.P. 54187 Tiainepantia, Edo. De Mexico
- **China :**
  No. 3 Building,No.285 Jingmao Rd., Industrial Park of Suzhou, Suzhou, Jiangsu, China



TAIWAN SUPERIOR BRANDS



NATIONAL BRAND YUSHAN AWARD



BUSINESS MERIT AWARD NATIONAL QUALITY AWARD

ISO 14001



Create to improve,
protect where we live,
balance environment and human.



TAIWAN EXCELLENCE



DESIGN AWARD 2016

Intellectual Property



Metric size

Imperial size

New Registered Trademark


Please recognize KING TONY's official registered trademark.



Trademark Worldwide Registration

KING TONY

Inspection Equipment

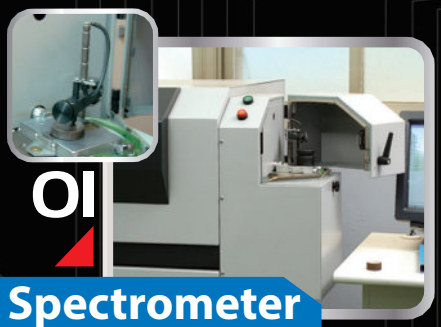

01

Spectrometer

Metal material elements analysis



02

Gauge measurement

Measure the screw tap to meet LEVEL I tolerance of DIN standard



03

Rockwell hardness tester

Test the product's hardness to meet KING TONY quality standard



06

Torque tester

Fracture test to check the max. torque to ensure excess of DIN standard



07

Precise cutting machine

Cut for a smooth section



11

Environmental simulation test of temperature & humidity

Simulate temperature from 70 °C ~ - 20°C to test product reaction and durability while obvious change of temperature



12

Tension tester

Test pulling force of product especially for joint workpiece according to DIN standard



13

Hammering tester


Test the lifetime of striking hammer and security of the joint of hammer& wooden shaft



16

Micro- torque tester

Test products with smaller torque such as bits for their durability

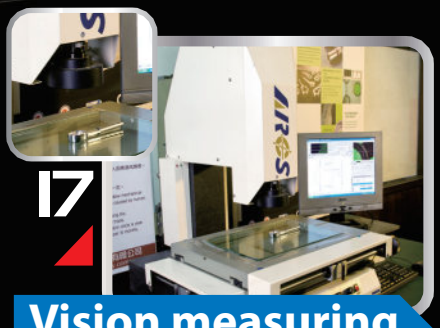

17

Vision measuring machine

Measure parts for difficult angle or in the narrow space

KING TONY



04

Salt-water spray tester

48 HRs environmental simulation test to check product's durability from being rusty



05

Thickness test of plating

Apply special chemical to check thickness of plating and ensure it reaches KING TONY 's standard



08

Mounting press machine

In order to fix tiny and multilateral workpiece



09

Grinding & polishing machine

Make surface of workpiece smoother and clearer for further observation



10

Micro- hardness tester

Analyze the change of metallography after heat treatment and the difference of hardness between surface and central location



14

Pliers class measure tester

Test the cutting force and durability



15

Torque wrench tester

Follow the DIN ISO & ASME standard to test torque tolerance by 3 points of the lowest point, 60%, and 100% of max. scale



18

Carton busting strength tester

Test the strength of carton in order to assure good packing quality



19

Insulated tester

Ensure products are insulated under the voltage 1000V

KING TONY

Production Process



01

Hot forge

Heat to take shape and complete fibers to improve durability



02

Lathing

Control sockets external diameter and the roundness



03

Drilling

Drilling pin hole on the groove to offer socket safety operation



06

Punching & Broaching

Make accurate dimension for the spanner



07

Marking

Stamp dimensions, material and manufacturer



11

Grinding

Remove oxide layer and ensure sockets roundness for follow process precision



12

Plating

Nickel-chrome plated to protect product from corrosion and improve finish



13

Phosphate sunk

Increase impact sockets wear resistant and prevent corrosion to improve the durability



04

Machining (CNC)

Finish complicated process to ensure the precision of product



05

De-burring

Remove the burrs and chamfer on square hole



08

Heat treatment

Enhance product performance to achieve max. hardness



09

Vibrating

Remove oxide layer and burrs for surface coating



10

Sand blast

Remove oxide layer and burrs for surface coating



14

Silk printing

The unique bi-colors silk printing design and is easy to distinguish metric and imperial dimension



15

Rubber stripe assembly

The unique bi-colors rubber stripe design and is easy to distinguish metric and imperial dimension

KING TONY


KING TONY


KING TONY
Enjoy your work
www.kingtony.com


KING TONY


KING TONY
Enjoy your work
HYDAC
rayflex
KING TONY

Exhibitions





Sponsor & Partnership







KINETONY


KING-TONY.COM.AU
E GET IT
lifetime guarantee.


KING TONY
GARCAREK
ALMAR


KING TONY



KING TONY


KING TONY
KING TONY

KING TONY


KING TONY
Enjoy your work
14 · XL · 91
MS GROUP
MARQUES DOS SANTOS
www.kingtony.com
• Quality • Innovation • Health • Enjoyment

Branding to Target Users

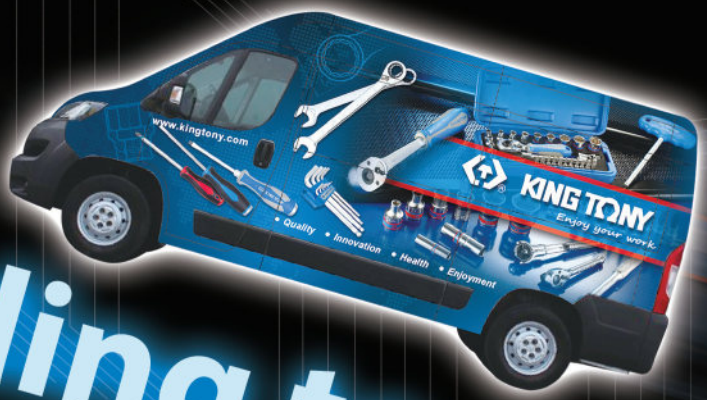





KING TONY

KING TONY TOOL TROLLEYS

SQUAD Series

KING TONY is very devoted to developing professional tools that meet user needs. In order to create a better storage for your professional tools, we have developed a new series of work station. From tool trolley to workbench, they are all the necessities for a professional mechanic

From industry, auto repair to general repair channel, we have visited countless users to hear their aspirations for tool storage. The purpose is to design the best meet needs product. It's consistent with our brand vision, "To provide professional tools to make customers feel comfortable and to help them with their work"

Just as our new series of tool trolley, the birth of this professional tool trolley series are to fulfill the needs of tool storage
Each model contain it's own characters for various of circumstances.
The ultimate purpose is to have them become your trustiest backup and support in your garage



NEW

Load bearing

- Overall supporting weight for tool trolley at a safety level
- Overall supporting weight for drawers at a safety level

Convenient

- Convenient and safety with Central lock system
- 100% drawer opening, does not interfere with the removal of tools
- 360° swivel wheel with brake function
- The size of the drawer conforms to TCS, and the tool set can be purchased freely according to the demand



Robustness

- Body frame are constructed with one-piece steel sheet for integral strength
- The bottom of the drawers are stamped in order to strengthen effectively

Protection


- Protection bumpers are for to avoid collisions and to protect object during maneuver
- Risk Free System (RFS) allows open one drawer at a time which prevents the loss of center of gravity from tilting and unstability
- Press to open drawer is a safe and reliable system

SQUAD Tool Trolley

For time being, KING TONY has reached to another level of making tools trolley, in this year, we have invested a whole new direction for your satisfication. Newly from concept to final product, from structure to finishing and even from top to bottom, we strive all our best into them

Start from the series name "SQUAD", it comes from the gaming industries, we believe this trolley can be extended to other business, and gaming is one of the potential market. This wording means a professional team which is us at KING TONY

This series have 4 models, Model D, Model D+, Model Dx, Model SW.
Each model size are differ, storage space are not the same, it depends on your demand. Certainly one of them would fulfill your garage
This series of tools trolley is a milestone for KING TONY







- Shape and outline of bumpers correspond to the lid, which makes a connection in between,with cut through pattern shows more energetic outlook
- ABS corner protection bumper



- keylock usually in front or in the middle or side of the drawers, The reason we place in the corner is we have noticed that the keys will swing around while trolley was moving and scratched the surface of the trolley plus it altered the outlook



Normal way of using handle



Ergonomic way of using handle which more convenience for steering just like steering a car




- Extra-large ergonomic handle



NEW


Model D






Model D^{x}




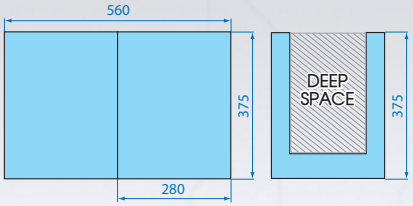


Model D^{+}




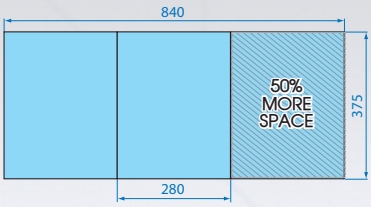

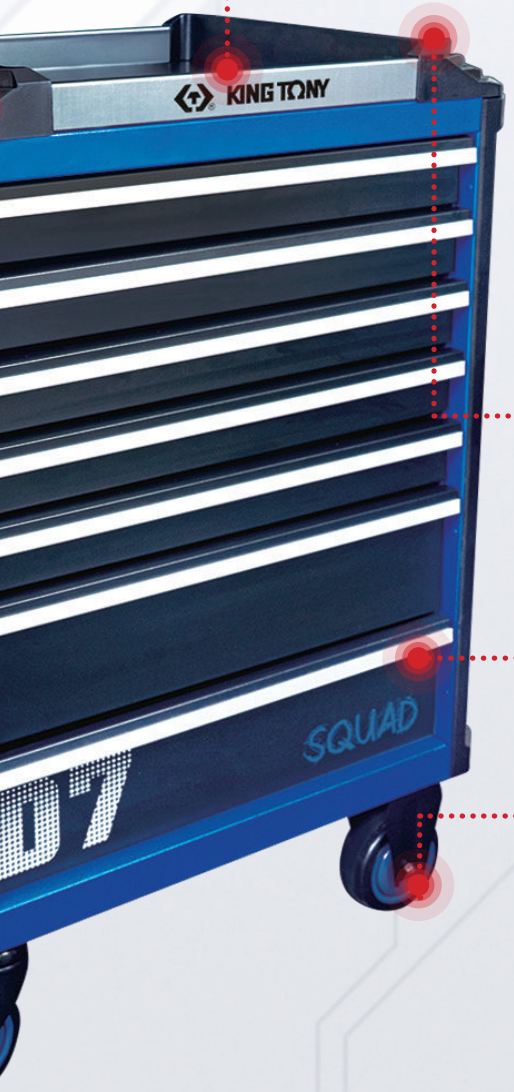



- Worktop depth has increased than previous models, parts are less likely to roll out



- Two models come in different size worktop



- Trapezoidal-shape storage space, easy to reach stuff





- Dual colors
- With brake systems



- Aluminum drawer strip, easy to pull out
  The drawer is with auto closure function

NEW

Features


- Dynamic top cover
- Stainless steel worktop
- Structure strengthen
- Stylish bumpers
- Additional space for accessories
- Aluminum drawer handle
- RFS locking system (one drawer at a time)
- 5"x2" TPR high performance casters
- Central key lock
- 100% pull out drawer with auto-return




Model D

87SQ31



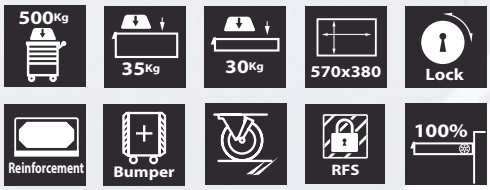

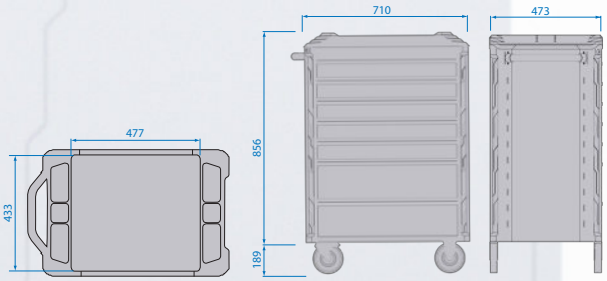


KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87SQ31-6B-BK	3 Drawers	570 x 380 x 70	5"x2"	500	63.00	14.30
	3 Drawers	570 x 380 x150				
87SQ31-7B-BK	5 Drawers	570 x 380 x 70			66.00	
	2 Drawers	570 x 380 x150				
87SQ31-8B-BK	7 Drawers	570 x 380 x 70			69.00	
	1 Drawers	570 x 380 x150				

Model D^{X}

87SQ32



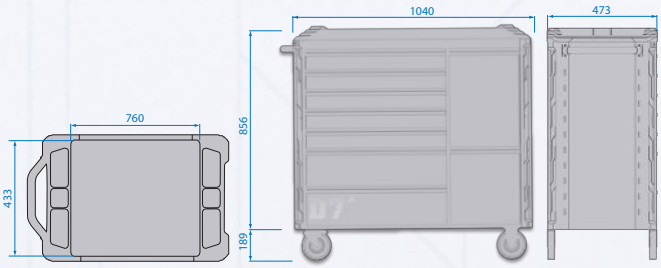


KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87SQ32-8B-BK	3 Drawers	570 x 380 x 70	5"x2"	700	90.00	22.85
	3 Drawers	570 x 380 x 150				
	Square Drawer	270 x 380 x 280				
	Bulk Square Drawer	270 x 380 x 380				
87SQ32-9B-BK	5 Drawers	570 x 380 x 70			92.00	
	2 Drawers	570 x 380 x 150				
	Square Drawer	270 x 380 x 280				
	Bulk Square Drawer	270 x 380 x 380				
87SQ32-10B-BK	7 Drawers	570 x 380 x 70			94.5.00	
	1 Drawers	570 x 380 x 150				
	Square Drawer	270 x 380 x 280				
	Bulk Square Drawer	270 x 380 x 380				

Model D^{+}

87SQ33



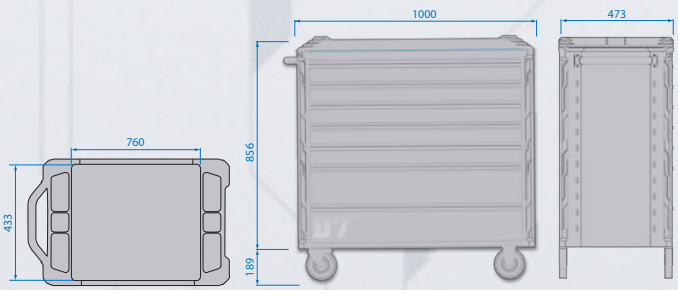

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87SQ33-6B-BK	3 Drawers	850 x 380 x 70	5"x2"	700	81.00	22.03
	3 Drawers	850 x 380 x 150				
87SQ33-7B-BK	5 Drawers	850 x 380 x 70			86.00	
	2 Drawers	850 x 380 x 150				
87SQ33-8B-BK	7 Drawers	850 x 380x 70			91.00	
	1 Drawers	850 x 380 x 150				

NEW

Superb Workbench

Within this series, we are delighted to introduce new Superb workbench
An advanced model that absolutely would be no miss in your garage

Every inch of space can be used in this trolley,
It has enormous amount of storage space
equipped with 10 standard drawers, 1 peg board drawer, 3 cabinets with lock
Besides, unlike what you have seen in market, each side of this trolley are functionable
Would be ideal for a team of professionals to share this tank and of course solitary is also suitable
Furthermore, extra large and thickness working wooden top allows you to study your products in details and longer durations without damaging body of the trolley
1 meter in height suits most people at a comfortable position
This highly functionable super tank are made for professional





- Doors cabinet with key lock for valuable electonic products
- Internal size : 654x376x205mm



- Able to fit other common accessories
  Size 435x501mm

- Additional storage space






- Vertical wrenches peg board drawer for hanging wrenches vertically
- Internal size : 385mm x 378mm




- Paper roll trash bin or could be can/bottle holder
- Paper roll holder
  Size 435x501mm

87SQ34-10B-BK

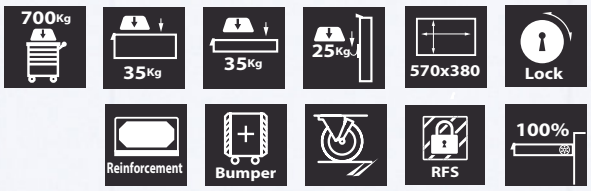



- Wide work top given 1235mm x 800mm space
- High end extra thick wood top
- Extra long metal handle bar for easy maneuver
- 10 drawers, plus 1 wrench hanging drawer
- 3 storage cabinets, from large to small for different storage purposes, all with key locks
- Able to fit other common accessories
- Absolute rectangular shape which fits every corner

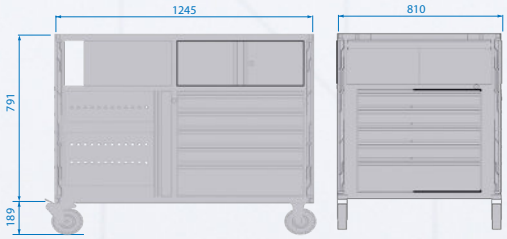


KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87SQ34-10B-BK	8 Drawers	570 x 380 x 70	5"x2"	700	130.00	41.63
	2 Drawers	570 x 380 x 150				



- Thickness: 32mm
- Size:1235x800mm

- Extra long Handle bar

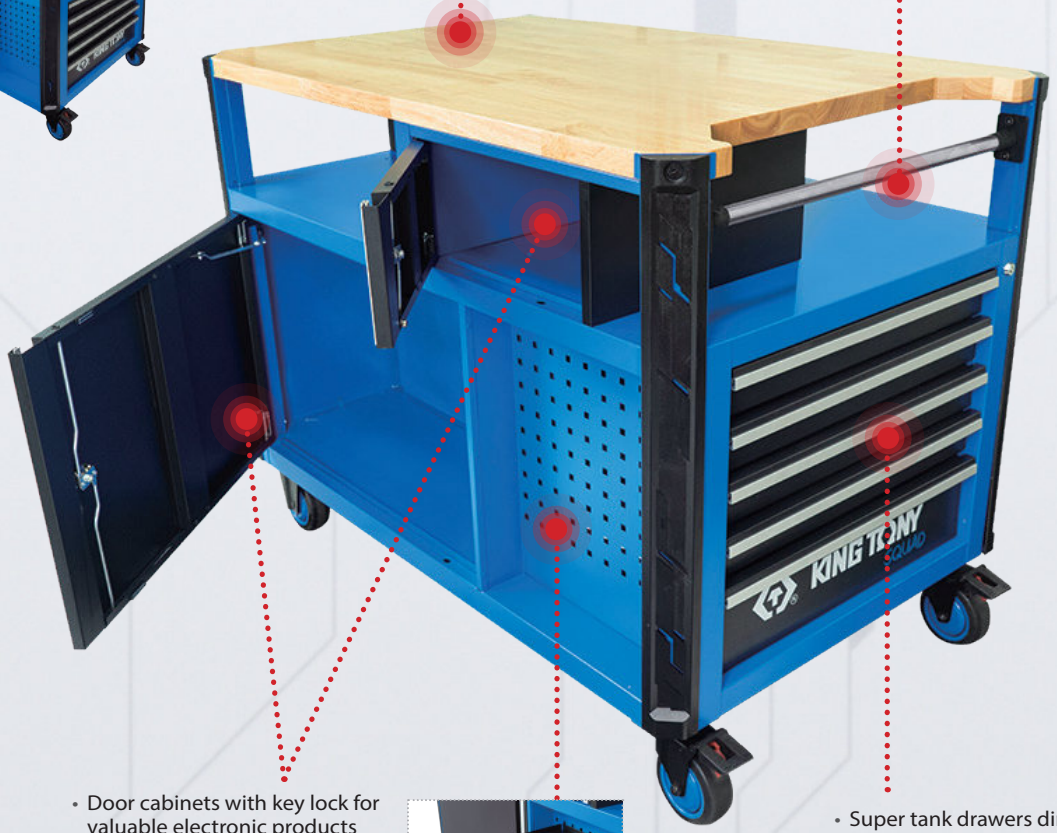

- Door cabinets with key lock for valuable electronic products
- Internal size: 389x406x202mm
- Internal size: 791x523x329mm



- Size: 426x499mm


- Super tank drawers dimension
- Internal size : 570x380x70mm
- Internal size : 570x380x150mm
- Multiple drawers at side

Accessories



Hook type

87SQ3-11



- Side pegboard
- If the right side of trolley do not have enough sufficient space, you might as well bought additional peg board for accessories
(W)325 x(H)683

87SQ3-12



- Document holder
(W)325 x(H)260 x(D)34

87SQ3-22



- Bottle holder
(W)320 x(H)101 x(D)74

87SQ3-13



- Shelf pegboard
(W)640 x(H)540

87SQ3-32



- Phone holder
(W)200 x(H)52


87SQ3-31



- Laptop or ipad holder
(W)378 x(D)285 x(H)79



- 3 angles of adjustment are available, 20°/45°/60°
- Can be turned left or right 360°



- Underneath the rack has a drawer for stationery storage




NEW

NEW

Hook type

87SQ3-23




- Power tools holder (W)285 x(D)172 x(H)71





- Left side of holder has three slots that are able to hang tools, hose or wrenches etc
- Right side of holder has 3 hooks for cleaning cloths, gloves, wires etc

87SQ3-33




- Folding shelf (W)398 x(D)280 x(H)179

87SQ3-41



- Trash bin (W)275 x(D)150 x(H)136

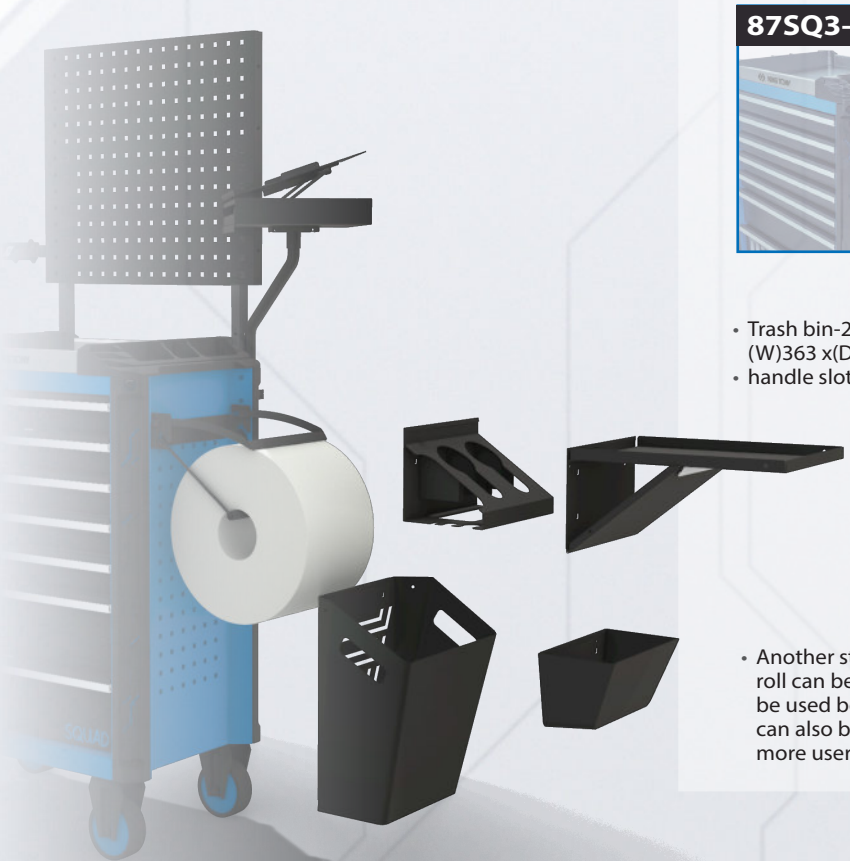

87SQ3-42



- Trash bin-25 Liters (W)363 x(D)232 x(H)411
- handle slots on the side

87SQ3-51



- Paper holder (W)280 x(D)308
- For paper roll within 280mm wide



- Another strength of the accessories is that the paper roll can be inserted on top of the trash bin, which can be used both at the same time at the same place, it can also be used seperately. This combination makes more user friendly and unique for this trolley

NEW

Tool Set Content

9-91215MRV

Blow case size (mm) :
422 x 360 x 90 (0.48 cuft)

Contents	5.11 kg	1 / 4
1062	27, 28, 29, 30, 32	
373A	8, 10, 11, 13, 17, 19, 22, 24	
3611-12R	6011-10R	




15 PC.


Tray category #6 (560 x 375mm)

Tool Set Content

934-086MRVD

86 PC.






Drawer (579 x 380 mm)



9-12FVE15MRV #9 P.84



9-12FVG15MRV #9 P.84



9-40606GPV #9 P.85



9-55VE01MRV #9 P.84



9-30612MRV #9 P.85



Insulated Tool Set

Handy case size (mm) :
372 x 422 x 92 (0.51cuft)

30VE31MPV

3/8"

Contents			Kg 4.21	1 / 3
	3335VE	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19		
	10F0VE	7, 8, 10, 12, 14		
	3221VE	6, 10		
	3771VE-08			
	1471	VDE PH1 x 100, PH2 x 100		
	1472	VDE 3 x 75, 4 x 100, 5.5 x 125		
	6116-07A		6216-06A	
	6318-08A		6CB02	



31 PC.

NEW

9-35VE02MRV

3/8"

Contents			Kg 1.52	1 / 10
	3335VE	06, 07, 08, 09, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19		
	10F0VE	7, 8, 10, 12, 14		
	3221VE	6, 10,		
	3771VE-08			



Tray category #9 (375 x 280mm)

22 PC.

9-90VE09CRV

Contents			Kg 1.20	1 / 10
	1471	VDE PH1 x 100, PH2 x 100		
	1472	VDE 3 x 75, 4 x 100, 5.5 x 125		
	6116-07A		6216-06A	
	6318-08A		6CB02	



Tray category #9 (375 x 280mm)

9 PC.


NEW

Wheel Nut Impact Socket & Set

44904MP01 1/2"

- Thin wall impact socket set with plastic sleeve
- Color coded, sizes are easy to recognize
- Material: Chrome molybdenum alloy steel
- The design of protective sleeve is able to reduce the wear of sheath and avoid damaging the aluminum alloy rims

1.12 kg / 1 / 20






4 PC.

Blow case size (mm) :
160 x 135 x 50 (0.038 cuft)

Contents		DR.	Applicable vehicle	Size mm	L mm
○	494515M	1/2"	Smart	15	85.0
○	494517M	1/2"	-	17	85.0
○	494519M	1/2"	-	19	85.5
○	494521M	1/2"	-	21	85.5

44904MP02 1/2"

1.12 kg / 1 / 20





4 PC.

Blow case size (mm) :
160 x 135 x 50 (0.038 cuft)

Contents		DR.	Applicable vehicle	Size mm	L mm
○	494517M	1/2"	-	17	85.0
○	494519M	1/2"	-	19	85.5
○	494521M	1/2"	-	21	85.5
○	494522M	1/2"	Opel	22	85.0

Wheel Nut Impact Socket Set

44907MP 1/2" 1/2"

2.13 kg / 1 /12



7 PC.

Contents		DR.	Applicable vehicle	Size mm	L mm
○	494515M	1/2"	Smart	15	85
○	494517M	1/2"	-	17	85
○	494519M	1/2"	-	19	85
○	494521M	1/2"	-	21	85
○	494522M	1/2"	Opel	22	85
○	9BW4501	1/2"	Mercedes Benz	17	85
○	9BW4502	1/2"	Hyundai/Kia	21	85

Impact Socket Set

4421MP1 1/2"

11 PC.

Contents		1.69	1 / 12
4535M	10, 11, 13, 17, 19, 22, 24, 27, 29, 30, 32		




Impact Socket Set

6424MP 3/4"

14 PC.

Blow case size (mm) :
422 x 360 x 90 (0.48 cuft)

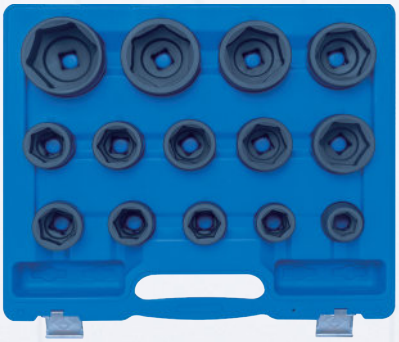

Contents		11.58	1 / 2
6535M	24, 27, 30, 32, 33, 34, 36, 38, 41, 46, 50, 55, 60, 65,		

Brake Caliper Socket Set

9BC4A05MP

5 PC.

- Brake caliper socket set dedicated to Volkswagen, Audi and Porsche (VAG) vehicles.
- 10-tooth sockets: 11.5 mm - 15 mm - 20 mm
- 7-tooth socket: Ø 14 mm - 22 mm

1.18 2 /24


KT NO.	Specification (mm)	Applicable car models
9BC42A11	10-tooth : 11.5	Porsche
9BC42A15	10-tooth : 15	Audi Q7, S8 & Porsche Macan, Cayenne, Cayman
9BC42A20	10-tooth : 20	Audi A8, S6 & Porsche Cayenne
9BC41A14	7-tooth : 14	Audi Q7 and S4
9BC41A22	7-tooth : 22	Audi S5



Impact Bit Socket

8015M

KT NO.	mm	L mm	g	
801524M	H24	80	741	1 / 24
801527M	H27	80	776	1 / 24
801530M	H30	80	820	1 / 24
801532M	H32	80	851	1 / 24
801536M	H36	80	921	1 / 24






NEW


Brake Caliper Slogging Wrench

10B0B 3/4"

- Use for the assembly and removal of the brake caliper screw connections on commercial vehicles
- Designed with a 3/4" DR., can be used with torque wrenches for tightening operations
- The torque adjustment formula laser etched onto the wrench for calculating the correct setting torque when tightening the fixings



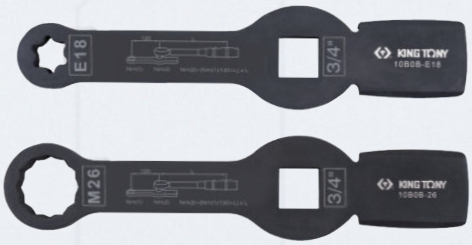



KT NO.	Size mm	Application	L mm	g	
10B0B-24	M24	SAF	215	580	1 / 24
10B0B-26	M26	DAF XF, XF95, XF105, XF106	220	580	1 / 24
10B0B-E18	E18	MAN TGL, TGM	215	580	1 / 24
10B0B-E20	E20	MAN TGL, TGM	215	580	1 / 24
10B0B-E24	E24	MAN TGA, TGS, TGX	220	580	1 / 24

Portable Wrench Set

KT NO.	PC.		Contents	Package	Kg	
12D06MRS01	6	1062	10, 11, 13, 14, 17, 19	color box	0.82	1 / 20
122A06MR	6	373AM	10, 12, 13, 14, 17,19	color box	-	1 / 10
122A06MR01	6		8, 10, 12, 13, 14, 17	color box	1.12	1 / 10



4 in 1 Ratcheting Wrench & Set

3739J

- 4 sizes combine in 1 wrench, total 8 sizes as a set, common size for general applications
- Compact ratchet mechanism with reversible function
- 120-teeth precision ratchet gears only need minimal 3° to move fasteners
- Anti-slip teeth, suitable for 80% rounded bolt
- High quality durable chrome vanadium exceeds DIN standard
- Hexagon ring design provides a better torque capacity





- Combine four general sizes in one wrench



- Suitable for use confined space



- Reversible ratchet with 120 teeth gear design



- Anti-slip teeth, suitable for 80% rounded bolt

KT NO.	Size mm	D1 mm	D2 mm	H1 mm	H2 mm	L mm	g	
3739J0813M	8 x 10 x 12 x 13	22	26.6	13.5	16.4	169	117	12 / 192
3739J1619M	16 x 17 x 18 x 19	31	35	19.8	21.2	199	225	6 / 72

14902JMR01



2 PC.

KT NO.	PC.	Contents	Kg	
14902JMR01	2	8 x 10 x 12 x 13, 16 x 17 x 18 x 19	0.34	1 / 24

132A13MR01

Blow case size (mm) :
303 x 228 x 50 (1.35 Cuft)

Contents — Kg 1.64 — 1 / 8

373AM — 8, 10, 11, 13, 14, 16, 17, 18, 19

02H — 02R — 03R — 04R




13 PC.

Thread Repair File

75RF09M

- For the restoration of defective internal and external threads
- Suitable for right and left-handed thread
- Suitable for metric pitch: 0,80 - 1,00 - 1,25 - 1,50 - 1,75 - 2,00 - 2,50 - 3,00

g 164 — 12 / 120





NEW

6PC. Adapter Set

78106

DIN 3123 | ISO 3316 | Cr-V | Chrome plated

- According to DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation

1.31 / 1 / 20

M	Contents	F
3/8 DR.	2813	1/4 DR.
1/4 DR.	3812	3/8 DR. (62 N·m Max torque)
1/2 DR.	3814	3/8 DR.
3/8 DR.	4813	1/2 DR. (202 N·m Max torque)
3/4 DR.	4816	1/2 DR.
1/2 DR.	6814	3/4 DR. (512 N·m Max torque)



6 PC.

6PC. Impact Adapter Set

786P06

DIN 3121 | Cr-Mo

- Square drive adaptor to DIN 3121 / ISO 1174 with ball lock
- Internal square drive to DIN 3121 / ISO 1174
- For machinery usage

1.31 / 1 / 20

M	Contents	F
3/8 DR.	2863P	1/4 DR.
1/4 DR.	3862P	3/8 DR. (62 N·m Max torque)
1/2 DR.	3864P	3/8 DR.
3/8 DR.	4863P	1/2 DR. (202 N·m Max torque)
3/4 DR.	4866P	1/2 DR.
1/2 DR.	6864P	3/4 DR. (512 N·m Max torque)



6 PC.

Interchangeable Air Blow Gun Set

- Mini blow gun with 6pcs quick release nozzle tip
- Unique design control airflow output
- Venturi nozzle for produce X2.7 boost air flow
- Flat jet nozzle tip 42mm wide low noise under 85dBA
- 100mm non-scratch nozzle tip
- 100mm steel extension nozzle tip
- Conical rubber nozzle tip allow extension wear
- Safety venting nozzle tip control under 30psi
- Plastic case size (mm) :
  207 x 170 x 55 (0.068 cuft)

7 PC.

NEW

Mini Air Blow Gun Set

7990A0

KT NO.	Air inlet inch	Working pressure PSI	Temperature range
7990A0	1/4"	90-120	-20°C to 85°C (-4°F to 185°F)



Contents

7990A0-P01(1/4" BSPT)





7990A-P02



7990A-P03



7990A-P04



7990A-P05



7990A-P06




7990A-P07

Interchangeable Accessories




- Airflow adjusting knob (Mini type)



- Quick release



- Multi-angle adjustment for air blow direction(6 different angle, reduce the pressure to your wrist)



- Brass inlet

Mini Air Blow Gun

7990A0-P01(1/4" BSPT)





7990A-P02
- **Plastic nozzle**
  100mm, NY+GF. Ideal for any kind of project, avoid causing damage to object



7990A-P03
- **Turbo nozzle**
  Special structure, increase 270% of airflow



7990A-P04
- **Noise reduction nozzle**
  (42mm)
  Sound less than 85 Decibel, low noise level



7990A-P05
- **Steel nozzle**
  ø6x100mm




7990A-P06
- **Rubber nozzle**
  Preventing causing damage to object
  (Use with steel nozzle)



7990A-P07
- **Safety venting nozzle**
  The pressure will be reduced to below 30PSI . It's to make sure the pressure won't cause damage to human body (Use with steel nozzle)





7990A-P08
- Storage rack




Screw Extractor Set

11015SQ


- Ideal tool for removing rounded/damaged/stuck bolts
- Material: 8660 steel
- Hardness: HRC49-52

0.53 kg | 1 / 20





Hex size(H) mm	Size(S) inch	Size(S) mm	Overall length(L) mm
12	1/8", 3/16", 1/4", 3/8"	3, 4, 5, 5.5, 6, 8, 10	29
16	1/2"	11, 12, 14	

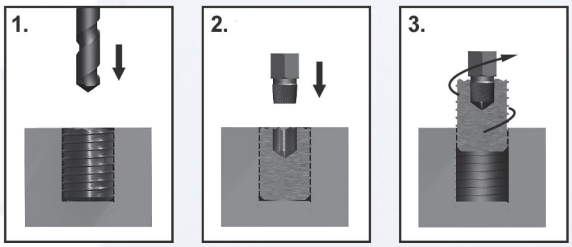


Operation:
1. Drilling a hole which is 0.5mm bigger than the extractor on the bolt
2. Insert the extractor in the bolt
3. Turn counter clockwise to remove the bolt

Note: This is a manual operated tool, do not use with impact or power tools

Pipe Wrench


6522

- 90° Angle Clamping Jaws
- I-beam handle design
- Special hardened teeth
- DIN 5234

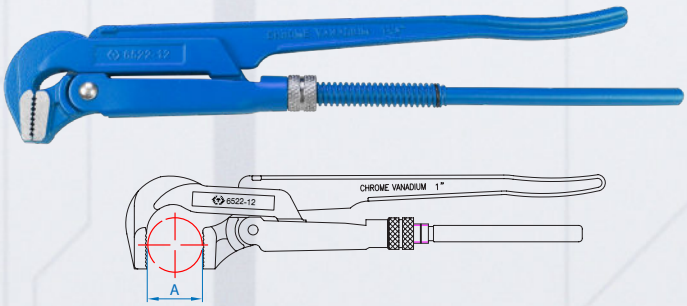

KT NO.	A mm	Size inch	Overall length inch	Overall length mm	g	
6522-12	45	1-3/4	12-1/2	320	693	1 / 20
6522-16	55	2-3/8	16-1/2	425	1265	1 / 20
6522-22	67	2-15/16	22	560	2210	1 / 10
6522-25	110	4-5/16	24-1/2	630	3000	1 / 4
6522-29	130	5-1/8	29	735	5290	1 / 2

NEW

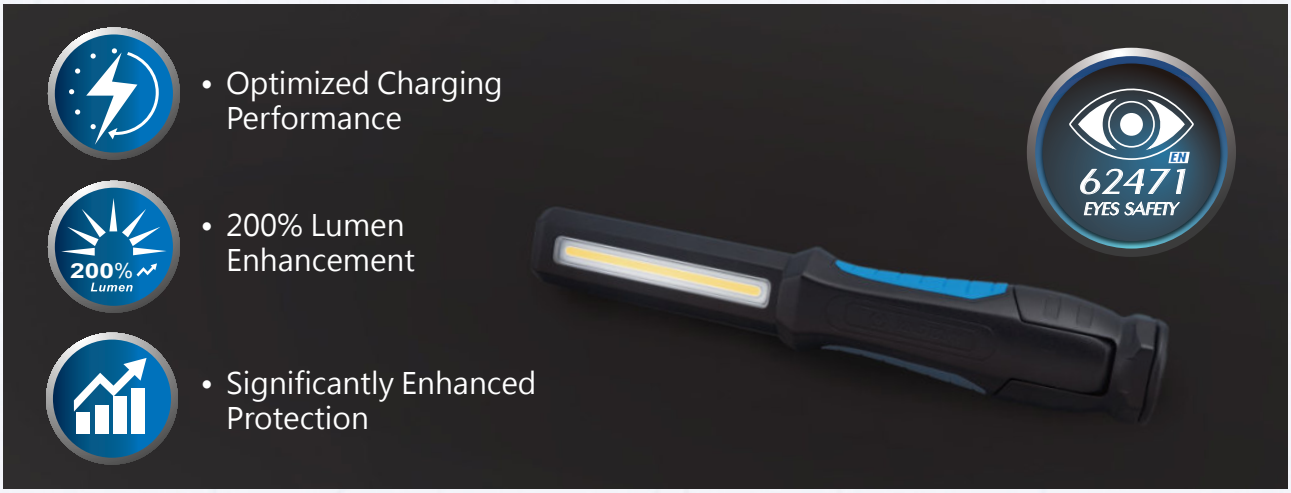

6W COB LED & 1W SMD LED Rechargeable Inspection Light

9TA271

600 Lumen | 6W | 3-12h | CE | Li-ion 2600 mAh 3.7V | Type-C USB | IP54 IK07 | 3.5h | RoHS

- 6W COB LED & 1W SMD LED
- White light color, Kelvin:6500K
- Switch mode:
- Top light/Main light(low-high)/Off
- Material: Durable ABS+PC+TPE
- Rechargeable battery:3.7V 2600mAh Li-ion battery
- Charging time:3.5hours
- IP54 protection rating
- IK07 vandalproof
- EN62471 Photobiological safety
- Working temperature: -10° C to + 40° C


Switch mode	Lumen	Operating hours
Toplight	120 lm	12h
Main light-low	250 lm	6h
Main light-high	600 lm	3h

KT NO.	L mm	g	/
9TA271	260	186	1 / 20






• Battery indicator

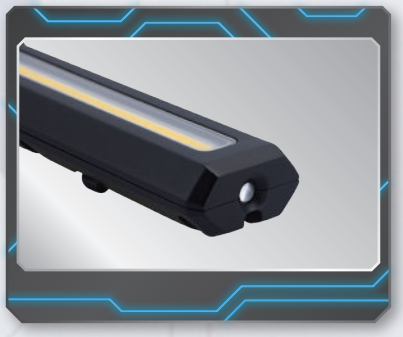


• Top light

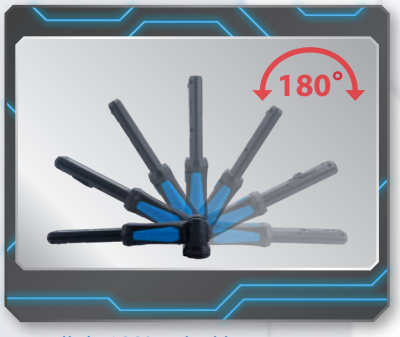

• Top light180° swivel base with 6 positions



• Ergonomic Handle

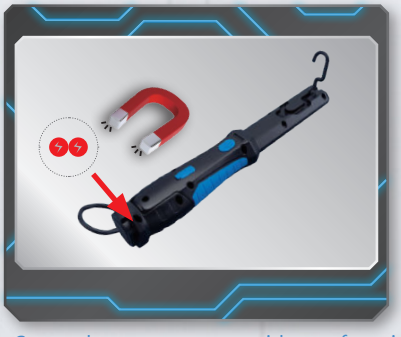

• Strong bottom magnet with two functional hooks

Ultra Compact Site Light

9TA48

- 30W COB LED
- White light color, kelvin : 6500K
- Rechargeable high quality 7.4V 5200mAh Li-ion
- Quick charging time : 4.5 hours
- Material : Aluminum Body, nylon stand and handle, rubber edge protecter

Switch mode	Lumen	Operating hours
Work light 20%	300 lm	25h
Work light 40%	750 lm	12h
Work light 60%	1500 lm	6h
Work light 80%	2250 lm	4h
Work light 100%	3000 lm	2h







- Input
- USB output (Power bank)



- Option to fixation

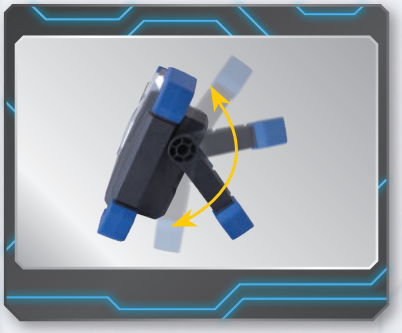

- 180 ° vertical rotation

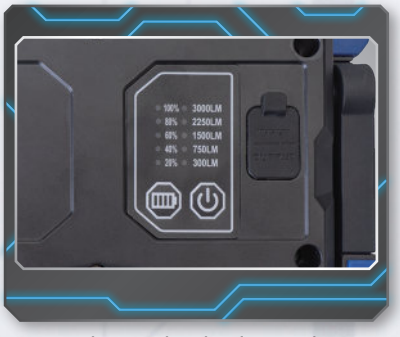

- 5 LED battery level indicators,low power warning



- Tripod mountable(option tripod not included)

KT NO.	Applicable area	L x W x H mm	g	
9TA48A	Europe	205 x 153 x 75	960	1 / 8
9TA48B	America & Asia	205 x 153 x 75	960	1 / 8
9TA48D	Australia & New Zealand	205 x 153 x 75	960	1 / 8

Contents


30W floodlight with power bank		x 1 PC.
Type-C USB		x 1 PC.
5V/2A Charger		

Damaged Nuts Remover Socket Set

CAUTION Can't be used with pneumatic wrench

9TD033MR

1/2"







4 PC.

Contents

0.40 kg | 4 / 48

	9TD403	17, 19, 21

NEW

Oil Filter Chain Wrench

3209

- Suitable for removing all kings of oil filter on vehicles
- Chain design for easily removing stubborn oil filter

KT NO.	Capacity mm	kg	
3209-120	Ø 60~120	302	12 / 48
3209-135	Ø 60~135	333	12 / 48
3209-220	Ø 60~220	385	12 / 36







Oil Filter Wrench for HGV Truck

9AE31X

- Oil filter wrench design for high torque requirements
- Use with a 1/2" square drive tool
- Universal tool for HGV truck, bus, tractor and marine engines

KT NO.	Ø Capacity mm	g	
9AE31X-120	105~118	500	6 / 24
9AE31X-135	118~130	667	6 / 24
9AE31X-145	130~143	750	6 / 24









- Strong steel band can be moreStable on oil filter removal

Carbide Scraper & Set







NEW

9CJ74

- The blade tip is made of tungsten carbide material, which offers high hardness and a long lifespan. Available in 16mm and 32mm width.
- It can be used to scrape off residual carbon deposits, rust marks, or silicone residue from surfaces of objects, such as old silicone on oil sumps, exhaust manifolds, or brake calipers.
- The blade tip is equipped with a protective cover, and the rear end has a hanging hole.




KT NO.	A mm	inch	L mm	g	📦/📦
9CJ7416	16	8	210	136	10 / 40


KT NO.	A mm	inch	L mm	g	📦/📦
9CJ7432	32	8	210	165	10 / 40

2 PC.

9CJ072

KT NO.	g	📦/📦
9CJ072	301	10 / 40

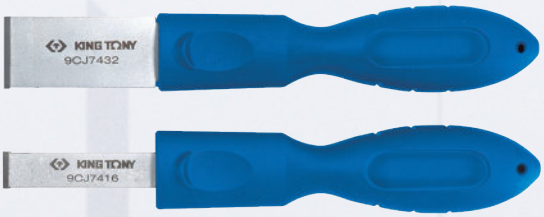


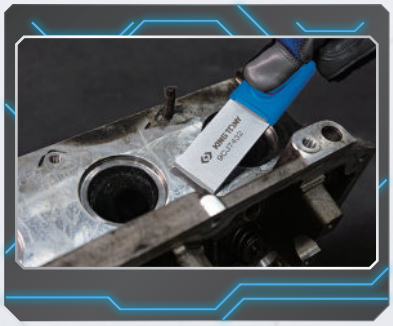

· Scrape off glue.



· Scrape off rust.

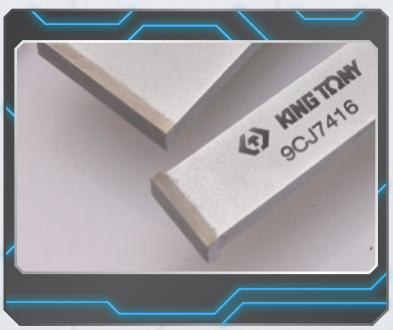

- The blade tip has been finely ground on all four sides, allowing for both pushing and pulling motions.



- Designed with ergonomic handle to conform to human ergonomics, providing a comfortable grip.


NEW

Signage for Display Stand

ADVT-03X

- Size: 960x55(mm)
- Magnet



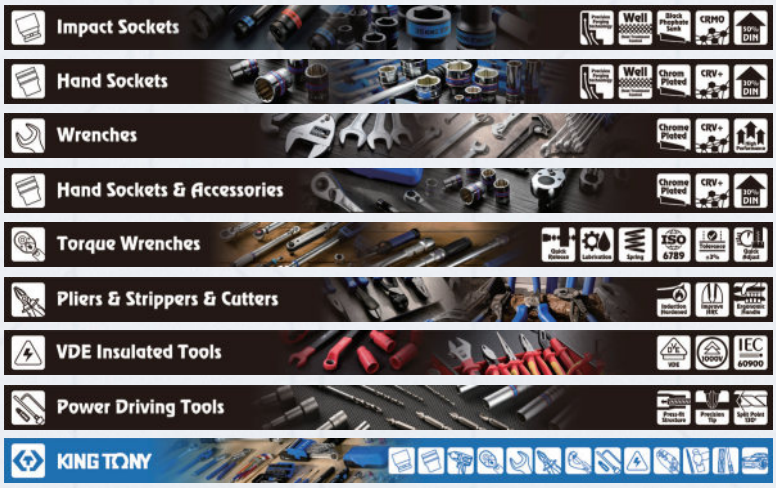

ADVT-031
ADVT-032
ADVT-033
ADVT-034
ADVT-035
ADVT-036
ADVT-037
ADVT-038
ADVT-039

Side Panel for Display Stand

ADVT-04 ADVT-05

- Size: 240x900(mm)



ADVT-04



ADVT-05

NEW

Personal Cooler Bag

ZS120-S

- Size : 290 x 150 x 210 mm
- Weight : 352g





Door mat

ZS417

- Size : 600 x 900 x 8mm PVC



KING TONY


Cutting Mat

ZS418K

- Size : 700 x 500 x 3 mm





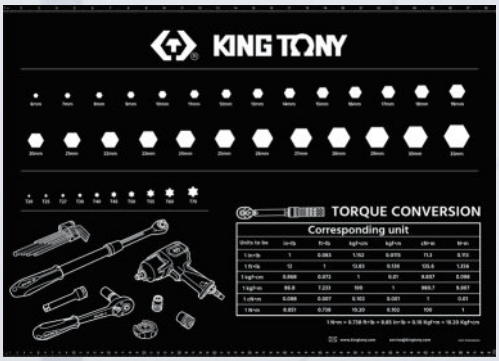

Mug

ZS606

- Capacity:550ml









TOOLS STORAGE & TOOLS SYSTEM SETS




KING TONY
SQUAD

OBJECT-ORIENTED ORGANIZATION






5 Flexible / adjustable shelves



Ball bearing slides



Steel panel for tool storage



Concealed handle



Hidden knob



Double volume



Front centralized locks



Stainless steel work surface



Cupboard with gas spring



The drawer with capacity 30kg

OBJECT-ORIENTED ORGANIZATION

87D11X01SA-KG

Overall: 4885 x 460 x 2000 mm

462.23 CUFT 116.75

Stainless Steel





87D11X01SA-KB

Overall: 4885 x 460 x 2000 mm

462.23 CUFT 116.75

Stainless Steel





OBJECT-ORIENTED ORGANIZATION

87D11X02SA-KG

Overall: 4235 x 460 x 2000 mm

400.87 CUFT 100.23

Stainless Steel





87D11X02SA-KB

Overall: 4235 x 460 x 2000 mm

400.87 CUFT 100.23

Stainless Steel





OBJECT-ORIENTED ORGANIZATION

87D11X03A-KG

Overall: 2955 x 460 x 2000 mm

262.26 CUFT 71.39

Wooden Top





87D11X03A-KB

Overall: 2955 x 460 x 2000 mm

262.26 CUFT 71.39

Wooden Top





OBJECT-ORIENTED ORGANIZATION

87D11X04A-KG

Overall: 2640 x 460 x 2000 mm

248.60 CUFT 64.91

Wooden Top




87D11X04A-KB

Overall: 2640 x 460 x 2000 mm

248.60 CUFT 64.91

Wooden Top





87D11X05A-KG

Overall: 2275 x 460 x 2000 mm

202.50 CUFT 51.83

Wooden Top




87D11X05A-KB

Overall: 2275 x 460 x 2000 mm

202.50 CUFT 51.83

Wooden Top





OBJECT-ORIENTED ORGANIZATION

87D11A-KG

Overall: 3920 x 460 x 2000 mm

351.57 CUFT 89.35

Wooden Top






87D11A-KB

Overall: 3920 x 460 x 2000 mm


351.57 CUFT 89.35

Wooden Top

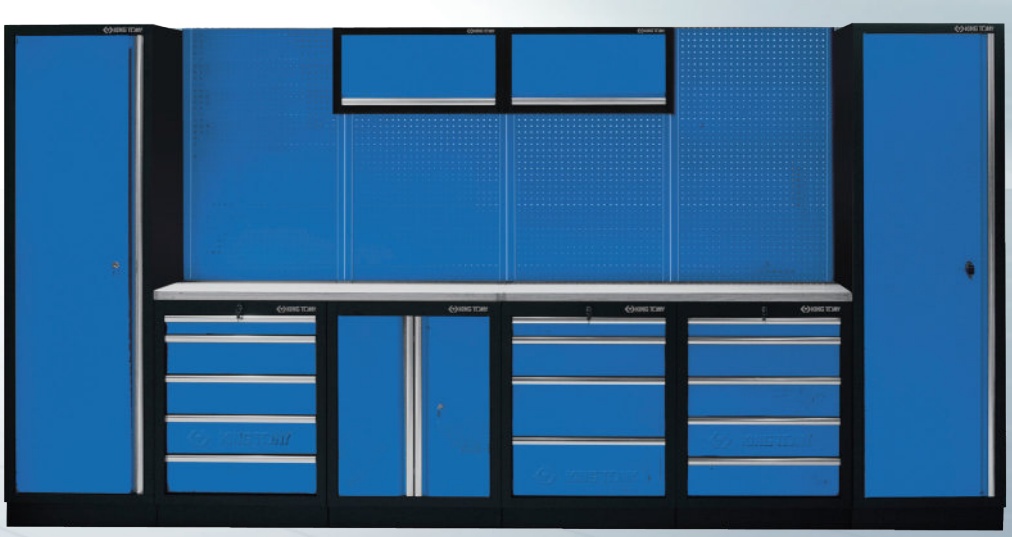



OBJECT-ORIENTED ORGANIZATION ACCESSORIES

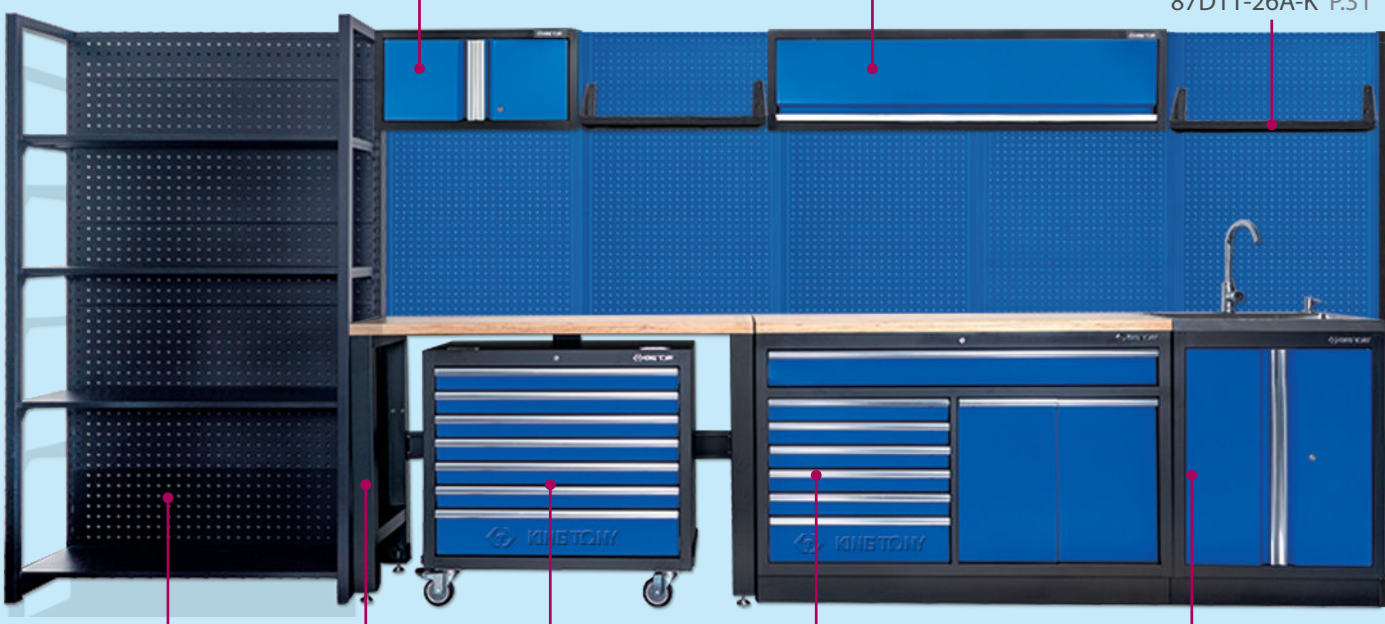

Tall Cabinet

87D11-02A-KG




87D11-02A-KG


87D11-02A-KB



87D11-02A-KB



KT NO.	Overall (mm)	Kg	CUFT
87D11-02A-KG 87D11-02A-KB	600 x 460 x 2000	53	9.28

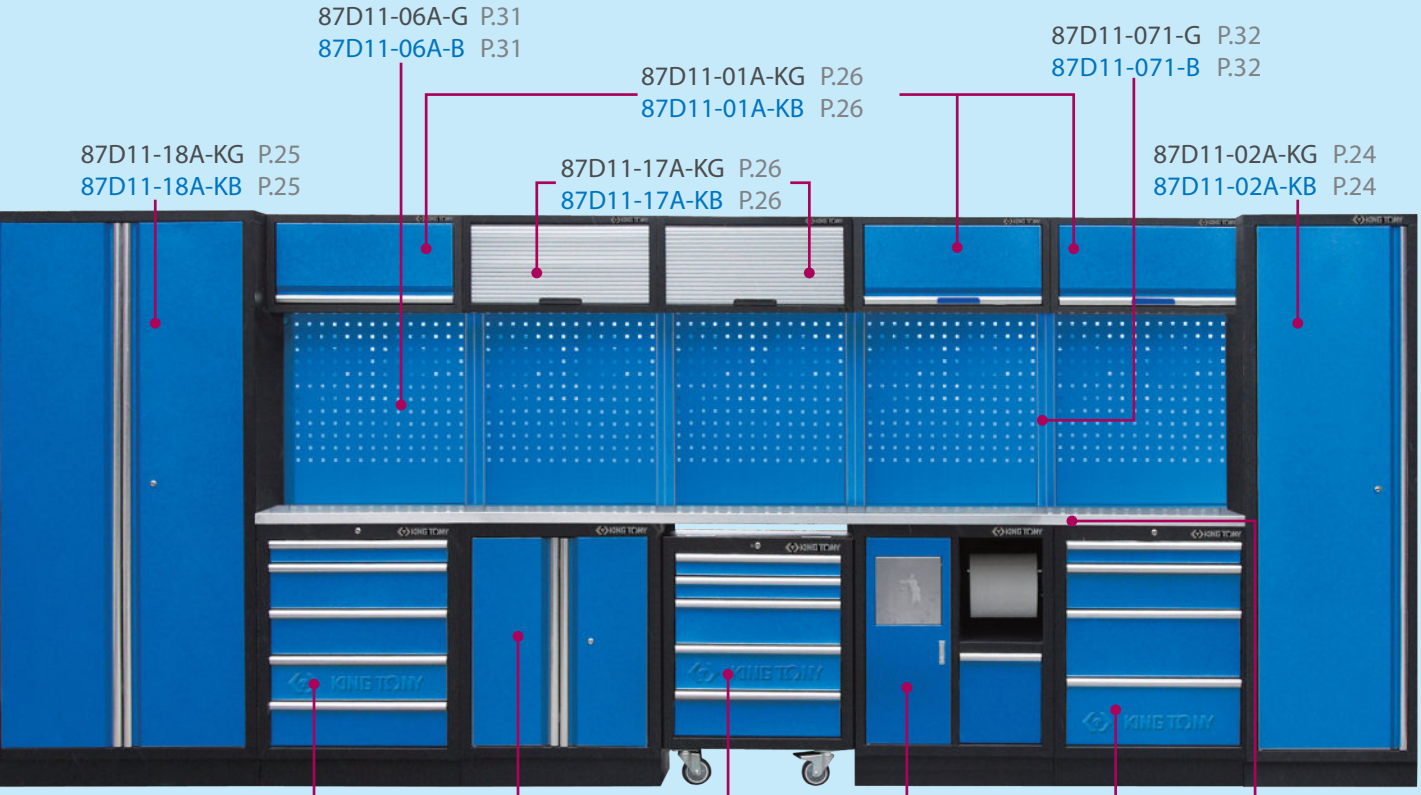

Tall Cabinet

87D11-18A-KG




87D11-18A-KG

KT NO.	Overall (mm)	Kg	CUFT
87D11-18A-KG 87D11-18A-KB	915 x 460 x 2000	78	12.72

87D11-18A-KB



87D11-18A-KB



Extra Wide Wall Cabinet

87D11-21A-KG




87D11-21A-KG


KT NO.	Overall (mm)	Kg	CUFT
87D11-21A-KG 87D11-21A-KB	1360 x 281 x 350	17	7.24

87D11-21A-KB



87D11-21A-KB






Wall Cabinet

87D11-01A-KG

87D11-17A-KG

87D11-22A-KG

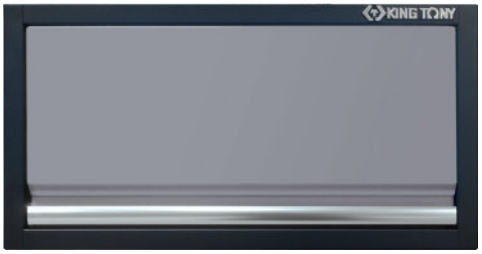

87D11-01A-KG



87D11-17A-KG



87D11-22A-KG

KT NO.	Overall (mm)	Kg	CUFT
87D11-01A-KG	680 x 280 x 350	10.0	3.73
87D11-01A-KB			
87D11-17A-KG		8.4	
87D11-17A-KB			
87D11-22A-KG		9	
87D11-22A-KB			

Rolling Shutter

87D11-01A-KB

87D11-17A-KB

87D11-22A-KB



87D11-01A-KB




87D11-17A-KB




87D11-22A-KB









Opened Door Cabinet

87D11-03A-KG




87D11-03A-KG

87D11-03A-KB



87D11-03A-KB

KT NO.	Overall (mm)	Kg	CUFT
87D11-03A-KG 87D11-03A-KB	680 x 460 x 910	28.5	13.58



Drawer Cabinet

87D11-04A-KG

87D11-04A-KB



87D11-04A-KG

87D11-04A-KB

87D11-05A-KG

87D11-05A-KB




87D11-05A-KG

87D11-05A-KB

KT NO.	Spec.	Overall (mm)	Kg	CUFT
87D11-04A-KG 87D11-04A-KB	4 Drawer	680 x 460 x 910	46.70	13.58
87D11-05A-KG 87D11-05A-KB	5 Drawer		49.30	



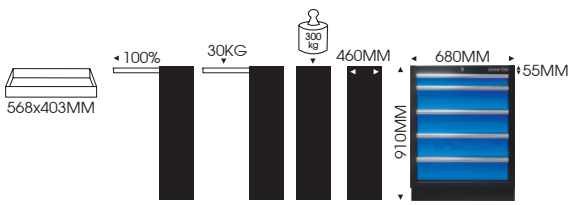

Trash Bin With Paper Holder


87D11-11A-KG

87D11-11A-KB



87D11-11A-KG　　87D11-11A-KB

KT NO.	Overall (mm)	Kg	CUFT
87D11-11A-KG 87D11-11A-KB	680 x 460 x 910	35.20	13.58



5 Drawers Cabinet

87D11-12A-KG


87D11-12A-KB

- Four swivel casters(one is with brake mechanism)



87D11-12A-KG　　87D11-12A-KB

KT NO.	Spec.	Overall (mm)	Kg	CUFT
87D11-12A-KG 87D11-12A-KB	5 Drawer	650 x 460 x 862	46	10.41

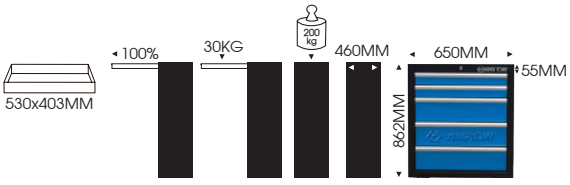

Washbasin Cabinet

87D11-19A-KG

- Water tap & Stainless steel sink, easy to clean
- Convenient two door cabinet



87D11-19A-KG

87D11-19A-KG



87D11-19A-KB














KT NO.	Overall (mm)	Kg	CUFT
87D11-19A-KG 87D11-19A-KB	680 x 464 x 948	33	14.23



Workbench Frame

87D11-24A-K

- Workbench frame is able to combine with tool cabinet 87D11-25A-KG
- Suitable for use with workbench table(87D11-08A)

The workbench table is not included ×



KT NO.	Overall (mm)	Kg	CUFT
87D11-24A-K	1361 x 458 x 910	19.5	4.22




7 Drawer Tool Cabinet With Casters

87D11-25A-KG


- Suitable for use with workbench 87D11-24A-K
- 35in wide drawer, increasing the storage space
- Four swivel casters(one is with brake mechanism)



87D11-25A-KG

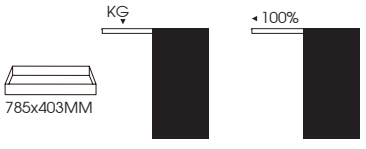

KT NO.	Spec.	Overall (mm)	Kg	CUFT
87D11-25A-KG 87D11-25A-KB	Overall	895 x 460 x 732	65	14.07
	1 Drawer	785 x 403 x 137		
	6 Drawer	785 x 403 x 58		



87D11-25A-KB



87D11-25A-KB



- The groove design is easy to pull out the cabinet

9 Drawer Bottom Cabinet

87D11-23A-KG

87D11-23A-KB


- 53 inch wide cabinet, with one wide drawer, six drawers, two big drawer
- Content with garage bin & storage box*18 PC.




87D11-23A-KG



87D11-23A-KB




• Storage box



• Garage bin




• Safety mechanism





KT NO.	Spec.	Overall (mm)	Kg	CUFT
87D11-23A-KG 87D11-23A-KB	Overall	1360 x 465 x 948	112	29.77
	1 Drawer	1272 x 403 x 84		
	5 Drawers	783 x 403 x 58		
	1 Drawer	783 x 403 x 137		
	2 door	284 x 371 x 531		

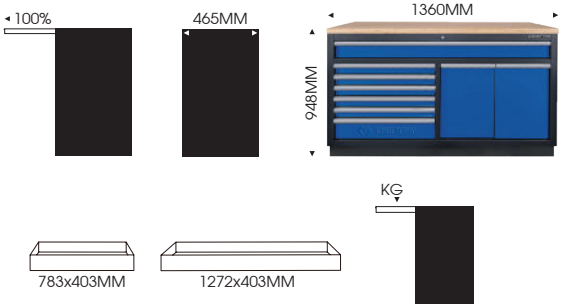

Storage Shelves

87D11-20A-K

87D11-20LA-K

- Multi-layer to storage
- Suitable for combine with 87D11 tool cabinet system




87D11-20A-K

87D11-20LA-K

KT NO.	Overall (mm)	Kg	CUFT
87D11-20A-K	680 x 458 x 2000	41	5.94
87D11-20LA-K	1200 x 458 x 2000	55	5.94



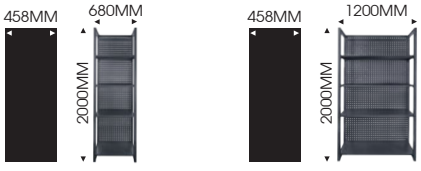


Storage Shelves

87D11-26A-K


- Wall tray for back panel, easy to storage

KT NO.	Overall (mm)	Kg		CUFT
87D11-26A-K	602 x 281 x 178	2.6	1 / 4	1.71



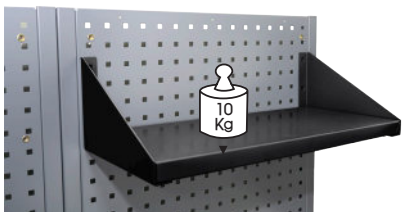





Pressed Wooden Board

87D11-08A

87D11-09A

87D11-10A

KT NO.	Overall (mm)		CUFT
87D11-08A	1360 x 465 x 38	12.5	1.61
87D11-09A	2042 x 465 x 38	19.0	2.39
87D11-10A	681 x 463 x 38	6.0	0.81



Stainless Board


87D11-08SA

87D11-09SA

87D11-10SA

KT NO.	Overall (mm)	Kg	CUFT
87D11-08SA	1360 x 465 x 38	21.0	1.61
87D11-09SA	2042 x 465 x 38	31.80	2.39
87D11-10SA	681 x 463 x 38	10.50	0.81







Back Panel

87D11-06A-G


87D11-06A-B

KT NO.	Overall (mm)	Kg	CUFT
87D11-06A-G 87D11-06A-B	615 x 25 x 1052	5.3	1.13



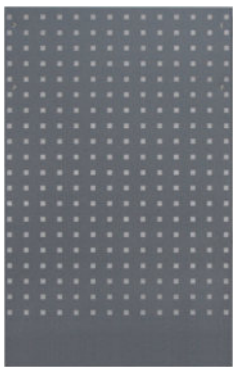

87D11-06A-G

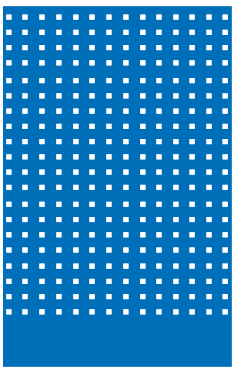


87D11-06A-B

Pillar

87D11-071A-G

KT NO.	Overall (mm)	Kg	CUFT
87D11-071A-G 87D11-071A-B	33 x 30 x 1420	1.5	0.13

87D11-071A-B

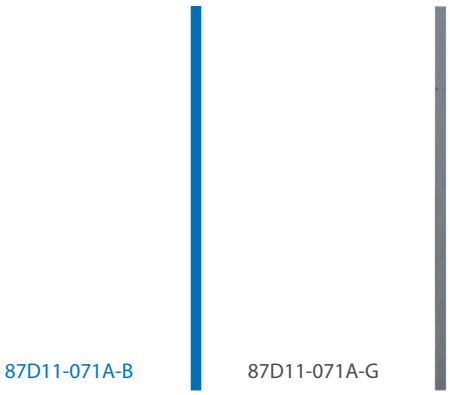


Optional accessories

87D11X06SA-KG

87D11X06A-KG

87D11X06SA-KB

87D11X06A-KB

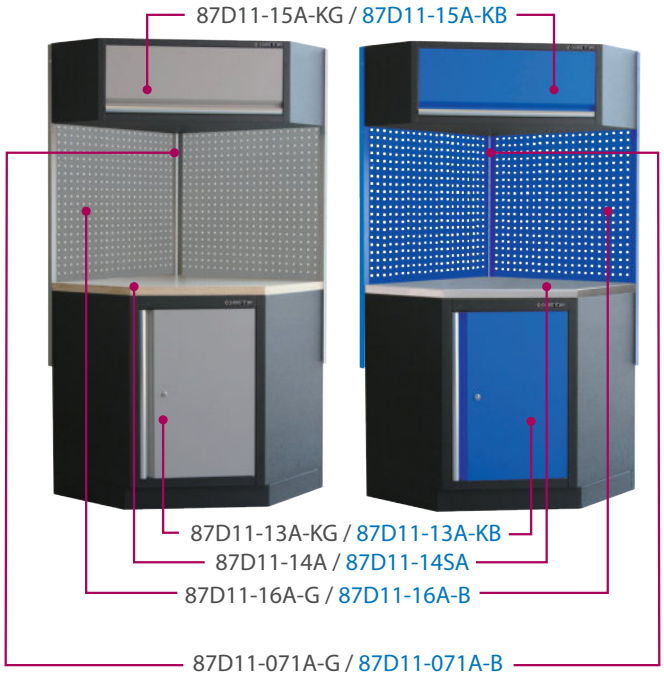

Corner Bottom Cabinet


87D11-13A-KG

87D11-13A-KB





KT NO.	Overall (mm)	Kg	CUFT
87D11-13A-KG 87D11-13A-KB	865 x 865 x 910	42	7.06



Corner Wall Cabinet


87D11-15A-KG

87D11-15A-KB





KT NO.	Overall (mm)	Kg	CUFT
87D11-15A-KG 87D11-15A-KB	865 x 865 x 350	21	12.70



Stainless Steel Board

87D11-14SA



KT NO.	Overall (mm)	Kg	CUFT
87D11-14SA	865 x 865 x 38	19	1.94

Pressed Wooden Board

87D11-14A




KT NO.	Overall (mm)	Kg	CUFT
87D11-14A	865 x 865 x 38	13	1.94


Corner Back Panel

87D11-16A-G

KT NO.	Overall (mm)	Kg	CUFT
87D11-16A-G 87D11-16A-B	800 x 25 x 1052	6.95	1.45



87D11-16A-B

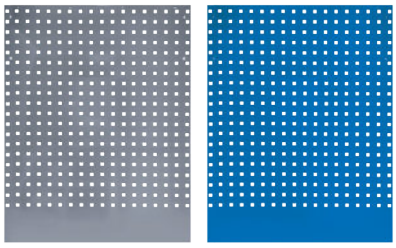

Adjusting Feet

KT NO.		Contents	g
87D11-05A-10		▪ Pack by 4 PC.	700

Hook

KT NO.		Contents	g
87E02-051A		▪ 1" Single hook ▪ Pack by 10 PC.	20
87E02-053A		▪ 3" extra long single hook ▪ Pack by 10 PC.	30
87E02-061A		▪ 1" Double hook ▪ Pack by 10 PC.	50
87E02-063A		▪ 3" extra long double hook ▪ Pack by 10 PC.	68



Tool Trolley

	KT NO.	Loading	Wheel	Work top	Drawers	100% Open	Risk-free	Bumper	Auto-return	INDEX
L	87432-B	360	5"X1-1/4"	Cutting mat	5 / 7	●	X	-	-	P.37
	87434-B	360	5"X1-1/4"	Cutting mat	5 / 7	●	X	-	-	P.37
	87432-G	680	5"X2"	Cutting mat	5 / 7	●	●	-	●	P.37
	87434-G	680	5"X2"	Cutting mat	5 / 7	●	●	-	●	P.37
	87634	360	5"X1-1/4"	Cutting mat	7	●	-	●	-	P.38
	87G31	500	5"X2"	Steel	6 / 7	●	-	●	●	P.40
	87G38	400	5"X2"	PVC mutli-f	6 / 7	●	-	-	-	P.39
	87SQ31	500	5"X2"	Stainless	6 / 7 / 8	●	●	●	●	N5
XL	87SQ32	700	5"X2"	Stainless	6 / 7 / 8	●	●	●	●	N6
	87SQ33	700	5"X2"	Stainless	6 / 7 / 8	●	●	●	●	N6
XXL	87435	600	6"X2"	Cutting mat	13	●	-	-	-	P.38
SV	87SQ34	700	5"X2"	Wooden	10	●	●	●	●	N8
	87441	540	4"X1-1/4"	Cutting mat	1 / 3	●	-	-	-	P.43
	87446	600	4"X1-1/4"	Cutting mat	3	●	-	-	-	P.44
	87G41	150	4"X1"	PVC mutli-f	-	-	-	-	-	P.40

Customized Color Choice Chart











8743X-XB-B

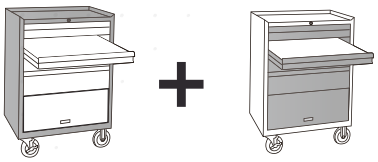


		-RK	
		-B	
		-BK	
		-K	
		-G	
		-OK	

(Other colors are optional, produce with minimum quantity)

Load bearing

- Overall supporting weight for tool trolley at a safety level
- Overall supporting weight for drawers at a safety level

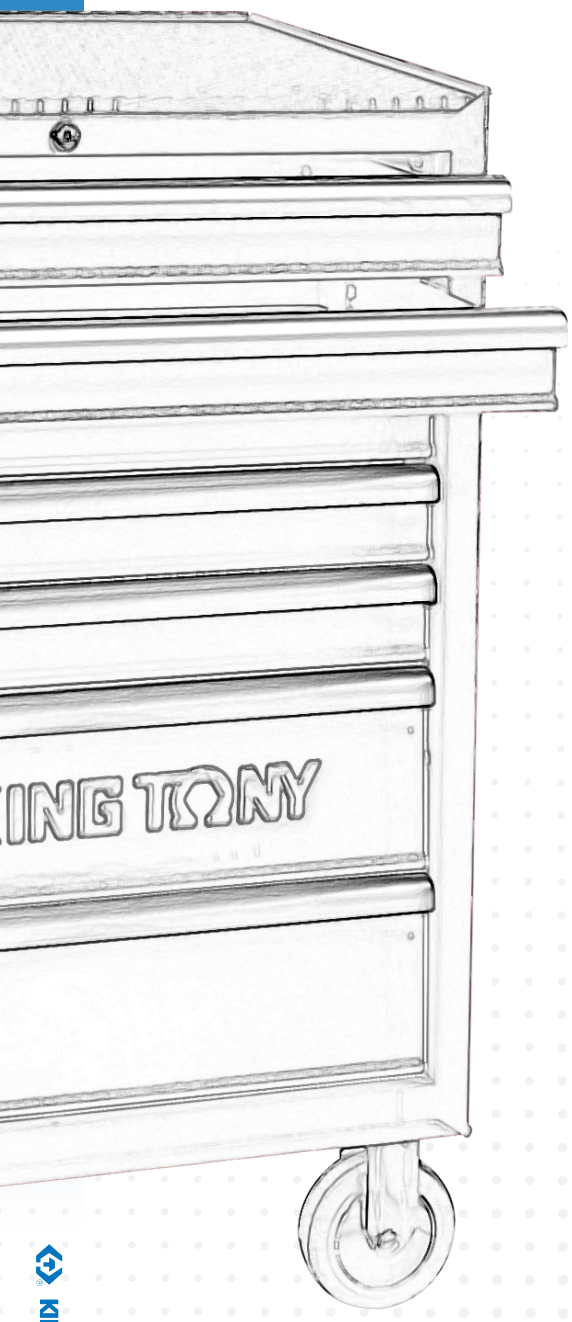

Convenient

- Convenient and safety with Central lock system
- 100% drawer opening, does not interfere with the removal of tools
- 360° swivel wheel with brake function
- The size of the drawer conforms to TCS, and the tool set can be purchased freely according to the demand

Robustness

- Body frame are constructed with one-piece steel sheet for integral strength
- The bottom of the drawers are stamped in order to strengthen effectively

Protection

- Protection bumpers are for to avoid collisions and to protect object during maneuver
- Risk Free System (RFS) allows open one drawer at a time which prevents the loss of center of gravity from tilting and unstability
- Press to open drawer is a safe and reliable system

Features





• 100% open ball bearing slide for drawer



• Industrial TPR floor brake casters



• One piece steel body



• Central locking system + 10mm top mat




• Embossed & hammed edge drawer increase strength



• Add strength and safety

Tool Trolley

(Other colors are optional, produce with minimum quantity)

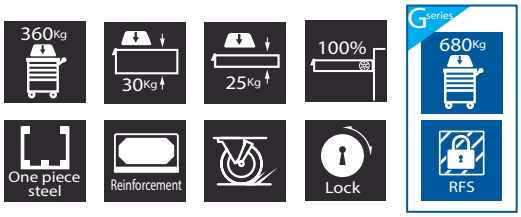


87432-5B



87434-7B



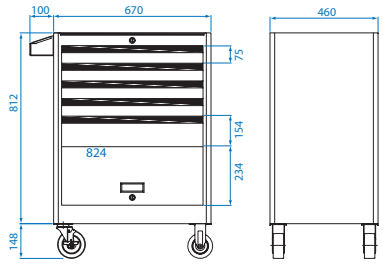


87432-5G




87434-7G



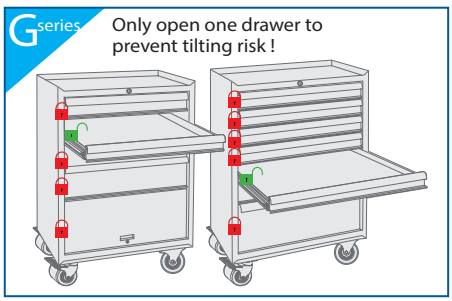

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87432-5B	4 Drawer	576 x 380 x 75	5"x1-1/4"	360 Kg	56	12.24
	1 Drawer	576 x 380 x 154				
	Bulk Drawer	603 x 404 x 234				
87434-7B	5 Drawer	576 x 380 x 75			64	
	2 Drawer	576 x 380 x 154				
87432-5G	4 Drawer	576 x 380 x 75	5" x 2"	680 Kg	56	
	1 Drawer	576 x 380 x 154				
	Bulk Drawer	603 x 404 x 234				
87434-7G	5 Drawer	576 x 380 x 75			64	
	2 Drawer	576 x 380 x 154				


Classic Bumper Type Tool Trolley

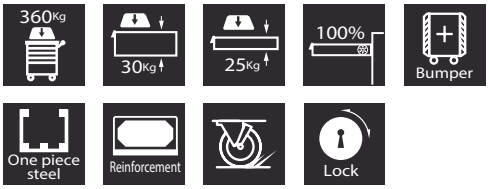

- Soft bumpers each side avoids scratch or damage vehicle
- More space for bottles & hanging
- Easily move two side handle bar & industrial TPR casters
- 100% pull out ball bearing drawer
- One piece steel for heavy load structure
- Central locking system + 10mm top mat


87634-7B



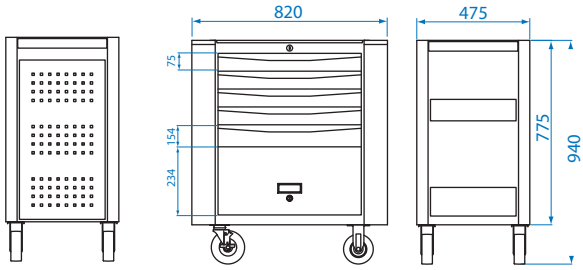


KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87634-7B	5 Drawer	576 x 380 x 75	5" x 1-1/4"	360 Kg	66.14	15.64
	2 Drawer	576 x 380 x 154				

Tool Trolley



87435-13B



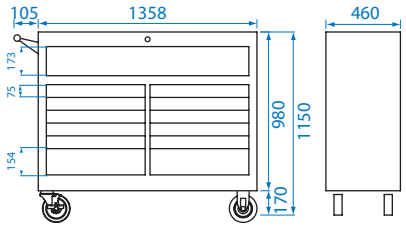

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87435-13B	10 Drawer	576 x 380 x 75	6" x 2"	600 Kg	166	31.54
	2 Drawer	576 x 380 x 154				
	1 Drawer	1215 x 390 x 173				

Features





• Trash can hook



• Side compartment




• Industrial TPR floor swivel casters



• Multi-functional working top


Tool Trolley

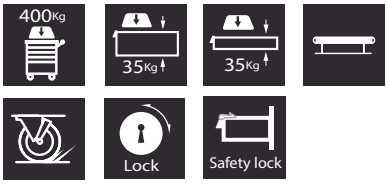

- Magnetic drawer closures
- Multi-functional working top
- Side locking system

87G38-7B-K



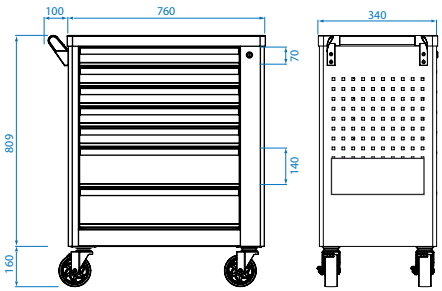

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87G38-7B-K	Overall	752 x 450 x 807	5" x 2"	400 Kg	58	13.19
	Overall+4 Casters	752 x 450 x 982				
	5 Drawers 2 Drawers	570 x 380 x 70 570 x 380 x 140				

Features





• Side handle bar



• Flat side panel



• Top platform



• Industrial TPR floor brakes casters




• Garbage bin

Heavy Duty Tool Trolley & Chest



87G31-7B-BK



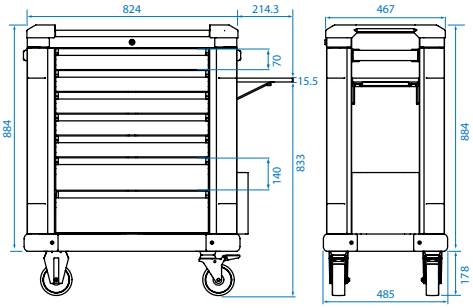


KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87G31-7B-BK	Overall	824 x 485 x 884	5" x 2"	500 Kg	75.00	16.85
	Overall + 4 Casters	824 x 485 x 1062				
	5 Drawers	575 x 410 x 70				
	1 Drawers	575 x 410 x 110				
	1 Drawers	575 x 410 x 140				

Heavy Duty Tool Trolley & Chest

130Kg

87G11-4B-BK



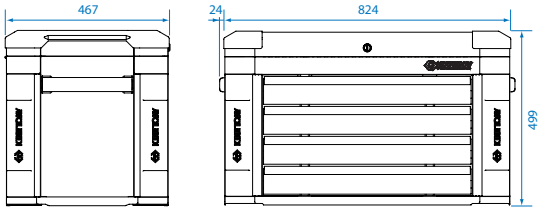

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87G11-4B-BK	Overall	824 x 467 x 499	41.5	9.72
	4 Drawers	575 x 410 x 70		

87G001DQ-BK (include 87G11-4B-BK + 87G31-7B-BK)







- 4 drawers top chest + 7 drawers tool trolley
- ABS corner protection bumpers avoids damaging vehicle
- 100% pull out ball bearing drawer with auto-return system
- Heavy duty ball bearing sides, 35kgs capacity for each drawer
- Top chest lid with hydraulic bars
- With side tray and garbage bin
- Internally welded joints for durability

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87G001DQ-BK	Overall	843 x 467 x 1365	5" x 2"	630 Kg	124.00	27.25
	Overall +4 Casters	843 x 467 x 1543				

Accessory

87432-15

- Plastic top mat
- Size : 920(W) x 490(D) x 50(H)mm



84087637BKT

- Plastic mat
- Size : 665(W) x 455(H) x 19(D) mm



87432-31

- Side handle bar
- Size : (Ø)38.5 x 457(L) mm



87432-32

- Can holder



87432-52

- Paper holder
- Size(H x L x D) : 45 x 290 x 65 mm




87432-17

- Flat side panel
- Size : 456 x 370mm



87432-23



87432-24



KT NO.	Frame(mm) Width x Depth x Height	Material	Divider Size mm
87432-23	574 x 358 x 40	Steel	Long: 560x40(2PC.) Short: 368x40(2PC.)
87432-24	-	Plastic	Long: 570x40(3PC.) Short: 375x40(3PC.)

87432-33

- Magnetic tool holder
- Size : 458 x 52 x 17mm



87432-34

- Bottle side holder




87432-41

CAUTION

Can't install side tray(87432-32) at the same time

- Work panel
- Size : 656(W) x 500(H) x 30(D) mm

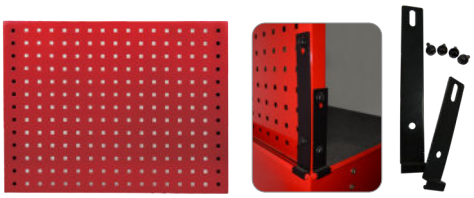

Tool Trolley




87441-1B

- 1 drawer trolley
- Two 3.5" deep trays are positioned for convenience




87441-3B

- 3 drawer trolley
- 2 PC. protective mat for top and bottom shelves
- 3 PC. protective drawer liners

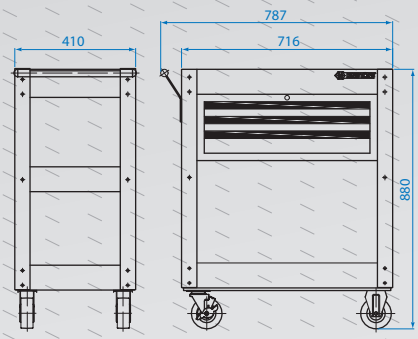

87G41-B

- With multi-functional working top
- 4"x 1" Heavy duty casters (2 Fixed and 2 swivel with stop function)

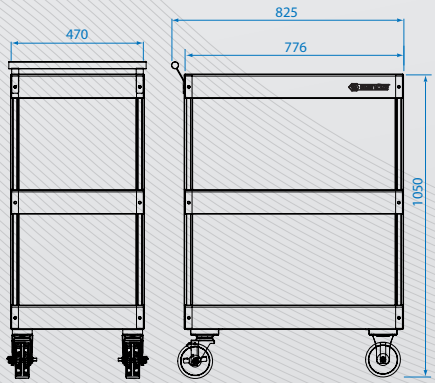




KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87441-1B	overall	716 x 410 x 750	4" x 1-1/4"	540 Kg	23.2	2.7
	overall + 4" x 1-1/4" Casters	716 x 410 x 880				
	1 Drawer	569 x 275 x 75				
87441-3B	overall	716 x 410 x 750	4" x 1-1/4"	540 Kg	33.0	4.95
	overall + 4" x 1-1/4" Casters	716 x 410 x 880				
	1 Drawer	569 x 275 x 75				
	2 Drawer	569 x 275 x 50				
87G41-B	Overall	776 x 470 x 900	4" x 1"	150 Kg	23.0	3.67
	Overall + 4 Casters	776 x 470 x 1050				

Tool Trolley

- 3 drawer trolley
- 2 PC. protective mat for top and bottom shelves
- 3 PC. protective drawer liners

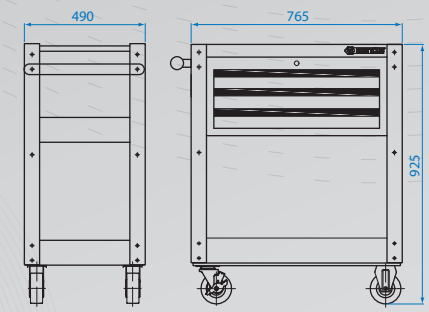



- Multiple space bar to hold other tools




87446-3B-KR



87446-3B-KB

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87446-3B-KR	overall	765 x 490 x 760	5"x1-1/4"	600 Kg	38	13
87446-3B-KB	overall + 5"x1-1/4" Casters	765 x 490 x 925				
	3 Drawer	576 x 380 x 75				

Accessory

KT NO.	Contents	
87502-01		Tool holder 500mmL
87502-02		Magnetic tool holder for workbench backpanel Size : 458 x 52 x 17mm
87502-050		U Shape hook
87502-051		1" Shape hook
87502-054		4" Shape hook
87502-058		8" Shape hook
87502-061		1" Double hook
87502-064		4" Double hook
87502-068		8" Double hook
87502-11		▪ Cutting board ▪ Oil-resistant, acid-resistant, moisture-resistant and anti-static ▪ 10mm PP foaming board
87502-12		▪ 4 PC. Adjusting device ▪ Includes adjustable bolt & adjustable pad

Roller Seat

Material: PVC leather + foam cushion + finishing powder coating steel
Two Open Storage Areas




87452B-B



Metal tray with rack funciton

87452C-B

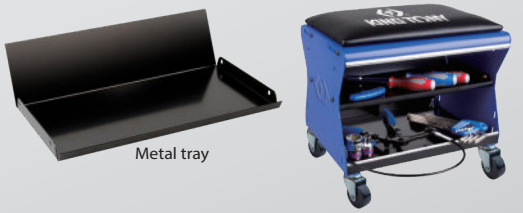

Metal tray

- Four 360° swivel Casters


KT NO.	Dimension(mm) Width x Depth x Height	Kg	📦/📦	CUFT
87452B-B	350 x 260 x 240	6.4	1 / 1	0.49
87452C-B		6.3	1 / 1	

87C34-3B-B

- Material : PVC leather + foam cushion + finishing powder coating steel
- 3 ball bearing drawers : 274 x 148 x 35 mm
- 3 bottle side holder






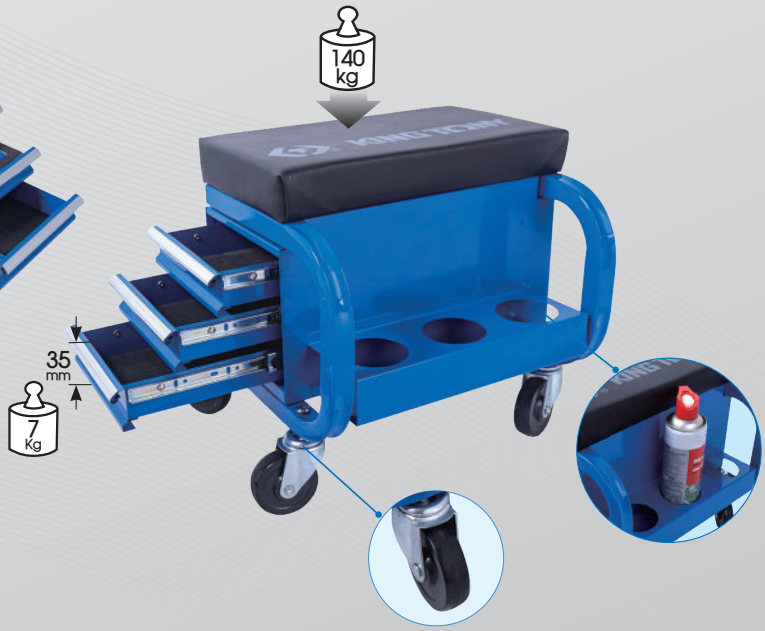

- Four 360° rotation 3"x1" casters


KT NO.	Dimension(mm) Width x Depth x Height	Kg	📦	CUFT
87C34-3B-B	370 x 400 x 365	8.8	1	2.43

Workbench

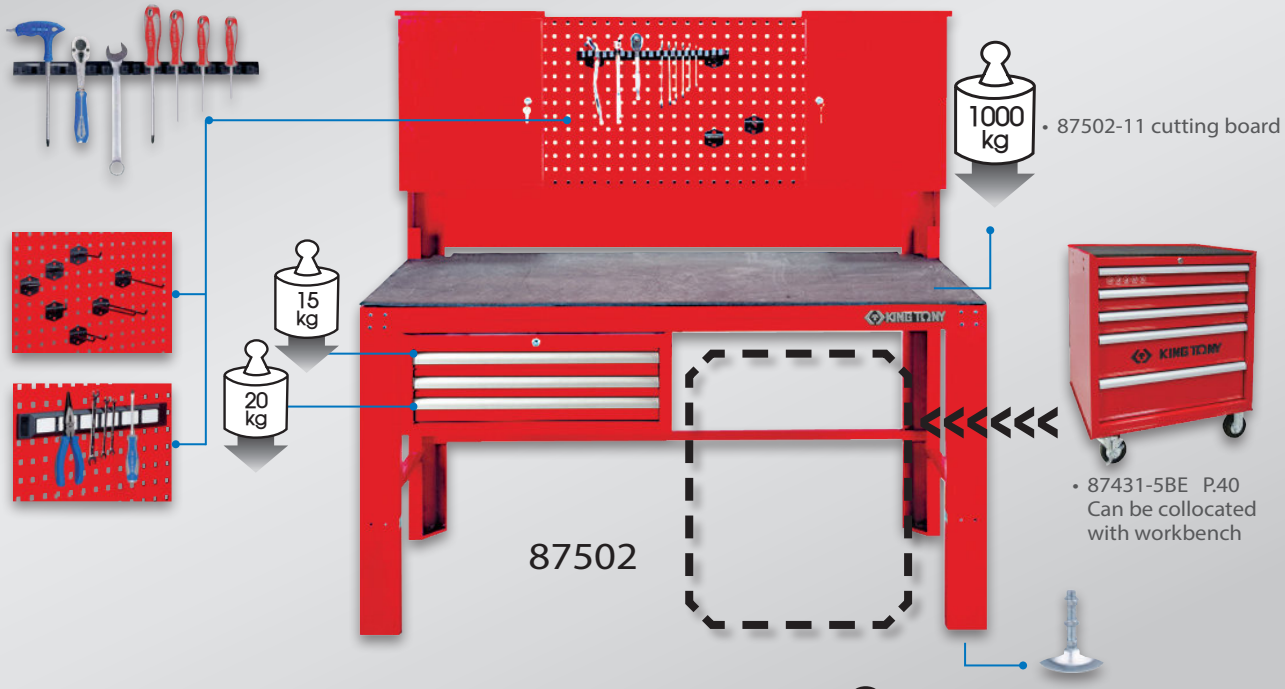

87431-5BE

▪ Four swivel casters(one is with brake mechanism)

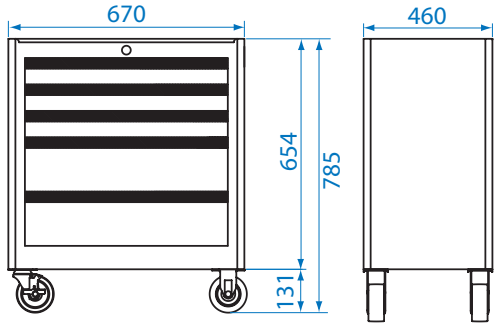



KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Casters	Static load	Kg	CUFT
87431-5BE	3 Drawer	576 x 380 x 75	4" x 1-1/4"	250 Kg	50	10.03
	2 Drawer	576 x 380 x 154				

87502P02

▪ Drawer chest for workbench



KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87502P02	Overall	660 x 307 x 251	13.00	2.7
	2 Drawer	569 x 275 x 50		
	1 Drawer	569 x 275 x 75		

87502P03


▪ 2 PC. wall cabinets




KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87502P03	Overall	400 x 200 x 500	14.00	4.5

Workbench

- Workbench excludes cutting board & tool holder

KT NO.			Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87502		▪ 3 drawer chest-ball bearing slide ▪ 2 wall cabinets	Overall	1525 x 700 x 1520	86.00	13.4
			3 Drawer chest	660 x 307 x 251		
			2 Drawer	569 x 275 x 50		
			1 Drawer	569 x 275 x 75		
			Wall cabinet	400 x 200 x 500		
87502P01		▪ Workbench with back panel	Overall	1525 x 700 x 1520	59.00	6.5
87502P011		▪ Workbench	Overall	1525 x 700 x 800	48.00	6.5
87502P012		▪ Back panel	Overall	1525 x 20 x 700	13.50	2.7


87512

KT NO.			Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87512		▪ 3 drawer chest ball bearing slide ▪ 1 wall cabinet	Overall	1565 x 766 x 1403	130.10	21.19
			3 Drawer chest	668 x 313 x 270		
			2 Drawer	568 x 262 x 50		
			1 Drawer	568 x 262 x 75		
			Wall cabinet	1565 x 203 x 603		

Wall Mounted Type Tool Cabinet

87201

- With 20 PC. hooks
  - 5 PC. U shape hook (87502-050)
  - 10 PC. 1" single hook (87502-051)
  - 5 PC. 1" double hook (87502-061)
- Heavy duty design for storage heavy duty tool
- Powder coating finishing
- Full opened door with 2 aluminum alloy handles
- 4 holes on the back of cabinet to be fixed on the wall
- Double wall door panel design, peg hole at inside wall of door





Steel thickness: (body)1.0 mm


87502-050


87502-051


87502-061

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87201	Overall	820 x 250 x 900	24.00	8

Tool Chest





87411-6B



87411-9B



87419-5B
(Extra deep)



87417-10B
(Extra deep)

- Powder coating
- Ball bearing slide
- Central locking system
- Hemmed edge design to improve strength and safety
- Drawer quick release and detent design

Selective colors:




-RK -B -BK -K -G -OK

(Produce with minimum quantity)



• Ball bearing slides



• Steel ball



• Lockable



• Plastic drawer divider for cabinet



• Bottom rubber mats to avoid slipping

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87411-6B	Overall	660 x 307 x 374	25.40	3.97
	Top	646 x 290 x 60		
	3 Drawer	170 x 275 x 50		
	2 Drawer	569 x 275 x 50		
	1 Drawer	569 x 275 x 75		
87411-9B	Overall	660 x 307 x 427	30.20	4.3
	Top	646 x 290 x 60		
	6 Drawer	170 x 275 x 50		
	2 Drawer	569 x 275 x 50		
	1 Drawer	569 x 275 x 75		

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87419-5B	Overall	660 x 455 x 483	40.00	8.58
	Top	646 x 420 x 70		
	2 Drawer	576 x 410 x 48.5		
	3 Drawer	576 x 410 x 75		
87417-10B	Overall	660 x 455 x 483	51.20	8.58
	Top	646 x 420 x 70		
	6 Drawer	169 x 410 x 48.5		
	1 Drawer	169 x 410 x 154		
	2 Drawer	576 x 410 x 48.5		
	1 Drawer	576 x 410 x 75		



87421-3B



87422-3B (Extra deep)

- 3 drawer chest
- Intermediate type
- Heavy gauge steel
- Drawer slides type-ball bearing
- Grooved full width drawer pulls add strength and offer to list contents of drawer
- Central locking system
- 10mm Top mat
- Powder coating finish
- 4 pins on the middle chest corners to tie in with top chest for extra security
- Overall size (mm) - 660(W) x 307(D) x 251(H) for 87421-3B
  Overall size (mm) - 660(W) x 455(D) x 254(H) for 87422-3B


KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87421-3B	Overall	660 x 307 x 251	13.00	2.7
	2 Drawer	569 x 275 x 50		
	1 Drawer	569 x 275 x 75		
87422-3B	Overall	660 x 455 x 254	24.8	5
	2 Drawer	576 x 410 x 48.5		
	1 Drawer	576 x 410 x 75		

Selective colors:




-RK -B -BK -K -G -OK

(Produce with minimum quantity)





• Ball bearing slides



• Steel ball



- Heavy gauge steel plus flange reinforced design
- Close cover synchronously lock all of the drawers
- Powder coating
- Overall size (mm) - 535(W) x 220(D) x 287(H)

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87401-2	2 Drawer	504 x 195 x 79	8.80	2.05
87401-3	3 Drawer	504 x 195 x 52	10.20	
87401-3H	3 Drawer	504 x 195 x 52	11.20	



87401-2



87401-3



87401-3H


Only 87401-3H:



• Internal lock system



• Ball bearing slides



• Steel ball

Tool Box

87402

- 3 section fold up type and adjustable
- Tubular handle, curved hinge
- Shaped pressing on flat surface to reinforced steel strength

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87402	5 compartments	470 x 220 x 260	5.60	1.22
87408		530 x 220 x 260	6.70	1.3

87408





87A05

87A05-KB

87A051

87A051-KB

- 3 section fold up type and adjustable
- Tubular handle, curved hinge
- Shaped pressing on flat surface to reinforced steel strength



87A05

KT NO.	Spec.	Dimension(mm) W x D x H	Kg	CUFT
87A05	5 compartments	470 x 220 x 260	5.10	1.41
87A05-KB				
87A051		530 x 220 x 260	6.80	1.48
87A051-KB				





87A05-KB

87A08

- Material : PP + Metal
- Shock-resistant reinforced polypropylene shell with metal cover
- Impact resistant and sturdy bumper at corners
- 30kgs load on top and stackable design
- V groove on top for sawing or placement
- Easy to use with grip handle for carry
- Portable tote tray take tools or small parts
- Lockable allow use padlock for security
- Metal double clasp

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87A08	2 compartments	470 x 210 x 207	2.0	0.91






87404

87407

- Meterial : PP
- Multi-function box, extra space for tools and parts
- Lightweight
- Durable design for tool storage





87404





87407

KT NO.	Spec.	Dimension(mm) Width x Depth x Height	Kg	CUFT
87404	2 compartments	560 x 278 x 270	2.40	1.75
87407		445 x 240 x 206	1.74	0.79

Parts Box

87137

- Parts box
- Material : PP

KT NO.	Dimension(mm) Width x Depth x Height	g
87137	180 x 39 x 96	109



• PP plastic storage box for spare parts

Portable Storage Box

8714101B

- Adjustable compartment is suitable for arranging different size of parts and accessories
- Transparent cover make it easy to find the parts you need
- The box is stackable design, you can combine two boxes together easily
- Durable material, easy to carry



• Adjustable compartment



• Suitable for arranging parts & accessories



• Stackable design



• Slide to lock



KT NO.	Size mm	g	
8714101B	376 x 290 x 67	790	1 / 16

Fabric Tool Bag

87711C

- Waterproof 600D Oxford
- Lightweight stainless bar & comfortable EVA handle
- Velcro cover for easy access & quickly take out tools
- Adjustable ambi-bag with soft padded shoulder strap
- 39 inner pockets for multiple-tools storage
- 50% less weight than metal box

KT NO.	Dimension(mm) Width x Depth x Height	kg	
87711C	510 x 255 x 345	3.00	1 / 1







87721B

- Heavy duty 600D Oxford
- Wide opening at top with zipper for easy access and security
- Removable shoulder strap
- Removable compartment for greater organization
- External and internal side pockets

KT NO.	Dimension(mm) Width x Depth x Height	kg	
87721B	360 x 200 x 260	0.95	1 / 1







Fabric Tool Bag

87722B

- Waterproof, reinforced rubber base protects tools
- 600D Oxford
- Internal and external storage pockets
- Zip fastening and rubber comfort grip handles
- Removable padded shoulder strap for comfortable carry

KT NO.	Dimension(mm) Width x Depth x Height	kg	
87722B	380 x 230 x 350	1.80	1 / 5





87732D

- For travelling, gyms
- Shoe compartment with a waterproof material
- Multi-layered and able to carry all types of protective gear
- Durable hard bumpers on base corners
- Inner flat zippered mesh pocket on flap and main compartment separation

CONSTRUCTION :

- 2 ventilation holes on the side
- 2 big webbing handle on top and the side to be able to move and carry the bag
- 2 strap handles to lift up the bag and carry on the shoulder
- 2 mesh pockets on internal sides of the bag
- 2 small front pockets
- 2 side pockets with zippers

KT NO.	Dimension(mm) Width x Depth x Height	kg	
87732D	500 x 260 x 210	1.00	20









87724D

- External and internal side pockets
- Removable shoulder strap
- 600D Nylon Oxford

KT NO.	Dimension(mm) Width x Depth x Height	kg	
87724D	330 x 125 x 250	0.52	20







87733D

- Durable fabric, smooth zipper and soft padding back
- Comfortable and Long-Lasting Usage
- Adjustable Waist Belt max to 130cm
- With 3 zippered pockets
- Convenient Earphone Hole
- Glow-in-the-dark logo keep you safe in the dark

KT NO.	Dimension(mm) Width x Depth x Height	kg	
87733D	420 x 120 x 150	0.19	50









Multi-use Backpack

87731D

- Multi-layered, easy to organize
- Extra side pocket



- External USB charge port design



- The breathable and comfortable shoulder straps foam is added inside



KT NO.	Dimension(mm) Width x Depth x Height	Kg	
87731D	310 x 150 x 440	0.6	40

87723B

- Material: 600D polyester
- Max Load: 20 kg
- Includes 14 pockets
- A water-proof and wear-resistant PVC base
- The main bag has a large capacity for easy access to tools. Multiple pockets can hold various tools within the backpack





KT NO.	Dimension(mm) Width x Depth x Height	Kg	
87723B	350 x 210 x 490	1.75	4











- The pads on the back of the product can absorb vibrations and increase breathability, making it more comfortable to carry













Modular Stacking Box

Modular Stacking Box

According to the demand of tools in different working environments, we've designed toolboxes to cope with different working situations. It is more convenient for the out-ofhome technician to carry the tools, also reducing the time for the technician to go back and forth between the vehicle and the construction site.
This saves the technician's time and energy, improving the technician's work efficiency and mobility



- For better clarity you can attach labels to either the front or the sides of the case to optimize your workflow









- I-Locking the 90° twist system is also extremely practical since you can open it just using one hand



- Fixing boxes in pallet truck



- With four swivel casters of which two are braked by an integrated brake











•The sturdy and ergonomic handles on the lid and in the front can be easily carried according to your requirement

• The double-layer tool pouch can adjust the space through the buckle to facilitate the user take the tools

L



87405-3
456 x 372 x 262 mm

M



87405-2
456 x 372 x 155 mm

S



87405-1
456 x 372 x 115 mm



87405-9
655 x 490 x 170 mm

Tool Box Set

37 PC.

9052-001MRV

Plastic case size (mm) :
456 x 372 x 155 (0.93 cuft)



Pouch 1 — 6 PC.



Pouch 2 — 21 PC.



EVA foam(9-90110GPV) — 10 PC.



Pouch 1

Contents



6CB21, 6716-06A, 6216-06A, 6336-08A



6318-08A, 6146-08A

Pouch 2

Contents

	1471	PH0 x 75, PH1 x 100, PH2 x 100
	1472	3 x 75, 4 x 100, 5.5 x 125, 6.5 X 150
	1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10
	20002UB	5 x 6mm, 8 x 10mm



6CB02, 3611VE-08, 79095-05M

EVA foam(9-90110GPV)

Contents

8.69 CUFT 1.16



6511-10, 3611-10R, 76223-08, 76210-10



7821-50, 67B3-55, 9CJ1120, 6AG11-20



6311-08, 67A1-07

Tool Box Set

112 PC.

9052-002MRV

Plastic case size (mm) :
456 x 372 x 155 (0.93 cuft)



Pouch 1 — 13 PC.



Pouch 2 — 7 PC.



EVA foam(9-7592MPV) — 92 PC.



Pouch 1

Contents	
1062	8, 9, 10, 11, 12, 13, 14, 16, 17, 18, 19, 22
9TA281	

Pouch 2

Contents			
3611-10R	6AB31-75	6211-06	6111-07
6311-08	6511-10	79095-05M	

EVA foam(9-7592MPV)

10.46 CUFT 1.16

Contents	
2335MR	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
4335MR	10, 13, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32
1147PR	T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H,T50H
1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10
20002UB	5 x 6mm, 8 x 10mm

1032CQ | 1005APR | 2792 4791R | 4251-10R | 2179DF


7821-30 | 4773-10GS | 2755-55G | 2142

Handy Case

Handy Case Series


The outside of handy case can afford high load capacity, and great crash-resistance. There are four different sizes with the conception of T.C.S mod. Therefore, its design is based on the user perspective , easy to carry and store, make every user enjoying their work.



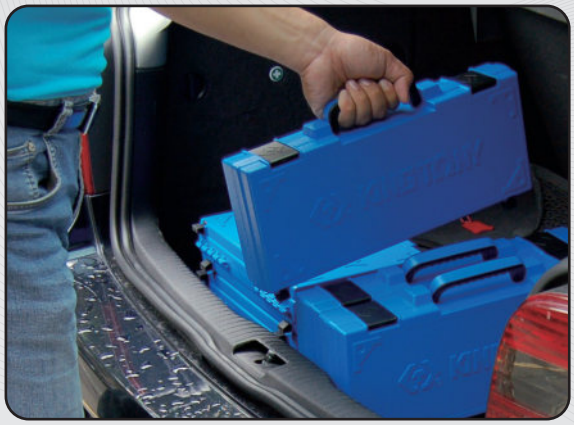





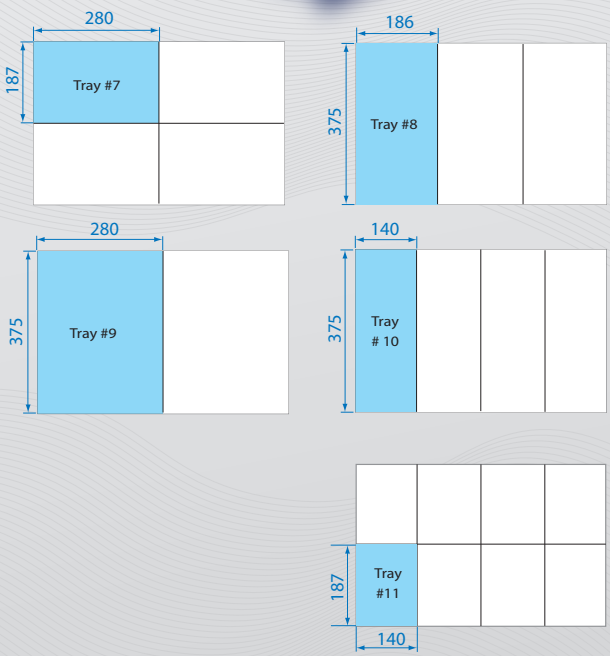

#11



820005
199 x 171 x 50mm

#7



820001
294 x 231 x 66mm

#10



820002
389 x 184 x 66mm

#8



820003
389 x 229 x 66mm

#9



820011
422 x 372 x 92mm

Handy Case

820011

- Made of shockproof PE-HD for heavy duty contents
- Ideal for tool storage & tool box system
- Easy to pile and store
- Anti-collision
- Case for Eva foam / tray





- Steel buckle provides security & strength



- Foam protection against collisions



- Hexagon overlap in 4 corners, easy to file up



- Extra space for thumb taking out

KT NO.	Size mm	EVA / Tray		
820011	422 x 372 x 92	#9	1417	1 / 4

82000

- Tool case made of sturdy ABS material
- Ideal for tool storage & tool box system
- Easy to pile and store
- Case for Eva foam / tray





- Plastic padding for better stable storage
- The hinge construction makes box more durable



- 180° swivel handle easy to carry



- Easy and quick to lock



- Foam protection against collisions



- Hexagon overlap in 4 corners, easy to pile up




- Extra space for thumb taking out

KT NO.	Size mm	EVA / Tray		
820001	294 x 231 x 66	# 7	641	1 /6
820002	389 x 184 x 66	#10	651	1 / 5
820003	389 x 229 x 66	# 8	793	1 / 4
820005	199 x 171 x 50	#11	293	1 / 8

Multi-Storage Case

827011

- Heavy duty plastic blow case with foam padded internal
- High impact polystyrene with dividers make 12 spaces
- Easy to carry tools from trolley & store bolts, nuts
- Mini case (278 x 87 x 42 mm)









Blow case size (mm) :
422 x 372 x 92 (0.51 Cuft)

KT NO.	Contents		
827011	84700011B x4	2.19	1 / 4


Plastic Tray

847000

- For accessories, parts and consumables
- Easily combine the parts box sizes depending on the handy case
- Easy to carry and segment

84700011B 84700002B 84700003B




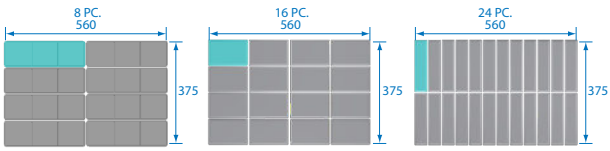

KT NO.	Size		
84700011B	283 x 93 x 43	150	8 / 72
84700002B	140 x 93 x 43	75	16 / 144
84700003B	187 x 47 x 43	50	24 / 216

Tools Control & Security Storage System

How to complete your tool trolley set and tool chest set



Three-colors fabrication



waterproof




Laser marking




Missing tools detected


Drawer (646x290 mm)




Drawer (172x275 mm)





Drawer (572x275 mm)



Drawer (579x380 mm)




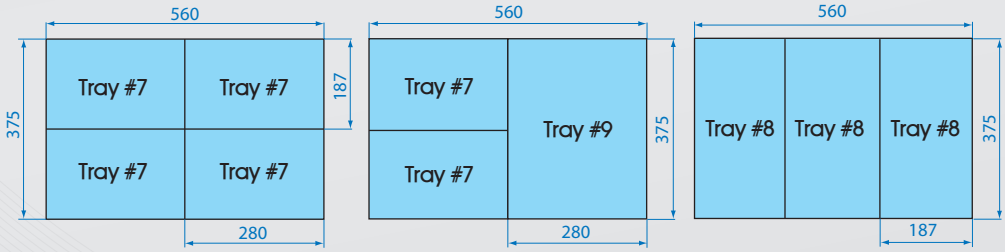


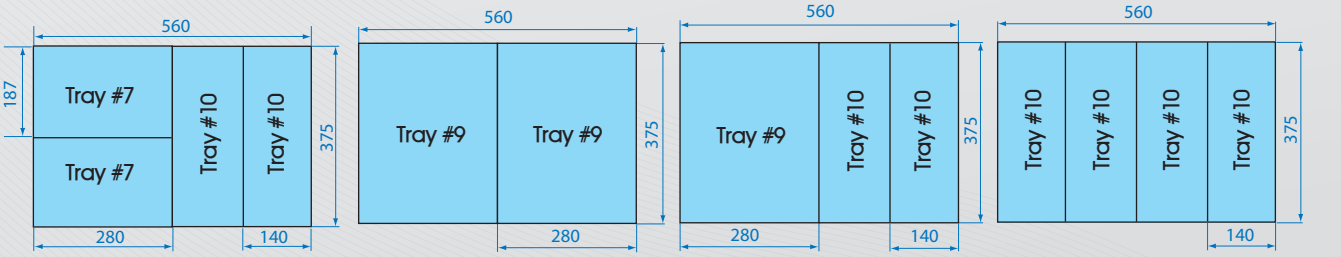


Drawer (896 x 379 mm)

- for 87462-7G-KB

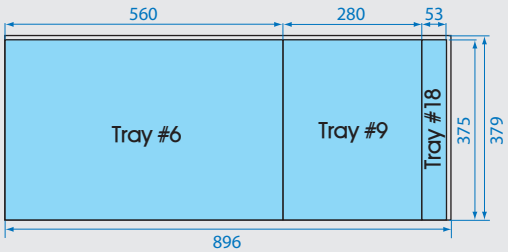

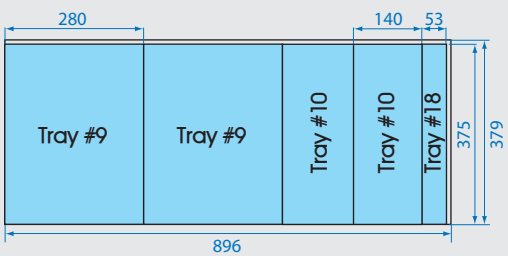

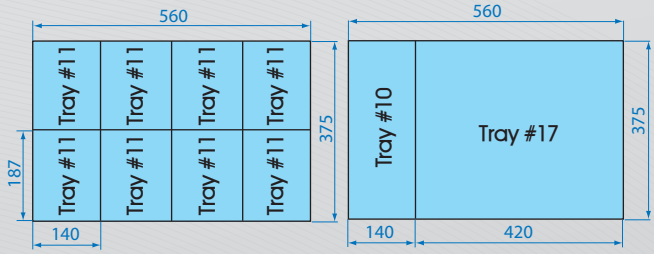

- **Security:**
  Separate spaces for each tools to prevent them being left in dangerous areas
- **Benefit:**
  Tools are quickly located and immediately returned after use to avoid loss
  3 colors EVA foam offers convenient identification of use with sustained sizes and mark
- **Efficiency:**
  A quick glance helps for missing tools
  Durable material prevents being dirty for easy maintenance


KING TONY


TOYOTA
KING TONY

Tool Trolley Contents

235 PC.



Contents No. 934-235MRVD — 24.15 CUFT 2.62


- Special tool set for Automobile, suitable for VOLKSWAGEN-GROUP, MERCEDES-BENZ, OPEL, BMW & Japanese passenger car



9-4537MRV #9 P.80 | 9-2565MRV #7 P.76 | 9-4129PRV #7 P.76



9-4147PRV #10 P.88 | 9-90135MRV #10 P.88 | 9-1220MRV #9 P.81

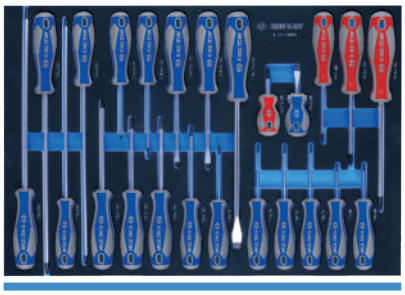

9-31124MRV #6 P.75



9-90119MRV #9 P.82 | 9-40104GPV #10 P.88 | 9-40113GPV #10 P.88



9-44214GPV #10 P.88 | 9-90118PRV #10 P.89

Tool Trolley Set

235 PC.

7 — 88.15 CUFT 14.86



934-235MRV (87434-7B P.37)



934-235MRV-G (87434-7B-G P.37)



934-235MRV-B (87434-7B-B P.37)

7 — 90.29 CUFT 18.26



9634-235MRV (87634-7B P.38)



9634-235MRV-G (87634-7B-G P.38)



9634-235MRV-B (87634-7B-B P.38)

Tool Trolley Contents

286 PC.



Contents No. 934-010MRVD

28.1 CUFT 2.51


- Special tool set for automobile, suitable for VOLKSWAGEN-GROUP, MERCEDES-BENZ, OPEL, BMW & Japanese passenger car




9-3544MRV #9 P.79 | 9-4537MRV #9 P.80



9-4147PRV #10 P.88 | 9-4401MPV #10 P.88 | 9-2565MRV #7 P.76 | 9-4129PRV #7 P.76

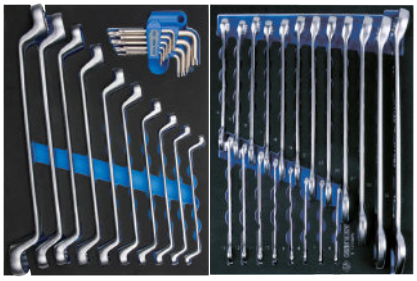

9-90119MRV #9 P.82 | 9-1220MRV #9 P.81

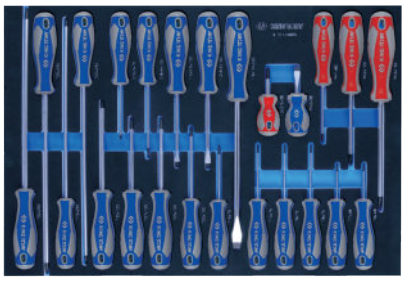

9-31124MRV #6 P.75



9-40104GPV #10 P.88 | 9-40113GPV #10 P.88 | 9-90135MRV #10 P.88 | 9-90118PRV #10 P.89

Tool Trolley Set

286 PC.

7 | 92.10 kg | CUFT 15.03



934-010MRV (87434-7B P.37)



934-010MRV-G (87434-7B-G P.37)



934-010MRV-B (87434-7B-B P.37)

7 | 94.24 kg | CUFT 18.43



9634-010MRV (87634-7B P.38)



9634-010MRV-G (87634-7B-G P.38)



9634-010MRV-B (87634-7B-B P.38)

Tool Trolley Contents

325 PC.



Contents No. 934-011MRVD


33.14 CUFT 3.75



9-3544MRV #9 P.79



9-4537MRV #9 P.80


9-2565MRV #7 P.76
9-4143FRV #7 P.77


9-1112MRV #9 P.82


9-90119MRV #9 P.82


9-1220MRV #9 P.81

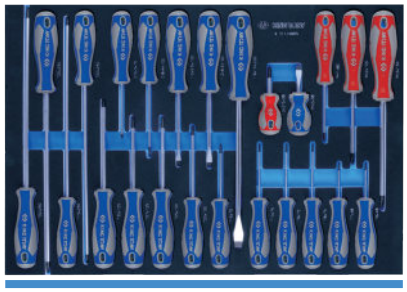
9-31124MRV #6 P.75


9-40104GPV #10 P.88
9-40113GPV #10 P.88
9-90135MRV #10 P.88
9-90118PRV #10 P.89


9-90413TQV #6 P.75


7962-04 P.478


9DC23 P.597


2121-18 P.605


7963-04 P.478


14210212 P.376
14226512 P.376


9-44214GPV #10 P.88
9-22108MRV #9 P.83

Tool Trolley Set

325 PC.

7 drawers
97.14 CUFT 15.99


934-011MRV (87434-7B P.37)


934-011MRV-G (87434-7B-G P.37)


934-011MRV-B (87434-7B-B P.37)

7 drawers
99.28 CUFT 19.39


9634-011MRV (87634-7B P.38)


9634-011MRV-G (87634-7B-G P.38)


9634-011MRV-B (87634-7B-B P.38)


Tool Trolley Contents

327 PC.




Contents No. 934-019MRVD

56.68 CUFT 4.6

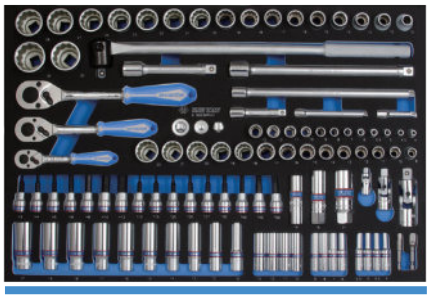

9-9003MRV01 #6 P.72

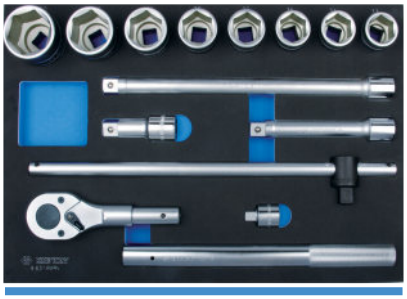


9-6314MRV #6 P.72




9-99430MFV #6 P.72



9-30208MRV #9 P.83



9-1220MRV #9 P.81



9-42116GPV #9 P.82



9-6414MPV #9 P.81



9-40104GPV #10 P.88



9-40113GPV #10 P.88



9-4147PRV #10 P.88



9-90118PRV #10 P.89



9-10112MRV #7 P.77
9-4143FRV #7 P.77



9-1044CQV #10 P.89



9-21-20-07MRV #10 P.89

Tool Trolley Set

327 PC.

7 120.68 CUFT 16.84



934-019MRV (87434-7B P.37)



934-019MRV-G (87434-7B-G P.37)



934-019MRV-B (87434-7B-B P.37)

7 122.82 CUFT 20.24



9634-019MRV (87634-7B P.38)



9634-019MRV-G (87634-7B-G P.38)



9634-019MRV-B (87634-7B-B P.38)

Tool Trolley Contents

525 PC.



Contents No. 935-525CRVD


68.08 CUFT 6.51



9-9003MRV01 #6 P.72



9-6314MRV #6 P.72







9-9040SRV #9 P.80

9-4129PRV #7 P.76

9-3612MR #7 P.127



9-4147PRV #10 P.88

9-4401MPV #10 P.88

9-4435MP #9 P.129



9-1112MRV #9 P.82

9-1220MRV #9 P.81



9-90119MRV #9 P.82


9-91190CRV #9 P.83




9-91124MRV #6 P.75



9-90217GRV #6 P.74

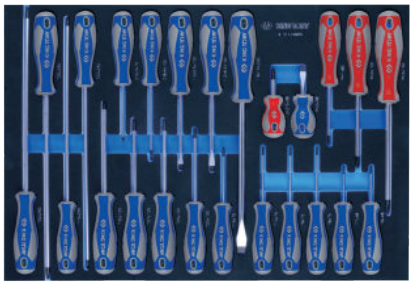

9-31124MRV #6 P.75







9-22108MRV #9 P.83

9-4143FRV #7 P.77

9-30904AY #7 P.127



9-90413TQV #6 P.75




74010 P.493



74020 P.493



74060 P.493



7861-16 P.470



7811-12 P.470



7851-16 P.471



7911-12 P.494



21-20-101 P.481



6532-14 P.370



79094-08C P.482

Tool Trolley Set

525 PC.



234.08

CUFT 38.05

935-525CRV

(87435-13B P.38)

Tool Chest Set

187 PC.

911-004CRV

47.38 CUFT 6.51





9-9077CRV #1 P.69




9-42102GPV #2 P.70 | 9-40122GPV #2 P.70 | 9-40112GPV #2 P.70



9-91131MRV #3 P.71



9-91126SRV #3 P.71

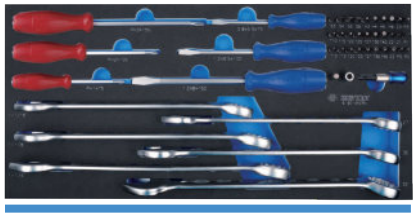

9-90145CRV #3 P.71



79093-05C P.482



7811-16 P.470



87411-6B P.48

Tool Chest Set

219 PC.

911-000CRV

48.27 CUFT 6.10





9-7069CRV #1 P.69



9-42114GPV #2 P.70 | 9-40102GPV #2 P.70 | 9-2548CRV #2 P.70



9-90129CRV #3 P.71



9-90128SR #3 P.111



9-90138CR #3 P.112



87411-6B P.48


Tool Chest Set

306 PC.

919-001CRV

66.01 CUFT 11.05



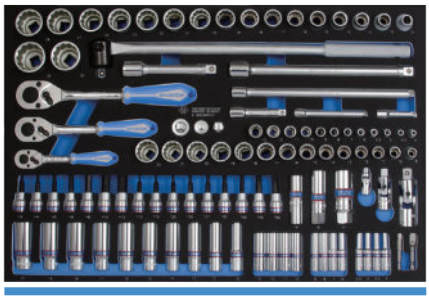

9-9003MRV01 #6 P.72




9-9040SRV #9 P.80



9-1220MRV #9 P.81



9-90217GRV #6 P.74



9-31110MRV #9 P.84



9-91190CRV #9 P.83



9-91124MRV #6 P.75



79094-08C
P.482




7911-12
P.494



87419-5B P.48



Tool Set Content



9-7069CRV

Tray category #1 (642 x 286mm)

70 PC.

Contents	7.5 kg	1 / 2
3330M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 20, 21, 22	
3330S	3/8, 7/16, 1/2, 9/16, 5/8, 11 /16, 3/4, 13 /16	
4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	
4330SR	3/8, 7/16, 1/2, 9/16, 5/8, 11 /16, 3/4, 13 /16, 7/8, 15/16, 1	
463516RC	463521RC	3792
4791R	3779-08G	4779-10GR
3452-08F	4452-15FR	3812
3571-08	4572-10	4813
3221-03 3221-06	4251-05R 4251-10R	7911-12




7911-12

9-9077CRV


Tray category #1 (642 x 286mm)

77 PC.


Contents	7.95 kg	1 / 2
2330M	4, 5, 6, 7, 8, 9, 10	
2330S	3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8	
3330M	10, 11, 12, 13, 14, 15, 17, 19	
3330S	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16	
4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	
4330SR	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4	
463021RC	2792	3792	4791R
2779-55G	3779-08G	3814
4779-10GR	2221-04	3221-06
4251-10R	3452-08F	4452-15FR
4572-12		



Tool Set Content

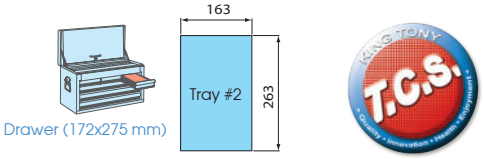

9-2548CRV Tray category #2 (263 x 163mm)

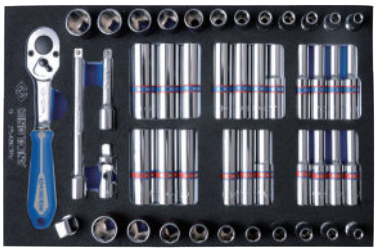

48 PC.

Contents — 1.28 kg — 1 / 10

2235M	4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13
2235S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13
2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2

2792 — 2813 — 2779-55G

2221-02
2221-04

9-40102GPV Tray category #2 (263 x 163mm)



2 PC.

Contents — 1.00 kg — 1 / 10

6011-10R — 6511-10

9-40112GPV Tray category #2 (263 x 163mm)



2 PC.

Contents — 0.69 kg — 1 / 10

6231-08 — 6311-10

9-40122GPV Tray category #2 (263 x 163mm)




2 PC.

Contents — 0.95 kg — 1 / 10

6111-08 — 6011-10R

9-42102GPV Tray category #2 (263 x 163mm)

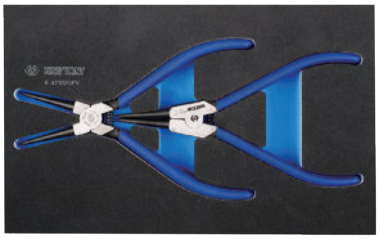


2 PC.

Contents — 0.32 kg — 1 / 10

68HS-07 — 68SS-07

9-42114GPV Tray category #2 (263 x 163mm)

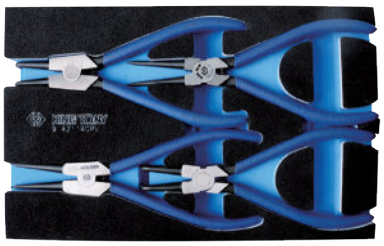


4 PC.


Contents — 0.60 kg — 1 / 10

68HS-07 — 68SS-07

68HB-07 — 68SB-07

Tool Set Content





9-91126SRV

Tray category #3 (554 x 260mm)

Contents		3.28 kg / 1 / 3
5060		1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1
5930		5/16 x 3/8, 3/8 x 7/16, 1/2 x 9/16, 9/16 x 5/8
1130SR		3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8
3611R		6, 12



26 PC.

9-91131MRV

Tray category #3 (554 x 260mm)

Contents		2.98 kg / 1 / 4
1930		8x10, 10x12, 11x13, 14x17
1060		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24
1125MR		H1.5, H2.5, H2, H3, H4, H5, H6, H8, H10



31 PC.

9-90145CRV

Tray category #3 (554 x 260mm)

Contents		4.04 kg / 1 / 3
1060		27, 30, 32
5060		1-1/16, 1-1/8, 1-1/4
1481		PH1x75, PH2x100, PH3x150
1482		5.5x75, 6.5x100, 8x150
1025S		3.0, 4.0, 5.0, 6.0
1025P		PH1, PH2 x 2, PH3
1025Z		PZ1, PZ2 x 2, PZ3
1025T		T10, T15, T20, T25, T27, T30, T40
1025H		H3, H4, H5, H6
1025U		T10H, T15H, T20H, T25H, T27H, T30H, T40H
7702-25	753-63	2141




45 PC.

9-90129CRV


Tray category #3 (554 x 260mm)

Contents		2.5 kg / 1 / 4
1421		PH0 x 60, PH1 x 80, PH2 x 38, PH2 x 100, PH3 x 150
1422		3 x 75, 6.5 x 38, 6.5 x 100, 6.5 x 150, 8 x 175
1130SR		3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8
1120MR		H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10
6111-07	6231-07	
6311-06		

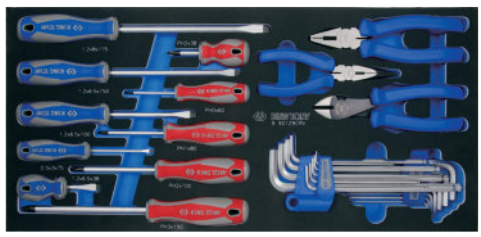

29 PC.

Tool Set Content



Drawer (579 x 380 mm)

9-6314MRV

Tray category #6 (560 x 375mm)

Contents			kg 9.96	1 / 2
○	6335M	33, 34, 35, 36, 38, 41, 46, 50		
	6572-20		6779-20F	
	6251-04 6251-08 6251-16		6814	




14 PC.

9-9003MRV01

Tray category #6 (560 x 375mm)

Contents			kg 7.30	1 / 3
○	2235M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13		
○	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13		
✱	3023	T10,T15,T20,T25,T27,T30,T40,T45,T50		
●	3025	H3,H4,H5,H6,H8,H10,H12		
○	3235M	10,12,13,14,15,16,17,18,19,21		
○	3330M	8,10,11,12,13,14,15,16,17,18,19,20,21,22		
○	4330MR	10,12,13,14,15,16,17,18,19,20,21,22,23,24,27,28,30,32		
	7702-50		7703-50	
	2792		3792	4791R
	363516		363521	36A014

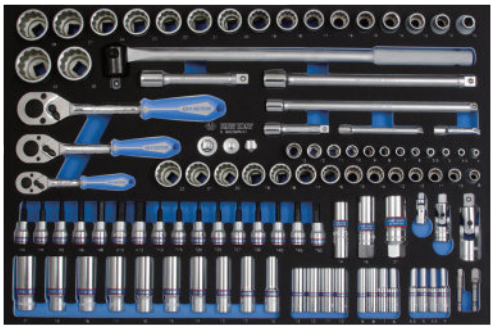

103 PC.

Contents

2813	3812	4813	
2221-02 2221-04	3221-03 3221-10	4251-05R 4251-10R	
2771-55G	3771-08G		
4771-10GR	4462-18F		

9-99430MFV



9-99430MFV

30 PC.

Contents			kg 12.38	1 / 2
○	8435M	27, 30, 32, 33, 36		
✪	6575M	E24, E26, E28, E30, E32		
✪	3375M	E4, E5, E6, E7, E8, E11		
✪	4375M	E10, E12, E14, E16, E18, E20, E22		
●	4025	H14, H17, H19		
	8866P		7823-20	
	320560		9DC22	

9-99430MFV01


Tray category #6 (560 x 375mm)




9-99430MFV01

31 PC.

Contents			kg 12.38	1 / 2
○	8435M	27, 30, 32, 33, 36		
✪	6575M	E24, E26, E28, E30, E32		
✪	3375M	E4, E5, E6, E7, E8, E11		
✪	4375M	E10, E12, E14, E16, E18, E20, E22		
●	4025	H14, H17, H19		
	4866P		8866P	7823-20
	320560		9DC22	





Drawer (579 x 380 mm)

Tool Set Content

9-44803AMPV

9-44803AMPV01

Tray category #6 (560 x 375mm)



9-44803AMPV



9-44803AMPV01

41 PC.

KT NO.		Contents			9.50	1 / 2
9-44803AMPV	 33481-095	 4945M	17, 19, 21		79900-10	
		 4435M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24		34423-1A	
9-44803AMPV01	 33411-050	 4535M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32		4797P	 4260-03P 4260-05P
					SY-211M x2	 33411-71

9-44805AMPV

Tray category #6 (560 x 375mm)

Contents			9.76	1 / 2
	4945M	17, 19, 21		
	4435M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24		
	4535M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32		
 33481-095	 37435-075	 33411-71		
 34423-1A	 SY-211M x2			
 4797P	 4260-03P 4260-05P			



41 PC.

9-94437MRV


Tray category #6 (560 x 375mm)

Contents		4.61	1 / 2
1060	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24		
3731M	8, 10, 11, 12, 13, 14, 15		
 4435M	17, 19, 21		
 1836P	PH2, PH3		
 1836S	9, 11		
 1880P	PH2, PH3		
 1880S	8, 10		
 4112	 414810S		



37 PC.

Tool Set Content



Drawer (579 x 380 mm)

9-90217GRV

Tray category #6 (560 x 375mm)

Contents				3.89	1 / 6
764	3,4,5,6				
76105-06		76717-05			
7811-16		6011-10R			
6111-08		6231-07		6311-08	
6314-05		68HB-07		68HS-07	
68SB-07		68SS-07		6511-10C	



17 PC.

9-91122MRV

Tray category #6 (560 x 375mm)

Contents		3.18	1 / 5
1060	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 24		
115HM	H6, H7, H8, H9, H10, H11, H12, H13		




22 PC.

9-22124MRV50

Tray category #6 (560 x 375mm)

Contents			2.18	1 / 5
115HM	H7, H8, H10, H11, H12, H13			
ST20109MR		ST20419PR		

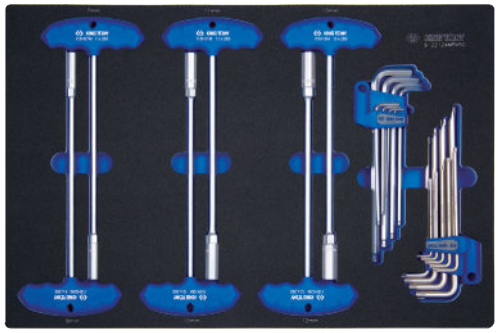

24 PC.

9-31920MRV


Tray category #6 (560 x 375mm)

Contents			2.01	1 / 2
1421	PH0 x 60, PH2 x 38, PH2 x 300			
1422	3 x 75, 6.5 x 38, 6.5 x 300			
1427	T8H x 75, T10H x 75, T15Hx 75, T20H x 100, T25H x 100, T27H x 100, T30H x 125,			
1461	PH2 x 100, PH3 x 150			
1462	6.5 x 100, 8 x 150			
43280212		48280180		
2121-18				



20 PC.

Tool Set Content




Drawer (579 x 380 mm)

9-31124MRV

Tray category #6 (560 x 375mm)

Contents		2.41	1 / 5
1421	PH2x38, PH1x80, PH2x100, PH3x150		
1422	3x75, 4x100, 5.5x100, 6.5x100, 10x200, 6.5x38		
1423	T6x48, T7x48, T8x75, T9x75, T10x75, T15x75, T15x250, T20x100, T20x250, T25x100, T25x250, T27x100, T30x125, T30x250		

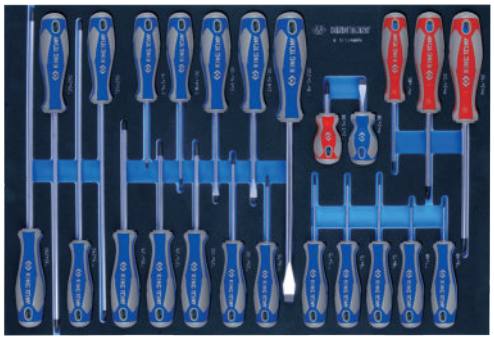

24 PC.

9-91124MRV

Tray category #6 (560 x 375mm)

Contents			4.12	1 / 5
3731	10, 12, 13, 14, 17, 18, 19			
1421	PH2 x 300			
1422	5 x 300			
74030		6615-11		
3611-10R 3611-12R		9TK118		
79063-12		11409SQ05		




11409SQ05

24 PC.

9-90413TQV

Tray category #6 (560 x 375mm)

Contents		2.49	1 / 5
115HM	8, 10, 13		
9CZ101		115345R	
48280180		43280212	
43240115Y		75102-08G	
75202-08G		75302-08G	
75402-08G		75502-08G	



13 PC.

9-91217MRV


Tray category #6 (560 x 375mm)


Contents		6.11	1 / 2
1421	PH1 x 80, PH2 x 100		
1422	3 x 75, 4 x 100, 5.5 x 125, 6.5 x 150, 8 x 175		
1423	T15 x 75, T20 x 100, T25 x 100, T27 x 100, T30 x 125		
48280180		9CF220	
7823-10 7823-20		7821-30	



17 PC.

Tool Set Content





Drawer (579 x 380 mm)

9-2331SRV

Tray category #7 (280 x 187mm)

Contents — 0.97 kg — 1 / 10

2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2, 9/16
2235S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16
2771-55G	2571-45 2142
2221-02 2221-04 2221-06	2792 2178DF



31 PC.

9-2534MRV

Tray category #7 (280 x 187mm)

Contents — 1.11 kg — 1 / 10

2335M	4, 4.5, 5 ,5.5 , 6 , 7 , 8 , 9 , 10 , 11 , 12 , 13, 14
2235M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
2771-55G	2571-45
2792	2178DF 2142
2221-02, 2221-04, 2221-06	



34 PC.

9-2565MRV

Tray category #7 (280 x 187mm)

Contents — 1.38 kg — 1 / 10

2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
2235M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
2375M	E4, E5, E6, E7, E8
2013X	T8, T9, T10, T15, T20, T25, T27, T30, T40
2015X	H3, H4, H5, H6, H8
2018X	PZ1, PZ2
2011X	PH1, PH2
2012X	3.5, 5.5, 8
1025T	T6, T7
1025M	M4, M5, M6, M8, M10



65 PC.

Contents

2792 2813 276A-04G

2221-02, 2221-04, 2221-06

9-4138PRV

Tray category #7 (280 x 187mm)

Contents — 1.85 kg — 1 / 10

4033	T20, T25, T27, T30, T40, T45, T50, T55, T60
4035	H4, H5, H6, H7, H8, H10, H12, H14, H17



18 PC.

9-4129PRV

Tray category #7 (280 x 187mm)


Contents — 2.07 kg — 1 / 10


4025	H3, H4, H5, H6, H7, H8, H10, H12, H14, H17, H19
4026	M5, M6, M8, M10, M12, M14
402B	M16, M18



19 PC.

Tool Set Content





Drawer (579 x 380 mm)

9-7128PRV

Tray category #7 (280 x 187mm)

Contents			1.30	1 / 10
	3023	T15, T20, T25, T27, T30, T40, T45, T50		
	3025	H3, H4, H5, H6, H7, H8 H10, H12		
	3375	E8, E10, E12, E14, E16, E18		
	4375	E10, E12, E14, E16, E18, E20		



28 PC.

9-4429MPV

Tray category #7 (280 x 187mm)

Contents			2.75	1 / 4
	4535M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32, 33, 34, 36		




19 PC.

9-10112MRV

Tray category #7 (280 x 187mm)

Contents			1.13	1 / 10
	3731	10, 11, 12, 13, 14, 15, 16, 17, 19		
	373202R	373203R	373204R	

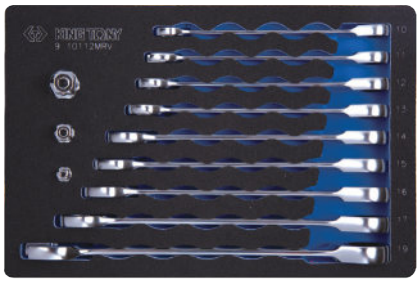


12 PC.

9-4143FRV

Tray category #7 (280 x 187mm)

Contents			1.63	1 / 8
	1636H	H5, H6, H7, H8, H10, H12		
	1636M	M6, M8, M10, M12		
	1636T	T30, T40, T45, T50, T55, T60		
	1832H	H3, H4, H5, H6, H7, H8, H10, H12		
	1832T	T15, T20, T25, T27, T30, T40, T45, T50		
	1836P	PH2, PH3		
	1836S	9 x 1.6, 11 x 2		
	1880P	PH2, PH3		

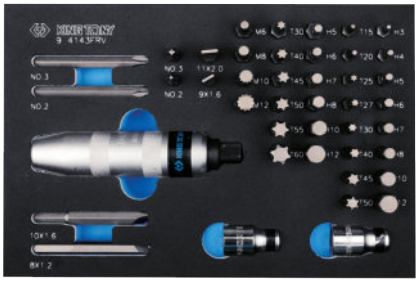

43 PC.

Contents

1880S	8 x 1.2, 10 x 1.6	
414810M, 414810S	4112	

9-25VE01MRV


Tray category #7 (280 x 187mm)


Contents			1.30	1 / 10
	2335VE	5, 6, 7, 8, 9, 10, 11, 12, 13, 14,		
	2035VE	H3, H4, H5, H6		
	2221VE	4, 6		
	2771VE-55	2178VE-05		



18 PC.

Tool Set Content






Drawer (579 x 380 mm)

9-30904AYV


Tray category #7 (280 x 187mm)


Contents			0.45	1 / 10
43250115Y		43270115Y		
43260115Y		43290115Y		

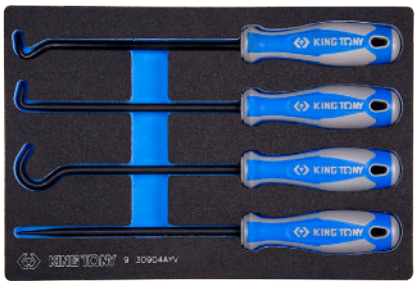

4 PC.

Tool Set Content





Drawer (579 x 380 mm)

9-35VE01MRV

Tray category #8 (375 x 187mm)

Contents			2.16	1 / 6
3335VE	10, 11, 12, 13, 14, 17, 19			
3025VE	H5, H6, H8			
3221VE	6, 10,			
3771VE-08		3178VE-08		



14 PC.

9-45VE01MRV

Tray category #8 (375 x 187mm)

Contents			3.22	1 / 6
4335VE	8, 10, 12, 13, 14, 17, 19, 21, 22, 24			
4025VE	H8, H10			
4251VE	5, 10			
4771VE-10		4178VE-08		



16 PC.

9-2550MRV

Tray category #8 (375 x 187mm)

Contents			1.37	1 / 15
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14			
2375M	E4, E5, E6, E7, E8			
2031	PH1, PH2, PH3, PH4			
2032	4, 5.5, 6.5, 8, 10			
2033	T8, T9, T10, T15, T20, T25, T27, T30, T40			
2035	H3, H4, H5, H6, H7, H8, H10			




50 PC.

Contents

2771-55G		2178DF	
2792		2571-45	
2293-04 2293-06		2221-02	

Tool Set Content

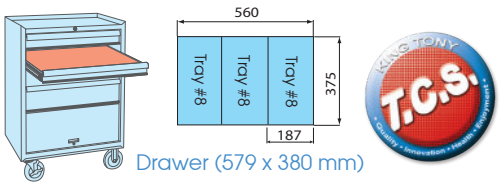

9-30909AYV

Tray category #8 (375 x 187mm)


- Use for scribing, alignment, installing and removing O rings, seals, cotter pins and washers
- Use for removing old gaskets more easily and quickly

Contents		kg 0.89	1 / 12
43250115Y		43350175Y	
43260115Y		43360175Y	
43270115Y		43370175Y	
43290115Y		43390175Y	
43240115Y			



9 PC.

Tray category #8 (375 x 187mm)

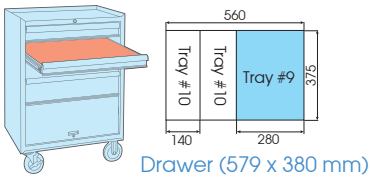

Tool Set Content

9-3544MRV

Tray category #9 (375 x 280mm)

Contents		kg 3.19	1 / 5
3335M		10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22	
3375M		E7, E8, E10, E11, E12	
3230M		8, 10, 11, 12, 13, 14, 16, 17, 19	
3750M		10, 11, 12, 13, 14, 15, 16, 17, 18, 19	
3812 3814	3223-14	3779-08G	3221-03 3221-06 3221-10



44 PC.

9-4221MRV

Tray category #9 (375 x 280mm)

Contents		kg 3.97	1 / 5
4230		8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32, 33, 34, 36	



21 PC.

9-4526MRV05



Tray category #9 (375 x 280mm)

Contents		kg 5.05	1 / 4
4335MR		8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 27, 30, 32	
4779-10FR		4572-12	
4452-15FR	4791R	4251-05R 4251-10R	



24 PC.

Tool Set Content

Drawer (579 x 380 mm)

9-4527MRV02

Tray category #9 (375 x 280mm)

Contents			kg 4.72	1 / 5
4335MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 27, 29, 30, 32			
4771-10GR		4791R		
4572-12		4251-05R 4251-10R		
4452-15FR		4581-10		



27 PC.

9-4537MRV

Tray category #9 (375 x 280mm)

Contents			kg 4.39	1 / 5
4335MR	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 26, 27, 28, 30, 32			
4375M	E10, E12, E14, E16, E18, E20, E22, E24			
4779-10GR		4293-02		
4251-05R 4251-10R		463516RC 463521RC		
4791R		463014RC		




37 PC.

9-9040SRV

Tray category #9 (375 x 280mm)

Contents		kg 3.02	1 / 5
2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2		
3330S	3/8, 7/16, 1/2, 9/16, 5/8		
4330SR	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/8, 1-1/4,		
5060	1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 7/8, 15/16, 1		

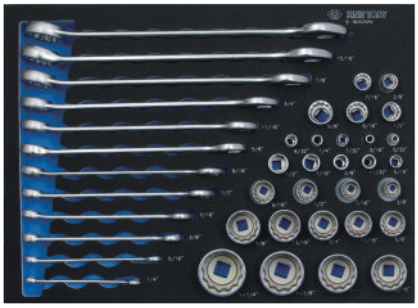

40 PC.

9-7560MRV01


Tray category #9 (375 x 280mm)


Contents		kg 6.24	1 / 2
2335M	4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14		
4335MR	10, 11, 13, 14, 15, 16,17, 18, 19, 20, 21, 22, 24, 27, 30, 32		
1025S	3, 4.5, 5, 6.5, 8		
1025P	PH0, PH1, PH2, PH3		
1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H		
1025Z	PZ1, PZ2, PZ3		
276A-04G		4771-10GR	
4452-15FR		4572-12	2745
213312DF		2792	4791R
2223-02 2223-04		4251-05R 4251-10R	2813



60 PC.

Tool Set Content





Drawer (579 x 380 mm)

9-4419MPV

Tray category #9 (375 x 280mm)

Contents		5.6	1 / 2
4435M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32, 33, 34, 36		



19 PC.

9-6414MPV

Tray category #9 (375 x 280mm)

Contents		10.08	1 / 2
6435M	19, 21, 22, 24, 26, 27, 29, 30, 32, 33, 35, 36, 38, 41		




14 PC.

9-1220MRV

Tray category #9 (375 x 280mm)

Contents		3.49	1 / 4
1060	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32		

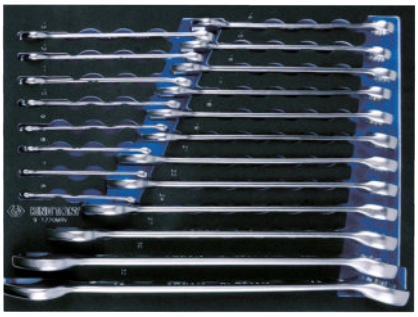

20 PC.

9-12D20MRV


Tray category #9 (375 x 280mm)

Contents		3.45	1 / 4
1062	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32		



20 PC.

Tool Set Content



Drawer (579 x 380 mm)

9-12A1MRV

Tray category #9 (375 x 280mm)

Contents		1.75	1 / 10
1061	8, 10, 12, 13, 14, 16, 17, 18, 19, 22, 24		



11 PC.

9-1112MRV

Tray category #9 (375 x 280mm)

Contents		2.34	1 / 4
1900	6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22, 21x23, 24x27, 25x28, 30x32		



12 PC.

9-90119MRV

Tray category #9 (375 x 280mm)

Contents		3.04	1 / 4
1970	6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22, 24x27, 30x32		
1143	T10, T15, T20, T25, T27,T30, T40, T45, T50		



19 PC.


9-42116GPV

Tray category #9 (375 x 280mm)

Contents		1.54	1 / 5






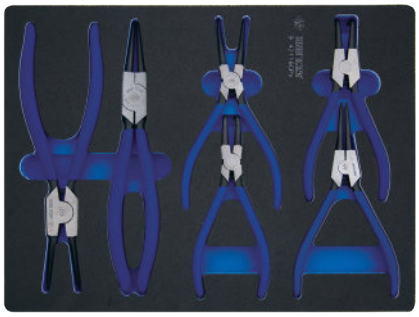

6 PC.

Tool Set Content

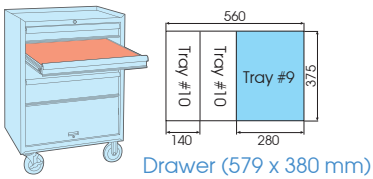

Drawer (579 x 380 mm)

9-91190CRV

Tray category #9 (375 x 280mm)

Contents		2.22	1 / 10
1025S	3.0, 4.0, 5.0, 6.0		
1025P	PH1, PH2 x 2, PH3		
1025Z	PZ1, PZ2 x 2, PZ3		
1025T	T10, T15, T20, T25, T27, T30, T40		
1025H	H3, H4, H5, H6		
1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H		
1025R	RB2		
7702-25	753-63		
10D0	10,12,13,14,17,18,19		
1130MR	H2.5, H3, H4, H5, H6, H8, H10		




90 PC.

Contents	
1130SR	3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8
1147R	T10H, T15H, T20H, T25H, T27H, T30H, T40H
3611-06R 3611-08R	77328-26
276A-04G	

9-22108MRV

Tray category #9 (375 x 280mm)

Contents		0.89	1 / 5
1160MR	H2, H2.5, H3, H4, H5, H6, H8, H10		

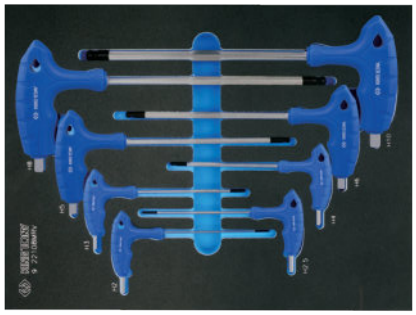


8 PC.

9-22308TRV

Tray category #9 (375 x 280mm)

Contents		0.71	1 / 10
1163TR	T10, T15, T20, T25, T30, T40, T45, T50		

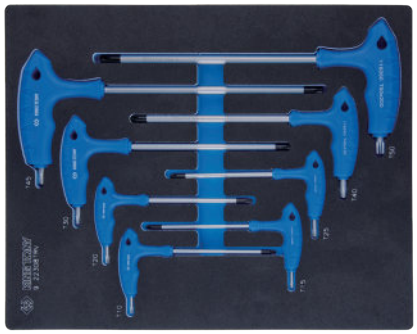

8 PC.

9-30208MRV


Tray category #9 (375 x 280mm)

Contents		1.41	1 / 5
1461	PH1 x 75, PH2 x 100, PH3 x 150		
1462	5.5 x 100, 6.5 x 100, 6.5 x 150, 8 x 150, 8 x 175		



8 PC.

Tool Set Content




Drawer (579 x 380 mm)

9-31110MRV

Tray category #9 (375 x 280mm)

Contents		2.46 kg / 1 / 5
1421		PH1 x 80, PH2 x100, PH3 x 150, PH2 x 38
1422		3 x 75, 4 x 100, 5.5 x 125, 6.5 x 38, 6.5 x 150, 8 x 175

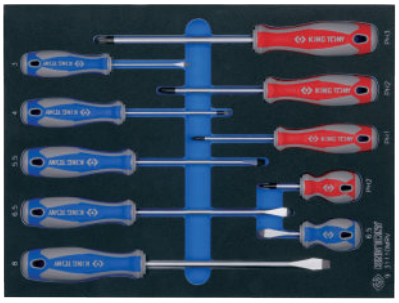


10 PC.

9-55VE01MRV

Tray category #9 (375 x 280mm)

Contents		2.34 kg / 1 / 5
2335VE		5, 6, 7, 8, 9, 10, 11, 12, 13, 14,
2035VE		H3, H4, H5, H6
2221VE		4, 6
3335VE		10, 11, 12, 13, 14, 15, 16, 17, 18, 19
3235VE		8, 10, 12, 14
3025VE		H8, H10
3221VE		6, 10
2771VE-55	2178VE-05	
3771VE-08	3178VE-08	

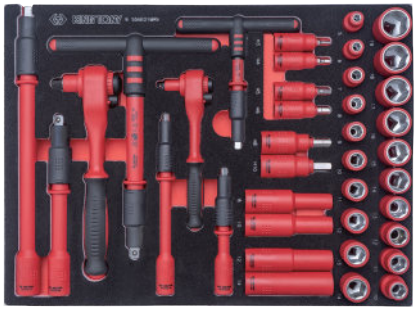

Tray category #9 (375 x 280mm)

38 PC.

9-12FVE15MRV

Tray category #9 (375 x 280mm)

Contents		1.96 kg / 1 / 10
10F0		7, 8, 9, 10, 11, 12, 13, 14, 16, 17, 18, 19, 21, 22, 24



15 PC.

9-12FVG15MRV


Tray category #9 (375 x 280mm)

Contents		2.86 kg / 1 / 5
10G0		7, 8, 9, 10, 11, 12, 13, 14, 16, 17, 18, 19, 21, 22, 24



15 PC.

Tool Set Content




Drawer (579 x 380 mm)

9-30612MRV

Tray category #9 (375 x 280mm)

12 PC.

Contents		1.30 kg / 1 / 10
1471	PH0 x 75, PH1 x 100, PH2 x 100, PH3 x 150	
1472	3 x 75, 4 x 100, 3.5 x 100, 5.5 x 125, 6.5 x 150, 8 x 175	
1474	1 x 125, 2 x 150	

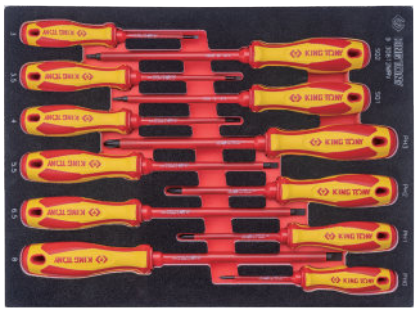


9-40606GPV

Tray category #9 (375 x 280mm)


6 PC.

Contents		1.88 kg / 1 / 10
6216-06A	6116-07A	
6318-08A	6336-08A	
6716-06A	6146-08A	

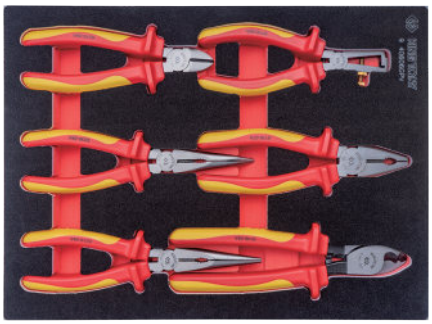



Tool Set Content

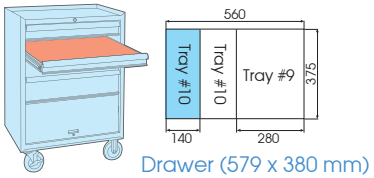

Drawer (579 x 380 mm)

9-2544SRV

9-2044SRV

Tray category #10 (375 x 140mm)


9-2544SRV


9-2044SRV

44 PC.

KT NO. | Contents | 0.92 | 1 / 6

KT NO.			Contents	
9-2544SRV	2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2	2235S: 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2 1025S: 3, 4.5, 5, 6.5, 8 1025P: PH0, PH1, PH2, PH3 5025H: H3/64, H1/16, H5/64, H3/32, H7/64, H1/8, H9/64, H5/32	2752-06G 2178DF 2792 2223-02 2223-04 2142
9-2044SRV	2330S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2		

9-2548MRV

9-2048MRV

Tray category #10 (375 x 140mm)


9-2548MRV



9-2048MRV


48 PC.

KT NO. | Contents | 1.09 | 1 / 6

KT NO.			Contents	
9-2548MRV	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	2235M: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 1025S: 3, 4.5, 5, 6.5, 8 1025P: PH0, PH1, PH2, PH3 1025H: H3, H4, H5, H6, H7, H8, H10	2752-06G 2178DF 2792 2223-02 2223-04 2142
9-2048MRV	2330M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14		

Tool Set Content





Drawer (579 x 380 mm)

9-2553MRV

Tray category #10 (375 x 140mm)

Contents		0.98	1 / 6
2335M	4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14		
1025H	H3, H4, H5, H6, H7, H8, H10		
1025S	3, 4.5, 5, 6.5, 8		
1025P	PH0, PH1, PH2, PH3		
1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H		
1025Z	PZ1, PZ2, PZ3		
1025T	T10, T15, T20, T25, T27, T30, T40		



53 PC.


Contents

7702-25 | 2792 | 2813
276A-04G | 213312DF
2223-02 2223-04 | 2745

9-2553MRV01

Tray category #10 (375 x 140mm)

Contents		0.97	1 / 6
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14		
1025H	H3, H4, H5, H6, H7,H8, H10		
1025T	T10, T15, T20, T25, T27, T30, T40		
1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H		
1025P	PH1, PH2, PH3		
1025Z	PZ1, PZ2, PZ3		
1025S	3, 4.5, 5, 6.5, 8		

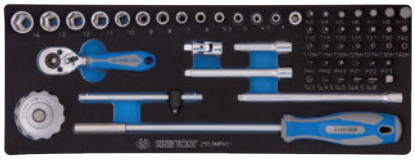

55 PC.

Contents

7702-25 | 276A-04G
2571-45 | 213312DF
2221-02 2221-04 2221-06 | 2745 | 2792 | 2142

9-3523MRV10

Tray category #10 (375 x 140mm)

Contents		1.73	1 / 6
3335M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 23, 24		
3771-08G	3792		
3571-08	3452-08F		
3293-03 3293-06			



23 PC.

9-3523MRV11

9-3023MRV11

Tray category #10 (375 x 140mm)

KT NO.	Contents		1.09	1 / 6
9-3523MRV11	3335M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24	3771-08G, 3293-03 3293-06, 3453-08, 3571-08, 3792	
9-3023MRV11	3330M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24		




9-3523MRV11



9-3023MRV11

23 PC.

Tool Set Content



Drawer (579 x 380 mm)

9-4147PRV

Tray category #10 (375 x 140mm)

Contents			1.81 kg	1 / 5
		40D0	H6, H8, H10	
		4066	M8, M9, M10, M12, M14	
		4023	T20, T25, T27, T30, T40 T45, T50, T55, T60	



17 PC.

9-4401MPV

Tray category #10 (375 x 140mm)

Contents			2.23 kg	1 / 6
		4945M	17, 19, 21	
		4535M	17, 19, 32, 34, 36	
		4415M	17, 19, 21	



11 PC.

9-90135MRV

Tray category #10 (375 x 140mm)

Contents			1.81 kg	1 / 6
		1930	8x10, 10x12, 11x13, 12x14, 17x19, 19x22	
		1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	



15 PC.

9-90135SRV

Tray category #10 (375 x 140mm)

Contents			1.28 kg	1 / 6
		5930	5/16 x 3/8, 3/8 x 7/16, 1/2 x 9/16, 9/16 x 5/8, 11/16 x 3/4, 3/4 x 7/8	
		1125SR	1/16, 5/64, 3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8	



15 PC.

9-40104GPV

Tray category #10 (375 x 140mm)

Contents			1.08 kg	1 / 8
	6311-08		6111-06	
	6231-07		6319-11C	



4 PC.

9-40113GPV

Tray category #10 (375 x 140mm)

Contents			1.12 kg	1 / 8
	6011-10R		6516-10C	6314-05




3 PC.

9-44214GPV


Tray category #10 (375 x 140mm)


Contents			1.08 kg	1 / 8
	67HS-07	67HB-07	68SS-07	68SB-07

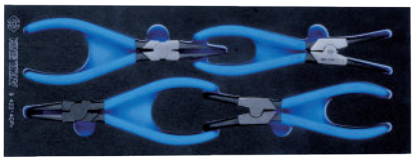

4 PC.

Tool Set Content






Drawer (579 x 380 mm)

9-30216MRV

Tray category #10 (375 x 140mm)

Contents			0.71 kg	1 / 6
	1461	PH2 x 100, PH3 X 150		
	1462	5.5 X 100, 6.5 X 150		
	1411	PH2 x 38		
	1412	6.5 x 38		

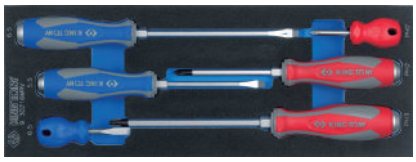


6 PC.

9-1044CQV

Tray category #10 (375 x 140mm)

Contents			1.75 kg	1 / 6
	1636H	H4, H5, H6, H7, H8, H10, H12		
	1680H	H4, H5, H6, H7, H8, H10, H12		
	1636M	M5, M6, M8, M10, M12		
	1680M	M5, M6, M8, M10, M12		
	1636T	T20, T25, T27, T30, T40, T45, T50, T55, T60		

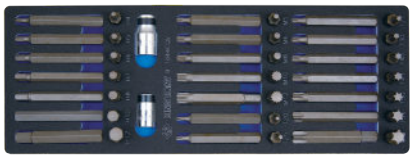

44 PC.

Contents

1680T	T20, T25, T27, T30, T40, T45, T50, T55, T60	
314810M	414810M	

9-90118PRV

Tray category #10 (375 x 140mm)

Contents			1.28 kg	1 / 6
76104-05		7821-30		
76217-06 76220-07		76403-06 76404-06 76405-65 76406-07		



8 PC.

9-90305TQV



5 PC.

9-90305TQV

9-90305TQV01

Tray category #10 (375 x 140mm)



9 PC.

9-90305TQV01

KT NO.		Contents			0.91 kg	1 / 6
9-90305TQV	9BM120	7971-07		77141-08		
9-90305TQV01	11205SQ	77335-25		79093-05C		

9-21-20-07MRV

Tray category #10 (375 x 140mm)


Contents			0.91 kg	1 / 6	Each Q'ty
4 x 8 mm		4 x 10 mm			20
4 x 8 mm		4 x 10 mm			
4.8 x 8 mm		4.8 x 10 mm			
21-20-101					1



121 PC.

Tool Set Content






Drawer (579 x 380 mm)

9-2516MRV03

Tray category #11 (187 x 140mm)

Contents	0.47	1 / 12
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	
2771-55G	2571-45	
2221-06	2792	



17 PC.

9-2524MRV

Tray category #11 (187 x 140mm)

Contents	0.63	1 / 12
2335M	4, 4.5, 5 , 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	
2771-55G	2571-45	2142
2221-02 2221-04 2221-06	2792	2178DF




21 PC.

9-2528MRV


Tray category #11 (187 x 140mm)

Contents	0.48	1 / 12
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11,12, 13, 14	
1025H	H3, H4, H5, H6	
1025S	4, 5	
1025T	T10, T15, T20, T30	
1025P	PH1, PH2	
276A-04G	2792	
2221-06	2142	



29 PC.






Drawer (579 x 380 mm)

9-91113SRV

Tray category #17 (375 x 420mm)


Contents	3.65	1 / 5
5970	1/4 x 5/16, 3/8 x 7/16 1/2 x 9/16, 5/8 x 11/16 3/4 x 7/8, 15/16 x1 1-1/16 x 1-1/8, 1-1/8 x 1-1/4 1-3/16 x 1-5/16	
3812	2813	3814 4813

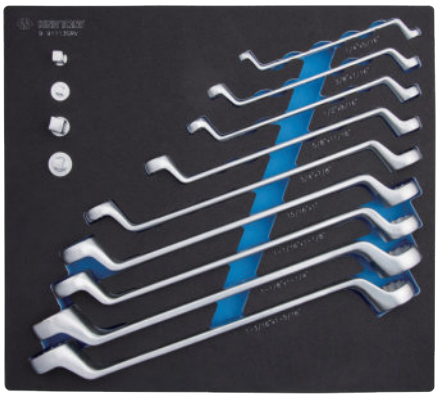

13 PC.

Tool Set Content






Drawer (579 x 380 mm)

9-45VE02MRV

Tray category #17 (375 x 420mm)

Contents		3.96 kg / 1 / 4
4335VE		8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32
4025VE		H4, H5, H6, H8, H10
4035VE		H4, H5, H6, H8, H10
4251VE		5, 10
4771VE-10	4178VE-08	

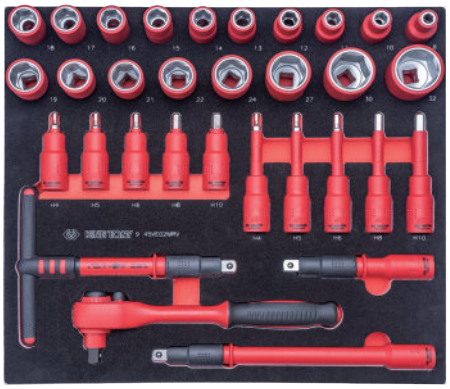

32 PC.



Fill Your Drawer

How to complete your tool trolley set and tool chest set


The drawer of tool chest includes one top drawer and different size

CAUTION


- Do not move the box / trolley unit unless you have closed the cover and locked the drawers
- Never open more than one loaded drawer at the same time
- Watch for sharp edges, we suggest to put on gloves before you lift the unit

Drawer (646x290 mm)



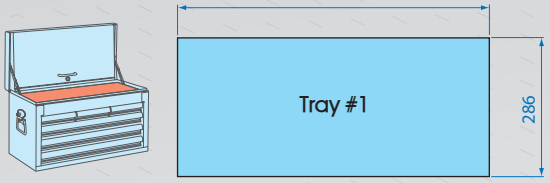



Drawer (172x275 mm)





Drawer (572x275 mm)


















Drawer (579x380 mm)





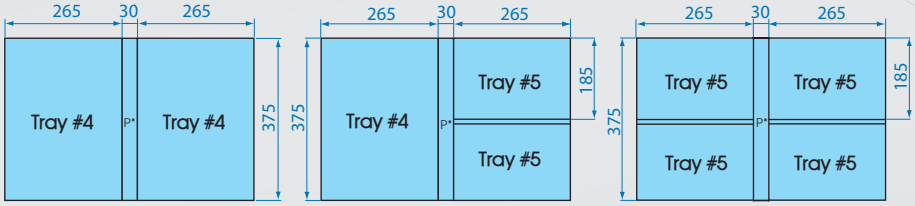


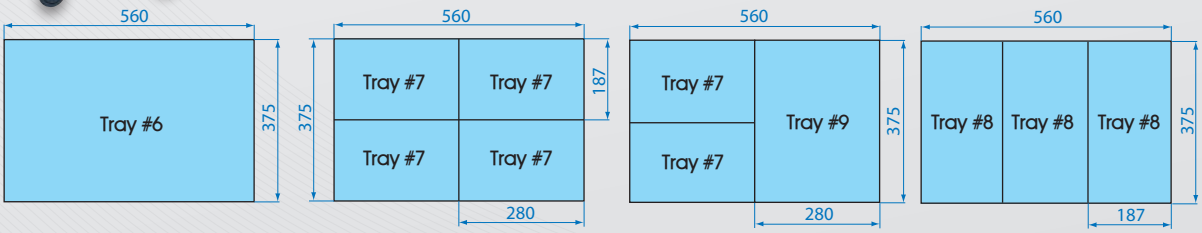


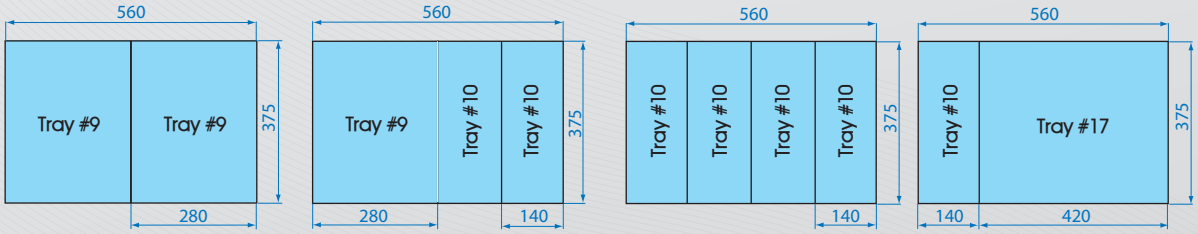

Drawer (504 x 195 mm)




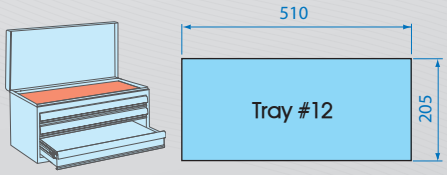


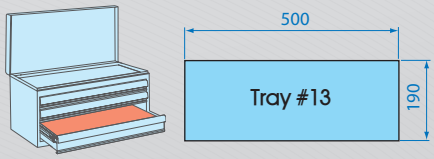

87402 Drawer (470 x 220 mm) #14
87408 Drawer (530 x 220 mm) #15



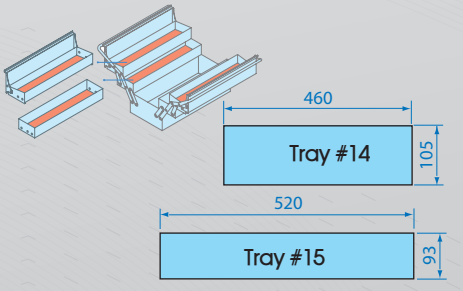

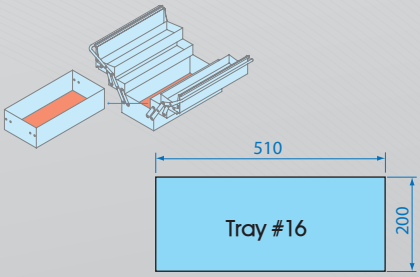

Tool Trolley Contents

101 PC.



Contents No. 932-009MRD


19.80 CUFT 2.41



9-4333MR #4 P.114

9-4120PR #5 P.123
9-4119PR #5 P.123

84700612B

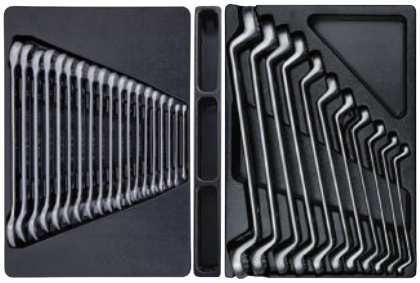

9-1219MR01 #4 P.116

9-1711MR #4 P.118

84700612B



9-90106SR #4 P.121

9-40103GP #5 P.124

84700612B



1110MR P.326



34423-1A P.305

Tool Trolley Set

101 PC.

5

75.8
CUFT 14.65



932-009MR
(87432-5B P.37)



932-009MR-G
(87432-5B-G P.37)



932-009MR-B
(87432-5B-B P.37)

7

85.94
CUFT 18.05



9634-009MR
(87634-7B P.38)



9634-009MR-G
(87634-7B-G P.38)



9634-009MR-B
(87634-7B-B P.38)

Tool Trolley Contents

144 PC.




Contents No. 932-010MRD

17.50 CUFT 1.86



9-4328MR #4 P.114 | 9-5575MR #4 P.115

84700612B

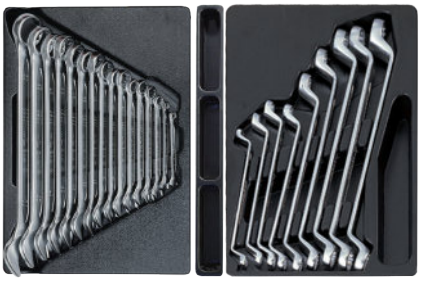

9-1216MR01 #4 P.116 | 9-1709MR #4 P.117

84700612B



9-90106SR #4 P.121 | 9-31106MR #5 P.124 | 9-40103GP #5 P.124

84700612B



34423-1A P.305

Tool Trolley Set

144 PC.

5 — 73.5 CUFT 14.1



932-010MR (87432-5B P.37)



932-010MR-G (87432-5B-G P.37)



932-010MR-B (87432-5B-B P.37)

7 — 83.64 CUFT 17.5



9634-010MR (87634-7B P.38)



9634-010MR-G (87634-7B-G P.38)



9634-010MR-B (87634-7B-B P.38)


Tool Trolley Contents

170 PC.



Contents No. 941-101MRD

24.80 CUFT 2.54





9-4026MR02 #1 P.110



9-3023MR01 #4 P.114

9-2526MR #5 P.123



9-22308PR #4 P.121


9-31106MR #5 P.124



9-4120PR #5 P.123

9-4119PR #5 P.123

9-1303MR #5 P.123





9-1711MR #4 P.118

9-1216MR #4 P.116

84700612B



9-90103RR #4 P.121

9-20110MR #5 P.124

9-40103GP #5 P.124

84700612B



9-4128FR #5 P.124



1010PR P.473

Tool Trolley Set

170 PC.

5 106.2 CUFT 18.31



941-101MR

(87411-6B P.48 87432-5B P.37)

7 125.2 CUFT 19.21



9644-101MR

(87411-6B P.48 87634-7B P.38)

Tool Trolley Contents

173 PC.



Contents No. 932-000MRD

24.70 CUFT 2.10



9-4333MR #4 P.114 | 9-7540MR #4 P.115

84700612B



9-1216MR01 #4 P.116 | 9-1711MR #4 P.118

84700612B



9-90131MR #4 P.116 | 9-31110MR #4 P.84

84700612B



9-22108MR #4 P.121 | 9-22308PR #4 P.121

84700612B



9-90103PP #4 P.121 | 9-40207GP #4 P.120

84700612B



1006PR #4 P.473

Tool Trolley Set

173 PC.

5

80.70

CUFT 14.34



932-000MR

(87432-5B P.37)



932-000MR-G

(87432-5B-G P.37)



932-000MR-B

(87432-5B-B P.37)

Tool Trolley Contents

179 PC.



Contents No. 932-008MRD

20.52 CUFT 2.41



9-4522MR #4 P.113 | 9-3523MR #4 P.114

84700612B



9-1219MR01 #4 P.116 | 9-90315MR #4 P.118

84700612B



9-91120MR #4 P.119 | 9-31909PR #4 P.122

84700612B



9-90103PP01 #4 P.121 | 9-40207GP #4 P.120

84700612B



9-4120PR #5 P.123
9-4119PR #5 P.123
9-31106MR #5 P.124
9-2526MR #5 P.123

84700612B



1010PR #4 P.473



9DC23 P.597

Tool Trolley Set

179 PC.

5 — 76.52 CUFT 14.65



932-008MR (87432-5B P.37)



932-008MR-G (87432-5B-G P.37)



932-008MR-B (87432-5B-B P.37)

7 — 86.66 CUFT 18.05



9634-008MR (87634-7B P.38)



9634-008MR-G (87634-7B-G P.38)



9634-008MR-B (87634-7B-B P.38)

Tool Trolley Contents

197 PC.



Contents No. 934-001MRD

28.70 CUFT 3.70



9-90408TQ #6 P.125



9-4516MR #4 P.113 | 9-5575MR #4 P.115

84700612B



9-1711MR #4 P.118 | 9-1218MR #4 P.116

84700612B



9-22108MR #4 P.121 | 9-31909PR #4 P.122

84700612B



9-90310MR #4 P.122 | 9-90106SR #4 P.121

84700612B



9-90205GN01 #4 P.120 | 9-4128FR #5 P.124 | 9-40103GP #5 P.124

84700612B




7962-04 P.478



9DC23 P.597



42114GP P.344



2121-18 P.605



7963-04 P.478



14210212 P.376
14226512 P.376



1108MR P.326

Tool Trolley Set

197 PC.

7 | 92.7 CUFT 15.94



934-001MR (87434-7B P.37)



934-001MR-G (87434-7B-G P.37)



934-001MR-B (87434-7B-B P.37)

7 | 94.84 CUFT 15.94



9634-001MR (87634-7B P.38)



9634-001MR-G (87634-7B-G P.38)



9634-001MR-B (87634-7B-B P.38)

Tool Chest Set

69 PC.

901-068MR

18.80 CUFT 2.05



9-4338MR #11 P.130 (901-069MR use)

901-069MR

18.40 CUFT 2.05




9-4338MR01 #11 P.130 (901-068MR use)





9-90121MR #12 P.130

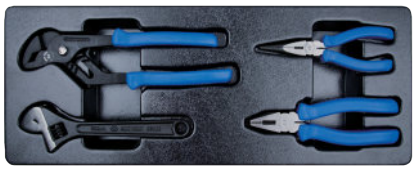

9-90104GP #12 P.130



87401-3 P.49



9-31006MR #12 P.131

Tool Chest Set

74 PC.

901-073MR

19.50 CUFT 2.05





9-4338MR03 #11 P.130



9-90126MR #12 P.130



9-90104GP #12 P.130



87401-3 P.49



9-31006MR #12 P.131

Tool Chest Set

219 PC.

911-000CR

50.50 CUFT 6.10



9-7069CR #1 110 (911-000CR use)

911-000CR02

50.80 CUFT 6.10



9-7069CR01 #1 P.110 (911-000CR02 use)





9-90129CR #3 P.112



9-90138CR #3 P.112



9-2548CR #2 P.111 (911-000CR use)

9-2548CR01 #2 P.111 (911-000CR02 use)

9-42114GP #2 P.111

9-40102GP #2 P.111



9-90128SR #3 P.111



87411-6B P.48

Tool Chest Set

107 PC.

911-002CR

40.50 CUFT 5.12






4042CR #476 x 282mm P.202

20107SR P.414

20109MR P.414

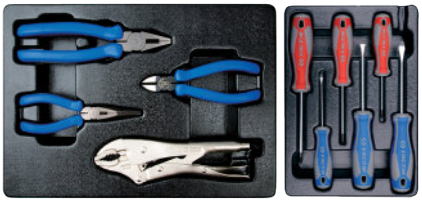

9-42144GP #4 P.120

9-31106MR #5 P.124



9-90138CR #3 112



87411-6B P.48




7811-16 P.470

Tool Chest Set

235 PC.

911-003CR

46.16 CUFT 6.10

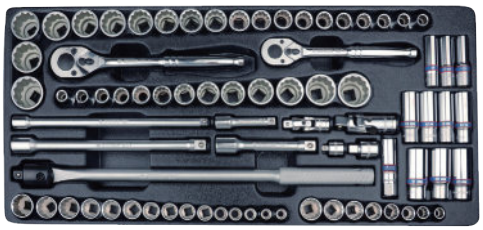

9-7078CR #1 P.110 (911-003CR use)

911-003CR01

46.16 CUFT 6.10



9-7078CR01 #1 P.110 (911-003CR01 use)





9-90220MR #3 P.112 (911-003CR use)



9-90220MR01 #3 P.112 (911-003CR01 use)



9-90154CR #3 P.113 (911-003CR use)



9-90154CR01 #3 P.113 (911-003CR01 use)



87411-6B P.48



9-90329CR #3 P.112



9-2548CR01 #2 P.111 (911-003CR use)

9-2548CR #2 P.111 (911-003CR01 use)

9-42114GP #2 P.111

9-40102GP #2 P.111



Tool Box Contents

62 PC.



Contents No. 902-062MRD

8.80 CUFT 1.22



9-4116FR #14 P.132



9-30206MR #14 P.132



9-1217MR #14 P.132



9-4319MR #14 P.131



9-90120MR #14 P.132



9-40203GP #14 P.132

Tool Box Set

62 PC.

14.4 CUFT 1.22



902-062MR (87402 P.50)

13.9 CUFT 1.22



9A05-062MR (87A05 P.50)



9A05-062MR-KB (87A05-KB P.50)

Tool Box Contents

63 PC.



Contents No. 902-164MRD

10.20 CUFT 1.22



9-4116FR #14 P.132



9-4219MR #14 P.131

	1060 P.322	8, 10, 12, 13, 14, 17, 19, 21, 22, 24
	1120MR P.414	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10
	1421 P.376	PH1 x 80, PH2 x 38, PH3 x 150
	1422 P.376	5.5 x 100, 6.5 x 38, 8 x 175

	6111-07 P.353		76217-06 P.472 76223-08 P.472
	6311-06 P.354		76403-05 P.472 76404-06 P.472 76405-65 P.472 76406-07 P.472
	6511-10 P.356		
	3611-08R P.342		
	76104-05 P.471		7811-16 P.470

Tool Box Set

63 PC.

15.8 CUFT 1.22



902-164MR (87402 P.50)

15.3 CUFT 1.22



9A05-164MR (87A05 P.50)



9A05-164MR-KB (87A05-KB P.50)

Tool Box Contents

65 PC.



Contents No. 902-065MRD

9.10 CUFT 1.22



9-4116FR #14 P.132



9-4319MR #14 P.131



9-90115MR #14 P.132



9-1716MR #14 P.132

1421 P.376 PH1 x 80, PH2 x 38, PH3 x 150

1422 P.376 5.5 x 100, 6.5 x 38, 8 x 175


6111-07 P.353


6311-06 P.354


6511-10 P.356


3611-08P P.342

76104-05 P.471

76217-06 P.472
76223-08 P.472

76403-05 P.472
76404-06 P.472
76405-65 P.472
76406-07 P.472


7811-16 P.470

Tool Box Set

65 PC.

14.7 CUFT 1.22



902-065MR (87402 P.50)

14.2 CUFT 1.22



9A05-065MR (87A05 P.50)



9A05-065MR-KB (87A05-KB P.50)

Tool Box Contents

68 PC.



Contents No. 902-068MRD

10.30 CUFT 1.22



9-4116FR #14 P.132



9-4319MR01 #14 P.131

1060 P.322 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24

1120MR P.414 H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10

1421 P.376 PH1 x 80, PH2 x 38, PH3 x 150

1422 P.376 5.5 x 100, 6.5 x 38, 8 x 175


6111-07 P.353


6311-06 P.354


6511-10 P.356


3611-12P P.342

76104-05 P.471


7911-12 P.494

76217-06 P.472
76223-08 P.472

76403-05 P.472
76404-06 P.472
76405-65 P.472
76406-07 P.472


7821-30 P.470

Tool Box Set

68 PC.

15.9 CUFT 1.22



902-068MR (87402 P.50)

15.4 CUFT 1.22



9A05-068MR (87A05 P.50)



9A05-068MR-KB (87A05-KB P.50)

Tool Box Contents

81 PC.



Contents No. 902-084MRD01 — 13.60 CUFT 1.22



9-4116FR03 #14 P.132



9-4219MR07 #14 P.131



1215MR P.323

- 4230M P.179 — 16, 17, 18, 19, 20, 21, 22, 24, 25, 26
- 1421 P.376 — PH1 x 100, PH2 x 150, PH3 x 150
- 1422 P.376 — 6.5 x 100, 6.5 x 150, 8 x 150
- 6231-07 P.353
- 6311-06 P.354
- 6463-08C P.355
- 6516-10C P.355
- 6031-07R P.360
- 3611-08R P.342
- 3611-12R P.342
- 20218MR P.412
- 7851-16 P.471
- 7811-16 P.470
- 76104-05 P.471
- 76105-06 P.471
- 76213-04 P.472
- 76215-05 P.472
- 76220-07 P.472
- 76306-05 P.471
- 76403-05 P.472
- 76404-06 P.472

Tool Box Set

81 PC.

19.24 CUFT 1.22



902-084MR01 (87402 P.50)

18.74 CUFT 1.22



9A05-084MR01 (87A05 P.50)



9A05-084MR01-KB (87A05-KB P.50)

Tool Box Contents

84 PC.



Contents No. 902-084SRD — 15.90 CUFT 1.22



9-4116FR03 #14 P.132



9-4219SR08 #14 P.131



1216SR P.323

- 4230S P.179 — 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4
- 1421 P.376 — PH1 x 100, PH2 x 150, PH3 x 150
- 1422 P.376 — 6.5 x 100, 6.5 x 150, 8 x 150
- 6231-07 P.353
- 6311-06 P.354
- 6463-08C P.355
- 6516-10C P.355
- 20107SR P.414
- 6031-07R P.360
- 3611-08R P.342
- 3611-12R P.342
- 7811-16 P.470
- 7851-16 P.471
- 76104-05 P.471
- 76105-06 P.471
- 76213-04 P.472
- 76215-05 P.472
- 76220-07 P.472
- 76306-05 P.471
- 76403-05 P.472
- 76404-06 P.472

Tool Box Set

84 PC.

21.55 CUFT 1.22



902-084SR (87402 P.50)

21.0 CUFT 1.22



9A05-084SR (87A05 P.50)



9A05-084SR-KB (87A05-KB P.50)

Tool Box Contents

88 PC.



Contents No. 902-089MRD01 — 13.90 CUFT 1.22



9-4116FR #14 P.132



9-4319MR01 #14 P.131



1812MR P.341

1060 P.322	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24
1900 P.326	6 x 7, 8 x 10, 11 x 13, 12 x 13, 17x19, 22 x 24
1120MR P.414	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10
1147R P.416	T10H, T15H, T20H, T25H, T27H, T30H, T40H

1421 P.367	PH2 x 38, PH3 x 150	
1422 P.367	3 x 75, 5 x 100	
6111-07 P.353		3611-08R P.342
6311-06 P.354		7911-12 P.494
6516-10C P.355		7821-80 P.470

Tool Box Set

88 PC.

19.5 CUFT 1.22  902-089MR01 (87402 P.50)

19.0 CUFT 1.22  9A05-089MR01 (87A05 P.50)

 9A05-089MR01-KB (87A05-KB P.50)

Tool Box Contents

103 PC.



Contents No. 902-103MRD — 19.20 CUFT 1.22



9-4116FR #14 P.132



9-4319MR01 #14 P.131



1812MR P.341

1060 P.322	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 27, 30, 32
1120MR P.414	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10
1147R P.416	T10H, T15H, T20H, T25H, T27H, T30H, T40H
1421 P.376	PH0 x 60, PH1 x 100, PH2 x 100, PH3 x 150
1422 P.376	3 x 75, 4 x 100, 5 x 75, 5.5 x 125, 6.5 x 150, 8 x 175

6111-07 P.353		7911-12 P.494
6311-06 P.354		7821-80 P.470
6516-10C P.355		76220-07 P.472
6231-08 P.353		76226-12 P.472
6431-10 P.355		76402-45 P.472
6011-10R P.360		76403-05 P.472
3611-12R P.342		76404-06 P.472
79093-03C P.482		76405-65 P.472
		76406-07 P.472
		76408-08 P.472
		76412-09 P.472
		76414-10 P.472

Tool Box Set

103 PC.

24.8 CUFT 1.22  902-103MR (87402 P.50)

24.3 CUFT 1.22  9A05-103MR (87A05 P.50)

 9A05-103MR-KB (87A05-KB P.50)

Tool Box Contents

109 PC.



Contents No. 902-109MRD — 19.40 CUFT 1.22



9-4116FR #14 P.132



9-4319MR01 #14 P.131



1812MR P.341



1306MR P.332



1060 P.322 — 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 27, 30, 32



1120MR P.414 — H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10



1147R P.416 — T10H, T15H, T20H, T25H, T27H, T30H, T40H



1421 P.376 — PH0 x 60, PH1 x 100, PH2 x 100, PH3 x 150



1422 P.376 — 3 x 75, 4 x 100, 5 x 75, 5.5 x 125, 6.5 x 150, 8 x 175



6111-07 P.353



6311-06 P.354



6516-10C P.355



6232-08 P.353



6431-10 P.355



6011-10R P.360



3611-12R P.342



79093-05C P.482



7911-12 P.494



7811-16 P.470

76220-07 P.472
76226-12 P.472

76402-45 P.472
76403-05 P.472
76404-06 P.472
76405-65 P.472
76406-07 P.472
76408-08 P.472
76412-09 P.472
76414-10 P.472

Tool Box Set

109 PC.



24.99 CUFT 1.22 — 902-109MR (87402 P.50)



24.5 CUFT 1.22 — 9A05-109MR (87A05 P.50)



9A05-109MR-KB (87A05-KB P.50)

Tool Box Contents

132 PC.



Contents No. 902-132CRD — 24.50 CUFT 1.51



9-4116FR #14 P.132



9-4319MR01 #14 P.131



1812MR P.341



1226MR P.323



1005GQ P.495



30617MR P.432



20208MR01
20208SR01
P.413



11205SQ P.489



1421 P.376 — PH0 x 60, PH1 x 100, PH2 x 100, PH3 x 150



1422 P.376 — 3 x 75, 4 x 100, 5 x 75, 5.5 x 125, 6.5 x 150, 8 x 175



6111-07 P.353



6311-06 P.354



6516-10C P.355



6231-07 P.353



6721-10 P.465



6711-06 P.355



3611-08P P.342
3611-12P P.342



20419PR P.417



7911-12 P.494



7811-12 P.470

76104-05 P.471

76220-07 P.472



6011-10R P.360



2121-18 P.605



7971-07 P.458



79093-03C P.482

Tool Box Set

132 PC.



30.1 CUFT 2.73 — 902-132CR (87402 P.50)



29.1 CUFT 2.92 — 9A05-132CR (87A05 P.50)



9A05-132CR-KB (87A05-KB P.50)

Tool Box Contents

77 PC.



Contents No. 908-077CRD

19.80 CUFT 0.99



9-4029CR #15 P.133



9-90111MR #15 P.133



9-4156PR #15 P.133



9-30206MR #14 P.132



9-1215MR03 #16 P.133



9-6010MR #16 P.133

Tool Box Set

77 PC.

26.52
CUFT 2.29



908-077CR
(87408 P.50)



Tool Box Contents

25 PC.



Contents No. 41026MRD

3.96 CUFT 0.78

- 4330MR P.178 — 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32
- 463021RC P.182
- 4791R P.192
- 4452-15FR P.190
- 4768-10F P.186
- 4572-12 P.191
- 4251-05R P.190
- 4251-10R P.190

Tool Box Set

25 PC.

5.7
CUFT 0.78



41026MR
(87407 P.50)

Tool Box Contents

25 PC.



Contents No. 41526MRD

3.96 CUFT 0.78

- 4335MR P.178 — 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32
- 463521RC P.182
- 4791R P.192
- 4452-15FR P.190
- 4768-10F P.186
- 4572-12 P.191
- 4251-05R P.190
- 4251-10R P.190

Tool Box Set

25 PC.

5.7
CUFT 0.78



41526MR
(87407 P.50)

Tool Box Contents

17 PC.



Contents No. 41517MRVD — 2.26 CUFT 0.91

4335MR P.178	10, 11, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24	4251-05R P.190	
4771-10GR P.186		3611-08R P.342	
4791R P.192		6111-06 P.353	

Tool Box Set

17 PC.

4.26 CUFT 0.91



41517MRV
(87A08 P.50)

Tool Box Contents

42 PC.



Contents No. 41542MRVD — 4.65 CUFT 0.91

4335MR P.178	10, 11, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24		4251-05R P.190		
1421 P.376	PH0 x 60, PH1 x 80, PH2 x 100		3611-08R P.342		
1422 P.376	3 x 75, 5.5 x 100, 6.5 x 150		6111-06 P.353		
1130MR P.414	H2.5, H3, H4, H5, H6, H8, H10		4771-10GR P.186		
1062 P.320	8, 9, 10, 11, 12, 13, 14, 17, 18, 19, 22, 24		4791R P.192		

Tool Box Set


42 PC.

6.65 CUFT 0.91



41542MRV
(87A08 P.50)

Tool Set Content



9-4526MR

9-4026MR02 Tray category #1 (642 x 286mm)

24 PC.


9-4526MR


9-4026MR02

KT NO.		Contents					
						4.6	1 / 5
9-4526MR	4335MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	463521RC	4768-10F	4572-12	4251-05R 4251-10R	
9-4026MR02	4330MR		463021RC	4768-10P	4452-15FR		

9-7069CR

9-7069CR01 Tray category #1 (642 x 286mm)

70 PC.


9-7069CR


9-7069CR01


7911-12

KT NO.		Contents						
							8.8	1 / 2
9-7069CR	3779-08G 4779-10GR	3330M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 20, 21, 22	463521RC	463516RC	3571-08		
		3330S	3/8, 7/16, 1/2, 9/16, 5/8, 11 /16, 3/4, 13 /16	3452-08F	4452-15FR	4251-05R 4251-10R		
9-7069CR01	3769-08P 4768-10P	4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	4572-10	3221-03 3221-06	7911-12		
		4330SR	3/8, 7/16, 1/2, 9/16, 5/8, 11 /16, 3/4, 13 /16, 7/8, 15/16, 1	3792	4791R	3812	4813	

9-7078CR

9-7078CR01 Tray category #1 (642 x 286mm)


78 PC.


9-7078CR


9-7078CR01

KT NO.		Contents						
							8.67	1 / 2
9-7078CR	3769-08P 4768-10P	3330M	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22	3235M	10, 12, 13, 14, 15, 16, 17, 18, 19, 22	363516		
		3330S	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16	4462-18F	3221-03 3221-10	4251-05R 4251-10R		
9-7078CR01	3779-08G 4779-10GR	4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 27, 28, 30, 32	3792	4791R	3812	4813	
		4330SR	3/8, 7/16,1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/8, 1-1/4					

Tool Set Content



9-2548CR

9-2548CR01 Tray category #2 (263 x 163mm)


9-2548CR


9-2548CR01

48 PC.

KT NO.		Contents	1.28 kg	1 / 10
9-2548CR	2779-55G	2235M: 4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 2235S: 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2 2335M: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 2335S: 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2 2792 2813 2221-02 2221-04		
9-2548CR01	2769-55P			


9-40102GP



2 PC.


Contents	1.0 kg	1 / 10
6011-10R	6511-10	

9-42114GP Tray category #2 (263 x 163mm)

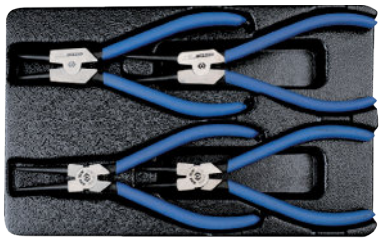

4 PC.

Contents	0.6 kg	1 / 10
68HS-07	68SS-07	
68HB-07	68SB-07	



9-90128SR


Tray category #3 (554 x 260mm)




28 PC.

Contents	4.8 kg	1 / 4
5060	1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 1	
5970	1/4 x 5/16, 3/8 x 7/16, 1/2 x 9/16, 5/8 x 11/16, 3/4 x 7/8, 15/16 x 1, 1-1/16 x 1-1/8	
76105-06	7811-16	
76215-05 76217-06 76220-07 76224-10	76404-06 76406-07 76408-08	

Tool Set Content


Drawer (572x275)



9-90138CR

Tray category #3 (554 x 260mm)

Contents		4.8	1 / 4
1060	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 20, 21		
1900	8 x 9, 10 x 11, 12 x 13, 14 x 15, 18 x 19		
1970	6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19		
1930	10 x 11, 12 x 14, 14 x 17		
5900	1/4 x 5/16, 3/8 x 7/16, 7/16 x 1/2, 9/16 x 5/8, 11/16 x 3/4, 13/16 x 7/8		
3611P	8, 12		



38 PC.

9-90329CR

Tray category #3 (554 x 260mm)

Contents		3.37	1 / 4
1060	6, 7, 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21		
5060	7/16, 1/2, 9/16, 5/8, 11/16, 3/4		
10D0	10, 12, 13, 14, 17, 18, 19		
3611R	6, 8		



29 PC.

9-90129CR

Tray category #3 (554 x 260mm)

Contents		2.5	1 / 4
1421	PH0 x 60, PH1 x 80, PH2 x 38, PH2 x 100, PH3 x 150		
1422	3 x 75, 6.5 x 38, 6.5 x 100, 6.5 x 150, 8 x 175		
1130SR	3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8		
1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10		
6111-07	6231-07		
6311-06			



29 PC.

9-90220MR


9-90220MR

9-90220MR01


Tray category #3 (554 x 260mm)



9-90220MR01

20 PC.

KT NO.		Contents		2.51	1 / 4
9-90220MR	14280204 14240206	3025 3023	H3, H4, H5, H6, H8, H10, H12 T30, T40	1421 1422	PH1x80, PH2x100 4x100, 5.5x125, 6.5x150, 8x175
9-90220MR01	14232004 14232504	6111-08 6232-08 6311-08			

Tool Set Content


Drawer (572x275)




9-90154CR


KT NO.	PC.	Contents	2.86	1 / 4
9-90154CR	54	1032CQ01	1130MR	H2.5, H3, H4, H5, H6, H8, H10
			1130SR	3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8
			7811-16	
			74030	
9-90154CR01	53	1032CQ	76717-05	
			761	Ø 4 x 120
			764	Ø 3 x 125 Ø 4 x 150 Ø 5 x 165

9-90154CR01

Tray category #3 (554 x 260mm)









Drawer (572x275)





Drawer (579x380)



9-4516MR

Tray category #4 (375 x 265mm)

Contents	3.12	1 / 10
4335MR	8, 10, 11, 12, 13, 14, 17, 19, 21, 23, 24	
4791R	4768-10F	4452-15FR
4251-05R 4251-10R		



16 PC.


9-4522MR

Tray category #4 (375 x 265mm)


Contents	2.96	1 / 10
4335MR	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24	
463521RC	463516RC	4791R
4768-10F	4251-03R, 4251-05R, 4251-10R	



22 PC.



Drawer (572x275)

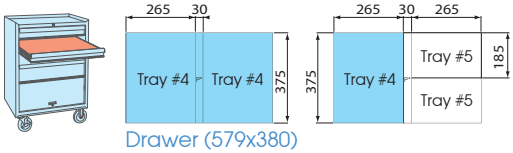

Drawer (579x380)

Tool Set Content

9-3523MR

9-3023MR01 Tray category #4 (375 x 265mm)

22 PC.


9-3523MR


9-3023MR01

KT NO.	Contents								
								1.38	1 / 10
9-3523MR	3335M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 20, 21, 22	3769-08F	3221-03 3221-06	3452-08F				
9-3023MR01	3330M		3769-08P	3792	3571-08				

9-4328MR

Tray category #4 (375 x 265mm)

28 PC.

Contents								4.6	1 / 6
4335MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 29, 32								
4027	T55H, T60H								
4791R	4768-10F	4452-15FR	4572-10	4251-05R 4251-10R					



9-4333MR


9-4333MR03 Tray category #4 (375 x 265mm)

33 PC.



9-4333MR


9-4333MR03

KT NO.	Contents									5.4	1 / 6
9-4333MR	4755-10G	4335MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32								
9-4333MR03	4779-10GR	463521RC	463516RC	4791R	4572-12	4452-15FR	4251-03R 4251-05R 4251-10R				



Drawer (572x275)

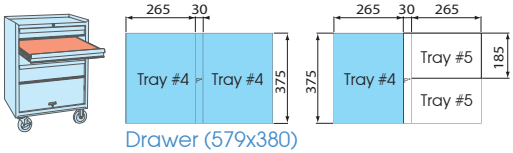


Drawer (579x380)

Tool Set Content

9-5575MR

Tray category #4 (375 x 265mm)

Contents		4.15	1 / 6
2335M		4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13	
2335S		1/4, 3/8, 1/2	
3235M		8, 10, 12, 14, 17	
3335M		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22	
2375M		E4, E5, E6, E7, E8	
3375M		E10, E12, E14, E16, E18	
2037		T10H, T15H, T20H, T25H, T27H, T30H	
2033		T20, T25, T30, T40	
3027		T40H, T45H, T50H	

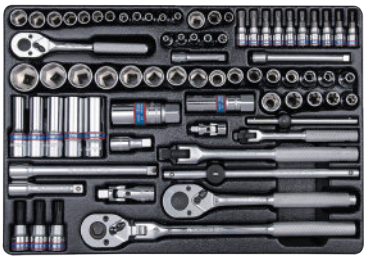

75 PC.

Contents

366516 366521 3221-16
2769-55F 3769-08F 3781-11F
2221-02 2221-04 3221-03 3221-06 2571-45
2452-05F 3452-08F 3571-08
2792 3792

9-7537MR

Tray category #4 (375 x 265mm)

Contents		2.28	1 / 6
2335M		4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13	
4023		T20, T25, T27, T30, T40, T45, T50, T55, T60	
4025		H3, H4, H5, H6, H7, H8, H10, H12, H14	
2779-55G	2571-45	2792	
2452-05F	2221-02 2221-04	2141	



37 PC.

9-7540MR

Tray category #4 (375 x 265mm)

Contents		3.50	1 / 5
2335M		4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13	
2375M		E4, E5, E6, E7, E8	
4375M		E10, E12, E14, E16, E18, E20	
4435M		10, 11, 12, 13, 14, 17, 19, 21, 22, 24	
2792	2755-55G	2571-45	
2221-02 2221-04	2177DF	2452-05F	



40 PC.


9-93523MR

Tray category #4 (375 x 265mm)


Contents		2.63	1 / 6
3335M		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 20, 21, 22	
1120MR		H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	
3792	3769-08F	3452-08F	3571-08	3221-03 3221-06



31 PC.



Drawer (572x275)

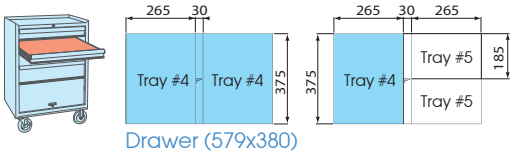

Drawer (579x380)

Tool Set Content

9-90131MR

Tray category #4 (375 x 265mm)

Contents		3.1 kg	1 / 10
4033	T20, T25, T27, T30, T40, T45, T50, T55, T60		
4035	H4, H5, H6, H7, H8, H10, H12, H14, H17		
1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10		
1930	10 x 11, 12 x 14, 14 x 17		
3204 (Ø 60 ~ 140)			



31 PC.

9-1205MR

Tray category #4 (375 x 265mm)

Contents		2.70 kg	1 / 6
1060	27, 28, 29, 30, 32		




5 PC.

9-1216MR | 9-1216MR01 | 9-1216MR03

Tray category #4 (375 x 265mm)

KT NO.	Contents	3.20 kg	1 / 6
9-1216MR	1060	6, 8, 10, 12, 13, 14, 16, 17, 19, 21, 22, 24, 26, 27, 29, 32	
9-1216MR01		6, 8, 10, 11, 13, 14, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32	
9-1216MR03		8, 10, 11, 12, 13, 14, 15, 17, 18, 19, 21, 22, 24, 27, 30, 32	

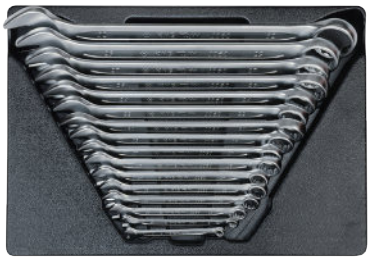


16 PC.

9-1219MR01

Tray category #4 (375 x 265mm)

Contents		2.25 kg	1 / 6
1060	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24		

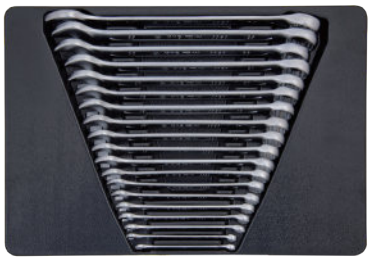

19 PC.


9-1218MR

Tray category #4 (375 x 265mm)


Contents		2.12 kg	1 / 6
1060	6, 7, 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24		
1930	8 x 10, 9 x 11		



18 PC.



Drawer (572x275)

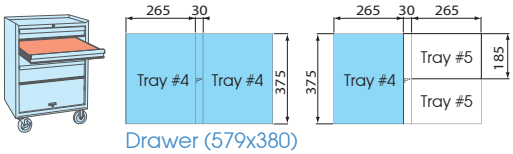

Drawer (579x380)

Tool Set Content

9-1282MR

Tray category #4 (375 x 265mm)

Contents		1.05	1 / 10
	10D0	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19	



12 PC.

9-1272MR

Tray category #4 (375 x 265mm)

Contents		1.45	1 / 5
	1067	6, 7, 8, 9, 10, 11, 12, 13, 14, 17, 19, 22	



12 PC.

9-1608MR

Tray category #4 (375 x 265mm)

Contents		1.5	1 / 6
	1960	6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22	



8 PC.

9-1609MR

Tray category #4 (375 x 265mm)

Contents		1.93	1 / 6
	1960	8 x 9, 10 x 12, 11 x 13, 12 x 14, 14 x 17, 17 x 19, 19 x 21, 22 x 24, 23 x 26	



9 PC.


9-1709MR

Tray category #4 (375 x 265mm)


Contents		2.18	1 / 6
	1970	8 x 9, 10 x 12, 11 x 13, 12 x 14, 14 x 17, 17 x 19, 19 x 21, 22 x 24, 23 x 26	



9 PC.



Drawer (572x275)

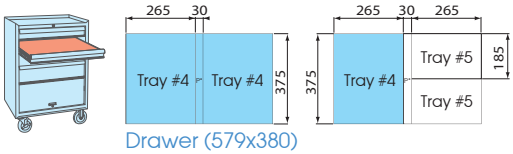

Drawer (579x380)

Tool Set Content

9-1711MR

Tray category #4 (375 x 265mm)

Contents		2.80	1 / 6
	1970	6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22, 21 x 23, 24 x 27, 30 x 32	



11 PC.

9-90315MR

Tray category #4 (375 x 265mm)

Contents		2.6	1 / 6
	1900	8 x 10, 10 x 12, 12 x 14, 14 x 17, 17 x 19, 21 x 23, 22 x 24	
	1970	8 x 10, 10 x 12, 12 x 14, 14 x 17, 17 x 19, 21 x 23, 22 x 24	
	79093-05C		




15 PC.

9-1812MR

KT NO.	Contents		3.69	1 / 6
9-1812MR	○	1080	8, 10, 11, 12, 13, 14, 16, 17, 18, 19, 22, 24	
9-1912MR	○	1081		

9-1912MR

Tray category #4 (375 x 265mm)

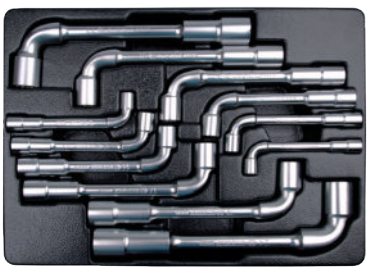


12 PC.


9-1838MR

Tray category #4 (375 x 265mm)


Contents		2.57	1 / 6
○	1084	8, 10, 11, 12, 13, 15, 17, 19	

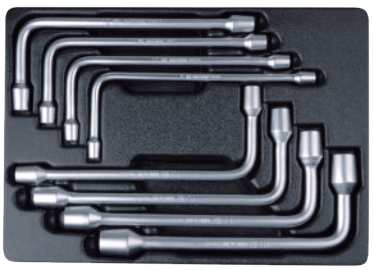

8 PC.



Drawer (572x275)

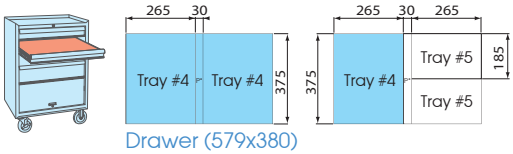

Drawer (579x380)

Tool Set Content

9-1C08MR

Tray category #4 (375 x 265mm)

Contents		0.91	1 / 10
19C0	6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22		



8 PC.

9-10115MR

KT NO.	Contents		1.9	1 / 10
9-10115MR	3731M	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 22	373202R	
9-102A15MR	373AM		373203R	
			373204R	

9-102A15MR

Tray category #4 (375 x 265mm)



15 PC.

9-12120MR

Tray category #4 (375 x 265mm)

Contents		1.27	1 / 6
3731M	8, 10, 12, 13, 14, 15, 17, 19		
373204R		373203R	



10 PC.

9-90109MN

Tray category #4 (375 x 265mm)

Contents		2.28	1 / 6
1970	8 x 10, 10 x 12, 11 x 13, 12 x 14, 14 x 17, 17 x 19		
6011-10N		3611-12R	



8 PC.


9-91120MR

Tray category #4 (375 x 265mm)


Contents		2.40	1 / 6
1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10		
1930	8 x 10, 10 x 12, 11 x 13, 14 x 17		
3731M	8, 10, 12, 13, 14		
6011-10N		3611-12R	



20 PC.



Drawer (572x275)

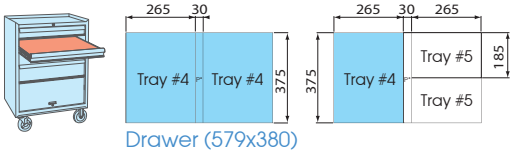


Drawer (579x380)


Tool Set Content

9-40207GP

9-40207GP01 Tray category #4 (375 x 265mm)

7 PC.

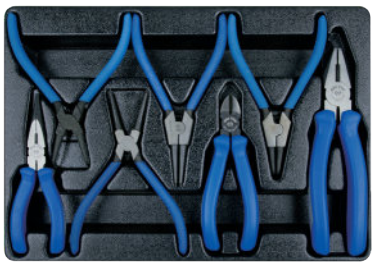
9-40207GP

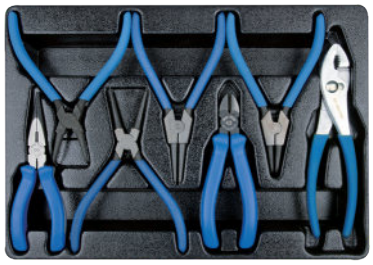
9-40207GP01

KT NO.	Contents							kg		
9-40207GP	6111-08	6211-06	6311-06	68HS-07	68HB-07	68SS-07	68SB-07	1.5	1 / 10	
9-40207GP01	6463-08C	6211-06	6311-06	67HS-07	67HB-07	67SS-07	67SB-07		1 / 6	


9-40604GP

Tray category #4 (375 x 265mm)

4 PC.

Contents — kg 1.98 — 1 / 6

6116-07A, 6216-06A, 6318-08A, 6516-10A

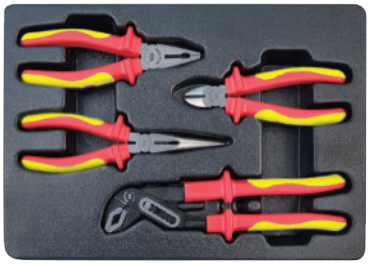


9-42144GP

Tray category #4 (375 x 265mm)

4 PC.

Contents — kg 1.63 — 1 / 8

6011-10N, 6111-08, 6211-06, 6311-06

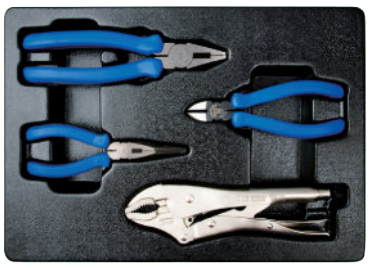

9-90205GN

9-90205GN01 Tray category #4 (375 x 265mm)


5 PC.


9-90205GN



9-90205GN01

Contents — kg 1.98 — 1 / 6

9-90205GN	6313-06	6011-10N	6111-07	6463-08C	74410
9-90205GN01	6311-06				



Drawer (572x275)

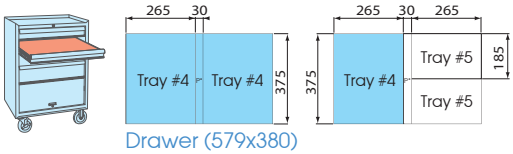

Drawer (579x380)

Tool Set Content

9-90103PP | 9-90103PP01 | 9-90103PP02

Tray category #4 (375 x 265mm)


9-90103PP


9-90103PP01


9-90103PP02

3 PC.

KT NO.	Contents					
9-90103PP 9-90103PP01 9-90103PP02	3611-12P	6511-10	7821-30 7811-16 7821-80	2.30 2.51	1 / 5 1 / 10

9-90103RR

Tray category #4 (375 x 265mm)

Contents — 2.3 kg — 1 / 5


3611-12R


6511-10


7821-30



3 PC.

9-90106SR

Tray category #4 (375 x 265mm)

Contents — 2.05 kg — 1 / 4

76404-06
76405-65
76406-07

76105-06


7822-30


7842-35



6 PC.

9-22108MR

Tray category #4 (375 x 265mm)

Contents — 1.10 kg — 1 / 10


1160MR H2, H2.5, H3, H4, H5, H6, H8, H10



8 PC.

9-22308TR


Tray category #4 (375 x 265mm)

Contents — 1.10 kg — 1 / 10



1163TR T10, T15, T20, T25, T30, T40, T45, T50



8 PC.



Drawer (572x275)

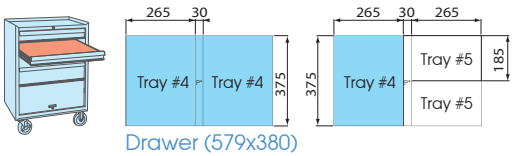

Drawer (579x380)

Tool Set Content

9-30110CR

Tray category #4 (375 x 265mm)

Contents		1.4	1 / 6
	1450	6, 7, 8, 9, 10, 11, 12, 13	
	5450	1/4, 5/16	



10 PC.

9-31110MR

Tray category #4 (375 x 265mm)

Contents		1.0	1 / 10
	1421	PH1 x 80, PH2 x 38, PH2 x 100, PH3 x 150	
	1422	3 x 75, 4 x 100, 5.5 x 125, 6.5 x 38, 6.5 x 150, 8 x 175	




10 PC.

9-31909PR

Tray category #4 (375 x 265mm)

Contents		0.65	1 / 6
	1427	T8H x 75, T9H x 75, T10H x 75, T15H x 75, T20H x 100, T25H x 100, T27H x 100, T30H x 125, T40H x 150	

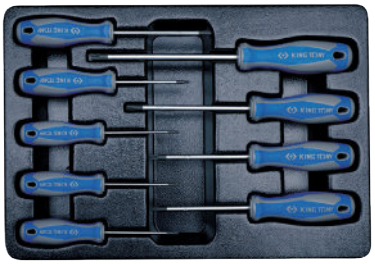


9 PC.

9-90310MR

Tray category #4 (375 x 265mm)

Contents		1.08	1 / 6
	1411	PH1 x 100, PH2 x 100, PH3 x 150	
	1412	5.5 x 100, 6.5 x 100, 8.0 x 150	
	76220-07	9CJ2120	14324003	24110214

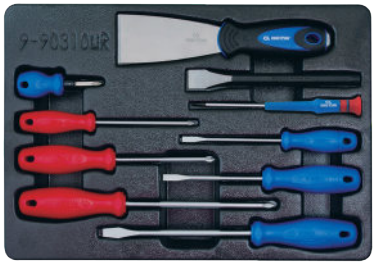

10 PC.


9-34128FR

Tray category #4 (375 x 265mm)

Contents		1.98	1 / 6
	1836P	PH2, PH3	
	1836S	9, 11	
	1880P	PH2, PH3	
	1880S	8, 10	
	1930	8 x 10, 11 x13, 12 x 14	
	4112	414810S	3204



14 PC.

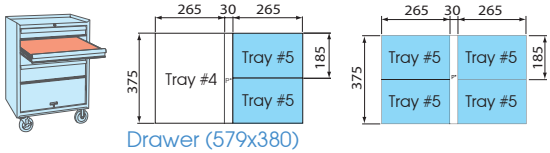

Drawer (579x380)

Tool Set Content

9-2526MR

Tray category #5 (265 x 185mm)

Contents			0.90	1 / 10
	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 13		
	2235M	4, 5, 5.5, 6, 7, 8, 9, 10, 11, 13		
	2779-55G	2813		
	2221-02 2221-04	2792		



26 PC.

9-4119PR

Tray category #5 (265 x 185mm)

Contents			1.10	1 / 10
	4033	T20, T25, T27, T30, T40, T45, T50, T55, T60		



9 PC.

9-4120PR

Tray category #5 (265 x 185mm)

Contents			1.30	1 / 10
	4035	H4, H5, H6, H7, H8, H10, H12, H14, H17		



9 PC.

9-91026PR

Tray category #5 (265 x 185mm)

Contents			1.30	1 / 10
	1143R	T10, T15, T20, T25, T27, T30, T40, T45, T50		
	1147R	T10H, T15H, T20H, T25H, T27H, T30H, T40H		
	4023	T30, T40, T45, T50, T55		
	4375M	E10, E12, E14, E16, E18		




26 PC.

9-1303MR

Tray category #5 (265 x 185mm)

Contents			0.50	1 / 10
	1930	10 x 11, 12 x 14, 14 x 17		



3 PC.


9-1905MR

Tray category #5 (265 x 185mm)


Contents			0.82	1 / 10
	1950	10 x 12, 11 x 13, 14 x 17, 16 x 18, 19 x 22		



5 PC.

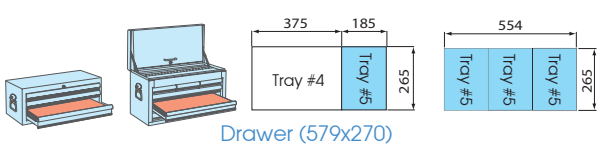

Drawer (579x270)

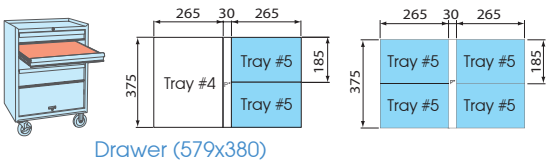

Drawer (579x380)

Tool Set Content

9-10112MR

KT NO.	Contents		1.22	1 / 10
9-10112MR	3731M	10, 11, 12, 13, 14, 15, 16, 17, 19	373202R	
9-102A12MR	373AM		373203R	
			373204R	

9-102A12MR Tray category #5 (265 x 185mm)




12 PC.

9-40103GP

Tray category #5 (265 x 185mm)

Contents		0.83	1 / 10
6111-07	6211-06		
6311-06			



3 PC.

9-31106MR

Tray category #5 (265 x 185mm)

Contents		0.60	1 / 10
1421	PH0 x 60, PH1 x 80, PH2 x 100		
1422	3 x 75, 5.5 x 100, 6.5 x 150		




6 PC.

9-4128FR

Tray category #5 (265 x 185mm)

Contents			1.70	1 / 10
1836P	PH2, PH3			
1836S	9, 11			
1880P	PH2, PH3			
1880S	8, 10			
4112	414810S			



10 PC.


9-20110MR

Tray category #5 (265 x 185mm)

Contents		1.10	1 / 10
1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10		
	3204 (Ø 60 ~ 140)		



10 PC.



Drawer (579x380)

Tool Set Content

9-7576MR

Tray category #6 (560 x 375mm)

76 PC.

Contents						kg 7.69	1 / 3
3335M	8, 10, 11, 12, 13, 14, 15, 16, 17, 19, 20, 21, 22, 24						
3235M	8, 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 24						
4335MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32						
4235M	10, 12, 13, 14, 17, 19, 21, 22, 24						
9TD403	12, 13, 14, 17, 19						
321510M 321512M		366516 366521		3792			
3452-08F		3769-08P		4311-16F			
4768-10P		4452-18FR		4573-10			



Contents

4251-03R	3221-03
4251-05R	3221-06
4251-10R	3221-10

9-94435MP

Tray category #6 (560 x 375mm)

35 PC.

Contents						kg 6.49	1 / 3
4435M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 24, 26, 29, 32						
4535M	10, 12, 13, 14, 17, 19, 21, 24						
4415M	17, 19, 21, 22						
4797P		68SS-07		68HS-07			
6011-10R		6211-06		6311-08			
6463-08C		74030					



9-31919MR

Tray category #6 (560 x 375mm)

19 PC.

Contents		kg 2.67	1 / 5
1411	PH0 x 75, PH2 x 38		
1412	3 x 75, 6.5 x 38		
1421	PH2 x 300		
1422	6.5 x 300		
1481	PH2 x 100, PH3 x 150		
1482	6.5 x 100, 8 x150		
1427	T8H x 75, T10H x 75, T15H x 75, T20H x 100, T25H x 100, T27H x 100, T30H x 125		
43280212		2121-18	



9-90408TQ


Tray category #6 (560 x 375mm)

8 PC.

Contents				kg 2.06	1 / 5
75102-08G		75202-08G			
75302-08G		75402-08G			
75502-08G		79063-12			
79093-05C		7911-12			



Tool Set Content



Drawer (579x380)

9-4057MR

Tray category #7 (280 x 187mm)

Contents		2.99	1 / 4
4330MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32, 33, 34, 36		




27 PC.

9-4557MR

Tray category #7 (280 x 187mm)

Contents		2.99	1 / 4
4335MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32, 33, 34, 36		

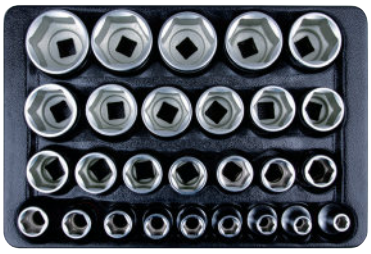

27 PC.

9-4138PR

Tray category #7 (280 x 187mm)

Contents		1.9	1 / 10
4033	T20, T25, T27, T30, T40, T45, T50, T55, T60		
4035	H4, H5, H6, H7, H8, H10, H12, H14, H17		



18 PC.

9-7128PR

Tray category #7 (280 x 187mm)

Contents		1.20	1 / 10
3025	H3, H4, H5, H6, H7, H8, H10, H12		
3023	T15, T20, T25, T27, T30, T40, T45, T50		
3375M	E8, E10, E12, E14, E16, E18		
4375M	E10, E12, E14, E16, E18, E20		



28 PC.

9-4427MP

Tray category #7 (280 x 187mm)

Contents		4.09	1 / 4
4535M	8, 9, 10, 11, 12, 13, 14, 15,16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32, 33, 34, 36		



27 PC.

9-4827MP


Tray category #7 (280 x 187mm)

Contents		4.09	1 / 4
4530M	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32, 33, 34, 36		



27 PC.

Tool Set Content



Drawer (579x380)

9-12C7MR

Tray category #7 (280 x 187mm)

Contents	0.78	1 / 10
1061	8, 10, 11, 13, 14, 17, 19	



7 PC.

9-3612MR

Tray category #7 (280 x 187mm)

Contents	1.27	1 / 10
3351MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19	



12 PC.

9-30904AY

Tray category #7 (280 x 187mm)


- Use for scribing, aligning, installing and removing O rings, seals and washers stainless

Contents	0.43	1 / 10
43250115Y	43270115Y	
43260115Y	43290115Y	



4 PC.

Tool Set Content



Drawer (579x380)

9-30909AY


Tray category #8 (375 x 187mm)

Contents	0.69	1 / 12
43250115Y	43350175Y	
43260115Y	43360175Y	
43270115Y	43370175Y	
43290115Y	43390175Y	
43240115Y		



9 PC.

Tool Set Content



Drawer (579x380)

9-12110MR

Tray category #8 (375 x 187mm)

Contents		1.89	1 / 12
3731M	8, 10, 12, 13, 14, 17, 19, 21, 22, 24		



10 PC.

9-90114MR

Tray category #8 (375 x 187mm)

Contents		1.75	1 / 12
1930	8 x 10, 10 x 11, 12 x 14, 14 x 17, 17 x 19		
1060	8, 10, 12, 14, 17, 19, 21, 22, 24		



14 PC.

9-40618GP

Tray category #8 (375 x 187mm)

Contents		1.89	1 / 12
1471	PH1 x 100, PH2 x 100		
1472	4 x 100, 5.5 x 125		
6CB02	100~500V		

6318-08A 6116-07A 6216-06A



8 PC.

9-1011GP

Tray category #8 (375 x 187mm)

Contents		1.15	1 / 12
761G	ø6x185mm		
763G	ø4x185mm, ø5x185mm ø6x185mm, ø8x185mm		
764G	ø2x140mm, ø3x150mm, ø4x180mm, ø5x200mm, ø6x210mm, ø8x220mm		



11 PC.


9-91016MR

Tray category #8 (375 x 187mm)

Contents		1.15	1 / 12
3730M	8, 10, 12, 13, 14, 17, 19		
1123R	T10, T15, T20, T25, T27, T30, T40, T45, T50		



16 PC.



Drawer (579x380)

Tool Set Content

9-4335MR

KT NO.	Contents	5.01 kg / 1 / 2
9-4335MR	4235M	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32, 36
9-4235MR	4230M	

9-4235MR

Tray category #9 (375 x 280mm)



25 PC.

9-4435MP

Tray category #9 (375 x 280mm)

Contents	7.3 kg / 1 / 2
4435M	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32, 36



25 PC.

9-6414MP

9-6414SP

Tray category #9 (375 x 280mm)



9-6414MP



9-6414SP

14 PC.

KT NO.	Contents	10.9 kg / 1 / 2
9-6414MP	6435M	19, 21, 22, 24, 26, 27, 29, 30, 32, 33, 35, 36, 38, 41
9-6414SP	6435S	3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4, 1-5/16, 1-3/8, 1-7/16, 1-1/2, 1-5/8

9-12A1MR


Tray category #9 (375 x 280mm)

Contents	1.91 kg / 1 / 4
1061	8, 10, 12, 13, 14, 16, 17, 18, 19, 22, 24



11 PC.

Tool Chest Set Content

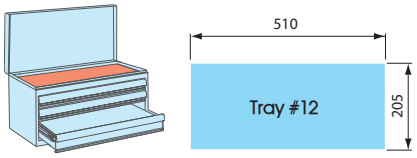

Drawer (504 x 195 mm)

9-4338MR | 9-4338MR01 | 9-4338MR03

Tray category #12 (510 x 205mm)

▪ For Top drawer of 87401-2 / 87401-3 / 87401-3H P.51

38 PC.



9-4338MR


9-4338MR01 / 9-4338MR03

KT NO.	Contents					
						5.96 kg / 1 / 5
9-4338MR	4335MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	4768-10F	4021	PH2, PH3	4251-05R 4251-10R
9-4338MR01			4755-10G	4022	8, 10	4572-12
				4023	T25, T27, T30, T40	4791R
9-4338MR03		8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32	4755-10G	4025	H4, H5, H6, H8, H10, H12	463521RC

▪ for 87401-2 / 87401-3 / 87401-3H P.51

Tool Chest Set Content

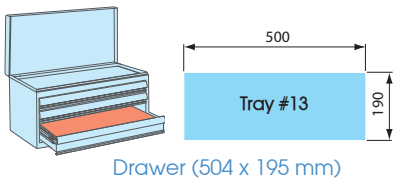

Drawer (504 x 195 mm)

9-90121MR

Tray category #13 (500 x 190mm)

Contents		2.1 kg / 1 / 5
	1900	6 x 7, 8 x 10, 11 x 13, 12 x 13, 17 x 19, 22 x 24
	1970	8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19
	1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10



21 PC.

9-90126MR

Tray category #13 (500 x 190mm)

Contents		2.38 kg / 1 / 5
	1060	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22
	1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10




26 PC.

9-90104GP

Tray category #13 (500 x 190mm)


Contents		1.36 kg / 1 / 5	
	3611-08P		6511-10
	6111-07		6311-06

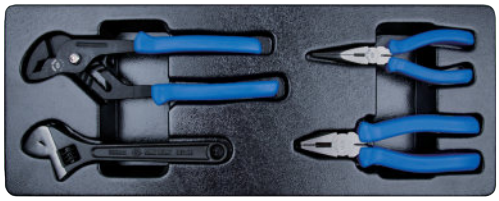

4 PC.

▪ for 87401-2 / 87401-3 / 87401-3H P.51

Tool Chest Set Content

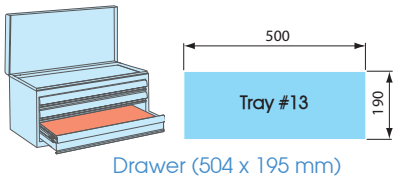


Drawer (504 x 195 mm)

9-31006MR

Tray category #13 (500 x 190mm)

Contents — 0.74 kg — 1 / 5

1421	PH1 x 80, PH2 x 38, PH3 x 150
1422	6.5 x 38, 5.5 x 100, 8 x 175

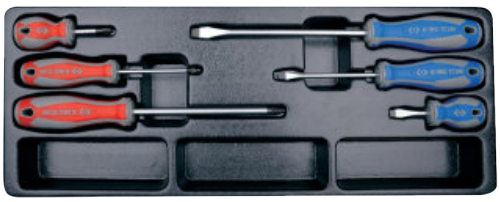

6 PC.

9-90113MA

Tray category #13 (500 x 190mm)

Contents — 2.98 kg — 1 / 5


4023	T45		
4025	H8, H12		
402B	M16		
3204	401408M	9AE42	
112005MR 112006MR	9AE2-6606 9AE2-7608	9AE2-7614 9AE2-9315	



13 PC.

▪ For 87402 / 87A05 P.52

Tool Box Set Content



Drawer (470 x 220 mm)

9-4219MR

9-4219MR07

9-4219SR08

9-4319MR

9-4319MR01

9-4319MR02

9-4319MR05

Tray category #14 (460 x 105mm)




20 PC.

KT NO. — Contents — 2.5 kg — 1 / 8

KT NO.	Contents			
9-4219MR	4768-10F	4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	4791R
9-4219MR07	4762-10F	4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27	
9-4219SR08		4330SR	5/16, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 25/32, 13/16, 7/8, 15/16, 1, 1-1/16, 1-3/16, 1-1/4	
9-4319MR	4768-10F	4335MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	
9-4319MR01	4755-10G			
9-4319MR02	4779-10FR			
9-4319MR05	4768-10F		8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32	

▪ For 87402 / 87A05 P.52

Tool Box Set Content



9-4116FR

9-4116FR03 Tray category #14 (460 x 105mm)



6 PC.

KT NO. | Contents | 2.2 | 1 / 8

KT NO.	Contents		
9-4116FR	463521RC	4251-05R 4251-10R	4572-12
9-4116FR03	463021RC	4452-18FR	4223-02R

9-1606MR

9-1606MR01 Tray category #14 (460 x 105mm)



6 PC.

KT NO. | Contents | 1.1 | 1 / 8

KT NO.	Contents	
9-1606MR	1960	10 x 12, 12 x 14, 14 x 17, 17 x 19, 19 x 21, 23 x 26
9-1606MR01		8 x 10, 10 x 12, 12 x 14, 14 x 17, 17 x 19, 22 x 24

9-1217MR Tray category #14 (460 x 105mm)



7 PC.

Contents | 1.5 | 1 / 8

1060	17, 18, 19, 20, 21, 22, 24

9-1716MR Tray category #14 (460 x 105mm)



6 PC.

Contents | 1.1 | 1 / 8

1970	8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19

9-90115MR Tray category #14 (460 x 105mm)



15 PC.

Contents | 1.2 | 1 / 8

1900	6 x 7, 8 x 10, 11 x 13, 12 x 13, 17 x 19, 22 x 24
1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10

9-40203GP Tray category #14 (460 x 105mm)



3 PC.

Contents | 0.8 | 1 / 8

6111-07	6211-06	
6311-06		

9-90120MR Tray category #14 (460 x 105mm)



20 PC.

Contents | 1.5 | 1 / 8

1060	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16
1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10

9-30106MR Tray category #14 (460 x 105mm)



6 PC.

Contents | 0.8 | 1 / 8

1421	PH1 x 80, PH2 x 100, PH3 x 150
1422	5.5 x 100, 6.5 x 150, 8 x 175

9-90125MR Tray category #14 (460 x 105mm)



15 PC.

Contents | 1.2 | 1 / 8

1900	8 x 10 , 10 x 12 , 12 x 14 , 14 x 17 , 17 x 19 , 22 x 24
1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10


9-30206MR Tray category #14 (460 x 105mm)




6 PC.

Contents | 1.18 | 1 / 8

1461	PH1 x 75, PH2 x 100, PH3 x 150
1462	5.5 x 100, 6.5 x 150, 8 x 175

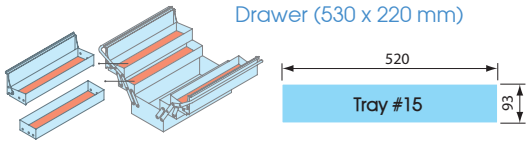

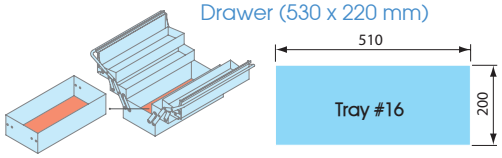

▪ For 87408 only P.52

Tool Box Set Content

9-4029CR Tray category #15 (520 x 93mm)

29 PC.



Contents		2.67 kg	1 / 5
4025	H5, H6, H8, H10, H12, H14		
4330MR	8, 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 23, 24, 26, 27, 28, 30, 32		
4330SR	7/16, 9/16, 7/8		
463521RC			

9-4156PR Tray category #15 (520 x 93mm)

6 PC.



Contents		1.99 kg	1 / 5
4779-10GR	4572-12		
4251-03R 4251-05R 4251-10R	4791R		

9-90111MR Tray category #15 (520 x 93mm)

11 PC.



Contents		1.25 kg	1 / 5
1145MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10		
3611-10P	6511-10C		

9-6010MR Tray category #16 (510 x 200mm)

9-6010MR01

10 PC.



KT NO.	Contents			kg	
9-6010MR	6330M	33, 36, 38, 41, 46, 50	6779-20F 6251-08 6251-16 6572-20	9.70	1 / 2
9-6010MR01		30, 32, 36, 41, 46, 50		9.50	

9-1215MR03 Tray category #16 (510 x 200mm)

15 PC.



Contents		3.12 kg	1 / 2
1060	8, 10, 11, 12, 13, 14, 17, 18, 19, 21, 22, 24, 27, 30, 32		



HAND SOCKETS & ACCESSORIES


KING TONY
3893EW

Socket Made



1 Hot forge



2 Lathing



3 Marking



4 Heat treatment



5 Sand blast



6 Grinding




7 Plating




8 Rubber stripe assembly

Precision forging Technology




Other brand (not good)




King Tony brand (good)

In forging process, metal moved while it is still in the solid state. King Tony specialized in forging technology to create better metal configuration. Non-straight grain flow and non-sharp corners can extend lifetime and durability of socket. Torque is transmitted for powerful tightening under safety.

Conventional heat treatment and microstructural



Other brand:
Over of Troostite (Zn,Mn) element will bring weak point. (not good)



King Tony brand:
Well spread (Fe) element will bring better strength. (good)

Heat treatment involves the use of heating or chilling experience and time control. King Tony controls heat treatment system to ensure the right hardness without the brittleness. From microstructural picture you can see elements are well- distributed.

Professional production & quality control






KING TONY hand socket reach 30% higher than DIN international standard.

Quality control also ensure that a sufficient level of production output. King Tony uses advance technology to inspect tiny difference on each step. Our hand socket, ratchet, extension bar, and power handle is 30% higher than international DIN standards. Impact socket reach 50% higher torque than DIN standards.

Finest material for tools

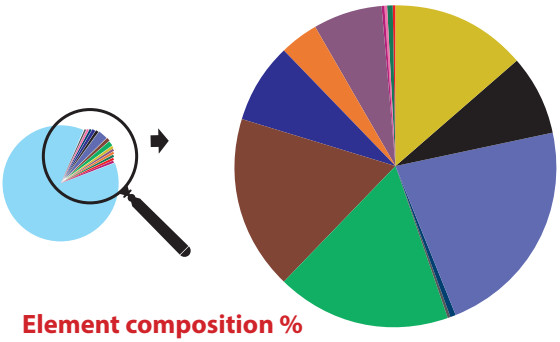


Element composition %


• Fe	97.1025%	• Mo	0.2325%	• P	0.0125%
• Mn	0.6485%	• Si	0.2301%	• S	0.0104%
• Ni	0.5089%	• Cu	0.1970%	• Co	0.0092%
• Cr	0.5058%	• V	0.1130%	• W	0.0088%
• C	0.4000%	• Al	0.0196%	• B	0.0012%

Tools are made to extend hand work. King Tony selects different material depends on its difference of nature for tightening, power impacting, cutting, rotating, and locking. Choose qualified material to meet required lifetime for professional use and consumption.

Extremely hard-wearing performance

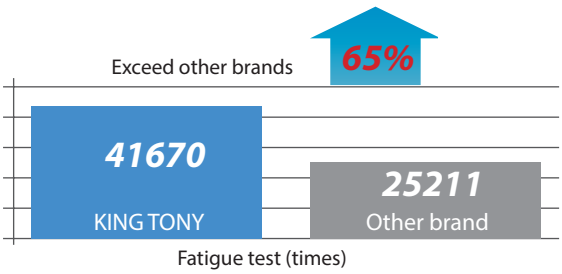

Fatigue test (times)

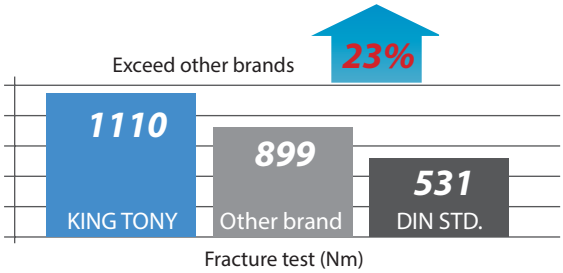

Fracture test (Nm)
1/2DR. 19mm hand socket (433519MR)


King Tony offers reliable tools for professional users, strictly controls its quality to ensure achievement of required performance. From "fracture & fatigue test", you will know the difference we have when compare to others.

Standard Socket

KT No. & D1

2330M 2330S 1/4"

- Metric-DIN 3124, ISO 2725-1
- Inch-ANSI/ASME B107.1






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	pcs/box
233004M	4	6.8	11.8	4	24	9	20 / 600
233045M	4.5	7.4	11.8	5	24	9	20 / 600
233005M	5	8.0	11.8	6	24	9	20 / 600
233055M	5.5	8.7	11.8	6	24	11	20 / 600
233006M	6	9.2	11.8	7	24	11	20 / 600
233007M	7	10.3	11.8	7	24	10	20 / 600
233008M	8	11.4	11.8	8	24	12	20 / 600
233009M	9	12.8	12.0	8	24	12	20 / 600
233010M	10	14.3	13.0	9	24	13	12 / 360
233011M	11	15.8	14.2	9	24	18	12 / 360
233012M	12	16.8	15.5	9	24	21	12 / 360
233013M	13	17.8	16.5	9	24	23	12 / 360
233014M	14	19.6	18.5	9	24	31	10 / 360

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	pcs/box
233005S	5/32	6.8	11.8	4	24	9	20 / 600
233006S	3/16	7.9	11.8	6	24	9	20 / 600
233007S	7/32	8.7	11.8	6	24	10	20 / 600
233008S	1/4	9.5	11.8	7	24	10	20 / 600
233009S	9/32	10.3	11.8	7	24	10	20 / 600
233010S	5/16	11.4	11.8	8	24	10	20 / 600
233011S	11/32	13.7	12.2	8	24	12	20 / 600
233012S	3/8	14.2	13.0	8	24	14	12 / 360
233014S	7/16	15.8	14.2	9	24	18	12 / 360
233015S	15/32	16.8	15.5	9	24	21	12 / 360
233016S	1/2	17.6	16.5	9	24	24	12 / 360

2335M 2335S 1/4"

- Metric-DIN 3124, ISO 2725-1
- Inch-ANSI/ASME B107.1






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	pcs/box
233532M	3.2	5.7	11.8	3.5	24	9	20 / 600
233504M	4	6.8	11.8	4	24	9	20 / 600
233545M	4.5	7.4	11.8	5	24	10	20 / 600
233505M	5	8.0	11.8	6	24	10	20 / 600
233555M	5.5	8.7	11.8	6	24	10	20 / 600
233506M	6	9.2	11.8	7	24	10	20 / 600
233507M	7	10.3	11.8	7	24	11	20 / 600
233508M	8	11.4	11.8	8	24	11	20 / 600
233509M	9	12.8	12.0	8	24	13	20 / 600
233510M	10	14.3	13.0	9	24	14	12 / 360
233511M	11	15.8	14.2	9	24	19	12 / 360
233512M	12	16.8	15.5	9	24	22	12 / 360
233513M	13	17.8	16.5	9	24	25	12 / 360
233514M	14	19.6	18.5	9	24	32	10 / 300
233515M	15	20.9	19.3	12	24	39	10 / 300

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	pcs/box
233505S	5/32	6.8	11.8	4	24	9	20 / 600
233506S	3/16	7.9	11.8	6	24	11	20 / 600
233507S	7/32	8.7	11.8	6	24	11	20 / 600
233508S	1/4	9.5	11.8	7	24	11	20 / 600
233509S	9/32	10.3	11.8	7	24	11	20 / 600
233510S	5/16	11.4	11.8	8	24	11	20 / 600
233511S	11/32	13.7	12.2	8	24	12	20 / 600
233512S	3/8	14.2	13.0	8	24	14	12 / 360
233514S	7/16	15.8	14.2	9	24	19	12 / 360
233515S	15/32	16.8	15.5	9	24	22	12 / 360
233516S	1/2	17.6	16.5	9	24	24	12 / 360
233518S	9/16	19.6	18.5	9	24	31	10 / 300

Deep Socket

2235M 1/4"

- DIN 3124, ISO 2725-1






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	pcs/box
223504M	4	6.9	11.6	6	49.5	18	20 / 320
223545M	4.5	7.5	11.6	6	49.5	20	20 / 320
223505M	5	8.0	11.6	7	49.5	21	20 / 320
223555M	5.5	8.8	11.6	7	49.5	21	20 / 320
223506M	6	9.5	11.6	8	49.5	22	20 / 320
223507M	7	10.5	11.6	12	49.5	23	20 / 320
223508M	8	11.8	11.8	15	50	24	20 / 320
223509M	9	13.0	13.0	15	50	30	15 / 240
223510M	10	14.5	14.5	15	50	38	15 / 240
223511M	11	15.8	15.8	21	50	43	15 / 240
223512M	12	16.8	16.8	21	50	48	15 / 240
223513M	13	17.8	17.8	21	50	52	15 / 240
223514M	14	19.8	19.8	21	50	69	15 / 240
223515M	15	20.9	20.9	25	50	71	12 / 240

2235S 1/4"

- Inch-ANSI/ASME B107.1






KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	pcs/box
223505S	5/32	6.8	11.8	6	50	19	20 / 320
223506S	3/16	7.9	11.8	7	50	20	20 / 320
223507S	7/32	8.7	11.8	9	50	21	20 / 320
223508S	1/4	9.5	11.8	9	50	23	20 / 320
223509S	9/32	10.3	11.8	15	50	24	20 / 320
223510S	5/16	11.8	11.8	15	50	25	20 / 320
223511S	11/32	13.0	13.0	15	50	32	15 / 240
223512S	3/8	14.5	14.5	15	50	41	15 / 240
223514S	7/16	15.8	15.8	21	50	47	15 / 240
223516S	1/2	17.6	17.6	21	50	54	15 / 300
223518S	9/16	19.6	19.6	21	50	71	15 / 270

Deep Socket

2230M — 1/4"

- DIN 3124, ISO 2725-1






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm		
223004M	4	6.8	11.8	6	50	20	20 / 320
223045M	4.5	7.4	11.8	7	50	20	20 / 320
223005M	5	8.0	11.8	7	50	20	20 / 320
223055M	5.5	8.7	11.8	9	50	20	20 / 320
223006M	6	9.2	11.8	9	50	21	20 / 320
223007M	7	10.3	11.8	15	50	22	20 / 320
223008M	8	11.8	11.8	15	50	25	20 / 320
223009M	9	13.0	13.0	15	50	28	15 / 240
223010M	10	14.5	14.5	15	50	36	15 / 240
223011M	11	15.8	15.8	21	50	41	15 / 240
223012M	12	16.8	16.8	21	50	47	15 / 240
223013M	13	17.8	17.8	21	50	49	15 / 240
223014M	14	19.8	19.8	21	50	66	15 / 240

Double Square Socket

2310M — 2310S — 1/4"

- Metric-DIN 3120
- Inch-ANSI / ASME B107.1






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm		
231008M	8	13.8	13.0	9	24	16	12 / 360
231010M	10	16.8	15.4	9	24	22	12 / 360
KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm		
231010S	5/16	13.8	13.0	9	24	15	12 / 360
231012S	3/8	16.8	15.4	9	24	24	12 / 360

Star Socket

2375M — 1/4"

- DIN 3120






KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm		
237504M	E4	6.0	11.8	3.6	24	9	20 / 600
237505M	E5	7.0	11.8	4.0	24	10	20 / 600
237506M	E6	8.0	11.8	6.0	24	10	20 / 600
237507M	E7	8.5	11.8	7.0	24	11	20 / 600
237508M	E8	9.8	11.8	8.0	24	11	20 / 600
237510M	E10	11.8	11.8	9.0	24	13	20 / 600

Star Socket

2275M — 1/4"

- DIN 3120





KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm		
227504M	E4	6.0	11.8	3.6	50	21	20 / 320
227505M	E5	7.0	11.8	4.0	50	22	20 / 320
227506M	E6	8.0	11.8	6.0	50	24	20 / 320
227507M	E7	8.5	11.8	7.0	50	24	20 / 320
227508M	E8	9.8	11.8	8.0	50	26	20 / 320


Bit Socket

CAUTION

In order to get normal life of bit socket, always use within limited torque to bit.

2011X — 1/4"

- Phillips head
- DIN ISO 8764-1






KT NO.	No.	L mm		
201101X	PH1	25	9	20 / 600
201102X	PH2	25	9	20 / 600
201103X	PH3	25	10	20 / 600
201104X	PH4	25	12	20 / 600

2012X — 1/4"

- Slotted head
- DIN ISO 2380-1






KT NO.	Tip width mm	Tip thickness mm	L mm		
201235X	3.5	0.6	25	8	20 / 600
201255X	5.5	1.0	25	9	20 / 600
201208X	8	1.2	25	10	20 / 600

2015X — 1/4"

- Hexagon head
- DIN ISO 2380-1






KT NO.	mm	L mm		
201503MX	H3	25	8	20 / 600
201504MX	H4	25	9	20 / 600
201505MX	H5	25	10	20 / 600
201506MX	H6	25	10	20 / 600
201508MX	H8	25	13	20 / 600
201510MX	H10	25	15	20 / 600
201506SX	3/16	25	9	20 / 600
201508SX	1/4	25	10	20 / 600

Bit Socket

KT No. & D1

2013X 1/4"

- For torx internal screw



KT NO.	Size	L mm		
201308X	T8	25	8	20 / 600
201309X	T9	25	8	20 / 600
201310X	T10	25	8	20 / 600
201315X	T15	25	8	20 / 600
201320X	T20	25	9	20 / 600
201325X	T25	25	9	20 / 600
201327X	T27	25	9	20 / 600
201330X	T30	25	10	20 / 600
201340X	T40	25	11	20 / 600

2018X 1/4"

- Pozidriv head
- DIN ISO 8764-1



KT NO.	No.	L mm		
201801X	PZ1	25	9	20 / 600
201802X	PZ2	25	9	20 / 600
201803X	PZ3	25	10	20 / 600
201804X	PZ4	25	11	20 / 600

2031 1/4"

- Phillips head
- DIN ISO 8764-1



KT NO.	No.	L mm		
203101	PH1	37	15	20 / 600
203102	PH2	37	15	20 / 600
203103	PH3	37	15	20 / 600
203104	PH4	37	16	20 / 600

2032 1/4"


- Slotted head
- DIN ISO 8764-1



KT NO.	Tip width mm	Tip thickness mm	L mm		
203235	3.5	0.5	37	15	20 / 600
203204	4	0.8	37	14	20 / 600
203255	5.5	1.0	37	15	20 / 600
203265	6.5	1.2	37	15	20 / 600
203207	7	1.2	37	15	20 / 600
203208	8	1.2	37	16	20 / 600
203210	10	1.6	37	20	20 / 600

2035 2035S 1/4"

- Hexagon head
- DIN 7422 / 3120

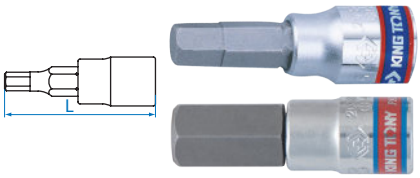

KT NO.	mm	L mm		
203503	H3	37	15	20 / 600
203504	H4	37	15	20 / 600
203505	H5	37	15	20 / 600
203506	H6	37	16	20 / 600
203507	H7	37	18	20 / 600
203508	H8	37	19	20 / 600
203510	H10	37	23	20 / 600

KT NO.	inch	L mm		
203504S	H1/8	37	15	20 / 600
203505S	H5/32	37	15	20 / 600
203506S	H3/16	37	16	20 / 600
203507S	H7/32	37	17	20 / 600
203508S	H1/4	37	18	20 / 600
203510S	H5/16	37	19	20 / 600
203512S	H3/8	37	22	20 / 600



Bit Socket

KT No. & D1

2033 1/4"

- For torx internal screw
- DIN 3120



KT NO.	Size	L mm	g	
203308	T8	37	14	20 / 600
203309	T9	37	14	20 / 600
203310	T10	37	14	20 / 600
203315	T15	37	14	20 / 600
203320	T20	37	15	20 / 600
203325	T25	37	15	20 / 600
203327	T27	37	15	20 / 600
203330	T30	37	16	20 / 600
203340	T40	37	16	20 / 600

2037 1/4"

- For tamper resistant torx screw
- DIN 3120



KT NO.	Size	L mm	g	
203708	T8H	37	14	20 / 600
203709	T9H	37	14	20 / 600
203710	T10H	37	14	20 / 600
203715	T15H	37	14	20 / 600
203720	T20H	37	15	20 / 600
203725	T25H	37	15	20 / 600
203727	T27H	37	15	20 / 600
203730	T30H	37	15	20 / 600
203740	T40H	37	16	20 / 600

2038 1/4"

- Pozidriv head
- DIN 3120



KT NO.	No.	L mm	g	
203801	PZ1	37	15	20 / 600
203802	PZ2	37	15	20 / 600
203803	PZ3	37	15	20 / 600



90 Teeth Dustproof Ratchet PAT.



- Material
  - chrome vanadium alloy steel handle
  - chrome molybdenum steel (gear) driver
- Finishing
  - polished, chrome plated
  - black driver by phosphate sunk

2773-55GS

1/4" | IP 51 | 2 PC. | PAT.

- 1/4" DR. & 1/2" DR. 90 teeth reversible ratchet
- 90 teeth ratchet mechanism, allowing ratchet action in very tight spaces
- IP51, dustproof design



1 New slimline I-Beam shank offers superior strength with less effort

2 Dustproof - Double Sealing gasket




3 Screwless design - Easy to repair



2773DK

KT NO.	Square DR.	Overall length inch	Overall length mm	g	pcs/box
2773-55GS	1/4"	5-1/2"	140	110	1 / 100
2773DK				renewal kits	

Mini Bit Ratchet PAT.

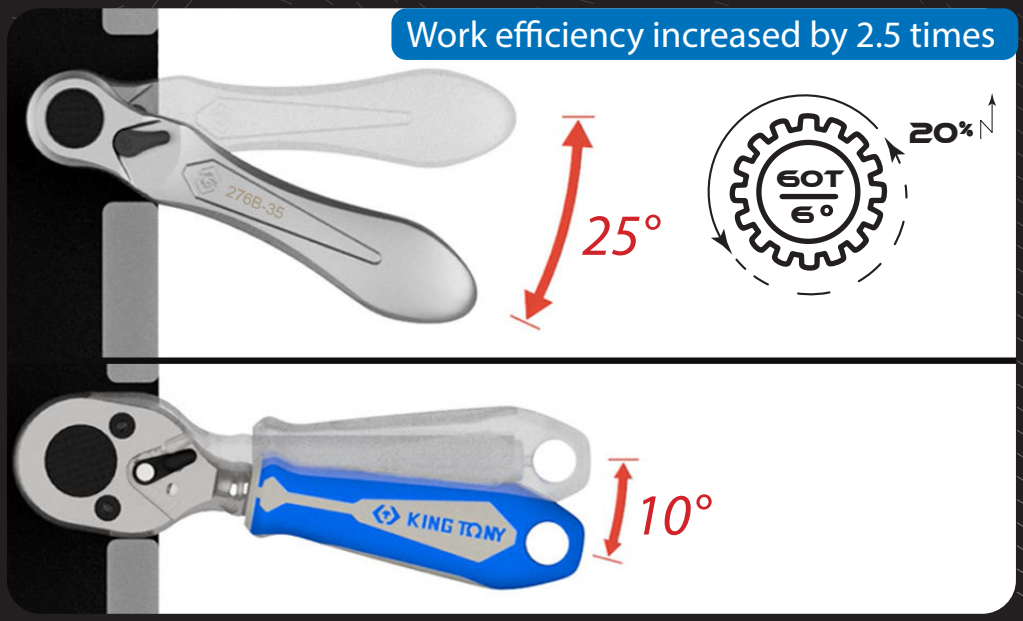


276B-0225

- Reversible ratchet
- 6° gear action degree (60 teeth)
- Quick release design, convenient for users to quickly replace bit
- BIT-holder 12-PT design for quick bit replacement
- Reduced head size and shape of waist can be used quickly and conveniently in narrow spaces







- Quick release Design

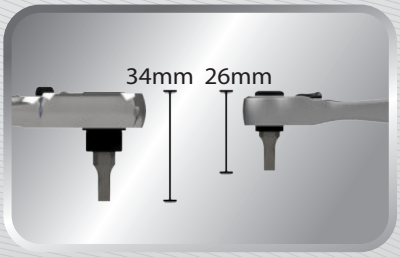

- Operating space 30% thinner

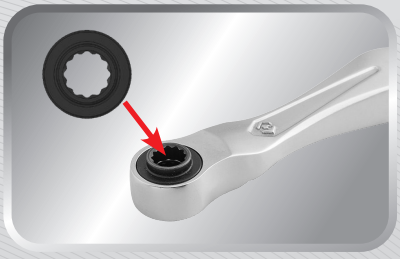

- D-head 12 PT design for quick bit replacement

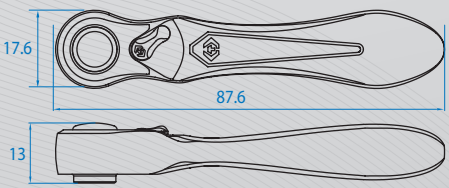

Contents	80	1 / 36
7702-25		
276B-35		

Ratchet

2725

FINE GEAR 1/4"

- Reversible ratchet
- 8° gear action degree (45 teeth)

KT NO.	Overall length inch	Overall length mm	g	pcs / box
2725-55F	5-1/2	140	156	5 / 90
2725-55G	5-1/2	140	168	5 / 90
2725DK	renewal kits		-	-



2725DK



2725-55G



2725-55F

2755

FINE GEAR 1/4"


- Reversible ratchet
- 5° gear action degree (72 teeth)
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	pcs / box
2755-55G	5-1/2	144	113	5 / 90
2755DK	renewal kits		-	-



2755DK






2752

QUICK RELEASE FINE GEAR 1/4"

- Quick release swivel reversible ratchet
- 5° gear action degree (72 teeth)
- Multi-angle design for difficult-to-reach fasteners






KT NO.	Overall length inch	Overall length mm	g	pcs / box
2752-06G	6	150	128	6 / 108
2752DK	renewal kits		-	-



2752DK





2752-45G

QUICK RELEASE FINE GEAR 1/4"

- Quick release swivel reversible ratchet
- 5° gear action degree (72 teeth)
- Multi-angle design for difficult-to-reach fasteners
- Application: T-handle ratchet / screwdriver ratchet

KT NO.	Overall length inch	Overall length mm	g	pcs / box
2752-45G	4-1/2	114	128	6 / 108
2752DK	renewal kits			




2752DK







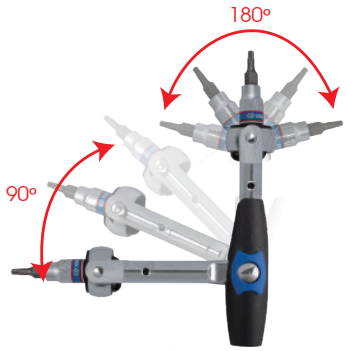

2761

QUICK RELEASE 1/4"

- Quick release reversible ratchet
- 15° gear action degree (24 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	pcs / box
2761-55F	5-1/2	140	164	6 / 108
2761-55P	5-1/2	140	156	6 / 108
2761DK	renewal kits		-	-



2761DK



2761-55F



2761-55P

Ratchet

KT No. & D1

2769 — 1/4"

- Reversible ratchet
- 15° gear action degree (24 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	pcs / box
2769-55F	5-1/2	140	167	6 / 108
2769-55P	5-1/2	140	159	6 / 108
2769DK	renewal kits		-	-



2769DK



2769-55F



2769-55P

2771 — QUICK RELEASE 1/4"

- Quick release reversible ratchet
- 15° gear action degree (24 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	pcs / box
2771-55F	5-1/8	130	142	6 / 108
2771-55G	5-1/8	134	110	6 / 108
2771DK	renewal kits		-	-



2771DK



2771-55F



2771-55G

2773 — 1/4"

- Quick release reversible ratchet
- 4° gear action degree (90 teeth)
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	pcs / box
2773-55GS	5-1/2	140	110	1 / 100
2773DK	renewal kits		-	-



2773DK


IP 51 · 90T 4° · 20 N · PAT.




2774 — 1/4"

- Universal joint reversible ratchet
- 15° gear action degree (24 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	pcs / box
2774-55F	5-1/8	130	146	6 / 108
2774-55G	5-1/8	134	114	6 / 108
2774DK	renewal kits		-	-







2774DK



2774-55F



2774-55G

2779 — 1/4"

- Reversible ratchet
- 15° gear action degree (24 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	pcs / box
2779-55F	5-1/8	130	145	6 / 108
2779-55G	5-1/8	134	113	6 / 108
2779DK	renewal kits		-	-



2779DK



2779-55F



2779-55G

Ratchet

KT No. & D1

2781

QUICK RELEASE 1/4"

- Quick release flexible and reversible ratchet
- 15° gear action degree (24 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	pcs/box
2781-06P	6	150	156	6 / 108
2781DK	renewal kits		-	-



2781DK



2760

MINI RATCHET 1/4"

- Mini reversible ratchet
- 5° gear action degree (72 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	pcs/box
2760-04	4	100	95	8 / 128
2760DK01	renewal kits		-	-



2760DK01



276A

FINE GEAR MINI RATCHET 1/4"


- Mini bit holder ratchet
- 5° gear action degree (72 teeth)
- Two teeth pawl action

KT NO.	A mm	D mm	L mm	H mm	g	pcs/box
276A-04G	23	26	111	20	101	6 / 108
276ADK			renewal kits			



276ADK



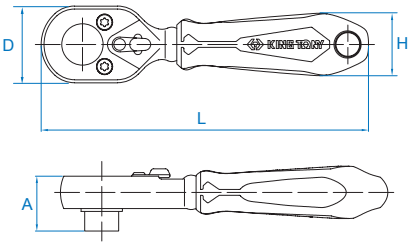



276A-04G (top, side, back)



Mini Ratchet Set

2515MR 1/4"

- Mini ratchet set
- 5° gear action degree (72 teeth)
- Two teeth pawl action

15 PC.



Contents		0.26	6 / 36
2335M	5, 5.5, 6, 7, 8		
1025P	PH1, PH2		
1025T	T10, T15, T20		
1025H	H3, H4, H5, H6		
276A-04G			

2501MR 1/4"

- 5° gear action degree (72 teeth)
- Two teeth pawl action

21 PC.




Contents		0.36	4 / 48
2335M	4, 5, 6, 7, 8, 9, 10, 11, 12, 13		
1025P	PH1, PH2, PH3		
1025T	T10, T20, T30		
1025H	H4, H6		
1025S	5.5x1.0, 6.5x1.2		
276A-04G			



Accessory

2745 1/4"

- Palm ratchet bit holder
- Non-toothed palm ratchet is designed for any angle of degree
- 3 position of forward / lock / reverse
- Suitable for narrow space where a standard wrench cannot attain
- Anodized aluminum alloy body & chrome vanadium alloy steel bit holder





KT NO.	Ø1 mm	H		
2745	46	26.5	103	12 / 144

2747 1/4"

- 72-teeth ratcheting mechanism gives a 5° ratcheting arc allowing you to quickly tighten or loosen fasteners.
- Anodized aluminum finish for protection and easy wipe down





2747DR 2747



- The special gyroscope-like structure allows you to loosen or lock objects with various angles

KT NO.	Ø (mm)	H (mm)	Teeth		
○ 2747	50	25	72	88	12 / 72
■ 2747DR	50	25	72	90	12 / 72

Accessory

- Material - chrome vanadium alloy steel
- Finishing - polished, chrome plated



KT No. & D1

2221 1/4"

- Extension bar
- DIN 3122



KT NO.	Overall length inch	mm	g	pcs / ctn
2221-02	2	55	27	30 / 480
2221-03	3	75	36	20 / 400
2221-04	4	100	44	15 / 240
2221-06	6	150	67	15 / 240
2221-10	10	254	107	15 / 240
2221-12	12	305	130	15 / 240

2293 1/4"

- Multi-function extension bar andoffset extension bar, wobble extension bar
- Hex key is applicable to the hex shank
- Max. torque : 35 N·m
- DIN 3123





KT NO.	Overall length inch	mm	g	pcs / ctn
2293-02	2	55	24	30 / 480
2293-03	3	75	34	20 / 400
2293-04	4	100	44	15 / 240
2293-06	6	150	65	15 / 300



KT No. & D1

2311 1/4"

- Flexible extension bar



KT NO.	Overall length inch	mm	g	pcs / ctn
2311-06	6	150	65	12 / 240
2311-12	12	300	89	12 / 120
2311-18	18	450	112	20 / 200



KT No. & D1

2312 1/4"

- Flexible extension bar



KT NO.	Overall length inch	mm	g	pcs / ctn
2312-06	6	150	59	12 / 240

CAUTION In order to get normal life of bit socket, Always use within limited torque to bit.

3893EW 1/4" & 3/8"

- Extension wrench
- Length extension drive bar enables easier works in confined spaces
- Provided with two square drive adapters in 1/4" and 3/8"
- Chain-driven mechanism enhances working durability and smoothness
- Max torque allowed: 130 N m / 96 ft lb





3/8"
3893EW-01





1/4"
3893EW-02







KT NO.	Drive	Overall length inch	mm	Capcity	g	pcs / ctn
3893EW		13.4	340	300	410	20 / 40
3893EW-01	3/8"	-	-		20	10 / 160
3893EW-02	1/4"	-	-		20	10 / 160

2223 1/4"

- Offset extension bar, wobble extension bar
- Max. torque:35 Nm
- DIN 3123



KT NO.	Overall length inch	mm	g	pcs / ctn
2223-02	2	55	24	30 / 480
2223-04	4	100	44	15 / 240

2792 1/4"

- Universal joint
- DIN 3123




KT NO.	Overall length inch	mm	g	pcs / ctn
2792	1 - 1/2	36	22	24 / 384

Accessory

2793 1/4"

- Universal joint
- Ball point type universal joint & with hex locking design
- Short pattern design enables greater access in confined spaces





KT NO.	Overall length inch	Overall length mm	g	pcs / box
2793	1-1/4	31	18	20 / 600

9113PR 1/4" 3/8" 1/2"

- Universal joint
- Ball point type universal joint & with hex locking design
- Short pattern design enables greater access in confined spaces



3 PC.

Contents 0.20 6 / 108



2793	31mm
3793	43mm
4793	59mm

2813 1/4"

- Adapter
- Convert to 3/8" drive
- DIN 3123



3/8" drive (M) ← 1/4" drive (F)

KT NO.	Spec.	g	pcs / box
2813	1/4" F x 3/8"M	20	12 / 360

213312DF 1/4"

- Magnetic screwdriver handle
- DIN 3126



KT NO.	Overall length inch	Overall length mm	g	pcs / box
213312DF	12	300	132	2 / 40

2176DF 1/4"

- 2 in 1 design Spinner handle + Bit holder
- NF ISO 3315, ISO 3315, DIN 3122, ASME B107.10





• Attached with 1/4" bit



• Attached with 1/4"DR. socket



• Easy to switch



• Attached with 1/4"DR. ratchet, compact size & easy to use

KT NO.	Overall length inch	Overall length mm	g	pcs / box
2176DF	6	150	105	6 / 60

2177DF 1/4"

- Spinner handle
- DIN 3122



KT NO.	Overall length inch	Overall length mm	g	pcs / box
2177DF	12-1/4	310	126	6 / 60

2178DF 1/4"

2179DF 1/4"

- Spinner handle
- DIN 3122



2178DF (PP + TPR)



2179DF (PP)

KT NO.	Overall length inch	Overall length mm	g	pcs / box
2178DF	6	150	76	6 / 120
2179DF	6	150	90	12 / 192

2178TG 1/4"

- Spinner handle
- DIN 3122



KT NO.	■	mm	mm	g	pcs / box
2178TG	1/4	115	154	94	6 / 96

2452 1/4"

- Flexible handle
- Action degree -180°
- DIN 3122





2452DK

KT NO.	Overall length inch	Overall length mm	g	pcs / box
2452-05F	5	130	86	15 / 270
2452DK	renewal kits			

Accessory

KT No. & D1

- Material - chrome vanadium alloy steel
- Finishing - polished, chrome plated & black phosphate sunk

2453 1/4"

- Flexible handle
- Action degree -180°
- New pattern design added in firm and powerful elements
- New forge technologies I-Beam shank offers 15% lightweight
- DIN 3122





2452DK

KT NO.	Overall length inch	Overall length mm	g	
2453-05F	5	130	71	15 / 270
2452DK	renewal kits			

2571 1/4"

- Sliding T-handle
- DIN 3122




KT NO.	Overall length inch	Overall length mm	g	
2571-45	4-1/2	115	44	12 / 192

2141

- Bit holder
- DIN 3122

2142 1/4"





2141





2142

KT NO.	Size inch	Overall length mm	g	
2141	1/4	25	14.0	20 / 320
2142	1/4	25	15	20 / 320

Socket Rail Set

2509MR 1/4"

- Socket rail 150mmL



9 PC.

Contents	kg 0.17	4 / 48
2335M	4, 5, 6, 7, 8, 9, 10, 11, 13	
8720609		

2509SR 1/4"

- Socket rail 150mmL



9 PC.

Contents	kg 0.17	4 / 48
2335S	5/32, 3/16, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2	
8720609		

Socket Rail Set

2513MR 1/4"

- Socket rail 240 mmL



13 PC.

Contents	kg 0.23	6 / 60
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	
8721114		

2513MRD1 1/4"

- Socket rail 508 mmL



13 PC.

Contents	kg 0.34	50
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	
8720813D1		

2311MR 1/4"

- Socket rail 240 mmL



13 PC.

Contents	kg 0.46	6 / 60
2235M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13,14	
8721114		

2127PR 1/4"

- Socket rail 130mmL
- For hex head screw
- H : 37mm



7 PC.

Contents	kg 0.15	4 / 32
2035	H3, H4, H5, H6, H7, H8, H10	
8720507		

2127SR 1/4"

- Socket rail 130mmL
- For hex head screw
- H : 37mm



7 PC.

Contents	kg 0.15	4 / 32
2035S	H1/8, H5/32, H3/16, H7/32, H1/4, H5/16, H3/8	
8720507		

Socket Rail Set

2109PR 1/4"

- Socket rail 150mmL
- For torx head screw
- H : 37mm

9 PC.



Contents			0.12	4 / 32
2033	T8, T9, T10, T15, T20, T25, T27, T30, T40			
8720609				

2114TR 1/4"

- Socket rail 150mmL
- For torx head screw
- H : 37mm

1/4" 1/4" 14 PC.



Contents		0.30	6 / 72
2033	T8, T9, T10, T15, T20, T25, T27, T30, T40		
2275M	E4, E5, E6, E7, E8		
8721114			

2107PR 1/4"

- Socket rail 130mmL
- For tamper resistant torx head screw
- H : 37mm

7 PC.



Contents		0.12	4 / 32
2037	T10H, T15H, T20H, T25H, T27H, T30H, T40H		
8720507			

2119PR 1/4"

- Socket rail 150mmL
- For tamper resistant torx head screw
- H : 37mm


9 PC.



Contents		0.12	4 / 32
2037	T8H, T9H, T10H, T15H, T20H, T25H, T27H, T30H, T40H		
8720609			

872 1/4"

- Rail length from 160 mm to 560 mm



KT NO.	L (mm)
870406	160
870208	200
870422	560
8720	-

8720813D1 1/4"

Socket rail carrier with retaining clip
446mm roller cabinet



KT NO.	Square drive	Clip	L (mm)
8720813D1	1/4"	13	508

Extension Bar Set

2104PR 1/4"



4 PC.

Contents		0.17	1 / 80
2221	2", 3", 4", 6"		

Socket Set

2313MR 1/4"



13 PC.

Contents		0.42	1 / 32
2335M	4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14		
2766-55G	2221-04		

2510SR 1/4"

Metal case size (mm) :
223 x 65 x 32 (0.016 cuft)

10 PC.



Contents		0.62	1 / 30
2235S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2		

2511MR 1/4"

Metal case size (mm) :
223 x 65 x 32 (0.016 cuft)

11 PC.



Contents		0.67	1 / 30
2235M	4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13		

Atom Series

Asymmetrical line design

2539MR-AM

Plastic case size (mm) :
170 x 95 x 51(0.029 cuft)

39 PC.

PAT.






▪ Push mechanism





▪ Easy to pick up











Contents

0.86 kg | 1 / 24

	2335M	5, 5.5, 6, 7, 8, 9, 10 ,11, 12, 13, 14
	1025P	PH1, PH2, PH3
	102512P	
	1025Z	PZ1, PZ2, PZ3
	1025U	T10H, T15H, T20H, T25H, T27H,T30H, T40H
	1025S	4.0, 5.0, 6.0
	1025H	H2.5, H3, H4, H5, H6
	2773-55GS	 2176DF
	2141  2793 	2221-02 2221-04



▪ Automatic raising bit rack

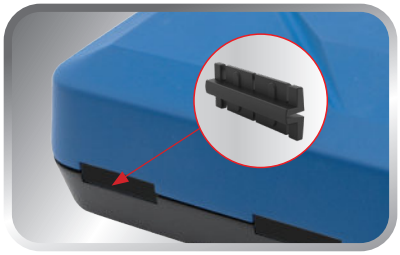

▪ Built-in rotation axis design

Socket Set

2516MR

2516SR 1/4"

Metal case size (mm) :
244 x 118 x 37 (0.038 cuft)

16 PC.



2516MR



2516SR

1.10 | 1 / 18

KT NO.		Contents	
2516MR	○ 2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 13	2779-55G, 2571-45, 2179DF, 2221-04, 2792
2516SR	○ 2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2	

2518MR

2518SR

2518MR01 1/4"

Metal case size (mm) :
198 x 105 x 32 (0.023cuft)

18 PC.



2518MR/2518MR01



2518SR

0.96 | 1 / 20

KT NO.		Contents		
2518MR	○ 2335M	4, 4.5, 5, 6, 7, 8, 9, 10, 11, 12	○ 2310M 8, 10	2452-05F, 2571-45, 2725-55F, 2792, 2221-02, 2221-04
2518SR	○ 2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2	○ 2310S 5/16, 3/8	
2518MR01	○ 2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13		

2019MR

2019SR

2519MR

2519SR 1/4"

Metal case size (mm) :
198 x 105 x 32 (0.023 cuft)

18 PC.



2019MR/2519MR



2019SR/2519SR

0.92 | 1 / 20

KT NO.		Contents		
2019MR	○ 2330M	4, 4.5, 5, 6, 7, 8, 9, 10, 11, 12	○ 2310M 8, 10	2769-55P, 2452-05F, 2221-02, 2221-04, 2571-45, 2792
2519MR	○ 2335M			
2019SR	○ 2330S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2	○ 2310S 5/16, 3/8	
2519SR	○ 2335S			

Socket Set

2021MR

Metal case size (mm) :
198 x 105 x 32 (0.023 cuft)

KT NO.	Contents		0.87 / 1 / 20
2021MR	2330M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13	2779-55G, 2221-02, 2221-04, 2452-05F, 2571-45, 2792, 2141
2521MR	2335M		

2521MR 1/4"



19 PC.

2525MRE 1/4"

Blow case size (mm) :
203 x 93 x 43(0.028cuft)

Contents		0.54 / 1 / 20
2335M		4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13
1025P		PH2 x2
1025H		H5, H6
1025T		T10, T15, T20, T25, T30, T40
2771-55G	2221-04	2142



25 PC.

2027MRE 1/4"

Blow case size (mm) :
203 x 93 x 43(0.028cuft)



2527MRE 1/4"



27 PC.

KT NO.			Contents	0.60 / 1 / 20
2027MRE	2330M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 12, 13, 14	1025P PH1, PH2 1025H H3, H4, H5 1025T T10, T15, T20, T25, T30, T40	2221-04 276A-04G 2142 2792
2527MRE	2335M			

Socket Set

2526MR

Metal case size (mm) :
244 x 118 x 37 (0.038 cuft)



2526MR

2526SR 1/4"



2526SR

26 PC.

KT NO.		Contents	1.30	1 / 18
2526MR	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 13	2779-55G	2221-02 2221-04
	2235M	4, 5, 5.5, 6, 7, 8, 9, 10, 11, 13		
2526SR	2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2	2792	2813
	2235S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2		

2031MR

Metal case size (mm) :
280 x 130 x 41 (0.053 cuft)

KT NO.	Contents		1.60	1 / 15
2031MR	2330M	4, 4.5, 5, 6, 7, 8, 9, 10, 11, 12, 13	2033 T8, T9, T10, T15, T20, T25, T27, T30 2035 H3, H4, H5, H6, H8, H10 2779-55G 2221-03 2221-06 2179DF 2571-45 2792
2531MR	2335M		

2531MR 1/4"



31 PC.

2030CR

2530CR 1/4"

Metal case size (mm) :
244 x 118 x 37 (0.038 cuft)



30 PC.

KT NO.	Contents		1.30	1 / 18
2030CR	2330M	4, 4.5, 5, 6, 7, 8, 9, 10, 11, 12	2310M 8, 10 2310S 5/16, 3/8 2769-55F 2792 2571-45 2452-05F 2221-02 2221-04
	2330S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2	
2530CR	2335M	4, 4.5, 5, 6, 7, 8, 9, 10, 11, 12	
	2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2	

2539MR 1/4"

Metal case size (mm) :
280 x 130 x 41 (0.053 cuft)



39 PC.

Contents			1.61	1 / 15
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13			
2375M	E4, E5, E6, E7, E8			
2033	T8, T9, T10, T15, T20, T25, T27, T30, T40			
2035	H3, H4, H5, H6, H7, H8, H10			
2779-55G	2179DF			
2571-45	2221-02 2221-04	2792		

Socket Set

2540MR 1/4"

Metal case size (mm):
316 x 104 x 40 (0.047 cuft)



39 PC.

Contents		1.52	1 / 12
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13		
1025S	4, 5.5, 7		
1025P	PH0, PH1, PH2, PH3		
1025H	H3, H4, H5, H6, H7, H8		
1025T	T10, T15, T20, T25, T30, T40		
2779-55G	213312DF	2792 2141	
2571-45	2452-05F	2221-02 2221-06	

2575MR 1/4"

Metal case size (mm):
244 x 118 x 37 (0.038 cuft)



45 PC.

Contents		1.24	1 / 18
2335M	4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14		
1025S	4, 6.5, 7, 8		
1025P	PH1, PH2, PH3		
1025H	H2.5, H3, H4, H5, H6, H7, H8, H10		
1025U	T8H, T9H, T10H, T15H, T20H, T25H, T27H,T30H, T40H		
1025Z	PZ1, PZ2, PZ3		
2755-55G	2223-02	2792	
2311-06	2179DF	2142	

2551MR

Metal case size (mm):
244 x 118 x 37 (0.038 cuft)



2551MR

2551MR01 1/4"



2551MR01

51 PC.

KT NO.		Contents					
						1.30	1 / 18
2551MR	2755-55G	2335M	4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H	2813 2142 2792	
		1025S	3, 4, 5, 6	1025Z	PZ1, PZ2 x2, PZ3	7702-25 753-63	
2551MR01	2761-55F	1025P	PH1, PH2 x2, PH3	1025T	T10, T15, T20, T25, T27, T30, T40	2223-02 2223-04 2178DF	
		1025H	H3, H4, H5, H6				

2516MRV03

Tray category #11 (187 x 140mm) 1/4"

Plastic case size (mm) :
199 x 161 x 56 (0.063 Cuft)

Contents			0.75	1/16
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14			
2771-55G	2571-45			
2221-06	2792			



17 PC.

2524MRV

Tray category #11 (187 x 140mm) 1/4"

Plastic case size (mm) :
199 x 161 x 56 (0.063 Cuft)

Contents				0.9	1/16
2335M	4, 4.5, 5 , 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14				
2771-55G	2571-45	2142			
2221-02 2221-04 2221-06	2178DF	2792			



21 PC.

Socket Set

2528MRV

Tray category #11 (187 x 140mm) 1/4"

Plastic case size (mm) :
199x 161 x 56 (0.063 Cuft)

Contents			0.76	1 / 16
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11,12, 13, 14			
1025H	H3, H4, H5, H6			
1025S	4, 5			
1025T	T10, T15, T20, T30			
1025P	PH1, PH2			
276A-04G	2792	2221-06	2142	



29 PC.

2331SRV

Tray category #7 (280 x 187mm) 1/4"

Plastic case size (mm) :
289 x 230 x 66 (0.154Cuft)

Contents			1.63	1 / 6
2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2, 9/16			
2235S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16			
2771-55G	2571-45	2142		
2221-02 2221-04 2221-06	2792	2178DF		




31 PC.

2534MRV

Tray category #7 (280 x 187mm) 1/4"

Plastic case size (mm) :
289 x 230 x 66 (0.154Cuft)

Contents			1.76	1 / 6
2335M	4, 4.5, 5 ,5.5 , 6 , 7 , 8 , 9 , 10 , 11 ,12 , 13, 14			
2235M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14			
2771-55G	2571-45	2142		
2221-02 2221-04 2221-06	2178DF	2792		

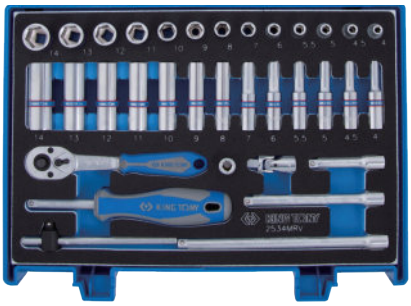

34 PC.

2565MRV

Tray category #7 (280 x 187mm) 1/4"

Plastic case size (mm):
289 x 230 x 66 (0.154 cuft)

Contents			2.67	1 / 6
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14			
2235M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14			
2375M	E4, E5, E6, E7, E8			
2013X	T8, T9, T10, T15, T20, T25, T27, T30, T40			
2015X	3, 4, 5, 6, 8			
2018X	PZ1, PZ2			
2011X	PH1, PH2			
2012X	3.5, 5.5, 8			
1025T	T6, T7			
1025M	M4, M5, M6, M8, M10			



65 PC.

Contents

2792	2813	276A-04G	2221-02 2221-04 2221-06

Socket Set

2044SRV

Plastic case size (mm) :
389 x 185 x 66 (0.168 Cuft)



2044SRV

2544SRV Tray category #10 (375 x 140mm) 1/4"



2544SRV

44 PC.

1.62 | 1 / 10

KT NO.			Contents	
2044SRV	2330S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2	2235S: 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2 1025S: 3, 4.5, 5, 6.5, 8 1025P: PH0, PH1, PH2, PH3 5025H: H3/64, H1/16, H5/64, H3/32, H7/64, H1/8, H9/64, H5/32	2142 2792 2223-02 2223-04 2752-06G 2178DF
2544SRV	2335S			

2048MRV

Plastic case size (mm) :
389 x 185 x 66 (0.168 Cuft)



2048MRV

2548MRV Tray category #10 (375 x 140mm) 1/4"



2548MRV

48 PC.

1.79 | 1 / 10

KT NO.			Contents	
2048MRV	2330M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	2235M: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 1025S: 3, 4.5, 5, 6.5, 8 1025P: PH0, PH1, PH2, PH3 1025H: H3, H4, H5, H6, H7, H8, H10	2142 2792 2223-02 2223-04 2178DF 2752-06G
2548MRV	2335M			

Socket Set

2553MRV

Tray category #10 (375 x 140mm) 1/4"

Plastic case size (mm) :
389 x 185 x 66 (0.168 Cuft)

1.67 | 1 / 10

Contents	
2335M	4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
1025H	H3, H4, H5, H6, H7, H8, H10
1025S	3, 4.5, 5, 6.5, 8
1025P	PH0, PH1, PH2, PH3
1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H
1025Z	PZ1, PZ2, PZ3
1025T	T10, T15, T20, T25, T27, T30, T40
7702-25	2792 2813



53 PC.

Contents

276A-04G 213312DF
2223-02 2223-04 2745

2553MRV01

Tray category #10 (375 x 140mm) 1/4"

Plastic case size (mm) :
389 x 185 x 66 (0.168 Cuft)

Contents	1.87	1/10
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	
1025H	H3, H4, H5, H6, H7,H8, H10	
1025T	T10, T15, T20, T25, T27, T30, T40	
1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H	
1025P	PH1, PH2, PH3	
1025Z	PZ1, PZ2, PZ3	
1025S	3, 4.5, 5, 6.5, 8	
7702-25	276A-04G	



55 PC.

Contents

2571-45, 213312DF, 2221-02, 2221-04, 2221-06, 2745, 2792, 2142

2550MRV

Tray category #8 (375 x 187mm) 1/4"

Plastic case size (mm) :
389 x 230 x 66 (0.208 Cuft)

Contents	2.2	1 / 6
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	
2375M	E4, E5, E6, E7, E8	
2031	PH1, PH2, PH3, PH4	
2032	4, 5.5, 6.5, 8, 10	
2033	T8, T9, T10, T15, T20, T25, T27, T30, T40	
2035	H3, H4, H5, H6, H7, H8, H10	
2771-55G	2178DF	
2571-45	2792	
2293-04, 2293-06	2221-02	




50 PC.

2549MR-EB



Contents	1.28	1 / 12
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10 x2, 11, 12, 13, 14	
2235M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	
2275M	E4, E5, E6, E7, E8	
2375M	E4, E5, E6, E7, E8, E10	
2031	PH1, PH2	
2032	4, 5.5	
2035	H3, H4, H5, H6, H8	
2221-02		






49 PC.

Standard Socket

3330M | 3330S 3/8"

- Metric-DIN 3124, ISO 2725-1
- Inch-ANSI / ASME B107.1






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
333006M	6	9.9	17.8	7.0	27	25	12 / 360
333007M	7	10.8	17.8	7.0	27	24	12 / 360
333008M	8	12.0	17.8	7.0	27	25	12 / 360
333009M	9	13.2	17.8	7.0	27	25	12 / 360
333010M	10	14.5	17.8	9.0	27	26	12 / 360
333011M	11	15.8	17.8	9.0	27	27	12 / 360
333012M	12	16.8	17.8	9.0	27	26	12 / 360
333013M	13	17.8	16.8	9.0	27	25	12 / 360
333014M	14	19.7	18.0	11.0	29	33	10 / 300
333015M	15	20.8	18.0	11.0	29	35	10 / 300
333016M	16	21.8	20.0	11.0	29	45	10 / 300
333017M	17	23.8	20.0	11.0	29	48	10 / 200
333018M	18	24.7	21.0	13.0	29	50	10 / 200
333019M	19	25.8	21.0	13.0	29	51	10 / 200
333020M	20	27.1	25.0	13.0	32	83	10 / 160
333021M	21	27.8	25.0	13.0	32	80	10 / 160
333022M	22	29.7	26.0	15.0	32	86	10 / 160
333023M	23	29.7	26.0	15.0	32	80	10 / 160
333024M	24	31.8	26.0	17.0	32	89	8 / 160

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
333008S	1/4	10.0	17.8	7.0	27	24	12 / 360
333010S	5/16	12.0	17.8	7.0	27	24	12 / 360
333011S	11/32	13.2	17.8	7.0	27	25	12 / 360
333012S	3/8	14.0	17.8	9.0	27	26	12 / 360
333014S	7/16	15.8	17.8	9.0	27	26	12 / 360
333015S	15/32	16.8	17.8	9.0	27	27	12 / 360
333016S	1/2	17.8	16.8	9.0	27	26	12 / 360
333018S	9/16	19.7	18.0	11.0	29	33	10 / 300
333019S	19/32	20.8	18.0	11.0	29	35	10 / 300
333020S	5/8	21.8	20.0	11.0	29	42	10 / 300
333022S	11/16	23.8	20.0	11.0	29	46	10 / 200
333024S	3/4	25.8	21.0	13.0	29	50	10 / 200
333026S	13/16	27.8	25.0	13.0	32	80	10 / 160
333028S	7/8	29.7	26.0	15.0	32	83	10 / 160
333030S	15/16	31.8	26.0	17.0	34	83	8 / 160
333032S	1	33.8	26.0	17.0	34	96	8 / 160

3335M | 3335S 3/8"

- Metric-DIN 3124, ISO 2725-1
  Inch-ANSI / ASME B107.1





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
333506M	6	9.9	17.8	7.0	27	25	12 / 360
333507M	7	10.8	17.8	7.0	27	24	12 / 360
333508M	8	12.0	17.8	7.0	27	26	12 / 360
333509M	9	13.2	17.8	7.0	27	25	12 / 360
333510M	10	14.5	17.8	9.0	27	28	12 / 360
333511M	11	15.8	17.8	9.0	27	27	12 / 360
333512M	12	16.8	17.8	9.0	27	28	12 / 360
333513M	13	17.8	16.8	9.0	27	26	12 / 360
333514M	14	19.7	18.0	11.0	29	35	10 / 300
333515M	15	20.8	18.0	11.0	29	39	10 / 300
333516M	16	21.8	20.0	11.0	29	43	10 / 300
333517M	17	23.8	20.0	11.0	29	50	10 / 200
333518M	18	24.7	21.0	13.0	29	51	10 / 200
333519M	19	25.8	21.0	13.0	29	53	10 / 200
333520M	20	27.1	25.0	13.0	32	87	10 / 160
333521M	21	27.8	25.0	13.0	32	82	10 / 160
333522M	22	29.7	26.0	15.0	32	89	10 / 160
333523M	23	29.7	26.0	15.0	32	84	10 / 160
333524M	24	31.8	26.0	17.0	32	94	8 / 160


KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
333508S	1/4	10.0	17.8	7.0	27	24	12 / 360
333510S	5/16	12.0	17.8	7.0	27	25	12 / 360
333511S	11/32	13.2	17.8	7.0	27	24	12 / 360
333512S	3/8	14.0	17.8	9.0	27	25	12 / 360
333514S	7/16	15.8	17.8	9.0	27	25	12 / 360
333515S	15/32	16.8	17.8	9.0	27	27	12 / 360
333516S	1/2	17.8	16.8	9.0	27	26	12 / 360
333518S	9/16	19.7	18.0	11.0	29	32	10 / 300
333519S	19/32	20.8	18.0	11.0	29	35	10 / 300
333520S	5/8	21.8	20.0	11.0	29	43	10 / 300
333522S	11/16	23.8	20.0	11.0	29	48	10 / 200
333524S	3/4	25.7	21.0	13.0	29	51	10 / 200
333526S	13/16	27.8	25.0	13.0	32	83	10 / 160
333528S	7/8	29.6	26.0	15.0	32	89	10 / 160
333530S	15/16	31.8	26.0	17.0	34	86	8 / 160
333532S	1	33.8	26.0	17.0	34	101	8 / 160

Thin Wall Deep Socket

3215M 3/8"

- Specifically for heat plug, glow plug








Thin walled design (D1)

KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
321510M	10	13.0	17.8	12.0	65	49	20 / 240
321512M	12	15.0	17.8	15.0	65	49	20 / 240

Deep Socket

3230M

- Metric-DIN 3124, ISO 2725-1
- Inch-ANSI / ASME B107.1



3230S 3/8"




KT NO.	mm	D1 mm	D2 (mm)	ℓ (mm)	L (mm)	g	pcs/box
323007M	7	10.8	17.8	10.0	63	55	20 / 320
323008M	8	12.0	17.8	12.0	63	49	18 / 288
323009M	9	13.2	17.8	12.0	63	57	18 / 288
323010M	10	14.5	17.8	12.0	63	57	15 / 240
323011M	11	15.8	17.8	15.0	63	57	15 / 240
323012M	12	16.8	17.8	15.0	63	58	15 / 240
323013M	13	17.8	16.8	15.0	63	57	15 / 240
323014M	14	19.7	18.0	16.0	63	73	12 / 192
323015M	15	20.8	18.0	18.0	63	73	10 / 160
323016M	16	21.8	20.0	18.0	63	87	8 / 128
323017M	17	23.8	20.0	18.0	63	101	8 / 128
323018M	18	24.7	21.0	20.0	63	107	6 / 96
323019M	19	25.8	21.0	20.0	63	113	6 / 96
323021M	21	27.8	25.0	20.0	63	122	6 / 96
323022M	22	29.7	26.0	20.0	63	150	6 / 96
323024M	24	31.8	26.0	25.0	63	158	6 / 120

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	pcs/box
323008S	1/4	10.0	16.8	10.0	63	48	20 / 320
323010S	5/16	12.0	17.8	12.0	63	48	18 / 288
323012S	3/8	14.0	17.8	12.0	63	53	15 / 240
323014S	7/16	15.8	17.8	15.0	63	54	15 / 240
323016S	1/2	17.8	16.8	15.0	63	58	15 / 240
323018S	9/16	19.7	18.0	16.0	63	74	12 / 192
323020S	5/8	21.8	20.0	18.0	63	88	8 / 128
323022S	11/16	23.8	20.0	18.0	63	98	8 / 128
323024S	3/4	25.8	21.0	20.0	63	111	6 / 96
323026S	13/16	27.8	25.0	20.0	63	125	6 / 96
323028S	7/8	29.7	26.0	21.0	63	158	6 / 96
323030S	15/16	31.8	26.0	22.0	63	170	5 / 80
323032S	1	33.8	26.0	22.0	63	195	5 / 80

3235M

- Metric-DIN 3124, ISO 2725-1
- Inch-ANSI / ASME B107.1



3235S 3/8"



KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	pcs/box
323506M	6	9.9	17.8	10.0	63	51	20 / 320
323507M	7	10.8	17.8	10.0	63	52	20 / 320
323508M	8	12.0	17.8	12.0	63	49	18 / 288
323509M	9	13.2	17.8	12.0	63	53	18 / 288
323510M	10	14.5	17.8	12.0	63	58	15 / 240
323511M	11	15.8	17.8	15.0	63	60	15 / 240
323512M	12	16.8	17.8	15.0	63	68	15 / 240
323513M	13	17.8	16.8	15.0	63	64	15 / 240
323514M	14	19.7	18.0	16.0	63	77	12 / 192
323515M	15	20.8	18.0	18.0	63	75	10 / 160
323516M	16	21.8	19.0	18.0	63	86	8 / 128
323517M	17	23.8	20.0	18.0	63	102	8 / 128
323518M	18	24.7	21.0	20.0	63	112	6 / 96
323519M	19	25.8	21.0	20.0	63	111	6 / 96
323521M	21	27.8	25.0	20.0	63	142	6 / 96
323522M	22	29.7	26.0	20.0	63	167	6 / 96
323524M	24	31.8	26.0	25.0	63	171	6 / 120

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	pcs/box
323508S	1/4	10.0	16.8	10.0	63	47	20 /320
323510S	5/16	12.0	17.8	12.0	63	56	18 / 288
323512S	3/8	14.0	17.8	12.0	63	56	15 / 240
323514S	7/16	15.8	17.8	15.0	63	59	15 / 240
323516S	1/2	17.8	16.8	15.0	63	41	15 / 240
323518S	9/16	19.7	18.0	16.0	63	76	12 / 192
323520S	5/8	21.8	20.0	18.0	63	90	8 / 128
323522S	11/16	23.8	20.0	18.0	63	97	8 / 128
323524S	3/4	25.8	21.0	20.0	63	108	6 / 96
323526S	13/16	27.8	25.0	20.0	63	146	6 / 96
323528S	7/8	29.7	26.0	21	63	166	6 / 96
323530S	15/16	31.8	26.0	22	63	182	5 / 80
323532S	1	33.8	26.0	22	63	206	5 / 80




Star Socket

KT No. & D1

3375M — 3/8"

- DIN 3120






KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm		
337504M	E4	6.0	16.8	3.6	28	21	12 / 360
337505M	E5	7.0	16.8	4.0	28	21	12 / 360
337506M	E6	8.0	16.8	5.0	28	22	12 / 360
337507M	E7	8.9	16.8	6.0	28	22	12 / 360
337508M	E8	10.0	16.8	6.5	28	23	12 / 360
337510M	E10	12.0	16.8	7.0	28	24	12 / 360
337511M	E11	12.8	16.8	8.0	28	24	12 / 360
337512M	E12	14.3	16.8	9.0	28	26	12 / 360
337514M	E14	15.9	17.8	9.5	28	31	12 / 360
337516M	E16	18.0	19.8	10.5	28	42	10 / 300
337518M	E18	20.0	21.8	11.0	28	55	10 / 300

3275M — 3/8"

- DIN 3120






KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm		
327504M	E4	6.0	16.8	3.6	63	45	12 / 240
327505M	E5	7.0	16.8	4.0	63	47	12 / 240
327506M	E6	8.0	16.8	5.0	63	48	12 / 240
327507M	E7	8.9	16.8	6.0	63	49	12 / 240
327508M	E8	10.0	16.8	6.5	63	52	12 / 240
327510M	E10	12.0	16.8	7.0	63	57	12 / 240
327511M	E11	12.8	16.8	8.0	63	59	12 / 240
327512M	E12	14.3	16.8	9.0	63	65	12 / 240
327514M	E14	15.9	16.8	9.5	63	67	12 / 240
327516M	E16	17.8	17.8	10.5	63	77	12 / 240
327518M	E18	19.8	19.8	11.0	63	100	10 / 160

333E — 3/8"


- For torx plus external screw
- DIN 3120





KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm		
333E10M	EP10	13.2	10.5	8	37	53	20 / 240
333E11M	EP11	14.0	11.0	9	37	53	20 / 240
333E12M	EP12	14.6	12.0	10	37	53	20 / 240
333E14M	EP14	16.5	14.0	11	37	55	20 / 240
333E16M	EP16	19.0	16.0	12	37	59	20 / 240
333E18M	EP18	20.3	18.0	15	37	60	20 / 240
333E20M	EP20	21.8	19.5	15	37	63	20 / 240



KING TONY Spark Plug Sockets								
Square drive	Type	Size / KT NO. inch	mm	Rubber I	Magnet	Rubber II	Metal clip	Spring
3/8"	6PT		14	36B014				
			14	36B514				
		5/8"	16	363516	366516		367516	
			18				367518	
		13/16"	20.8	363521	366521		367521	
	12PT		14			36C014		36A014
			14			36D014		
		5/8"	16	363016				
			18	36B018			367018	
		13/16"	20.8	363021	366021		367021	
1/2"	6PT		14	463514RC			467514C	
		5/8"	16	463516RC	466516C		467516	
		13/16"	20.8	463521RC	466521C		467521	
	12PT		14	463014RC			467014C	
		5/8"	16	463016RC	466016		467016	
		13/16"	20.8	463021RC	466021		467021	

Metal Clip Universal Joint Spark Plug Socket


3650 — 3/8"

- Inside sleeve - Metal clip for a firm hold and assembly of the spark plugs
- Universal joint- for working in restricted access and obstructive areas
- 12-point socket enables application on 14mm spark plugs of 6-point and 12-point
- Application: For 14 mm spark plugs e.g. BMW and MERCEDES-BENZ
- DIN 3120


365016A


365014B / 365016B

KT NO.	inch	mm	D mm	L mm		
365014B	-	14.0	18.5	155	169	6 / 120
365016A	5/8	16.0	21.0	101	130	6 / 180
365016B	5/8	16.0	21.0	162	185	6 / 120



36A0

36B5

36B0


36C0


36D0 — 3/8"

- Inside sleeve - rubber and spring
- DIN 3120
- 36C014 & 36D014 are suitable for BMW, Mini, RENAULT Clio / Twingo / Kangoo type, PEUGEOT 206 1.4 16V, CITROEN C5 HPI


Spring


36A014




Rubber


36B014



36C014


36B018


36D014


Rubber


36B514



KT NO.	Type	Size mm	D mm	L mm		
36A014	12 points	14.0	18.5	63	65	12 / 192
36B514	6 points	14.0	18.5	63	63	12 / 192
36B014	12 points	14.0	18.5	63	59	12 / 192
36B018	12 points	18.0	24.7	65	104	8 / 128
36C014	12 points	14.0	18.5	90	90	12 / 144
36D014	12 points	14.0	18.5	250	297	6 / 54

Spark Plug Socket

KT No. & D1

3630 | 3660 | 3635 | 3665

3670 | 3675 | 3/8"

- 6 / 12 points
- Size combined- 16.0mm (5/8") - 20.8mm (13/16")
- Inside sleeve - rubber / magnet
- DIN 3120



KT NO.	Type	Size inch	Size mm	D mm	L mm		
363016	12 points Rubber	5/8	16.0	21	70	85	10 / 200
363021	12 points Rubber	13/16	20.8	27.7	70	149	12 / 120
366021	12 points Magnet	13/16	20.8	27.7	70	149	12 / 120
363516	6 points Rubber	5/8	16.0	21	70	88	10 / 200
363521	6 points Rubber	13/16	20.8	27.7	70	153	12 / 120
366516	6 points Magnet	5/8	16.0	21	70	89	10 / 200
366521	6 points Magnet	13/16	20.8	27.7	70	155	12 / 120
367018	12 points Metal clip	-	18.0	23.8	63	84	12 / 120
367021	12 points Metal clip	13/16	20.8	27.7	70	167	12 / 120
367516	6 points Metal clip	5/8	16.0	21.0	70	86	10 / 200
367518	6 points Metal clip	-	18.0	23.8	63	91	12 / 120
367521	6 points Metal clip	13/16	20.8	27.7	70	169	12 / 120


363016


363021



366021



363516


366516


363521



366521






367516


367018



Glow Plug Socket & Set

3785M 3/8"

- The socket has a Sprung-loaded clip with ball bearing end to stop the glow plug from falling out
- Suitable for the removal of glow plugs in most diesel engines



KT NO.	mm	D1 mm	D2 mm	L mm		
378508M	8	13.5	17.8	118	131	10 / 100
378509M	9	13.5	17.8	118	120	10 / 100
378510M	10	13.5	17.8	118	123	10 / 100
378512M	12	17.8	17.8	118	147	10 / 100
378514M	14	17.8	17.8	118	139	10 / 100
378516M	16	19.8	17.8	118	154	10 / 100

3716MR 3/8"

Blow case size (mm):
260 x 160 x 64 (0.094 cuft)

6 PC.






Contents		1.23	1 / 10
3785M	8, 9, 10, 12, 14, 16		

Flexible Ring Socket Wrench & Set

3350M — 3/8"

- Flexible head folds up to 200°
- Combined with F-handle, handle, T-handle speed-handle
- Suitable for all hydraulic, fuel, oil brake, A/C, auto tool and air line work
- DIN 3120

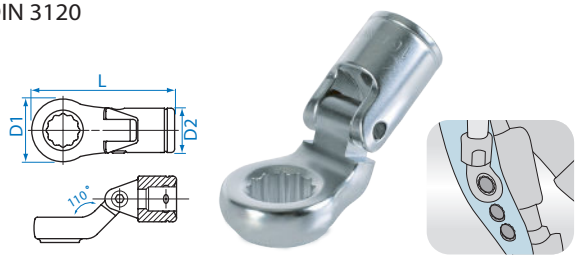

KT NO.	mm	D1 mm	D2 mm	L mm	g	
335008M	8	15.0	18.8	45.0	44	12 / 360
335009M	9	18.0	18.8	49.0	48	12 / 360
335010M	10	18.0	18.8	49.0	49	12 / 360
335011M	11	22.0	18.8	53.0	58	12 / 360
335012M	12	22.0	18.8	53.0	58	12 / 360
335013M	13	26.0	18.8	60.0	80	12 / 240
335014M	14	26.0	18.8	60.0	82	12 / 240
335015M	15	27.0	18.8	60.0	80	12 / 240
335016M	16	32.0	24.7	73.5	159	6 / 96
335017M	17	33.0	24.7	73.5	159	6 / 96
335018M	18	33.0	24.7	73.5	156	6 / 96
335019M	19	32.0	24.7	73.5	161	6 / 96

3609MR10 — 3/8"

- Socket rail 290mmL




9 PC.

Contents	kg 0.99	20
3350M	8, 10, 12, 13, 14, 16, 17, 18, 19	
8731109		

Flexible Crowfoot Socket Wrench & Set

3351M — 3/8"

- Flexible head folds up to 200°
- Combined with F-handle, handle, T-handle speed-handle
- Suitable for all hydraulic, fuel, oil brake, A/C, auto tool and air line work
- DIN 3120

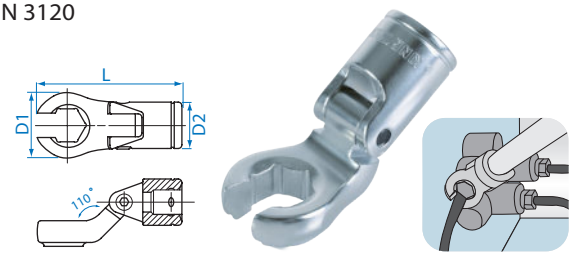

KT NO.	mm	D1 mm	D2 mm	L mm	g	
335108M	8	15.0	18.8	45.0	45	12 / 360
335109M	9	18.0	18.8	49.0	48	12 / 360
335110M	10	18.0	18.8	49.0	49	12 / 360
335111M	11	22.0	18.8	53.0	57	12 / 360
335112M	12	22.0	18.8	53.0	57	12 / 360
335113M	13	26.0	18.8	60.0	77	12 / 240
335114M	14	26.0	18.8	60.0	76	12 / 240
335115M	15	27.0	18.8	60.0	76	12 / 240
335116M	16	32.0	24.7	73.5	153	6 / 96
335117M	17	33.0	24.7	73.5	152	6 / 96
335118M	18	33.0	24.7	73.5	150	6 / 96
335119M	19	33.3	24.7	73.5	153	6 / 96

3619MR10 — 3/8"

- Socket rail 290mmL



9 PC.

Contents	kg 0.89	20
3351M	8, 10, 12, 13, 14, 16, 17, 18, 19	
8731109		

3612MR — 3/8"

Metal case size (mm):
296 x 130 x 41 (0.056 cuft)

Contents	kg 1.89	1 / 10
3351M	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19	



12 PC.

Universal Socket & Set

KT No. & D1


3750M

- Chrome vanadium alloy steel
- DIN 3120

KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
375010M	10	14.5	19	4.6	49.5	56	15 / 240
375011M	11	15.8	19	5.4	50.5	57	15 / 240
375012M	12	17.0	19	6.1	51.0	57	15 / 240
375013M	13	18.3	19	6.7	52.0	56	15 / 240
375014M	14	20.0	19	8.3	52.0	60	12 / 192
375015M	15	22.0	19	8.3	54.5	66	10 / 160
375016M	16	22.0	19	9.5	54.5	63	10 / 160
375017M	17	24.0	19	9.5	55.5	71	8 / 128
375018M	18	26.0	19	10	55.5	75	6 / 96
375019M	19	26.0	19	11	57.5	72	6 / 96

3750S 3/8"

- Chrome vanadium alloy steel





KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
375012S	3/8	14.0	19	4.6	49.0	56	15 / 240
375014S	7/16	15.8	19	5.4	50.5	58	15 / 240
375016S	1/2	18.3	19	6.7	52.0	59	15 / 240
375018S	9/16	20.0	19	8.3	52.0	60	12 / 192
375020S	5/8	22.0	19	9.5	54.5	65	10 / 160
375022S	11/16	24.0	19	9.5	55.5	65	8 / 128
375024S	3/4	26.0	19	11.0	57.5	74	6 / 96


3709MR10 3/8"

- Socket rail 240mmL



9 PC.

Contents	kg 0.6	14
3750M	10, 11, 12, 13, 14, 16, 17, 18, 19	
8730907		

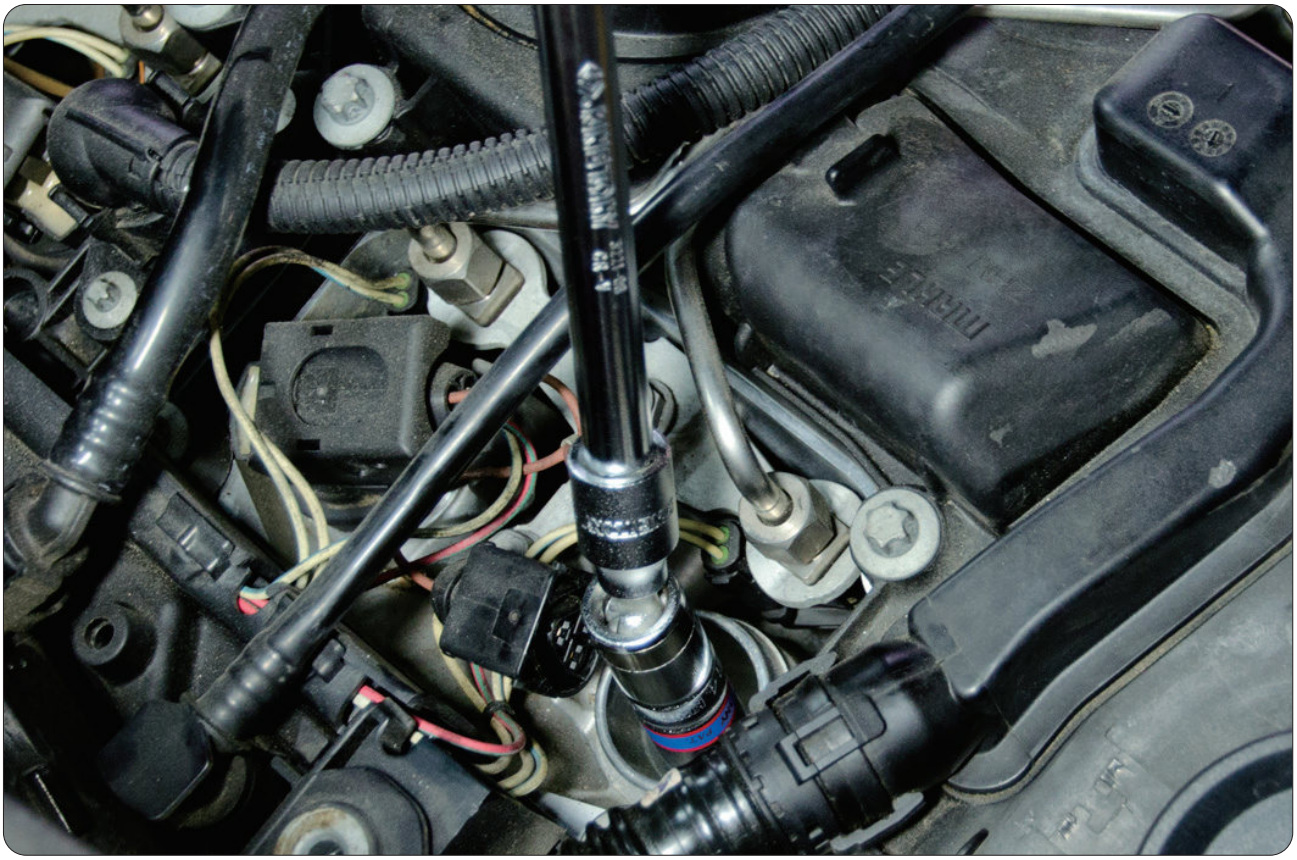

Bit Socket

CAUTION

In order to get normal life of bit socket, always use within limited torque to bit.

3021 — 3/8"

- Phillips head
- DIN ISO 8764-1



KT NO.	No.	Overall length mm		
302102	PH2	50	34	20 / 400
302103	PH3	50	34	20 / 400
302104	PH4	50	34	20 / 400

3022 — 3/8"

- Slotted head
- DIN ISO 8764-1



KT NO.	Tip width mm	Tip thickness mm	Overall length mm		
302205	5	1.0	50	34	20 / 400
302208	8	1.2	50	38	20 / 400
302210	10	1.6	50	46	20 / 400

3025 — 3/8"

- Hexagon head
- DIN 7422 / 3120



KT NO.	mm	Overall length mm		
302503	H3	50	30	20 / 400
302504	H4	50	34	20 / 400
302505	H5	50	35	20 / 400
302506	H6	50	35	20 / 400
302507	H7	50	39	20 / 400
302508	H8	50	41	20 / 400
302509	H9	50	44	20 / 400
302510	H10	50	50	20 / 400
302512	H12	50	53	20 / 400

3023 — 3/8"

- For torx internal screw
- DIN 3120



KT NO.	mm	Overall length mm		
302308	T8	50	30	20 / 400
302309	T9	50	30	20 / 400
302310	T10	50	34	20 / 400
302315	T15	50	34	20 / 400
302320	T20	50	33	20 / 400
302325	T25	50	34	20 / 400
302327	T27	50	34	20 / 400
302330	T30	50	35	20 / 400
302340	T40	50	36	20 / 400
302345	T45	50	39	20 / 400
302350	T50	50	40	20 / 400

3027 — 3/8"

- For tamper resistant torx screw
- DIN 3120



KT NO.	mm	Overall length mm		
302708	T8H	50	33	20 / 400
302709	T9H	50	33	20 / 400
302710	T10H	50	33	20 / 400
302715	T15H	50	34	20 / 400
302720	T20H	50	33	20 / 400
302725	T25H	50	34	20 / 400
302727	T27H	50	34	20 / 400
302730	T30H	50	35	20 / 400
302740	T40H	50	35	20 / 400
302745	T45H	50	39	20 / 400
302750	T50H	50	39	20 / 400

3039 — 3/8"

- Ribe bit socket
- Use for VW, Audi, Fiat cylinder head bolt
- DIN 3120



KT NO.	size	Overall length mm		
303906	M6	90	70	8 / 160
303907	M7	90	71	8 / 160
303908	M8	90	71	8 / 160
303909	M9	90	88	8 / 160
303910	M10	90	90	8 / 160

302D — 3/8"

- For torx plus tamper screw
- IPR20 for the operation of the screwed connection of the plug-in pump on MERCEDES-BENZ Atego and Actros MAZDA 3 1.4 and 1.6
- IPR25 for the screwed connections at the control unit and the air flow sensor on VW
- DIN 3120



KT NO.	mm	Overall length mm		
302D08	IPR8	50	33	20 / 400
302D09	IPR9	50	33	20 / 400
302D10	IPR10	50	33	20 / 400
302D15	IPR15	50	33	20 / 400
302D20	IPR20	50	34	20 / 400
302D25	IPR25	50	34	20 / 400
302D27	IPR27	50	34	20 / 400
302D30	IPR30	50	35	20 / 400
302D40	IPR40	50	36	20 / 400
302D45	IPR45	50	38	20 / 400
302D50	IPR50	50	40	20 / 400
302D55	IPR55	50	48	20 / 400
302D60	IPR60	50	53	15 / 300

Ratchet

KT No. & D1

3725

FINE GEAR 3/8"

- Reversible ratchet
- 8° gear action degree (45 teeth)
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	pcs / box
3725-08F	8	203	369	2 / 40
3725-08G	8	207	384	2 / 32
3725DK	renewal kits		-	-



3725DK



3725-08F



3725-08G

3755

FINE GEAR 3/8"


- Reversible ratchet
- 5° gear action degree (72 teeth)
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	pcs / box
3755-08G	8	200	190	2 / 40
3755DK	renewal kits		-	-



3755DK






3752

QUICK RELEASE FINE GEAR 3/8"

- Quick release swivel reversible ratchet
- 5° gear action degree (72 teeth)
- Multi-angle design for difficult-to-reach fasteners






KT NO.	Overall length inch	Overall length mm	g	pcs / box
3752-09G	9	235	374	2 / 32
3752DK	renewal kits		-	-



3752DK





3760

MINI RATCHET FINE GEAR 3/8"

- Mini reversible ratchet
- 5° gear action degree (72 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	pcs / box
3760-45	4-3/8	110	116	6 / 108
3760DK01	renewal kits		-	-



3760DK01



3761

QUICK RELEASE 3/8"

- Quick release reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	pcs / box
3761-08F	8	200	401	2 / 40
3761-08P	8	200	376	2 / 40
34362-2DK	renewal kits		-	-



34362-2DK



3761-08F



3761-08P

Ratchet

3769 — 3/8"

- Reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	
3769-08F	8	200	405	2 / 40
3769-08P	8	200	380	2 / 40
3769DK	renewal kits		-	-



3769DK



3769-08F




3769-08P

3771 — QUICK RELEASE 3/8"

- Quick release reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	
3771-08G	8	200	268	2 / 40
3771DK	renewal kits		-	-




3771DK




3774 — 3/8"

- Universal joint reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122
- 15° rotation

KT NO.	Overall length inch	Overall length mm	g	
3774-08G	8	200	275	2 / 40
3774DK	renewal kits		-	-







3774DK



3779 — 3/8"

- Reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	
3779-08F	8	200	366	2 / 40
3779-08G	8	200	273	2 / 40
3779DK	renewal kits		-	-



3779DK



3779-08F




3779-08G

3781 — QUICK RELEASE 3/8"

- Quick release flexible and reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	
3781-11F	11	280	467	2 / 40
3781-11P	11	280	445	2 / 40
3781DK	renewal kits		-	-



3781DK



3781-11F



3781-11P

- Material - chrome vanadium alloy steel
- Finishing - polished, chrome plated & black phosphate sunk

Accessory

KT No. & D1

3221 — 3/8"

- Extension bar
- DIN 3123



KT NO.	Overall length inch	Overall length mm	g	pcs / box
3221-16	1-3/4	44	47	12 / 360
3221-03	3	75	77	12 / 240
3221-06	6	150	146	6 / 120
3221-10	10	250	238	6 / 96
3221-18	18	450	324	1 / 50
3221-24	24	600	424	1 / 50

3223 — 3/8"

- Offset extension bar, wobble extension bar
- Max. torque : 150 N·m
- DIN 3123

CAUTION — The offset extension bar has less strength than normal extension bar. Do not use as a normal extension bar.



KT NO.	Overall length inch	Overall length mm	g	pcs / box
3223-14	1-1/2	38	40	14 / 224
3223-02	2	50	52	12 / 360
3223-03	3	75	75	12 / 240
3223-06	6	150	144	6 / 120
3223-10	10	250	237	6 / 96

3293 — 3/8"

- Multi-function of extension bar and offset extension bar, wobble extension bar
- Max. torque : 150 N·m





KT NO.	Overall length inch	Overall length mm	g	pcs / box
3293-03	3	75	75	12 / 240
3293-06	6	150	143	6 / 120
3293-10	10	250	228	6 / 96

3311 — 3/8"

- Flexible extension bar
- DIN 3120



KT NO.	Overall length inch	Overall length mm	g	pcs / box
3311-06	6	150	144	5 / 100
3311-12	12	300	168	12 / 108

3893EW — 1/4" & 3/8"


- Extension wrench
- Length extension drive bar enables easier works in confined spaces
- Provided with two square drive adapters in 1/4" and 3/8"
- Chain-driven mechanism enhances working durability and smoothness
- Max torque allowed: 130 N m / 96 ft lb





3/8" 3893EW-01 — 1/4" 3893EW-02



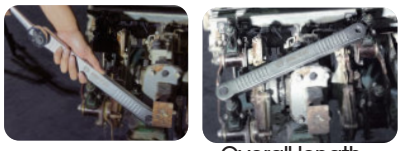

KT NO.	Drive	Overall length inch	Overall length mm	Capcity	g	pcs / box
3893EW		13.4	340	300	410	20 / 40
3893EW-01	3/8"	-	-		20	10 / 160
3893EW-02	1/4"	-	-		20	10 / 160

3452 — 3/8"

- Flexible handle
- Action degree -180°
- DIN 3122



3452DK



KT NO.	Overall length inch	Overall length mm	g	pcs / box
3452-08F	8	205	291	4 / 80
3452-10F	10	250	310	4 / 64
3452DK	renewal kits		-	-

3453 — 3/8"

- Flexible handle
- Action degree -180°
- New pattern design added in firm and powerful elements
- New forge technologies I-Beam shank offers 15% lightweight
- DIN 3122





3453DK

KT NO.	Overall length inch	Overall length mm	g	pcs / box
3453-08F	8	200	221	4 / 80
3453DK	renewal kits			

3571 — 3/8"

- Sliding T-handle
- DIN 3122



KT NO.	Overall length inch	Overall length mm	g	pcs / box
3571-08	8	200	178	4 / 80

Accessory

KT No. & D1

3792 3/8"


- Universal joint
- DIN 3123



KT NO.	Overall length inch	Overall length mm	g	
3792	2	50	67	15 / 300

3794 3/8"

- Universal joint
- 30° rotation
- Short pattern design enables greater access in confined spaces





KT NO.	Overall length inch	Overall length mm	g	
3794	1-4/5	46	106	15 / 300

9113PR 1/4" 3/8" 1/2"

- Universal joint
- Ball point type universal joint & with hex locking design
- Short pattern design enables greater access in confined spaces



3 PC.

Contents 0.20 6 / 108



2793	31mm
3793	43mm
4793	59mm

3812 3814 3/8"

- Adapter
- Convert to 1/4" drive or 1/2" drive
- 3812→Max. torque : 62 N·m
- DIN 3123, ISO 3316



3812 / 3814

KT NO.	Spec.	g	
3812	3/8"Fx1/4"M	30	12 / 192
3814	3/8"Fx1/2"M	46	12 / 360

3148 3/8"

- Bit holder
- DIN 3120 / 3126



KT NO.	Size	Overall length mm	g	
314808S	1/4"	30	35	12 / 360
314810S	5/16"	30	35	12 / 360
314810M	10 mm	30	35	12 / 360

Socket Rail Set

3013MR 3013SR

3513MR 3/8"

- Socket rail 290mmL



13 PC.

Contents 0.52 4 / 24

KT NO.		Contents	
3013MR	3330M	7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19	8731213
3013SR	3330S	1/4, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 13/16	
3513MR	3335M	7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19	

3508MR10 3/8"

- Socket rail 210mmL



8 PC.

Contents 0.65 2 / 24

3235M	10, 11, 12, 13, 14, 16, 17, 19	
8730808		

3106PR 3/8"

- Socket rail 150mmL



6 PC.

Contents 0.28 4 / 48

3375M	E8, E10, E12, E14, E16, E18
8730606	

3116PR 3/8"

- Socket rail 150mmL



6 PC.

Contents 0.39 4 / 32

3275M	E4, E5, E8, E10, E12, E14
8730606	

3129PR 3/8"

- Socket rail 210mmL



9 PC.

Contents 0.27 4 / 32

3375M	E4, E5, E6, E7, E8, E10, E12, E14, E16
8730809	

Socket Rail Set

Packing



3109PR8 / 3119PR8 / 3149PR8 / 3131PR8

3121PR 3/8"

- Socket rail 290mmL

11 PC.



Contents — 0.32 kg / 4 / 24

3375M	E4, E5, E6, E7, E8, E10, E11, E12, E14, E16, E18
8731213	

3E07PR 3/8"

- Socket rail 210mmL

7 PC.



Contents — 0.42 kg / 4 / 32

333E	EP10, EP11, EP12, EP14, EP16, EP18, EP20
8730808	

3108PR8 3/8"

- Socket rail 210mmL
- For hex head screw
- H : 50mm

8 PC.



Contents — 0.34 kg / 50

3025	H3, H4, H5, H6, H7, H8 H10, H12
8730808	

3109PR8 3/8"

- Socket rail 210mmL
- For torx head screw
- H : 50mm

9 PC.



Contents — 0.36 kg / 50

3023	T10, T15, T20, T25, T27, T30, T40, T45, T50
8730809	

3119PR8 3/8"

- Socket rail 210mmL
- For tamper resistant torx head screw
- H : 50mm

9 PC.



Contents — 0.36 kg / 50

3027	T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H, T50H
8730809	

3131PR8 3/8"

- Socket rail 210mmL
- For tamper resistant torx head screw
- H : 50mm

11 PC.



Contents — 0.4 kg / 48

3027	T8H, T9H, T10H, T15H,T20H, T25H, T27H, T30H, T40H, T45H, T50H
8730811	

3146PR 3/8"

- Socket rail 150mmL
- For torx plus tamper resistant head screw
- H : 50mm

6 PC.



Contents — 0.36 kg / 4 / 32

302D	IPR10, IPR15, IPR20, IPR25, IPR27, IPR30
8730606	

3149PR8 3/8"

- Socket rail 210mmL
- For torx plus tamper resistant head screw
- H : 50mm

9 PC.



Contents — 0.36 kg / 50

302D	IPR10, IPR15, IPR20, IPR25, IPR27, IPR30, IPR40, IPR45, IPR50
8730809	

3105PR 3/8"

- 3/8" + 1/2" drive ribe bit socket set
- Socket rail 150mmL
- For ribe head screw
- H : 100mm

5 PC.




Contents — 0.75 kg / 4 / 32

3039	M7, M8
4049	M10, M12, M13
8740606	

Socket Rail

873 — 3/8"

- Rail length from 160 mm to 560 mm





KT NO.		L (mm)
870406		160
870311		280
870422		560
8730		-

8730811D1 — 3/8"

- Socket rail carrier with retaining clip
- 446mm roller cabinet





KT NO.	Square drive	Clip	L (mm)
8730811D1	3/8"	11	508

Extension Bar Set

3113PR — 3/8"

3 PC.



Contents — 0.5 kg — 35

	3221	3", 6", 10"

3103PR — 3/8"

3 PC.



Contents — 0.4 kg — 35

	3223	3", 6", 10"

Socket Set

3213MR — 3/8"

Contents — 0.79 kg — 1 / 24

○	3330M	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19
	3755-08G	3221-06



13 PC.

3508MR — 3/8"

Metal case size (mm):
203 x 79 x 41 (0.023 cuft)



Contents — 1.0 kg — 1 / 20

○	3235M	10, 11, 12, 13, 14, 16, 17, 19

3508SR — 3/8"

Metal case size (mm):
203 x 79 x 41 (0.023 cuft)



8 PC.

Contents — 1.0 kg — 1 / 20

○	3235S	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16

Socket Set

3020MR | 3020SR | 3020MR02 | 3020SR02 | 3520MR | 3520MR02 | 3/8"

Metal case size (mm) :
372 x 153 x 40 (0.08 cuft)



3020MR / 3520MR



3020SR

20 PC.

KT NO.		Contents					
3020MR	3330M	6, 7, 8, 9, 10, 11, 12, 13, 14, 17, 19, 21, 22	363021	3769-08F	3221-03 3221-06	2.5	1 / 6
3020MR02				3779-08F		2.8	
3020SR	3330S	1/4, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 11/16, 3/4, 13/16, 7/8		3769-08F	3452-08F	2.5	
3020SR02				3779-08F	3571-08	2.8	
3520MR	3335M	6, 7, 8, 9, 10, 11, 12, 13, 14, 17, 19, 21, 23	363521	3769-08F	3792	2.5	
3520MR02				3779-08F		2.8	

3023MR | 3523MR | 3/8"

Metal case size (mm) :
372 x 153 x 40 (0.08 cuft)



22 PC.

KT NO.	Contents					2.8	1 / 6
3023MR	3330M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 20, 21, 22	3769-08F	3452-08F	3571-08		
3523MR	3335M			3221-03 3221-06	3792		

3024MR | 3024SR | 3524MR | 3/8"

Metal case size (mm) :
318 x 147 x 46 (0.076 cuft)



3024MR/3524MR



3024SR

24 PC.

KT NO.	Contents					2.2	1 / 10
3024MR	3330M	6, 7, 8, 9, 10, 11, 13, 14, 17, 19	3021	PH2,PH3			
3524MR	3335M		3022	5,8			
			3025	H3, H4, H5, H6, H7, H8, H10			
3024SR	3330S	1/4, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4	3779-08G	3221-06	3792		

Socket Set

3027MR / 3027SR / 3527MR 3/8"

Metal case size (mm) :
318 x 147 x 46 (0.076 cuft)

2.6 | 1 / 10

KT NO.	Contents			
3027MR	3330M	7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19	3235M: 8, 10, 11, 12, 13, 14, 16, 17, 19	3779-08G, 3221-03, 3812, 3792
3527MR	3335M			
3027SR	3330S	1/4, 5/16, 11/32, 3/8, 7/16,15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 13/16		
	3235S	5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16		



3027MR/3527MR

26 PC.



3027SR

3034MR / 3534MR 3/8"

Metal case size (mm) :
372 x 153 x 40 (0.08 cuft)

3.1 | 1 / 6

KT NO.	Contents			
3034MR	3330M	6, 7, 8, 9, 10, 11, 13, 14, 17, 19	3375M: E4, E5, E6, E7, E8, E10, E12, E14, E16, E18	3779-08G, 3452-10F, 3571-08, 3221-03, 3221-06, 3792
3534MR	3335M		3023: T8, T9, T10, T15, T20, T25, T27, T30, T40, T45	



36 PC.

3036CR 3/8"

Metal case size (mm) :
372 x 153 x 40 (0.08 cuft)

3.27 | 1 / 6

Contents		
3330M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 20, 21, 22	
3330S	1/4, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 13/16, 7/8	
3769-08F, 3452-08F, 3571-08, 3221-03, 3221-06, 3792		



36 PC.

3537MR 3/8"

Metal case size (mm) :
372 x 153 x 40 (0.08 cuft)

3.17 | 1 / 6

Contents	
3023	T8, T9, T10, T15, T20, T25, T27, T30, T40, T45
3335M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17, 18, 19
3375M	E4, E5, E6, E7, E8, E10, E12, E14, E16, E18
3779-08G, 3452-10F, 3571-08, 3221-03, 3221-06, 3792	



39 PC.

Socket Set

3055CR 3/8"

Metal case size (mm) :
490 x 205 x 52 (0.185 cuft)

Contents		6	1 / 3
○	3330M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22	
○	3230M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19	
○	3330S	1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8	
○	3230S	1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4	
○	363516	○ 363521	3792
	3771-08G	3452-10F	
	3293-06	3221-03 3221-10	



55 PC.

3523MRV10 Tray category #10 (375 x 140mm) 3/8"

Plastic case size (mm) :
389 x 185 x 66 (0.168 Cuft)

Contents		2.43	1 / 10
○	3335M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 23, 24	
	3771-08G	3792	
	3571-08	3452-08F	
	3293-03 3293-06		




23 PC.


3023MRV11

3523MRV11 Tray category #10 (375 x 140mm) 3/8"

Plastic case size (mm) :
389 x 185 x 66 (0.168 Cuft)

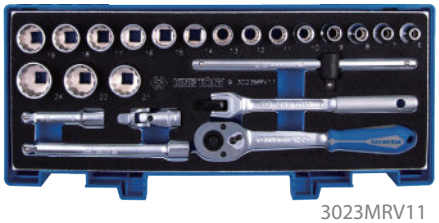

3023MRV11

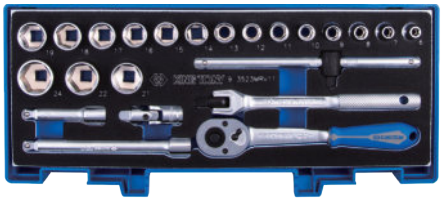

3523MRV11


23 PC.

KT NO.	Contents		2.40	1 / 10
3023MRV11	○ 3330M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18,19, 21, 22, 24	3771-08G	3453-08F
3523MRV11	○ 3335M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24	3571-08	3293-03 3293-06 3792

3032SRV Tray category #8 (375 x 187mm) 3/8"

Plastic case size (mm) :
389 x 230 x 66 (0.168 Cuft)

Contents		3.28	1 / 6
○	3230S	5/16, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 13/16, 7/8	
○	3330S	1/4, 5/16, 11/32, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16	
	3771-08G	3453-08F	
	3293-03 3293-06	3792	

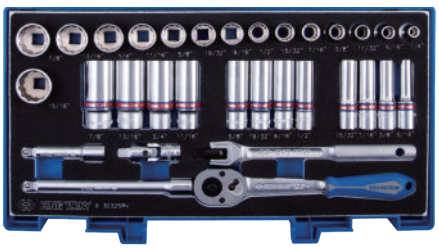

32 PC.


Socket Set

3033MRV


3533MRV

Tray category #8 (375 x 187mm) 3/8"

Plastic case size (mm) :
389 x 230 x 66 (0.168 Cuft)

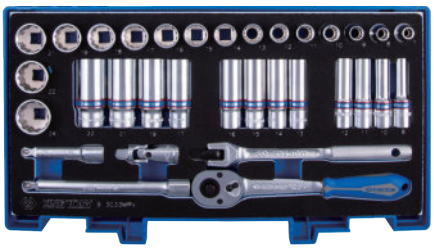

3033MRV

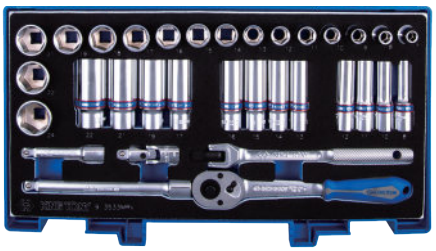

3533MRV

33 PC.

KT NO. | Contents | | | 3.40 | 1 / 6

KT NO.			Contents
3033MRV	○	3330M	7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24
	○	3230M	8, 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22
3533MRV	○	3335M	7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24
	○	3235M	8, 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22

3771-08G, 3792, 3453-08F, 3293-03, 3293-06

3545MRV


Tray category #8 (375 x 187mm) 3/8"

Plastic case size (mm) :
389 x 230 x 66 (0.168 Cuft)

Contents | 2.47 | 1 / 6

○	3335M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24
✪	3375M	E4, E5, E6, E7, E8, E10, E11, E12, E14, E16, E18
✱	3023	T8, T9, T10, T15, T20, T25, T27, T30, T40, T45, T50

3771-08G, 3453-08F, 3571-08, 3792, 3293-03, 3293-06

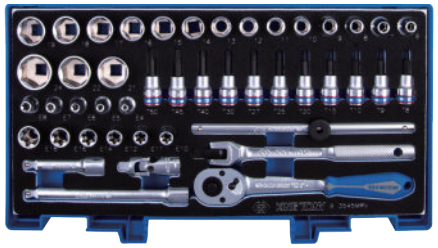

45 PC.

3054MR

3/8"

Blow case size (mm) :
340 x 263 x 80 (0.25cuft)

Contents | 3.85 | 1 / 3

○	3330M	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17, 18, 19, 21, 22
○	3235M	8, 10, 12, 13, 14
✱	1025T	T10, T15, T20, T25, T30, T40, T45 T50
○	3630	16, 21
⬢	1145MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10
⊕	14A1	PH2 x 100
⊖	14A2	5.5 x 100
	1060	8, 10, 12, 13, 14, 17, 19

3771-08G, 3792, 3221-03, 3221-06, 314808S, 6111-06



54 PC.

Socket Set

3568MR 3/8"

Metal shelf size (mm) :
415 x 336 x 320 (1.58 cuft)



268 PC.

Contents		Each Q'ty
3335M	8, 9, 10, 11, 12, 13	10
	14, 15, 16, 17, 18, 19	8
	21, 22, 23, 24	6
3235M	7, 8, 9, 10, 11, 12, 13	10
	14, 15, 16, 17, 18, 19	8
	21, 22, 24	6

KT NO.	Spec.	kg	Cuft
3568MR-A	87102	6.35	0.67
3568MR-D	268 PC. socket content	16.50	0.38




▪ Metric-DIN 3124, ISO 2725-1 / Inch-ANSI / ASME B107.1

Standard Socket

KT No. & D1

4330MR 4330SR 1/2"






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
433008MR	8	13.2	23.3	7.0	38	53	10 / 200
433009MR	9	14.0	23.3	7.0	38	52	10 / 200
433010MR	10	15.0	23.3	8.0	38	51	10 / 200
433011MR	11	16.4	23.3	8.0	38	54	10 / 200
433012MR	12	17.8	23.3	9.0	38	54	10 / 200
433013MR	13	19.0	23.3	10.0	38	58	10 / 200
433014MR	14	20.4	23.3	11.0	38	60	10 / 200
433015MR	15	21.6	23.3	11.0	38	61	10 / 200
433016MR	16	22.5	23.3	11.0	38	61	10 / 200
433017MR	17	24.0	23.2	12.0	38	62	10 / 200
433018MR	18	25.2	23.2	13.0	38	69	10 / 200
433019MR	19	27.0	23.2	13.0	38	72	10 / 160
433020MR	20	27.9	23.2	13.0	38	74	10 / 160
433021MR	21	28.9	23.2	14.0	38	78	10 / 160
433022MR	22	30.2	24.0	15.0	40	90	10 / 160
433023MR	23	31.2	25.0	15.0	40	92	8 / 160
433024MR	24	32.1	26.0	17.0	42	101	8 / 160
433025MR	25	33.4	27.0	17.0	42	107	8 / 160
433026MR	26	35.0	28.0	17.0	42	125	6 / 120
433027MR	27	36.6	28.0	19.0	42	130	6 / 120
433028MR	28	37.8	30.0	20.0	42	142	6 / 120
433029MR	29	39.0	30.0	21.0	44	161	6 / 120
433030MR	30	40.0	29.5	21.0	44	156	6 / 120
433032MR	32	42.5	30.0	23.0	44	163	6 / 120
433033MR	33	43.0	30.0	24.0	46	173	6 / 96
433034MR	34	45.0	30.0	24.0	46	207	6 / 96
433036MR	36	47.0	33.0	24.0	46	236	6 / 96

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
433010SR	5/16	13.2	21.8	7.0	38	41	10 / 200
433012SR	3/8	15.0	21.8	7.0	38	44	10 / 200
433013SR	13/32	15.0	23.3	7.0	38	51	10 / 200
433014SR	7/16	16.4	23.3	8.0	38	53	10 / 200
433015SR	15/32	18.0	23.3	8.0	38	55	10 / 200
433016SR	1/2	19.0	23.3	10.0	38	57	10 / 200
433018SR	9/16	20.4	23.3	11.0	38	59	10 / 200
433019SR	19/32	21.6	23.3	11.0	38	60	10 / 200
433020SR	5/8	22.5	23.3	11.0	38	62	10 / 200
433022SR	11/16	24.0	23.2	12.0	38	60	10 / 200
433024SR	3/4	27.0	23.2	13.0	38	73	10 / 160
433025SR	25/32	28.0	23.2	13.0	38	75	10 / 160
433026SR	13/16	28.6	23.2	13.0	38	79	10 / 160
433028SR	7/8	30.2	24.0	15.0	40	87	10 / 160
433030SR	15/16	32.6	26.0	17.0	42	105	8 / 160
433032SR	1	34.8	26.8	17.0	42	119	8 / 160
433034SR	1-1/16	36.6	28.0	19.0	42	133	6 / 120
433036SR	1-1/8	39.0	30.0	21.0	44	158	6 / 120
433038SR	1-3/16	40.0	29.5	21.0	44	156	6 / 120
433040SR	1-1/4	42.5	30.0	23.0	44	173	6 / 120
433044SR	1-3/8	46.0	33.0	24.0	46	243	6 / 96

4335MR 4335SR 1/2"





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
433506MR	6	12.0	23.3	7.0	38	51	10 / 200
433507MR	7	12.6	23.3	7.0	38	51	10 / 200
433508MR	8	13.2	23.3	7.0	38	52	10 / 200
433509MR	9	14.0	23.3	7.0	38	51	10 / 200
433510MR	10	15.0	23.3	8.0	38	51	10 / 200
433511MR	11	16.4	23.3	8.0	38	54	10 / 200
433512MR	12	17.8	23.3	9.0	38	56	10 / 200
433513MR	13	19.0	23.3	10.0	38	58	10 / 200
433514MR	14	20.4	23.3	11.0	38	61	10 / 200
433515MR	15	21.6	23.3	11.0	38	62	10 / 200
433516MR	16	22.5	23.3	11.0	38	63	10 / 200
433517MR	17	24.0	23.2	13.5	38	63	10 / 200
433518MR	18	25.2	23.2	13.5	38	66	10 / 200
433519MR	19	27.0	23.2	17.0	38	74	10 / 160
433520MR	20	27.9	23.2	17.0	38	76	10 / 160
433521MR	21	28.9	23.2	17.0	38	79	10 / 160
433522MR	22	30.2	24.0	17.0	38	90	10 / 160
433523MR	23	31.2	25.0	17.0	38	99	8 / 160
433524MR	24	32.1	26.0	17.0	38	108	8 / 160
433525MR	25	33.4	27.0	18.0	40	118	8 / 160
433526MR	26	35.0	28.0	21.0	42	130	6 / 120
433527MR	27	36.6	28.0	21.0	42	141	6 / 120
433528MR	28	37.8	30.0	20.0	42	154	6 / 120
433529MR	29	39.0	30.0	20.0	44	165	6 / 120
433530MR	30	40.0	29.5	22.0	44	164	6 / 120
433532MR	32	42.5	30.0	22.0	44	180	6 / 120
433533MR	33	43.0	30.0	24.0	46	185	6 / 96
433534MR	34	45.0	30.0	24.0	46	206	6 / 96
433536MR	36	47.0	33.0	24.0	46	251	6 / 96
433538MR	38	49.0	34.0	25.0	50	268	6 / 60
433539MR	39	50.0	34.0	25.0	50	291	6 / 60
433541MR	41	53.0	36.0	27.0	53	336	6 / 36
433546MR	46	59.0	40.0	30.0	58	453	4 / 32

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
433510SR	5/16	13.2	21.8	7.0	38	44	10 / 200
433512SR	3/8	15.0	21.8	7.0	38	45	10 / 200
433514SR	7/16	16.4	23.3	8.0	38	54	10 / 200
433515SR	15/32	18.0	23.3	8.0	38	56	10 / 200
433516SR	1/2	19.0	23.3	10.0	38	58	10 / 200
433518SR	9/16	20.4	23.3	11.0	38	59	10 / 200
433519SR	19/32	21.6	23.3	11.0	38	61	10 / 200
433520SR	5/8	22.5	23.3	11.0	38	62	10 / 200
433522SR	11/16	24.0	23.2	12.0	38	62	10 / 200
433524SR	3/4	27.0	23.2	13.0	38	75	10 / 160
433525SR	25/32	28.0	23.2	13.0	38	77	10 / 160
433526SR	13/16	28.6	23.2	13.0	38	80	10 / 160
433528SR	7/8	30.2	24.0	15.0	40	92	10 / 160
433530SR	15/16	32.6	26.0	17.0	42	113	8 / 160
433532SR	1	34.8	26.8	17.0	42	124	8 / 160
433534SR	1-1/16	36.6	28.0	19.0	42	138	6 / 120
433536SR	1-1/8	39.0	30.0	21.0	44	166	6 / 120
433538SR	1-3/16	40.0	29.5	21.0	44	168	6 / 120
433540SR	1-1/4	42.5	30.0	23.0	44	176	6 / 120

Socket Set

4072MR | 4072SR | 4572MR | 4572SR 1/2"

Metal shelf size (mm) :
415x 336 x 320 (1.58 cuft)



4072MR / 4572MR


KT NO.	PC.		Contents	Each Q'ty
4072MR	172	4330MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18	8
			19, 20, 21, 22, 23, 24, 25	7
4572MR	172	4335MR	26. 27, 28, 29, 30,	6
			32	5
4072SR	136	4330SR	5/16, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16	8
			3/4, 25/32, 13/16, 7/8, 15/16	7
4572SR	136	4335SR	1, 1-1/16, 1-1/8, 1-3/16	6
			1-1/4	5

KT NO.	Spec.	kg	Cuft
4072MR 4572MR -A	87103	6.37	0.67
4072MR 4572MR -D	172 PC. socket content	17.73	0.38
4072SR 4572SR -A	87103	6.37	0.67
4072SR 4572SR -D	136 PC. socket content	13.00	0.28

Deep Socket

4230M | 4230S ◯ 1/2"

- Metric-DIN 3124, ISO 2725-1
- Inch-ANSI / ASME B107.1





KT NO.	◯ mm	D1 mm	D2 mm	ℓ mm	L mm	kg	
423008M	8	13.2	22.0	16	77	79	6 / 120
423009M	9	14.0	22.0	16	77	79	6 / 120
423010M	10	15.2	23.7	24	77	99	6 / 120
423011M	11	16.3	23.7	24	77	104	6 / 120
423012M	12	17.7	23.7	24	77	110	6 / 120
423013M	13	18.7	23.7	24	77	114	6 / 120
423014M	14	20.2	23.7	35	77	121	6 / 120
423015M	15	21.3	23.7	35	77	120	6 / 120
423016M	16	22.6	23.7	35	77	128	6 / 96
423017M	17	23.7	23.2	35	77	122	6 / 96
423018M	18	25.5	23.2	35	77	141	6 / 96
423019M	19	25.7	23.2	35	77	126	6 / 96
423020M	20	27.7	24.0	35	77	150	6 / 96
423021M	21	27.7	25.0	35	77	148	6 / 96
423022M	22	29.8	26.0	35	77	175	6 / 96
423023M	23	31.8	27.5	35	77	210	5 / 60
423024M	24	31.8	28.5	35	77	204	5 / 60
423025M	25	33.8	29.5	35	77	239	5 / 60
423026M	26	35.8	30.5	35	77	220	5 / 60
423027M	27	35.8	31.5	34	77	253	5 / 60
423028M	28	37.8	32.5	34	77	308	5 / 50
423029M	29	37.8	33.5	34	77	273	5 / 50
423030M	30	39.8	34.5	34	77	276	5 / 50
423032M	32	41.8	36.0	34	77	309	5 / 50
423033M	33	43.8	38.5	35	77	356	5 / 50
423034M	34	44.8	38.5	35	77	422	5 / 50
423036M	36	46.8	40.5	36	77	462	2 / 40


KT NO.	◯ inch	D1 mm	D2 mm	ℓ mm	L mm	kg	
423010S	5/16	13.2	22.0	9	77	92	6 / 120
423012S	3/8	14.7	22.0	10	77	82	6 / 120
423014S	7/16	16.3	23.7	12	77	98	6 / 120
423016S	1/2	18.7	23.7	14	77	114	6 / 120
423018S	9/16	20.2	23.7	15	77	119	6 / 120
423020S	5/8	22.6	23.7	17	77	129	6 / 96
423022S	11/16	23.7	23.2	35	77	124	6 / 96
423024S	3/4	25.7	23.2	35	77	128	6 / 96
423026S	13/16	27.7	25.0	37	77	151	6 / 96
423028S	7/8	29.8	26.0	37	77	170	6 / 96
423030S	15/16	31.8	28.5	37	77	208	5 / 60
423032S	1	33.8	29.5	37	77	233	5 / 60
423034S	1-1/16	36.6	31.5	28	77	247	5 / 60
423036S	1-1/8	37.8	32.5	28	77	254	5 / 50
423038S	1-3/16	39.8	34.5	34	77	285	5 / 50
423040S	1-1/4	41.8	36.0	34	77	305	5 / 50

Deep Socket

KT No. & D1

4235M / 4235S — 1/2"

- Metric-DIN 3124, ISO 2725-1
- ANSI / ASME B107.1






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm		
423508M	8	13.2	22.0	16	77	90	6 / 120
423509M	9	14.0	22.0	16	77	81	6 / 120
423510M	10	15.2	23.7	24	77	102	6 / 120
423511M	11	16.3	23.7	24	77	103	6 / 120
423512M	12	17.7	23.7	24	77	113	6 / 120
423513M	13	18.7	23.7	24	77	119	6 / 120
423514M	14	20.2	23.7	35	77	121	6 / 120
423515M	15	21.3	23.7	35	77	126	6 / 120
423516M	16	22.6	23.7	35	77	130	6 / 96
423517M	17	23.7	23.2	35	77	127	6 / 96
423518M	18	25.5	23.2	35	77	149	6 / 96
423519M	19	25.7	23.2	35	77	133	6 / 96
423520M	20	27.7	24.0	35	77	158	6 / 96
423521M	21	27.7	25.0	35	77	155	6 / 96
423522M	22	29.8	26.0	35	77	185	6 / 96
423523M	23	31.8	27.5	35	77	218	5 / 60
423524M	24	31.8	28.5	35	77	211	5 / 60
423525M	25	33.8	29.5	35	77	251	5 / 60
423526M	26	35.8	30.5	35	77	236	5 / 60
423527M	27	35.8	31.5	34	77	295	5 / 60
423528M	28	37.8	32.5	34	77	281	5 / 50
423529M	29	37.8	33.5	34	77	292	5 / 50
423530M	30	39.8	34.5	34	77	301	5 / 50
423532M	32	41.8	36.0	34	77	330	5 / 50
423533M	33	43.8	38.5	35	77	373	5 / 50
423534M	34	44.8	38.5	35	77	478	5 / 50
423536M	36	46.8	40.5	36	77	478	2 / 40
423538M	38	49.0	40.5	38	77	504	2 / 40
423541M	41	53.0	40.5	40	77	521	2 / 24

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm		
423510S	5/16	13.2	22.0	16	77	90	6 / 120
423512S	3/8	14.7	22.0	16	77	84	6 / 120
423514S	7/16	16.3	23.7	24	77	104	6 / 120
423516S	1/2	18.7	23.7	24	77	116	6 / 120
423518S	9/16	20.2	23.7	35	77	123	6 / 120
423520S	5/8	22.6	23.7	35	77	130	6 / 96
423522S	11/16	23.7	23.2	35	77	124	6 / 96
423524S	3/4	25.7	23.2	35	77	131	6 / 96
423526S	13/16	27.7	25.0	35	77	157	6 / 96
423528S	7/8	29.8	26.0	35	77	181	6 / 96
423530S	15/16	31.8	28.5	35	77	218	5 / 60
423532S	1	33.8	29.5	35	77	223	5 / 60
423534S	1-1/16	36.6	31.5	34	77	266	5 / 60
423536S	1-1/8	37.8	32.5	34	77	262	5 / 50
423538S	1-3/16	39.8	34.5	34	77	296	5 / 50
423540S	1-1/4	41.8	36.0	34	77	327	5 / 50
423542S	1-5/16	44.0	38.5	35	77	430	5 / 50
423544S	1-3/8	46.0	38.5	35	77	452	2 / 40
423546S	1-7/16	47.5	40.5	36	77	485	2 / 40
423548S	1-1/2	49.0	40.5	38	77	507	2 / 40

4245M — EXTENDED LENGTH — 1/2"

- DIN 3120






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm		
424508M	8	13.2	22.0	9.0	90	104	6 / 120
424509M	9	14.0	22.0	10.0	90	106	6 / 120
424510M	10	15.2	23.7	11.0	90	130	6 / 120
424512M	12	17.7	23.7	13.0	90	152	6 / 120
424513M	13	18.7	23.7	14.0	90	151	6 / 120
424514M	14	20.2	23.7	15.0	90	159	6 / 120

4255M — EXTENDED LENGTH — 1/2"

- DIN 3120






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm		
425508M	8	13.2	22.0	9	120	127	6 / 96
425509M	9	14.0	22.0	10	120	134	6 / 96
425510M	10	15.2	23.7	11	120	160	6 / 96
425512M	12	17.7	23.7	13	120	195	6 / 96
425513M	13	18.7	23.7	14	120	201	6 / 96
425514M	14	20.2	23.7	15	120	202	6 / 96

Square Socket

4014M — 1/2"

- DIN 3120





KT NO.	mm	inch	D mm	ℓ mm	L mm		
401408M	RB8.0		23.5	13.5	35	54	10 / 200
401409M	RB9.5	3/8	23.5	13.5	35	58	10 / 200
401410M	RB10.0		23.5	13.5	35	57	10 / 200
401411M	RB10.5		23.5	13.5	35	58	10 / 200
401412M	RB12.0		23.5	13.5	35	62	10 / 200
401413M	RB12.7	1/2	23.5	13.5	35	64	10 / 200
401414M	RB13.5		23.5	13.5	35	67	10 / 200
401419M	RB19.0		25.0	15.5	40	108	10 / 160

Deep Socket Set

4066MR

Metal shelf size (mm) :
415x 336 x 320 (1.58 cuft)

4066SR

4566MR 1/2"



4066MR / 4566MR


KT NO.	PC.		Contents	Each Q'ty
4066MR	165	4230M	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18	8
			19, 20, 21, 22, 23, 24	7
4566MR	165	4235M	26, 27, 28, 29, 30	6
			32	5
4066SR	114	4230S	5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16	8
			3/4, 13/16, 7/8, 15/16, 1	7
			1-1/16, 1-1/8, 1-3/16	6
			1-1/4	5

KT NO.	Spec.	kg	Cuft
4066MR 4566MR -A	87103	5.87	0.62
4066MR 4566MR -D	165 PC. socket content	30.70	0.63
4066SR -A	87103	5.87	0.62
4066SR -D	114 PC. socket content	21.0	0.47

Star Socket

4375M 1/2"

- For torx external screw
- Chrome vanadium steel
- Polished, chrome plated
- DIN 3120






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
437508M	E08	11.4	23.8	7.0	37	52	10 / 200
437510M	E10	13.2	23.8	7.5	37	55	10 / 200
437511M	E11	14.0	23.8	8.0	37	57	10 / 200
437512M	E12	15.0	23.8	9.0	37	58	10 / 200
437514M	E14	16.4	23.8	10.0	37	59	10 / 200
437516M	E16	18.8	23.8	11.0	37	63	10 / 200
437518M	E18	20.5	23.8	12.5	39	68	10 / 200
437520M	E20	22.8	23.8	14.0	39	72	10 / 200
437522M	E22	24.6	23.8	16.0	39	78	10 / 200
437524M	E24	26.5	23.8	16.0	39	85	10 / 160

4275M 1/2"

- Long type
- Chrome vanadium steel
- Polished, chrome plated
- DIN 3120






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
427508M	E08	11.4	23.8	7.0	77	106	6 / 120
427510M	E10	13.2	23.8	7.5	77	112	6 / 120
427512M	E12	15.0	23.8	9.0	77	121	6 / 120
427514M	E14	16.4	23.8	10.0	77	127	6 / 120
427516M	E16	18.8	23.8	11.0	77	143	6 / 120
427518M	E18	20.5	23.8	12.5	77	148	6 / 120
427520M	E20	22.8	23.8	14.0	77	161	6 / 120
427522M	E22	24.6	23.8	16.0	77	178	6 / 96
427524M	E24	26.5	23.8	16.0	77	197	6 / 96

433E 1/2"

- For torx plus external screw
- DIN 3120





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
433E18M	EP18	21	25.8	15.0	45	91	6 / 96
433E20M	EP20	23	25.8	15.0	45	98	6 / 96
433E22M	EP22	-	25.8	17.0	45	110	6 / 96
433E24M	EP24	27.8	26.0	18.0	45	119	6 / 96
433E26M	EP26	29.8	26.0	19.0	45	125	6 / 96
433E28M	EP28	31.8	26.0	21.0	45	125	6 / 96
433E30M	EP30	33.8	26.0	22.0	45	131	6 / 96
433E32M	EP32	35.8	26.0	23.0	45	149	6 / 96

Spark Plug Socket

KT No. & D1

4630RC | 4660 | 4635RC | 4665C

4670 | 4675 | 1/2"

- 6 / 12 points
- Size combined
  - 16.0mm (5/8")
  - 20.8mm (13/16")
- Inside sleeve
  - rubber
  - magnet
- DIN 3120
- 14mm use for Toyota Yaris, Vios



KT NO.	Type	Size inch	Size mm	D mm	L mm		
463014RC	12 points Rubber	-	14.0	19.05	70	70	12 / 240
463016RC	12 points Rubber	5/8	16.0	20.75	70	72	10 / 200
466016	12 points Magnet	5/8	16.0	20.75	70	74	10 / 200
463514RC	6 points Rubber	-	14.0	19.05	70	70	12 / 240
463516RC	6 points Rubber	5/8	16.0	20.75	70	76	10 / 200
466516C	6 points Magnet	5/8	16.0	20.75	70	77	10 / 200
463021RC	12 points Rubber	13/16	20.8	27.7	70	142	12 / 120
466021	12 points Magnet	13/16	20.8	27.7	70	139	12 / 120
463521RC	6 points Rubber	13/16	20.8	27.7	70	148	12 / 120
466521C	6 points Magnet	13/16	20.8	27.7	70	150	12 / 120
467014C	12 points Metal clip	-	14.0	19.05	70	70	12 / 240
467016	12 points Metal clip	5/8	16.0	20.75	70	73	10 / 200
467021	12 points Metal clip	13/16	20.8	27.7	70	121	12 / 120
467514C	6 points Metal clip	-	14.0	19.05	70	70	12 / 240
467516	6 points Metal clip	5/8	16.0	20.75	70	74	10 / 200
467521	6 points Metal clip	13/16	20.8	27.7	70	162	12 / 120


463014RC - Thin walled design


463514RC - Thin walled design


463016RC - Thin walled design


466016 - Thin walled design


463516RC - Thin walled design



466516C - Thin walled design



463021RC


466021


463521RC



466521C






467514C


467014C





Bit Socket

CAUTION

In order to get normal life of bit socket, always use within limited torque to bit.

4021 — 1/2"

- Phillips head
- DIN ISO 8764-1



KT NO.	No.	Overall length mm		
402102	PH2	60	67	10 / 180
402103	PH3	60	77	10 / 180
402104	PH4	60	68	10 / 180

4022 — 1/2"

- Slotted head
- DIN ISO 5264 / 3120



KT NO.	Tip width mm	Tip thickness mm	Overall length mm		
402208	8	1.2	60	68	10 / 180
402210	10	1.6	60	75	10 / 180
402212	12	2.0	60	89	10 / 180
402214	14	2.5	60	104	10 / 180
402216	16	2.5	60	104	10 / 180

4025

4035

40D5 — 1/2"

- Hexagon head
- DIN 7422



KT NO.	mm / Inch	Overall length mm		
402503	H3	60	65	10 / 180
402504	H4	60	65	10 / 180
402505	H5	60	66	10 / 180
402506	H6	60	68	10 / 180
402507	H7	60	67	10 / 180
402508	H8	60	70	10 / 180
402509	H9	60	78	10 / 180
402510	H10	60	80	10 / 180
402511	H11	60	95	10 / 180
402512	H12	60	94	10 / 180
402514	H14	60	114	10 / 180
402517	H17	66	166	10 / 100
402519	H19	66	225	10 / 120
403504	H4	80	74	6 / 120
403505	H5	80	75	6 / 120
403506	H6	80	77	6 / 120
403507	H7	80	77	6 / 120
403508	H8	80	80	6 / 120
403509	H9	80	91	6 / 120
403510	H10	80	93	6 / 120
403511	H11	80	111	6 / 120
403512	H12	80	113	6 / 120
403514	H14	80	140	6 / 120
403517	H17	80	193	6 / 120
403519	H19	80	259	6 / 96
40D506	H6	140	101	6 / 120
40D508	H8	140	102	6 / 120
40D510	H10	140	131	6 / 120
402506S	3/16	60	66	10 / 180
402507S	7/32	60	68	10 / 180
402508S	1/4	60	69	10 / 180
402509S	9/32	60	71	10 / 180
402510S	5/16	60	76	10 / 180
402512S	3/8	60	79	10 / 180
402514S	7/16	60	92	10 / 180
402516S	1/2	60	110	10 / 180
402518S	9/16	66	156	10 / 120
402520S	5/8	66	162	10 / 120
402524S	3/4	66	226	10 / 120

40D0 — 1/2"

- Hexagon with ball point head



KT NO.	mm	Overall length mm		
40D006	H6	140	101	6 / 120
40D008	H8	140	103	6 / 120
40D010	H10	140	132	6 / 120

4026

4046

4036 — 1/2"

4066

- Spline head
- DIN 3120



KT NO.	Size	Overall length mm		
402605	M5	60	69	10 / 180
402606	M6	60	67	10 / 180
402608	M8	60	70	10 / 180
402610	M10	60	78	10 / 180
402612	M12	60	91	10 / 180
402614	M14	60	108	10 / 180
402616	M16	60	144	10 / 120
402618	M18	60	195	10 / 120
403605	M5	80	75	6 / 120
403606	M6	80	76	6 / 120
403608	M8	80	76	6 / 120
403610	M10	80	91	6 / 120
403612	M12	80	110	6 / 120
403614	M14	80	135	6 / 120
404605	M5	100	83	6 / 120
404607	M7	100	84	6 / 120
404608	M8	100	85	6 / 120
404610	M10	100	105	6 / 120
404612	M12	100	128	6 / 120
404614	M14	100	161	6 / 120
406608	M8	140	102	6 / 120
406609	M9	140	131	6 / 120
406610	M10	140	130	6 / 120
406612	M12	140	168	6 / 120
406614	M14	140	212	6 / 120
406616	M16	140	301	6 / 72

Bit Socket

KT No. & D1

404108 1/2"

- Spline head
- DIN 3120
- Use for Toyota Tercel cylinder head bolt



KT NO.	Size	Overall length mm	g	
404108	M8.9	100	123	6 / 120

402A 1/2"

- Pentagon head
- For using on most vehicles fitting brake system



KT NO.	Size	Overall length mm	g	
402A10	10	60	89	10 / 180

402B 1/2"

- Spline head
- Tamper resistant type
- For gearbox and sump plugs of Audi A4/A6/A3, Golf IV/LT of VW



KT NO.	Size	Overall length mm	g	
402B16	M16	66	151	10 / 120
402B18	M18	66	204	10 / 120

4049 1/2"

- Use for VW, Audi, Fiat cylinder head bolt



KT NO.	Size	Overall length mm	g	
404904	M4	100	81	6 / 120
404905	M5	100	83	6 / 120
404906	M6	100	83	6 / 120
404907	M7	100	83	6 / 120
404908	M8	100	84	6 / 120
404909	M9	100	102	6 / 120
404910	M10	100	103	6 / 120
404925	M10.5	100	102	6 / 120
404912	M12	100	127	6 / 120
404913	M13	100	156	6 / 120
404914	M14	100	159	6 / 120
404916	M16	100	215	6 / 120

4027 4037 1/2"

- For tamper resistant torx screw
- DIN 3120



4027



4037

KT NO.	Size	Overall length mm	g	
402720	T20H	60	65	10 / 180
402725	T25H	60	66	10 / 180
402727	T27H	60	66	10 / 180
402730	T30H	60	66	10 / 180
402740	T40H	60	67	10 / 180
402745	T45H	60	70	10 / 180
402750	T50H	60	68	10 / 180
402755	T55H	60	77	10 / 180
402760	T60H	60	105	10 / 180
403720	T20H	80	74	6 / 120
403725	T25H	80	73	6 / 120
403727	T27H	80	74	6 / 120
403730	T30H	80	77	6 / 120
403740	T40H	80	76	6 / 120
403745	T45H	80	77	6 / 120
403750	T50H	80	79	6 / 120
403755	T55H	80	90	6 / 120
403760	T60H	80	131	6 / 120

4023 4033 1/2"

- For torx internal screw
- DIN 3120



4023



4033

KT NO.	Size	Overall length mm	g	
402320	T20	60	68	10 / 180
402325	T25	60	66	10 / 180
402327	T27	60	68	10 / 180
402330	T30	60	65	10 / 180
402340	T40	60	67	10 / 180
402345	T45	60	69	10 / 180
402350	T50	60	69	10 / 180
402355	T55	60	78	10 / 180
402360	T60	60	106	10 / 180
402370	T70	60	110	10 / 180
403320	T20	80	76	6 / 120
403325	T25	80	74	6 / 120
403327	T27	80	75	6 / 120
403330	T30	80	75	6 / 120
403340	T40	80	78	6 / 120
403345	T45	80	76	6 / 120
403350	T50	80	79	6 / 120
403355	T55	80	92	6 / 120
403360	T60	80	132	6 / 120
403370	T70	80	136	6 / 120



Ratchet & Set

KT No. & D1

4725


FINE GEAR 1/2"

- Reversible ratchet
- 8° gear action degree(45 teeth)
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	pcs/box
4725-10FR	10	250	590	1 / 40
4725-10GR	10	250	631	1 / 20
4725-12FR	12	300	652	2 / 40
4725-12GR	12	300	693	1 / 20
4725-12BR	12	300	637	2 / 40
4725DKR01	renewal kits		-	-



4725DKR01

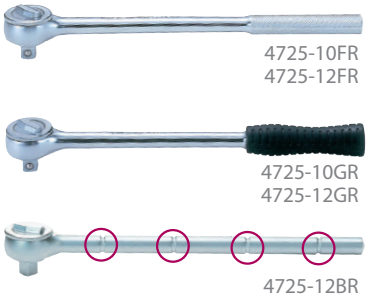

4725-10FR
4725-12FR
4725-10GR
4725-12GR
4725-12BR

4755


FINE GEAR 1/2"

- Reversible ratchet
- 5° gear action degree (72 teeth)
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	pcs/box
4755-10G	10	262	540	1 / 20
4755DK	renewal kits		-	-



4755DK

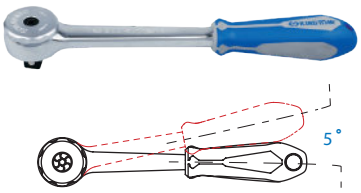

4756


QUICK RELEASE FINE GEAR 1/2"

- Quick release reversible ratchet
- 5° gear action degree (72 teeth)
- DIN 3122

KT NO.	Overall length inch	Overall length mm	g	pcs/box
4756-10G	10	262	539	1 / 20
4756DK	renewal kits		-	-



4756DK

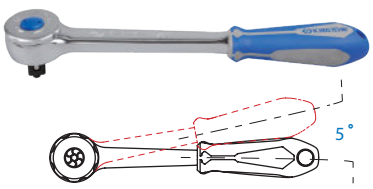



Ratchet

4752

QUICK RELEASE FINE GEAR 1/2"

- Quick release swivel reversible ratchet
- 5° gear action degree (72 teeth)
- Multi-angle design for difficult-to-reach fasteners



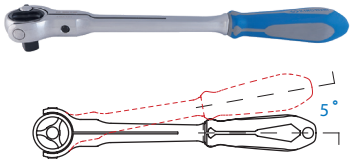

KT NO.	Overall length inch	mm	g	
4752-12G	12	312	639	1 / 20
4752DK	renewal kits		-	-



4752DK

4760

MINI RATCHET FINE GEAR 1/2"

- Mini reversible ratchet
- 5° gear action degree (72 teeth)
- Two teeth pawl action
- DIN 3122



4760-05

KT NO.	Overall length inch	mm	g	
4760-05	4-3/4	120	209	5 / 90
4760-05G	5-1/2	137	201	4 / 72
4760DK01	renewal kits		-	-



4760DK01



4760-05G

4762

QUICK RELEASE 1/2"

- Quick release reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122



4762-10G / 4762-15G



4762-10F



4762-10P

KT NO.	Overall length inch	mm	g	
4762-10G	10	250	536	5 / 30
4762-10F	10	250	580	6 / 36
4762-10P	10	250	552	6 / 36
4762-15G	15	375	693	5 / 20
4762DK	renewal kits		-	-



4762DK

4768

1/2"

- Reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122



4768-10G / 4768-15G




4768-10F / 4768-15F



4768-10P

KT NO.	Overall length inch	mm	g	
4768-10G	10	250	542	5 / 30
4768-10F	10	250	589	6 / 36
4768-10P	10	250	557	6 / 36
4768-15G	15	375	723	5 / 20
4768-15F	15	375	760	6 / 24
4768DK	renewal kits		-	-




4768DK

4771

QUICK RELEASE 1/2"

- Quick release reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122





4771-10BR



4771-10FR



4771-10GR

KT NO.	Overall length inch	mm	g	
4771-10BR	10	250	551	2 / 40
4771-10FR	10	250	620	2 / 40
4771-10GR	10	262	540	1 / 20
4771DK	renewal kits		-	-




4771DK


Ratchet

KT No. & D1

4774 — 1/2"

- Universal joint reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122
- 15° rotation








4774-10F



4774-10G

KT NO.	Overall length inch	Overall length mm	g	pcs / box
4774-10F	10	250	619	2 / 40
4774-10G	10	262	553	1 / 20
4774DK	renewal kits		-	-



4774DK

4779 — 1/2"

- Reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122



4779-10BR



4779-10FR



4779-10GR

KT NO.	Overall length inch	Overall length mm	g	pcs / box
4779-10BR	10	250	559	2 / 40
4779-10FR	10	250	626	2 / 40
4779-10GR	10	262	551	1 / 20
4779DK01	renewal kits		-	-



4779DK01

4772 — 1/2"

- Design spec. similar to DIN 3122, ISO 3315
- Made from special-purpose drop-forged and hardened aluminium
- Finishing - anodic treatment - black driver by phosphate sunk
- The mechanism as in all 4771/9 ratchets is made from high-quality steel





KT NO.	Overall length inch	Overall length mm	g	pcs / box
4772-10F	10	250	350	1 / 25
4772DK01	renewal kits		-	-




4772DK01

4781 — QUICK RELEASE 1/2"

- Quick release flexible and reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action
- DIN 3122



KT NO.	Overall length inch	Overall length mm	g	pcs / box
4781-12F	12	300	783	1 / 20
4781DK	renewal kits		-	-



4781DK

Ratchet Set

7773GS — QUICK RELEASE 1/2" & 1/4"

- 1/4" & 1/2" DR. 90 teeth dustproof ratchets
- 90 teeth ratchet mechanism, allowing ratchet action in very tight spaces
- IP51, dustproof design

2 PC. IP 51 PAT.

Contents		kg 0.70	pcs / box 1 / 36
2773-55GS	140mm		
4773-10GS	262mm		



2773-55GS




4773-10GS

90 Teeth Dustproof Ratchet PAT.



- Material
  - chrome vanadium alloy steel handle
  - chrome molybdenum steel (gear) driver
- Finishing
  - polished, chrome plated
  - black driver by phosphate sunk

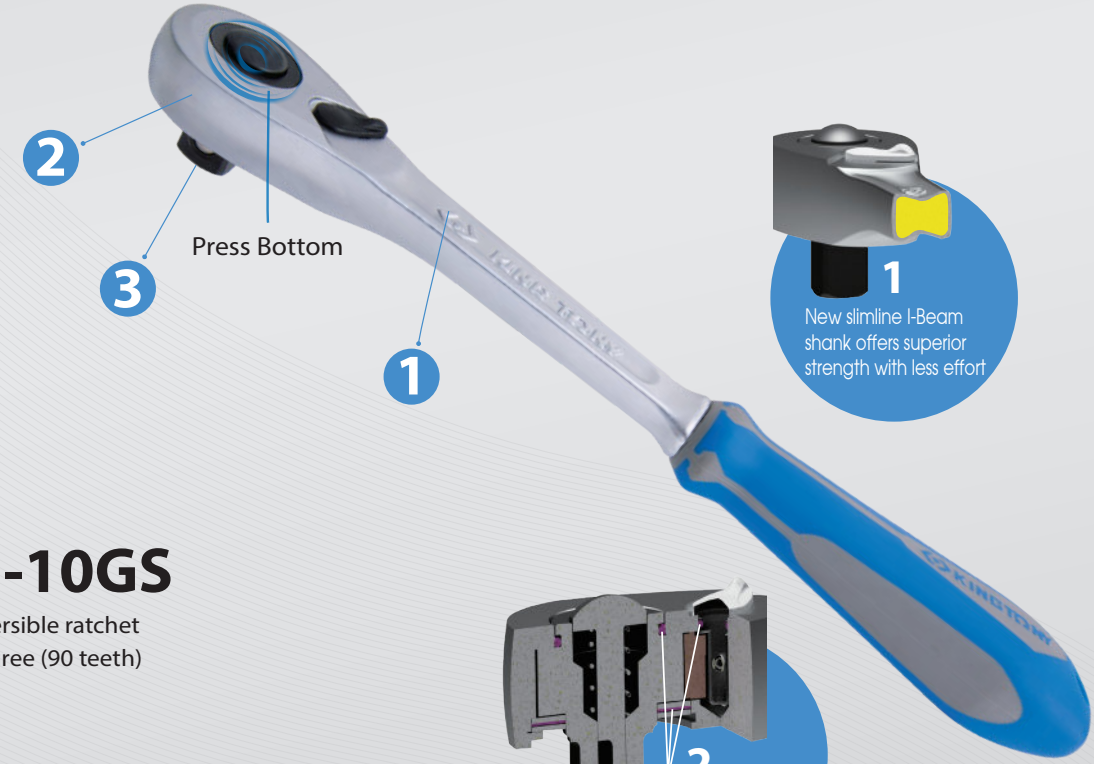

1
New slimline I-Beam shank offers superior strength with less effort

4773-10GS

- Quick release reversible ratchet
- 4° gear action degree (90 teeth)
- DIN 3122
- IP51

KT NO.	Square DR.	Overall length inch	Overall length mm		
4773-10GS	1/2"	10	262	500	1 / 25
4773DK				renewal kits	

2
Dustproof - Double Sealing gasket

4773-10GS (IP51)




4773DK



3
Screwless design - Easy to repair


4773-22GS

1/2" DR. Telescopic Ratchet Wrench

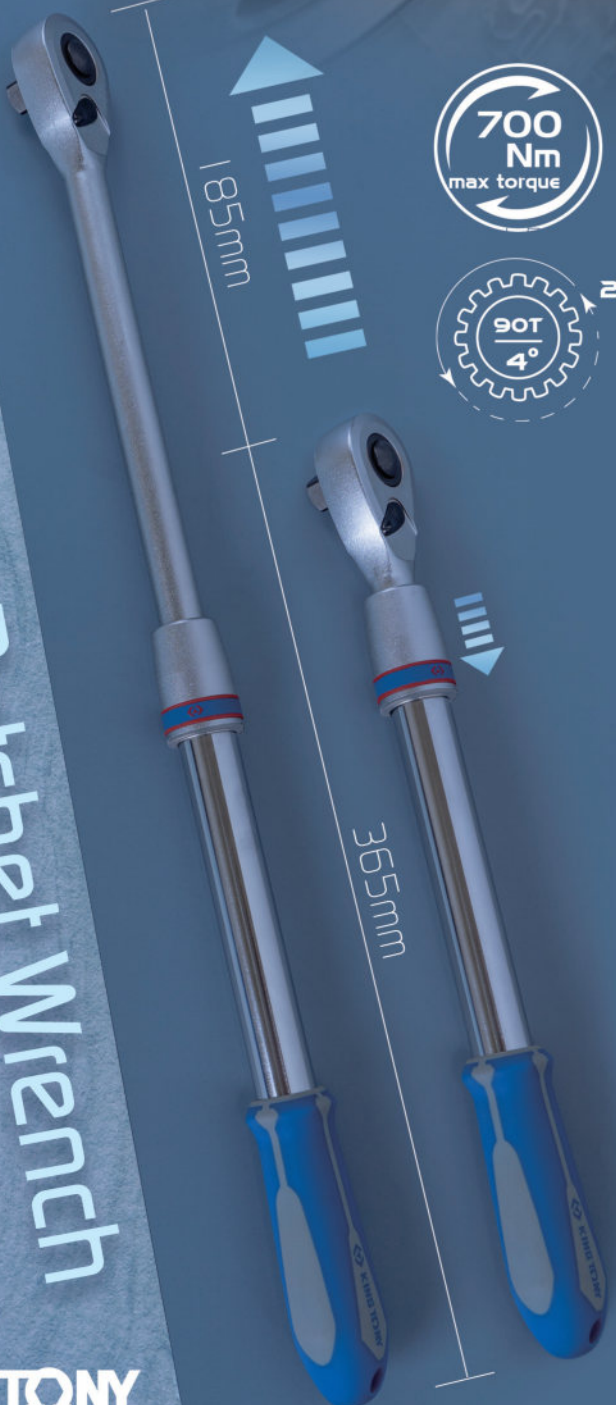

700 Nm max torque

90T 4° 20%

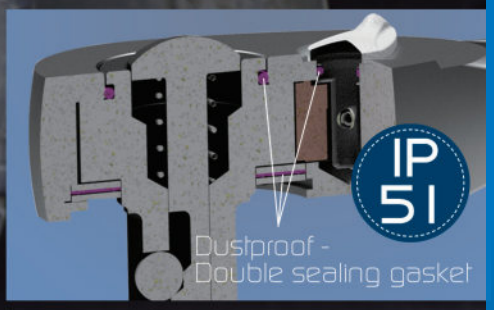





KT NO.	Max L mm	Min L mm	g	
4773-22GS	550	365	1200	1 / 20
477DK		renewal kits		

- Special telescopic design saves storage space
- Pull down to unlock, fix, and quickly adjust
- Dust-proof design to increase product life
- 700N·m torque value, which far exceeds the standard
- Higher torque, less effort. Extra long lever for increased power: max 550 mm
- The long plastic handle has a hook at its end for hanging and working at height
- 4° gear action degree (90 teeth)

KING TONY

Accessory

CAUTION

The offset extension bar has less strength than normal extension bar. Do not use as a normal extension bar.

4121 1/2"

- Adjustable handle
- Push-Lock design



KT NO.	Overall length inch	Overall length mm	g	
4121-11GR	11-1/2	295	535	1 / 20

4251 1/2"

- Extension bar
- DIN 3123



KT NO.	Overall length inch	Overall length mm	g	
4251-02R	2	55	105	12 / 216
4251-03R	3	75	143	6 / 120
4251-04R	4	100	182	4 / 80
4251-05R	5	125	197	4 / 80
4251-06R	6	150	231	4 / 64
4251-08R	8	200	294	4 / 80
4251-10R	10	250	364	4 / 64

4104PR 1/2"

- Extension bar

4 PC.



Contents 0.84 kg 1 / 25

4251 3" 5" 6" 10"

4221 1/2"

- Extension bar
- DIN 3123



KT NO.	Overall length inch	Overall length mm	g	
4221-18	18	450	548	1 / 20
4221-24	24	600	685	1 / 20
4221-30	30	750	860	1 / 20
4221-36	36	900	1055	1 / 20

4223 1/2"

- Offset extension bar, wobble extension bar
- Max. torque : 320 N·m
- DIN 3123



KT NO.	Overall length inch	Overall length mm	g	
4223-02R	2	55	98	12 / 216
4223-05R	5	125	194	4 / 80
4223-10R	10	250	358	4 / 64

4293 1/2"

- Multi-function of extension bar and offset extension bar, wobble extension bar
- Max. torque : 320 N·m
- DIN 3123



KT NO.	Overall length inch	Overall length mm	g	
4293-02	2	55	97	12 / 216
4293-05	5	125	191	4 / 80
4293-10	10	250	356	4 / 64

4311 1/2"

- Speed brace
- DIN 3122



4311-16F



4311-16G

KT NO.	Overall length inch	Overall length mm	g	
4311-16F	16-1/4	412	610	5 / 40
4311-16G	16-1/4	412	499	5 / 40

4452 1/2"

- Flexible handle
- Action degree -180°
- DIN 3122



4452DK



KT NO.	Overall length inch	Overall length mm	g	
4452-15FR	15	375	718	2 / 24
4452-18FR	18	450	810	2 / 20
4452DK	renewal kits(for 15F/18F)		62	-

KT NO.	Overall length inch	Overall length mm	g	
4452-24FR	24	600	1138	20
4452DK1	renewal kits(for 24F)		62	-

4453 1/2"

- Flexible handle
- Action degree -180°
- New pattern design added in firm and powerful elements
- New forge technologies I-Beam shank offer 15% lightweight
- DIN 3122



4452DK



4453-15F



4453-18F

KT NO.	Overall length inch	Overall length mm	g	
4453-15F	15	375	630	2 / 24
4453-18F	18	450	708	2 / 20
4452DK	renewal kits(for 15F/18F)		62	-


Accessory

KT No. & D1

4461 1/2"

- Extends from 18 in. to 24 in.
- This breaker bar has a 180° swivel head and an ergonomically designed handle
- Break free stubborn or stuck fasteners
- Flexible head for multiple angles of use









4462DK

KT NO.	Max.L mm	Min.L mm	g	
4461-24G	600	450	1185	1 / 10
4462DK	renewal kits			

4462 1/2"

- Flexible handle
- Action degree -180°
- DIN 3122



4462DK



KT NO.	Overall length inch	Overall length mm	g	
4462-18F	18	463	1046	1 / 20
4462-24F	24	613	1350	1 / 20
4462DK	renewal kits		-	-

4572 1/2"

- Sliding T-handle
- DIN 3122



4572DK



KT NO.	Overall length inch	Overall length mm	g	
4572-10	10	250	371	2 / 40
4572-12	12	300	426	2 / 40
4572DK	renewal kits		-	-


4573 1/2"

- Sliding T-handle
- DIN 3120





4573DK



KT NO.	Overall length inch	Overall length mm	g	
4573-10R	10	250	470	2 / 40
4573DK	renewal kits		-	-

4581 1/2"


- 90° L-handle
- DIN 3122



KT NO.	Overall length inch	Overall length mm	g	
4581-10	10	250	450	1 / 40

4583 1/2"


- 105° L-handle
- DIN 3120

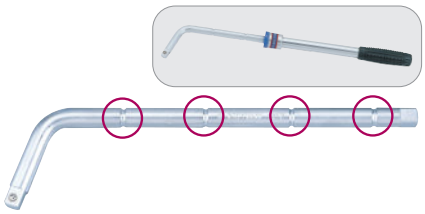

KT NO.	Overall length inch	Overall length mm	g	
4583-12R	12-1/2	315	550	1 / 40

4584 1/2"

- 90° L-handle
- DIN 3120



KT NO.	Overall length inch	Overall length mm	g	
4584-12R	12	300	547	40

4148 1/2"

- Bit holder



KT NO.	Size	Overall length mm	g	
414808S	1/4"	38	50	10 / 200
414810S	5/16"	38	55	10 / 200
414810M	10 mm	38	56	10 / 200

4813 4816 1/2"

- Adapter
- Convert to 3/8" drive or 3/4" drive
- 4813 →Max. torque : 202 N·m
- DIN 3123, ISO 3316



4813
3/8" drive(M)



4816
3/4" drive(M)

1/2" drive(F)


KT NO.	Spec.	g	
4813	1/2"Fx3/8"M	56	10 / 200
4816	1/2"Fx3/4"M	111	10 / 200

Accessory

KT No. & D1

4791R 1/2"

- Univesal joint
- DIN 3120, ISO 3316






KT NO.	Overall length inch	Overall length mm		
4791R	3	77.5	159	5 / 100

4794 1/2"

- Univesal joint
- 30° rotation
- Short pattern design enables greater access in confined spaces





KT NO.	Overall length inch	Overall length mm		
4794	2-3/8	60	105	5 / 180

9113PR 1/4" 3/8" 1/2"

- Universal joint
- Ball point type universal joint & with hex locking design
- Short pattern design enables greater access in confined spaces



3 PC.

Contents		0.20	6 / 108
	2793	31mm	
	3793	43mm	
	4793	59mm	

4844R 1/2"

- 1/2 " drive (1/2 " F x 1/2 " M)
- Finish : Chrome Alloy Steel, chrome plated
- Reversible
- 5° gear action degree (72 teeth)
- Apply to 1/2" accessory (Ex : 4453-15F)
- Apply to 1/2“ torque wrench (Ex : 3446E series)





PAT.

Outer diameter 37 x Height 62 mm

KT NO.	Overall length inch	Overall length mm		
4844R	2-7/16	62	250	1 / 64


KT NO.	Contents			
4122FR	 4844R	 4453-15F	880	1 / 20
4122FR01	 4844R	 4453-18F	958	1 / 20

Magnetic Insert

91000M

- Magnetic insert for sockets
- Powerful retention force
- Reusable
- 11 PC. set, for metric sockets







11 PC.

KT NO.	Size (mm)		
91000M	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm	42	12 / 144

Socket Rail Set

4010MR / 4010SR / 4510MR / 4510SR 1/2"

- Socket rail 230mmL



8 PC.

4010MR/4510MR



4010SR/4510SR

KT NO.	Contents		0.64	4 / 32
4010MR	4330MR	10, 12, 13, 14, 17, 19, 21, 22	8740908	
4510MR	4335MR			
4010SR	4330SR	3/8, 7/16, 1/2, 9/16, 11/16, 3/4, 13/16, 7/8		
4510SR	4335SR			

4208MR10 / 4308MR10 1/2"

- Socket rail 240mmL



8 PC.

KT NO.	Contents		1.22	2 / 12
4208MR10	4230MR	12, 13, 14 17, 19, 21 22, 23	8741108	
4308MR10	4235MR			

4106PR 1/2"

- Socket rail 230mmL



6 PC.

Contents 0.51 4 / 32

4375M E10, E12, E14, E16, E18, E20

8740906

4148PR10 1/2"

- Socket rail 240mmL



8 PC.

Contents 1.24 2 / 12

4275M E10, E12, E14, E16, E18, E20, E22, E24

8741108

4118MR 1/2"

- Socket rail 230mmL



8 PC.

Contents 0.57 4 / 32

4014M RB8, RB9.5, RB10, RB10.5, RB12, RB12.7, RB13.5, RB19

8740908

4311MR 1/2"

- Socket rail 230mmL



11 PC.

Contents 0.92 2 / 12

4335MR 10, 11, 13, 14, 15, 17, 18, 19

4725-10GR 4572-10

4251-05R 8740908

Bit Socket Rail Set

4110PR10 1/2"

- Socket rail 240mmL
- For hex head screw
- H : 60mm



9 PC.

Contents 0.77 2 / 12

4025 H3, H4, H5, H6, H7, H8, H10, H12, H14

8741009

4110SR10 1/2"

- Socket rail 240mmL
- For hex head screw
- H : 60mm



9 PC.

Contents 1.22 2 / 12

4025S 3/16, 7/32, 1/4, 9/32, 5/16, 3/8, 1/2, 9/16, 5/8

8741009

Bit Socket Rail Set

4120PR10 1/2"

- Socket rail 240mmL
- For hex head screw
- H : 80mm

9 PC.



Contents	1.0 kg	2 / 12
4035	H4, H5, H6, H7, H8, H10, H12, H14, H17	
8741009		

4108PR10 1/2"

- Socket rail 240mmL
- For hex head screw
- H : 60mm

8 PC.



Contents	0.96 kg	2 / 12
4025	H6, H7, H8, H10, H12, H14, H17, H19	
8741009		

4126PR 1/2"

- Socket rail 127mmL
- For spline head screw
- H : 60mm

4 PC.



Contents	0.38 kg	4 / 32
4026	M6, M8, M10, M12	
8740504		

4105PR 1/2"

- Socket rail 150mmL
- For spline head screw
- H : 60 & 66 mm

5 PC.



Contents	0.57 kg	4 / 32
4026	M8, M10, M12, M14	
402B	M16	
8740605		

4136PR 1/2"

- Socket rail 127mmL
- For spline head screw
- H : 80mm

4 PC.



Contents	0.46 kg	4 / 32
4036	M6, M8, M10, M12	
8740504		

4109PR10 1/2"

- Socket rail 240mmL
- For torx head screw
- H : 60mm

9 PC.



Contents	0.74 kg	2 / 12
4023	T20, T25, T27, T30, T40, T45, T50, T55, T60	
8741009		

4119PR10 1/2"

- Socket rail 240mmL
- For torx head screw
- H : 80mm

9 PC.



Contents	0.84 kg	2 / 2
4033	T20, T25, T27, T30, T40, T45, T50, T55, T60	
8741009		

4116PR 1/2"

- Socket rail 180mmL
- For ribe head screw
- H : 100mm

6 PC.




Contents	0.38 kg	4 / 24
4049	M9, M10, M12, M13, M14, M16	
8740706		

Socket Rail

874 1/2"

- Rail length from 160 mm to 560 mm



KT NO.	L (mm)
870406	160
870410	260
870422	560
8740	-

8740809D1 1/2"

- Socket rail carrier with retaining clip
- 446mm roller cabinet



KT NO.	Square drive	Clip	L (mm)
8740809D1	1/2"	9	508

Socket & Wrench Set

4313MR01 1/2"



13 PC.

Contents	1.55	1 / 12
4335MR	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19	
4771-10GR	4251-06R	

4213MR 1/2"



11 PC.

Contents	1.39	1 / 15
4330MR	10, 11, 12, 13, 14, 17, 19, 21, 22	
4766-10G	4251-06R	



Socket Set

4208MR 4208SR
4308MR 1/2"

Metal case size (mm) :
246 x 103 x 38 (0.034 cuft)



8 PC.

4208MR / 4308MR



4208SR

KT NO.	Contents	1.75	1 / 12
4208MR	4230M	12, 13, 14, 17, 19, 21, 22, 23	
4308MR	4235M		
4208SR	4230S	1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16	

4215MR 4315MR 1/2"

Metal case size (mm) :
445 x 135 x 50 (0.107 cuft)



15 PC.

KT NO.	Contents	3.80	1 / 6
4215MR	4230M	10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 24, 27, 30, 32	
4315MR	4235M		

4216MR 4316MR 1/2"

Metal case size (mm) :
445 x 135 x 50 (0.107 cuft)



16 PC.

KT NO.	Contents	3.68	1 / 6
4216MR	4230M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32	
4316MR	4235M		

Bit Socket Set

4109PR

Metal case size (mm) :
198 x 105 x 32 (0.023 cuft)

9 PC.



4109PR

4119PR 1/2"



4119PR

KT NO.	Contents			
4109PR	4023	T20, T25, T27, T30, T40, T45, T50, T55, T60	1.04	1 / 20
4119PR	4033		1.13	1 / 20

4110PR

Metal case size (mm) :
198 x 105 x 32 (0.023 cuft)

9 PC.



4110PR

4120PR 1/2"



4120PR

KT NO.	Contents			
4110PR	4025	H3, H4, H5, H6, H7, H8, H10, H12, H14	1.03	1 / 20
4120PR	4035	H4, H5, H6, H7, H8, H10, H12, H14, H17	1.38	1 / 20

4117PR 1/2"

Metal case size (mm) :
224 x 94 x 40 (0.03 cuft)

7 PC.



Contents — 1.22 — 1 / 8

4026	M6, M8, M10, M12, M14
402B	M16, M18

4128PR 1/2"

Metal case size (mm) :
224 x 94 x 40 (0.03 cuft)

8 PC.



Contents — 1.24 — 1 / 8

4026	M5, M6, M8, M10
402B	M16
4036	M8, M10, M12

Socket Set

4501MR 1/2"

Metal case size (mm) :
392 x 90 x 50 (0.062 cuft)

15 PC.



Contents — 3.28 — 1 / 6

4335MR	8, 10, 11, 12, 13, 14, 17, 19, 21, 22, 24, 27
4779-10FR	4251-05R
4452-15FR	

4511MR 1/2"

Metal case size (mm) :
445 x 187 x 50 (0.147 cuft)

24 PC.



4511MR



4511SR

KT NO. Contents — 5.5 — 1 / 4

4511MR	4335MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	463521RC, 4725-12GR, 4572-10, 4251-05R, 4251-10R, 4223-02R
4511SR	4335SR	3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 25/32, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4	

Socket Set

4012MR / 4012SR / 4512MR / 4512SR 1/2"

Metal case size (mm) :
445 x 135 x 50 (0.106 cuft)



4012MR / 4512MR



4012SR / 4512SR

14 PC.

3.50 kg | 1 / 6

KT NO.		Contents		
4012MR	○ 4330MR	10, 11, 12, 13, 14, 17, 19, 21, 22, 24	○ 463021RC	4768-10F
4512MR	○ 4335MR		○ 463521RC	4572-12
4012SR	○ 4330SR	3/8, 7/16, 15/32, 1/2, 9/16, 11/16, 3/4, 13/16, 7/8, 15/16	○ 463021RC	4251-05R
4512SR	○ 4335SR		○ 463521RC	

4016SR / 4516MR / 4516SR 1/2"

Metal case size (mm) :
370 x 150 x 54 (0.105 cuft)



4516MR



4016SR / 4516SR

16 PC.

3.68 kg | 1 / 6

KT NO.		Contents		
4016SR	○ 4330SR	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1-1/16	○ 463021RC	4791R, 4779-10FR
4516MR	○ 4335MR	10, 11, 12, 13, 14, 17, 19, 21, 23, 24, 27	○ 463521RC	4251-05R
4516SR	○ 4335SR	3/8, 7/16, 15/32, 1/2, 9/16, 5/8, 3/4, 13/16, 15/16, 1, 1-1/16	○ 463521RC	4452-15FR

4220MR

Metal case size (mm) :
445 x 135 x 50 (0.106 cuft)

3.83 kg | 1 / 6

KT NO.	Contents		
4220MR	○ 4330MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27	4755-10G, 4251-05R, 4251-10R, 4791R
4320MR	○ 4335MR		

4320MR 1/2"



20 PC.

4223MR 1/2"

Metal case size (mm) :
490 x 205 x 52 (0.185 cuft)

4.7 kg | 1 / 3

Contents

○ 4330MR — 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 27, 30, 32, 34

4771-10G, 4461-24G, 4791R, 4251-05R



22 PC.

Socket Set

4031MR | 4031SR | 4531MR | 4531SR 1/2"

Metal case size (mm) :
445 x 187 x 50 (0.147 cuft)



4031MR / 4531MR



4031SR / 4531SR

23 PC.

KT NO.		Contents	Kg 5.3 / 1 / 4
4031MR	4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	4779-10GR; 4251-05R 4251-10R
4531MR	4335MR		
4031SR	4330SR	5/16, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 25/32, 13/16, 7/8, 15/16, 1, 1-1/16, 1-3/16, 1-1/4	4452-15FR; 4791R
4531SR	4335SR		

4024MR | 4024SR | 4524MR | 4524SR
4033MR | 4033SR | 4533MR | 4533SR 1/2"

Metal case size (mm) :
445 x 187 x 50 (0.147 cuft)



4024SR / 4524SR



4024MR / 4524MR



4033SR / 4533SR



4033MR / 4533MR

24 PC.

KT NO.		Contents		Kg 5.7 / 1 / 4
4033SR	4330SR	5/16, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 25/32, 13/16, 7/8, 15/16, 1, 1-1/16, 1-3/16, 1-1/4	463021RC	4779-10BR; 4121-11GR
4533SR	4335SR		463521RC	
4033MR	4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	463021RC	4223-02R
4533MR	4335MR		463521RC	
4024SR	4330SR	3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 25/32, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4	463021RC	4573-10
4524SR	4335SR		463521RC	
4024MR	4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	463021RC	4725-12BR; 4583-12R
4524MR	4335MR		463521RC	

Socket Set

4224MR / 4324MR 1/2"

Metal case size (mm) :
445 x 187 x 50 (0.147 cuft)

24 PC.



4224MR / 4324MR

KT NO.		Contents					Kg 5.3	1 / 4
4224MR	○ 4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	4779-10GR	4452-18FR	4572-12	4251-05R 4251-10R	4791R	
4324MR	○ 4335MR							

4028MR / 4028SR / 4528MR / 4528SR 1/2"

Metal case size (mm) :
445 x 187 x 50 (0.147 cuft)

24 PC.



4028MR / 4528MR



4028SR / 4528SR

KT NO.		Contents				Kg 5.3	1 / 4
4028MR	○ 4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	○ 463021RC	4779-10GR	4791R		
4528MR	○ 4335MR		○ 463521RC		4251-05R 4251-10R		
4028SR	○ 4330SR	3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 25/32, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4	○ 463021RC	4779-10GR	4572-10		
4528SR	○ 4335SR		○ 463521RC				

4032MR / 4032SR / 4532MR / 4532SR 1/2"

Metal case size (mm) :
445 x 187 x 50 (0.147 cuft)

24 PC.



4032MR / 4532MR



4032SR / 4532SR

KT NO.		Contents				Kg 5.3	1 / 4
4032MR	○ 4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	○ 463021RC	4779-10FR	4251-05R 4251-10R		
4532MR	○ 4335MR		○ 463521RC				
4032SR	○ 4330SR	5/16, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 25/32, 13/16, 7/8, 15/16, 1, 1-1/16, 1-3/16, 1-1/4	○ 463021RC	4452-15FR	4791R		
4532SR	○ 4335SR		○ 463521RC				

Socket Set

4325MR 1/2"

Metal case size (mm) :
445 x 187 x 50 (0.147 cuft)

Contents — 5.3 kg — 1 / 4

○	4335MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32
	4779-10GR	4251-05R, 4251-10R, 4791R
	4311-16G	4572-10



24 PC.

4026MR 4026SR 4526MR 4526SR
4026MR03 4026SR03 4526MR03 4526SR03

4026MR04 1/2"

Metal case size (mm) :
445 x 187 x 50 (0.147 cuft)



4026MR / 4526MR



4026SR / 4526SR

24 PC.



4026SR03 / 4526SR03



4026MR03 / 4526MR03



4026MR04

KT NO.		Contents			
4026MR	○ 4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	○ 463021RC	4768-10F	
4526MR	○ 4335MR		○ 463521RC		
4026MR03	○ 4330MR	8, 10, 11, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	4791R	4779-10GR	4452-15FR
4526MR03	○ 4335MR				4572-12
4026MR04	○ 4330MR			4755-10G	4251-05R, 4251-10R
4026SR	○ 4330SR	5/16, 3/8, 7/16, 15/32, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 25/32, 13/16, 7/8, 15/16, 1, 1-1/16, 1-3/16, 1-1/4	○ 463021RC	4768-10F	
4526SR	○ 4335SR		○ 463521RC		
4026SR03	○ 4330SR		4791R	4779-10GR	
4526SR03	○ 4330MR				

Socket Set

4033MR03

Metal case size (mm) :
445 x 187 x 50 (0.147 cuft)

4533MR03 1/2"

24 PC.



4033MR03 / 4533MR03

KT NO.			Contents			4.43	1 / 4
4033MR03	○	4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	4791R	4779-10BR	4223-02R	
4533MR03	○	4335MR		4121-11GR	4573-10	4583-12R	

4030CR

Metal case size (mm) :
445 x 187 x 50 (0.147 cuft)

4030CR01 1/2"

30 PC.



4030CR



4030CR01

KT NO.			Contents				
4030CR	○	4330MR	10, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 30, 32	4768-10P	4452-15FR	4791R	4.90	1 / 4
4030CR01	○	4330SR	7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1	4779-10GR	4251-05R	4813	4.92	

4034MR

4034MR06

4534MR

4534MR06 1/2"

Metal case size (mm) :
476 x 282 x 57 (0.27 cuft)

33 PC.



4034MR / 4534MR



4034MR06 / 4534MR06

KT NO.			Contents				
4034MR	○	4330MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32	○ 463021RC	○ 463516RC	4251-03R 4251-05R 4251-10R	7.6	1 / 2
4534MR	○	4335MR		○ 463521RC	4779-10FR	4572-12		
4034MR06	○	4330MR		○ 463014RC	4779-10GR	4452-18FR	7.9	
4534MR06	○	4335MR		○ 463016RC		4791R		

Socket Set

4535MR 1/2"

Metal case size (mm) :
445 x 187 x 50 (0.147 Cuft)

Contents		4.46	1 / 4
4335MR	10, 11, 12, 13, 14, 15, 17, 19, 21, 22, 24, 27, 30, 32		
1836H	H5, H6, H7, H8, H10, H12		
1836T	T25, T27, T30, T40, T45, T50		
1836P	PH2, PH3		
463516RC	463514RC		

4251-05R
4251-10R
4771-10GR
4794
414810S



35 PC.

4042CR 4042CR02 4542CR 4542CR02 1/2"

Metal case size (mm) :
476 x 282 x 57 (0.27 cuft)



4042CR / 4542CR



4042CR02 / 4542CR02

42 PC.

KT NO.	Contents				8.5	1 / 2
4042CR	4330MR	4330SR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32 5/16, 3/8, 7/16, 1/2, 9/16, 19/32, 5/8, 11/16, 3/4, 25/32, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4	463021RC	4768-10F	4452-18FR
4542CR	4335MR	4335SR		463521RC		4251-05R 4251-10R
4042CR02	4330MR	4330SR		4779-10GR		
4542CR02	4335MR	4335SR		4791R		4572-12

4044CR 4544CR 1/2"

Metal case size (mm) :
476 x 282 x 57 (0.27 cuft)

KT NO.	Contents		8.5	1 / 2
4044CR	4330MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 30, 32	4779-10BR	
	4330SR	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/8, 1-3/16, 1-1/4	4573-10	
4544CR	4335MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 30, 32	4121-11GR	
	4335SR	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/8, 1-3/16, 1-1/4	4583-12R	
			4791R	
			4223-02R	



43 PC.


Socket Set

4523MRV01

Tray category #8 (375 x 187mm) 1/2"

Plastic case size (mm) :
389 x 230 x 66 (0.208 Cuft)

Contents		3.88 kg	1 / 6
4335MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32		
4771-10GR		4791R	
4572-10		4251-05R 4251-10R	

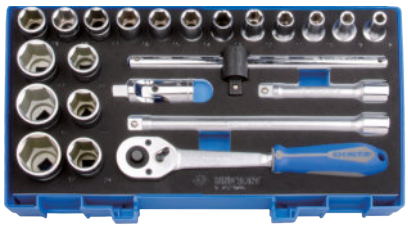

23 PC.

Socket & Tool Set

4524MRV04

Tray category #8 (375 x 187mm) 1/2"

Plastic case size (mm) :
389 x 230 x 66 (0.208 Cuft)

Contents		5.08 kg	1 / 4
4335MR	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 27, 28, 30, 32		
4251R	5, 10		
4793			
4572-12			
4773-22GS			



24 PC.

4526MR15

1/2"

Blow case size (mm) :
422 x 275 x 85 (0.35 cuft)

Contents		5.05 kg	1 / 4
4335MR	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 27, 30, 32		
4779-10FR		4572-12	
4452-15FR	4791R	4251-05R 4251-10R	



24 PC.

4047MR

Blow case size (mm) :
422 x 275 x 85 (0.35 cuft)

KT NO.	Contents		6.62 kg	1 / 2
4047MR	4330MR	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	1120MR H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10 1147R T10H, T15H, T20H, T25H, T27H, T30H, T40H 1411 PH2x100, PH2x150 1412 6.5x100, 6.5x150 4251-05R 4251-10R 4452-15FR 4791R 4572-12 4768-10F 463521RC 6111-07 6311-06	
4547MR	4335MR			

4547MR

1/2"



47 PC.

Socket Set

4306MRN 1/2"

Contents — 2.28 kg — 1 / 8

4335MR	17, 19		
4121-11GR		4251-03R	
4584-12R		4725-12BR	



6 PC.

Impact Driver Set

CAUTION Please wear proper safety gear while working.

4108FR 4111FR 4112FR 1/2"

Metal case size (mm) :
190 x 60 x 48 (0.019 cuft)





KT NO.	PC.	Contents		kg	
4108FR	8	⊖ 1836S 9, 11	⊕ 1836P PH2, PH3 ⊕ 1880P PH2, PH3	1.04	1 / 24
4111FR	6	⊖ 1880S 8, 10	⊕ 1880P PH2, PH3	1.00	
4112FR	6	⊖ 1836S 9, 11	⊕ 1836P PH2, PH3	1.00	

4112
414810S

4505MR 4505SR 1/2"

Metal case size (mm) :
246 x 103 x 38 (0.034 cuft)



10 PC.



10 PC.

kg 1.6 — 1 / 12

KT NO.	Contents	
4505MR	4335MR	8, 10 12, 14
4505SR	4335SR	5/16, 3/8 1/2, 9/16

⊖ 1836S 9, 11 ⊕ 1836P PH2, PH3 — 4112 — 414810S

4116FR01 3/4"

- 3/4"DR. impact driver with knurled grip
- Instant impact force releases rusted or frozen screws without damaging them
- Forward and reverse drive direction
- Comfortable handle with non-slip knurled handle
- Can be used anywhere, no air or power source required
- Max torque: 512N.m for 1/2" DR. convert adapter

kg 1.27 — 1 / 20








Standard Socket

6330M — 3/4"

- Metric-DIN 3124, ISO 2725-1






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
633017M	17	26.0	32.7	14	51	144	8 / 96
633019M	19	30.0	32.7	14	51	164	8 / 96
633021M	21	32.0	32.7	16	51	169	8 / 96
633022M	22	33.0	35.7	16	51	204	8 / 96
633023M	23	34.0	35.7	16	51	210	8 / 96
633024M	24	35.0	35.7	17	51	209	8 / 96
633026M	26	35.7	35.0	17	52	196	8 / 96
633027M	27	38.0	36.0	19	52	219	8 / 96
633028M	28	39.0	36.0	19	52	220	8 / 96
633029M	29	40.0	38.0	19	52	245	8 / 96
633030M	30	42.0	38.0	21	54	274	6 / 48
633032M	32	44.0	38.0	23	56	297	6 / 48
633033M	33	46.0	39.0	23	56	330	6 / 48
633034M	34	47.0	42.0	24	57	377	6 / 48
633035M	35	48.0	42.0	25	58	393	6 / 36
633036M	36	50.0	42.0	25	58	420	6 / 36
633038M	38	52.0	45.0	27	60	468	6 / 36
633041M	41	56.0	45.0	29	64	549	4 / 32
633042M	42	57.0	45.0	29	64	541	4 / 32
633046M	46	62.0	48.0	33	68	673	4 / 32
633048M	48	64.0	48.0	34	70	689	2 / 24
633050M	50	68.0	48.0	34	72	840	2 / 24
633054M	54	72.0	50.0	35	75	943	1 / 20
633055M	55	74.0	50.0	37	76	989	1 / 20
633058M	58	77.0	50.0	37	78	1044	1 / 20
633060M	60	80.0	50.0	40	78	1072	1 / 20
633063M	63	83.0	55.0	40	81	1201	1 / 12
633065M	65	85.0	58.0	43	83	1311	1 / 12
633070M	70	92.0	58.0	46	88	1634	1 / 12

6330S — 3/4"

- Inch-ANSI / ASME B107.1






KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
633022S	11/16	26	35.7	14	50.8	144	8 / 96
633024S	3/4	30	35.7	14	50.8	164	8 / 96
633026S	13/16	32	35.7	16	50.8	169	8 / 96
633028S	7/8	33	35.7	16	51.0	206	8 / 96
633030S	15/16	35	35.7	17	51.0	213	8 / 96
633032S	1	35	35.7	17	52.0	208	8 / 96
633034S	1-1/16	38	36.0	19	52.0	219	8 / 96
633036S	1-1/8	40	38.0	19	52.0	244	8 / 96
633038S	1-3/16	42	38.0	21	54.0	273	6 / 48
633040S	1-1/4	44	38.0	23	56.0	299	6 / 48
633042S	1-5/16	46	39.0	23	56.0	331	6 / 48
633044S	1-3/8	48	42.0	25	58.0	393	6 / 36
633046S	1-7/16	50	42.0	25	58.0	412	6 / 36
633048S	1-1/2	52	45.0	27	60.0	477	6 / 36
633050S	1-9/16	54	45.0	28	62.0	493	4 / 32
633052S	1-5/8	56	45.0	29	64.0	564	4 / 32
633054S	1-11/16	58	45.0	29	65.0	562	4 / 32
633056S	1-3/4	60	48.0	31	66.0	636	4 / 32
633058S	1-13/16	62	48.0	34	68.0	669	4 / 32
633060S	1-7/8	64	48.0	34	70.0	712	2 / 24
633062S	1-15/16	66	48.0	34	70.0	768	2 / 24
633064S	2	68	48.0	34	72.0	826	2 / 24
633066S	2-1/16	70	50.0	35	74.0	893	1 / 20
633068S	2-1/8	72	50.0	35	75.0	944	1 / 20
633070S	2-3/16	74	50.0	37	76.0	957	1 / 20
633072S	2-1/4	76	50.0	37	76.0	962	1 / 20
633074S	2-5/16	78	50.0	37	78.0	1084	1 / 20
633076S	2-3/8	80	50.0	40	78.0	1093	1 / 20
633078S	2-7/16	82	55.0	40	81.0	1160	1 / 12
633080S	2-1/2	84	55.0	40	81.0	1238	1 / 12
633082S	2-9/16	85	58.0	43	83.0	1355	1 / 12
633084S	2-5/8	86	58.0	43	83.0	1277	1 / 12
633086S	2-11/16	90	58.0	43	85.0	1514	1 / 12
633088S	2-3/4	92	58.0	46	88.0	1642	1 / 12



Standard Socket

6335M — 3/4"

- DIN 3124, ISO 2725-1






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	pcs/box
633517M	17	26.0	32.7	14	51	147	8 / 96
633518M	18	28.0	32.7	14	51	155	8 / 96
633519M	19	30.0	32.7	14	51	168	8 / 96
633520M	20	31.0	32.7	16	51	169	8 / 96
633521M	21	32.0	32.7	16	51	173	8 / 96
633522M	22	33.0	35.7	16	51	208	8 / 96
633523M	23	34.0	35.7	16	51	211	8 / 96
633524M	24	35.0	35.7	17	51	216	8 / 96
633525M	25	35.0	35.7	17	52	211	8 / 96
633526M	26	35.7	35.0	17	52	199	8 / 96
633527M	27	38.0	36.0	19	52	226	8 / 96
633528M	28	39.0	36.0	19	52	230	8 / 96
633529M	29	40.0	38.0	19	52	252	8 / 96
633530M	30	42.0	38.0	21	54	287	6 / 48
633531M	31	43.0	38.0	23	55	295	6 / 48
633532M	32	44.0	38.0	23	56	308	6 / 48
633533M	33	46.0	39.0	23	56	345	6 / 48
633534M	34	47.0	42.0	24	57	392	6 / 48
633535M	35	48.0	42.0	25	58	403	6 / 36
633536M	36	50.0	42.0	25	58	438	6 / 36
633537M	37	51.0	45.0	25	59	471	6 / 36
633538M	38	52.0	45.0	27	60	491	6 / 36
633539M	39	53.0	45.0	28	61	499	4 / 32
633540M	40	54.0	45.0	28	62	512	4 / 32
633541M	41	56.0	45.0	29	64	571	4 / 32
633542M	42	57.0	45.0	29	64	573	4 / 32
633543M	43	58.0	45.0	29	65	591	4 / 32
633544M	44	60.0	48.0	31	66	689	4 / 32
633545M	45	61.0	48.0	33	67	687	4 / 32
633546M	46	62.0	48.0	33	68	708	4 / 32
633547M	47	63.0	48.0	33	69	729	4 / 32
633548M	48	64.0	48.0	34	70	708	2 / 24
633549M	49	66.0	48.0	34	70	808	2 / 24
633550M	50	68.0	48.0	34	72	891	2 / 24
633551M	51	69.0	50.0	35	73	911	1 / 20
633552M	52	69.0	50.0	35	73	873	1 / 20
633553M	53	70.0	50.0	35	74	904	1 / 20
633554M	54	72.0	50.0	35	75	968	1 / 20
633555M	55	74.0	50.0	37	76	1025	1 / 20
633556M	56	75.0	50.0	37	76	1052	1 / 20
633557M	57	76.0	50.0	37	76	1017	1 / 20
633558M	58	77.0	50.0	37	78	1067	1 / 20
633559M	59	78.0	50.0	37	78	1127	1 / 20
633560M	60	80.0	50.0	40	78	1145	1 / 20
633562M	62	82.0	55.0	40	81	1258	1 / 12
633563M	63	83.0	55.0	40	81	1304	1 / 12
633564M	64	84.0	55.0	40	81	1300	1 / 12
633565M	65	85.0	58.0	43	83	1422	1 / 12
633570M	70	92.0	58.0	46	88	1800	1 / 12

Deep Socket

KT No. & D1

6230M — 3/4"

- DIN 3124, ISO 2725-1






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	pcs/box
623030M	30	42.0	38.0	31	90	584	1 / 24
623032M	32	44.0	38.0	34	90	568	1 / 24
623033M	33	46.0	39.0	34	90	542	1 / 24
623036M	36	50.0	42.0	37	90	608	1 / 24
623039M	39	53.0	45.0	41	90	666	1 / 24
623041M	41	56.0	45.0	41	90	701	1 / 24
623046M	46	62.0	48.0	46	95	889	1 / 10
623050M	50	68.0	48.0	50	95	1022	1 / 10

6235M — 3/4"

- DIN 3124, ISO 2725-1





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	pcs/box
623517M	17	26.0	32.7	20	90	275	2 / 48
623518M	18	28.0	32.7	20	90	345	2 / 48
623519M	19	30.0	32.7	20	90	325	2 / 48
623520M	20	31.0	32.7	22	90	373	2 / 48
623521M	21	32.0	32.7	22	90	335	2 / 48
623522M	22	33.0	35.7	22	90	391	2 / 48
623523M	23	34.0	35.7	24	90	390	2 / 48
623524M	24	35.0	35.7	24	90	406	2 / 48
623525M	25	35.0	35.7	25	90	399	2 / 48
623526M	26	35.7	35.0	25	90	353	1 / 24
623527M	27	38.0	36.0	28	90	389	1 / 24
623528M	28	39.0	36.0	28	90	397	1 / 24
623529M	29	40.0	38.0	28	90	428	1 / 24
623530M	30	42.0	38.0	31	90	469	1 / 24
623531M	31	43.0	38.0	34	90	472	1 / 24
623532M	32	44.0	38.0	34	90	490	1 / 24
623533M	33	46.0	39.0	34	90	549	1 / 24
623534M	34	47.0	42.0	34	90	591	1 / 24
623535M	35	48.0	42.0	37	90	583	1 / 24
623536M	36	50.0	42.0	37	90	632	1 / 24
623537M	37	51.0	45.0	37	90	687	1 / 24
623538M	38	52.0	45.0	41	90	673	1 / 24
623539M	39	53.0	45.0	41	90	689	1 / 24
623540M	40	54.0	45.0	41	90	713	1 / 24
623541M	41	56.0	45.0	41	90	753	1 / 24
623542M	42	57.0	45.0	46	95	794	1 / 24
623543M	43	58.0	45.0	46	95	816	1 / 10
623544M	44	60.0	48.0	46	95	920	1 / 10
623545M	45	61.0	48.0	46	95	932	1 / 10
623546M	46	62.0	48.0	46	95	940	1 / 10
623547M	47	63.0	48.0	46	95	961	1 / 10
623548M	48	64.0	48.0	50	95	948	1 / 10
623549M	49	66.0	48.0	50	95	1015	1 / 10
623550M	50	68.0	48.0	50	95	1064	1 / 10
623551M	51	69.0	50.0	50	95	1114	1 / 10
623552M	52	69.0	50.0	50	95	1109	1 / 10
623553M	53	70.0	50.0	50	95	1119	1 / 10
623554M	54	72.0	50.0	50	95	1170	1 / 10
623555M	55	74.0	50.0	50	95	1236	1 / 10
623556M	56	75.0	50.0	50	95	1272	1 / 10
623557M	57	76.0	50.0	52	100	1392	1 / 10
623558M	58	78.0	50.0	52	100	1446	1 / 10
623559M	59	78.0	50.0	52	100	1410	1 / 10
623560M	60	80.0	50.0	53	100	1471	1 / 10
623563M	63	83.0	55.0	53	100	1511	1 / 6
623565M	65	85.0	58.0	55	100	1613	1 / 6
623570M	70	92.0	58.0	55	100	1766	1 / 6

Bit Socket

6023 — 3/4"

- For torx internal screw
- DIN 3120
- E.g. on commercial vehicles and agricultural machinery
- Screw of the steering tie lever on commercial vehicles MAN
  602380 : for M series
  6023A0 : for F series



602360 6023A0

KT NO.	Size	L mm	g	
602360	T60	80	246	2/48
602370	T70	80	253	2/48
602380	T80	80	326	2/48
602390	T90	80	332	2/48
6023A0	T100	80	339	2/48

6025 — 3/4"

- HEXAGON head
- DIN 7422



602514 602519

KT NO.	mm	L mm	g	
602514	H14	80	257	2 / 48
602517	H17	80	268	2 / 48
602519	H19	80	278	2 / 48
602522	H22	80	361	2 / 48

Ratchet

6724 — 3/4"

- Reversible ratchet
- 8° gear action degree (45 teeth)
- DIN 3122



6724DK



KT NO.	Overall length inch	mm	g	
6724-20F	20	500	2223	1 / 6
6724DK	renewal kits		-	-

6778 — 3/4"

- Quick release reversible ratchet
- 15° gear action degree (24 teeth)
- DIN 3122



6778DK



KT NO.	Overall length inch	mm	g	
6778-20FS	20	500	2612	1 / 6
6778DK	renewal kits		-	-

Ratchet & Accessory

6779 — 3/4"

- Reversible ratchet
- 15° gear action degree (24 teeth)
- DIN 3122



6779DK




KT NO.	Overall length inch	mm	g	
6779-20F	20	500	2449	1 / 6
6779DK	renewal kits		-	-

6251 — KT No. & D1 — 3/4"



- Extension bar
- DIN 3123



KT NO.	Overall length inch	mm	g	
6251-04	4	100	418	4 / 40
6251-08	8	200	734	2 / 20
6251-16	16	400	1375	1 / 10

6452 — 3/4"

- Flexible handle
- Action degree -180°
- DIN 3122



6452DK



KT NO.	Overall length inch	mm	g	
6452-18F	18	450	1768	1 / 10
6452-30F	30	750	2581	1 / 8
6452DK	renewal kits		-	-

- Material - chrome vanadium alloy steel
- Finishing - polished, chrome plated & black phosphate sunk

6462 — 3/4"

- Flexible Handle
- Action degree-180
- DIN3122



6462DK



KT NO.	Overall length inch	mm	g	
6462-40P	40	1020	3900	1 / 6
6462DK	renewal kits			


Ratchet & Accessory


6482 3/4"


- 180° swivel ratchet head
- 3 position ratchet control : forward / reverse / lock
- Telescopic handle : 620 mm-970 mm
- 15° gear action (24 teeth)
- DIN 3122













6482DK

KT NO.	D mm	Min.L inch	Min.L mm	Max.L inch	Max.L mm	kg	
6482-24G	46	24	620	36	970	3	1 / 6
6482DK	renewal kits						

6572 3/4"

- Sliding T-handle
- DIN 3122



6572DK



KT NO.	Overall length inch	Overall length mm	g	
6572-20	20	500	1542	1 / 10
6572DK	renewal kits		-	-

6581 3/4"

- 90° L-handle



KT NO.	Overall length inch	Overall length mm	g	
6581-12	12	300	1307	10
6581-18	18	450	1939	12

6585 3/4"

- Double driver L-handle 90°



KT NO.	Overall length inch	Overall length mm	g	
6585-19	19	478	2010	12

6791 3/4"

KT No. & D1

- Universal joint
- DIN 3123, ISO 3316



KT NO.	Overall length inch	Overall length mm	g	
6791	4-1/4	108	571	2 / 20

6814 / 6818 3/4"

- Adapter
- Convert to 1/2" drive or 1" drive
- 6814→Max. torque : 512 N·m
- DIN 3123, ISO 3316

KT No. & D1



6814 / 6818

KT NO.	Spec.	g	
6814	3/4"F x 1/2"M	120	8 / 96
6818	3/4"F x 1"M	296	6 / 60

Socket Rail

8760807D1 3/4"

- Socket rail carrier with retaining clip
- 446mm roller cabinet





KT NO.	Square drive	Clip	L (mm)
8760807D1	3/4"	7	508
8760			

Socket Set

6014MR / 6314MR 3/4"

Metal case size (mm) :
537 x 177 x 78 (0.26 cuft)


6014MR


6314MR

14 PC.

KT NO.		Contents	Kg 13.8	1
6014MR	6330M	22, 24, 27, 30, 32, 36, 38, 41, 46, 50	6779-20F, 6251-08, 6251-16, 6572-20	
6314MR	6335M			

6016MR / 6316MR / 6016SR 3/4"

Metal case size (mm) :
537 x 177 x 78 (0.26 cuft)


6316MR


6016MR/6016SR

16 PC.

KT NO.		Contents	Kg 14.0	1
6016MR	6330M	21, 22, 23, 24, 27, 30, 32, 36, 38, 41, 46, 50	6779-20F, 6251-08, 6251-16, 6572-20	
6316MR	6335M			
6016SR	6330S	7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4, 1-3/8, 1-1/2, 1-5/8, 1-3/4, 1-7/8, 2		

6023MR / 6323MR / 6023SR 3/4"

Metal case size (mm) :
537 x 177 x 78 (0.26 cuft)


6323MR


6023MR/6023SR

23 PC.

KT NO.		Contents	Kg 17.1	1
6023MR	6330M	21, 22, 23, 24, 26, 27, 28, 29, 30, 32, 34, 35, 36, 38, 41, 46, 50	6779-20F, 6251-04, 6251-08, 6251-16, 6572-20, 6791	
6323MR	6335M			
6023SR	6330S	7/8, 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4, 1-5/16, 1-3/8, 1-7/16, 1-1/2, 1-9/16, 1-5/8, 1-3/4 1-13/16, 1-7/8, 2		

6224CR 3/4"

Metal case size (mm) :
537 x 177 x 78 (0.26 cuft)



24 PC.

KT NO.		Contents	Kg 17.9	1
6224CR	6330M	22, 24, 27, 30, 32, 36, 38, 41, 46, 50	6779-20F, 6251-08, 6251-16, 6572-20	
	6330S	1, 1-1/8, 1-1/4, 1-5/16, 1-3/8, 1-7/16, 1-1/2, 1-5/8, 1-3/4, 2		

Socket Set

6226CR — 3/4"

Metal case size (mm) :
537 x 177 x 78 (0.26 cuft)



26 PC.

KT NO. | Contents | 17.2 | 1

KT NO.		Contents
6226CR	○ 6330M	22, 24, 27, 30, 32, 36, 38, 41, 46, 50
	○ 6330S	7/8, 15/16, 1, 1-1/8, 1-3/16, 1-5/16, 1-3/8, 1-7/16, 1-5/8, 1-3/4, 1-7/8, 2

6251-04
6251-08
6572-20
6452-18F

6014MR12

Blow case size(mm) :
422 x 372 x 92 (0.51 cuft)



Contents | 10.8 | 1 / 2

○ 6330M	22, 24, 27, 30, 32, 36, 38, 41, 46, 50
6251-04 6251-08	6779-20F
6572-20	

6314MR12 — 3/4"

Blow case size(mm) :
422 x 372 x 92 (0.51 cuft)



14 PC.

Contents | 10.8 | 1 / 2


○ 6335M	22, 24, 27, 30, 32, 36, 38, 41, 46, 50
6251-04 6251-08	6779-20F
6572-20	



Socket Set

8330M 1"

- DIN 3124, ISO 2725-1






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
833036M	36	52	48	26	65	514	1 / 24
833038M	38	54	48	26	65	536	1 / 24
833041M	41	58	50	29	70	659	1 / 24
833046M	46	65	54	32	75	961	1 / 24
833050M	50	70	54	34	75	985	1 / 20
833054M	54	74	57	38	80	1164	1 / 20
833055M	55	76	57	42	83	1256	1 / 12
833058M	58	79	57	42	83	1263	1 / 12
833060M	60	82	58	46	87	1488	1 / 12
833063M	63	86	58	46	87	1548	1 / 12
833065M	65	88	65	49	90	1817	1 / 12
833067M	67	91	70	49	91	1932	1 / 12
833070M	70	94	70	50	93	2064	1 / 8
833071M	71	95	70	50	93	2026	1 / 8
833075M	75	100	70	50	95	2168	1 / 8
833077M	77	103	80	52	100	2732	1 / 8
833080M	80	107	80	52	100	3009	1 / 8

8330S 1"

- ANSI / ASME B107.1





KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
833046S	1-7/16	52	48	26	65	506	1 / 24
833048S	1-1/2	54	48	26	65	537	1 / 24
833054S	1-11/16	60	54	29	70	741	1 / 24
833060S	1-7/8	67	54	34	75	912	1 / 10
833064S	2	71	54	34	75	989	1 / 10
833072S	2-1/4	78	57	42	83	1267	1 / 12
833076S	2-3/8	82	58	46	87	1452	1 / 12
833084S	2-5/8	90	65	49	90	1825	1 / 12
833094S	2-15/16	100	70	52	95	2076	1 / 8
8330A0S	3-1/8	107	80	52	100	2975	1 / 8

Ratchet

8779 1"

- Reversible ratchet
- 15° gear action degree (24 teeth)
- DIN 3122



8779DK




KT NO.	Overall legth inch	mm	g	
8779-32F	32	800	4400	5
8779DK	renewal kits		-	-

Accessory

- Chrome vanadium handle, chrome molybdenum driver
- Chrome plated handle & black phosphate sunk driver

8251 1"

- Extension bar
- DIN3123



KT NO.	Overall length inch	mm	g	
8251-08	8	200	1364	1 / 16
8251-16	16	400	2555	1 / 10

8462 1"

- Flexible Handle
- Action degree-180
- DIN3122



8462DK



KT NO.	Overall length inch	mm	g	
8462-40P	40	1020	3950	1 / 6
8462DK	renewal kits			

8572 1"

- Sliding T-handle
- DIN 3122



8572DK



KT NO.	Overall length inch	mm	g	
8572-25	25	630	4200	6
8572DK	renewal kits		-	-

8581 1"

- L-handle
- DIN 3122



KT NO.	Overall length inch	mm	g	
8581-26	26	660	5182	4

8816 1"

- Adapter
- Convert to 3/4" drive
- Max. torque : 1412 N·m
- DIN 3123, ISO 3316

3/4" drive(M)



← 1" drive(F)

KT NO.	Spec.	g	
8816	1"F x 3/4"M	309	6 / 48

Socket Set

8015MR

Metal case size (mm) :
660 x 205 x 108 (0.52 cuft)

8015SR 1"



14 PC.


KT NO.	Contents	34.1	1
8015MR	8330M: 36, 41, 46, 50, 55, 60, 65, 70, 75, 80	8779-32F	8251-08, 8251-16
8015SR	8330S: 1-7/16, 1-1/2, 1-11/16, 1-7/8, 2, 2-1/4, 2-3/8, 2-5/8, 2-15/16, 3-1/8		8572-25

Socket Rail Set

7112PR

- Socket rail 260mmL
  - Rail with 5 PC. 3/8" & 6 PC. 1/2" drive clip

12 PC.

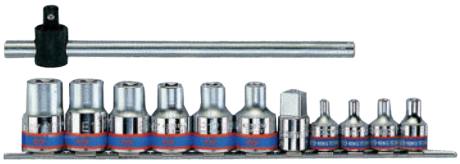

Contents	0.76	2 / 24
3375M	E4, E5, E6, E8	
4375M	E10, E12, E14, E16, E18, E20	
3571-08	8771011	3814

7113PR 3/8"+1/2"

- Socket rail 260mmL
  - Rail with 6 PC. 3/8" drive & 6 PC. 1/2" drive clip

12 PC.



Contents	0.6	2 / 24
3375M	E4, E5, E6, E7, E8, E11	
4375M	E10, E12, E14, E16, E18, E20	
8771012		

Socket Set

7120PR

Metal case size (mm) :
296 x 130 x 41 (0.056 cuft)

KT NO.	Contents	1.79	1 / 10
7120PR	4023: T30, T40, T45, T50, T55	3375M	E6, E7, E8, E10
		4375M	E12, E14, E16, E18, E20
7120PR01	4027: T30H, T40H, T45H, T50H, T55H	3023	T10, T15, T20, T25, T27
		4813	

7120PR01 3/8"+1/2"



20 PC.

Socket Set

5022MR　5522MR　5022SR　1/4"+3/8"

Metal case size (mm) :
285 x 135 x 45 (0.059 cuft)



5022MR / 5522MR



5022SR

21 PC.

KT NO.	Contents			1.60 / 1 / 10
5022MR	○ 3330M	10, 11, 12, 13, 14, 17, 19	○ 2335M 4, 5, 5.5, 6, 7, 8, 9	○ 363021
5522MR	○ 3335M			○ 363521
5022SR	○ 2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32	○ 363021	○ 363516
	○ 3330S	3/8, 7/16, 15/32, 1/2, 9/16, 11/16, 3/4		

3769-08F　3221-03　3221-06　3812　2179DF

5039CR　1/4"+3/8"

Metal case size (mm) :
318 x 147 x 46 (0.076 cuft)

Contents		2.60 / 1 / 10
○ 2335M		4.5, 5, 6, 7, 8, 9, 10, 11, 12
○ 2335S		3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2
○ 3330M		9, 10, 11, 12, 13, 14, 16, 17, 19
○ 3330S		3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4

3769-08F　3221-03　2179DF　○ 363021　3812



39 PC.

7558MR　1/4"+1/2"

Metal case size (mm) :
445 x 187 x 50 (0.147 cuft)

Contents		3.8 / 1 / 4
○	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
○	4335MR	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24
⊖	1025S	4, 6, 8
⊕	1025P	PH1, PH2, PH3
⬢	1025H	H3, H4, H5, H6, H7, H8
✿	1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H
✳	1025Z	PZ1, PZ2, PZ3

2779-55G　4779-10GR　2792　4791R　2141

2221-02
2221-04　4251-05R　2179DF



58 PC.

Socket Set

9063MR
9563MR
9063MR01
9563MR01 1/4"+3/8"+1/2"

Metal case size (mm) :
476 x 282 x 57 (0.27 cuft)



9063MR/9563MR



9063MR01/9563MR01

62 PC.

KT NO.		Contents			7.4	1 / 2
9063MR	○ 4330MR ○ 3330M	4330MR / 4335MR 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32 3330M / 3335M 8, 9, 10, 11, 12, 13, 14, 15, 17, 19	○ 363021	4768-10F 3769-08F	○ 2335M	4, 4.5, 5, 6, 7, 8, 9, 10, 11, 12
9563MR	○ 4335MR ○ 3335M		○ 363521	○ 3235M 12, 14, 17, 19	◉ 3023 ◉ 3025	T20, T25, T27, T30, T40 H4, H5, H6, H8, H10
9063MR01	○ 4330MR ○ 3330M		○ 363021	4755-10G 3779-08G	2571-45 3571-08 4572-12	2221-04 3221-06 4251-06R
9563MR01	○ 4335MR ○ 3335M		○ 363521	○ 3235M 10, 13, 17, 19	3792 4791R 3812	

9033CR 1/4"+3/8"+1/2"

Metal case size (mm) :
450 x 370 x 56 (0.329 cuft)

Contents		12.3	1 / 2
○	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13	
○	2335S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2	
○	2235M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13	
○	2235S	5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2	
○	3330M	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22	
○	4330MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 30, 32	
○	4330SR	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/8, 1-3/16, 1-1/4	
◉	2015M	H3, H4, H5, H6, H8, H10	
◉	2015S	1/8, 3/16, 7/32, 1/4, 5/16, 3/8	
⊕	2011X	PH1, PH2, PH3, PH4	
◉	1115-03	H1.5, H2, H2.5	



135 PC.

Contents


463516RC, 463021RC, 2179DF, 2452-05F
3769-08F, 4768-10F, 2571-45, 4572-10
2221-02, 2221-04, 3221-03, 3221-06, 4251-05R, 4251-10R, 3812, 3792, 4791R
2561 cross bar. 4-1/2"L
3840 3/8" drive spin disc.
4840 1/2" drive spin disc.

Socket & Tool Set

7096MR

7596MR 1/4"+1/2"

Blow case size (mm) :
422 x 275 x 85 (0.35 cuft)

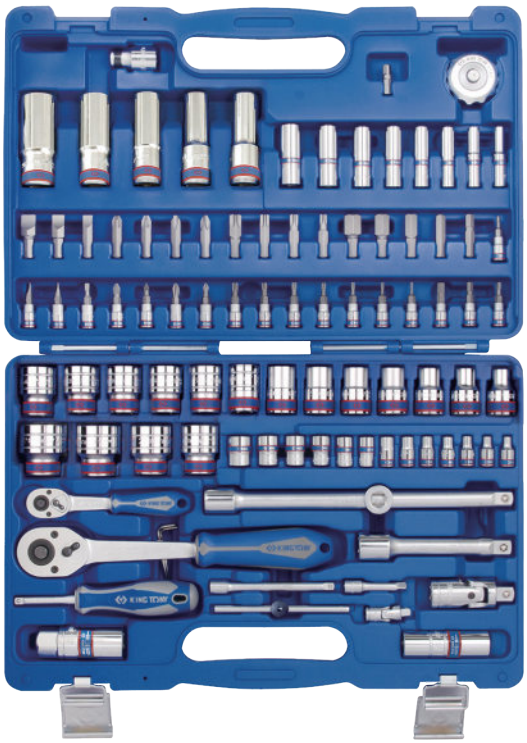

96 PC.

6.22 | 1 / 4


KT NO.	Contents		
7096MR	2330M 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	2031 PH1, PH2	2771-55G
	2230M 6, 7, 8, 9, 10, 11, 12, 13	2032 4, 5.5, 6.5	2178DF
	4230M 14, 15, 17, 19, 22	2033 T8, T10, T15, T20, T25, T27, T30	4771-10GR
	4330MR 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32	2035 H3, H4, H5, H6	2571-45
	4630RC 16, 21	2038 PZ1, PZ2	4222-10
		1836P PH3, PH4	2221-02 2221-04
7596MR	2335M 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	1836S 8x1.2, 10x1.6, 12x2.0	4251-05R
	2235M 6, 7, 8, 9, 10, 11, 12, 13	1836T T40, T45, T50, T55	2792 4791R
	4235M 14, 15, 17, 19, 22	1836H H7, H8, H10, H12, H14	3824
	4335MR 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32	1836Z PZ3, PZ4	414810S
	4635RC 16, 21	1115-03 1.5, 2, 2.5	7702-25
			2745


Socket & Tool Set

7011MR

7511MR 1/4"+1/2"

Blow case size (mm) :
422 x 275 x 85 (0.35 cuft)

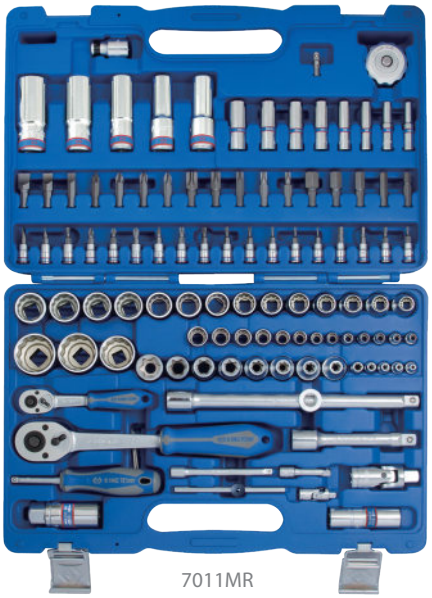
7011MR

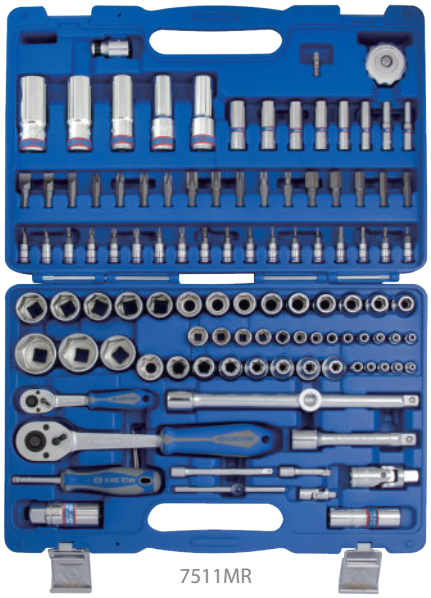
7511MR

110 PC.

KT NO. | Contents | 6.90 | 1 / 4

7011MR

- 2330M — 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
- 2230M — 6, 7, 8, 9, 10, 11, 12, 13
- 4230M — 14, 15, 17, 19, 22
- 4330MR — 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32
- 463016RC
- 463021RC

7511MR

- 2335M — 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
- 2235M — 6, 7, 8, 9, 10, 11, 12, 13
- 4235M — 14, 15, 17, 19, 22
- 4335MR — 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32
- 463516RC
- 463521RC

Contents

- 2375M — E4, E5, E6, E7, E8
- 4375M — E10, E11, E12, E14, E16, E18, E20, E24
- 2031 — PH1, PH2
- 2032 — 4, 5.5, 6.5
- 2033 — T8, T10, T15, T20, T25, T27, T30
- 2035 — H3, H4, H5, H6
- 2038 — PZ1, PZ2
- 1836P — PH3, PH4
- 1836S — 8x1.2, 10x1.6, 12x2.0
- 1836T — T40, T45, T50, T55, T60
- 1836H — H7, H8, H10, H12, H14
- 1836Z — PZ3, PZ4
- 1115-03 — 1.5, 2, 2.5
- 2771-55G
- 4771-10GR
- 2178DF
- 2221-02
- 2221-04
- 4222-10
- 4251-05R
- 2571-45
- 3824
- 414810S
- 2792
- 4791R
- 2745
- 7702-25

Socket & Tool Set

7082MR

7582MR 1/4"+1/2"

Blow case size (mm) :
422 x 275 x 85 (0.35 cuft)

83 PC.





KT NO. | Contents | 5.65 | 1 / 4

7082MR


2330M — 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14


4330MR — 14, 15, 16, 17, 18, 19, 20, 22, 24, 27, 30, 32


463016RC


463021RC


1060 — 8, 10, 11, 12, 13, 14, 17, 19


2031 — PH1, PH2


2032 — 4, 5.5, 6.5


2033 — T8, T10, T15, T20, T25, T27, T30


2035 — H3, H4, H5, H6


2038 — PZ1, PZ2


1836P — PH3, PH4


1836S — 8x1.2, 10x1.6, 12x2.0


1836H — H8, H10, H12, H14


1836T — T40, T45, T50, T55


1836Z — PZ3, PZ4


2771-55G


4771-10GR


2178DF

2221-02
2221-04

2312-06

2571-45

4251-05R

4222-10


79831


2792
4791R

7702-25


3824


414810S

7582MR


2335M — 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14


4335MR — 14, 15, 16, 17, 18, 19, 20, 22, 24, 27, 30, 32


463516RC


463521RC

Socket Set

7077MR

7577MR 1/4"+1/2"

Blow case size (mm) :
422 x 360 x 110 (0.59 Cuft)



77 PC.

7.52 | 1 / 2

KT NO.	Contents		
7077MR	2330M 4, 5, 6, 7, 8, 9, 10, 11, 12	463016RC	1115-03 1.5, 2, 2.5
	2230M 8, 10, 12, 13		1025P PH1, PH2, PH3
	4330MR 12, 13, 14, 15, 17, 18, 19, 21, 22, 24, 27, 30, 32	463021RC	1025S 3, 4, 5, 6
			1025H H3, H4, H5, H6
			1025T T10, T15, T20, T25, T27, T30, T40
7577MR	2335M 4, 5, 6, 7, 8, 9, 10, 11, 12	463516RC	1421 PH1 x 80, PH2 x 100, PH3 x 150
	2235M 8, 10, 12, 13		1422 4 x 100, 6.5 x 100
	4335MR 12, 13, 14, 15, 17, 18, 19, 21, 22, 24, 27, 30, 32	463521RC	1060 8, 10, 12, 13, 14, 15, 17, 19

2771-55G
4771-10GR
6111-07
6516-10
2178DF
7821-50
2571-45
2221-03
2312-06
4222-10
4251-05R
2792
4791R
3824
2141

Socket & Tool Set

7081MR

7581MR

7581MR01 1/4"+1/2"

Blow case size (mm) :
422 x 360 x 110 (0.59 cuft)

81 PC.





7581MR01





7581MR / 7081MR

7.14 1 / 2

KT NO.			Contents	
7081MR	2330M 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 4330MR 10, 11, 12, 13, 14, 15, 17, 19, 22, 24	4771-10GR	463016RC 463021RC	1421 PH1 x 80, PH2 x 100 1422 4 x 100, 5.5 x 125, 6.5 x 150 1025H H3, H4, H5, H6, H7, H8 1025T T20, T25, T30, T40 1120MR H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10 1147R T10H, T15H, T20H, T25H, T27H, T30H, T40H 1060 6, 7, 8, 10, 12, 13, 14, 15, 17, 19 276A-04G 6111-06 6311-06 6516-10 76104-05 76215-05 76404-06 2221-04 9DC22 79831 7821-50 4251-05R 750-60 2792 4791R
7581MR	2335M 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13	4771-10GR	463516RC	
7581MR01	4335MR 10, 11, 12, 13, 14, 15, 17, 19, 22, 24	4755-10G	463521RC	

Socket & Tool Set

7087MR

7587MR01

7587MR

7587SR 1/4"+1/2"

Blow case size (mm) :
422 x 360 x 110 (0.59 cuft)

87 PC.



7087MR / 7587MR



7587MR01



7587SR

Kg 9.2 / 1 / 2

KT NO.	Contents		
7087MR	2330M: 5, 5.5, 6, 7, 8, 10, 11, 12, 13 2230M: 7, 8, 10, 12, 13 20107MR01 4330MR: 10, 12, 13, 14, 15, 17, 18, 19, 21, 22, 24, 27, 30, 32 1060: 8, 10, 12, 13, 14, 15, 17, 18, 19, 22	2312-06 463016RC	1636H: H5, H6, H7, H8, H10, H12 1636M: M6, M8, M10, M12 1636T: T30, T40, T45, T50, T55, T60 1421: PH1 x 80, PH2 x 100 1422: 4 x 100, 5.5 x 100 463014RC, 414810M, 4791R, 2792 4251-05R, 2571-45, 4453-15FR 2779-55G, 4779-10GR, 6111-06 6231-07, 6516-10, 20407PR 19980016, 19980410
7587MR	2335M: 5, 5.5, 6, 7, 8, 10, 11, 12, 13 2235M: 7, 8, 10, 12, 13 4335MR: 10, 12, 13, 14, 15, 17, 18, 19, 21, 22, 24, 27, 30, 32 1060: 8, 10, 12, 13, 14, 15, 17, 18, 19, 22 463516RC 20107MR01	2312-06 2221-06	
7587MR01			
7587SR	2335S: 5/32, 3/16, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2 2235S: 9/32, 5/16, 3/8, 7/16, 1/2 20107SR 4335SR: 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 25/32, 13/16, 7/8, 15/16, 1-1/16, 1-1/8, 1-1/4 5060: 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 11/16, 3/4, 13/16, 7/8	2312-06 463516RC	

Socket & Tool Set

7098MR

7598MR 1/4"+1/2"

Blow case size (mm) :
422 x 360 x 110 (0.59 cuft)



97 PC.


KT NO.	Contents	8.87 / 1 / 2
7098MR	2330M 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 2230M 7, 8, 10, 12, 13 4330MR 10, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32 463016RC 463021RC 1421 PH2 x 38, PH2 x 100, PH3 x 150 1422 4 x 100, 6.5 x 38 1462 6.5 x 150 1025S 4, 5.5, 7, 8 1025P PH0, PH1, PH2, PH3 1025H H1.5, H2, H2.5, H3, H4, H5, H6, H7, H8, H10 1025U T8H, T10H, T15H, T20H, T25H, T27H, T30H, T40H 1025Z PZ1, PZ2, PZ3 1060 6, 7, 8, 10, 12, 13, 14, 15, 16, 17, 18, 19	4771-10BR 2771-55F 2571-45 4573-10 4121-11GR 6111-06 6516-10 2178DF 4583-12R 4251-10R 2221-02 2221-04 2792 4223-02R 4791R 2141
7598MR	2335M 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 2235M 7, 8, 10, 12, 13 4335MR 10, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32 463516RC 463521RC	

Socket & Tool Set

7003MR

7503MR 1/4"+1/2"

Blow case size (mm) :
422 x 360 x 110 (0.59 Cuft)

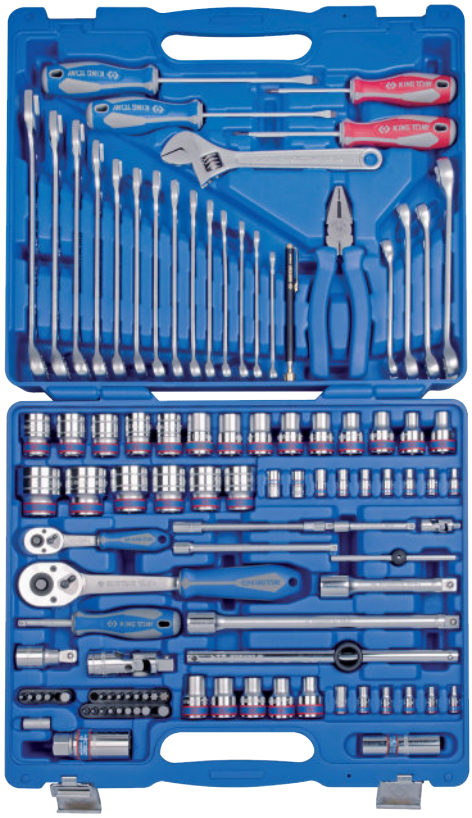

103 PC.


KT NO.	Contents			9.24	1 / 2
7003MR	2330M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10	2375M	E4, E5, E6, E7, E8, E10	4771-10GR
	4330MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32	4375M	E11, E12, E14, E16, E18	2771-55G
	463016RC	463021RC	1060	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24	6111-07
			1930	8 x 10, 11 x 13, 12 x 14, 17 x 19	2178DF
			1025H	H2, H2.5, H3, H4 , H5, H6, H7, H8, H10	3611-08R
			1025M	M4, M5, M6, M8, M10	2221-03 2221-06
			1025T	T15, T20, T25, T27, T30, T40, T45, T50	2571-45 4572-10
			1421	PH1 x 80, PH2 x 100	2312-06
			1422	5.5 x 125, 6.5 x 150	4251-05R 4251-10R
7503MR	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10			2792 4791R
	4335MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32			4223-02R
	463516RC	463521RC			2128-26
					2141

Socket & Tool Set


7010MR

7510MR 1/4"+1/2"

Blow case size (mm) :
422 x 360 x 110 (0.59 cuft)

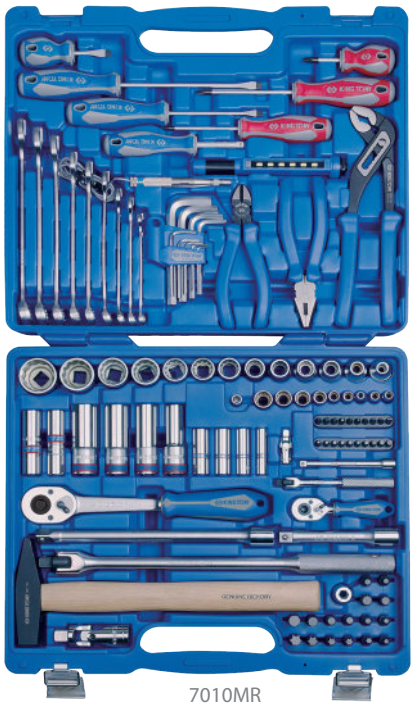

7010MR

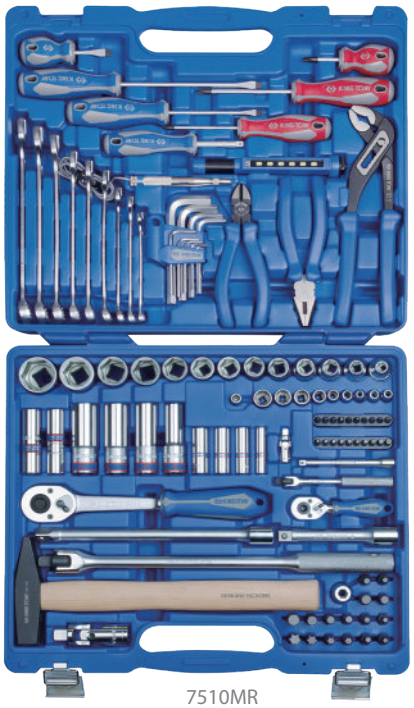

7510MR



110 PC.

9.2 1 / 2


KT NO.	Contents		
7010MR	2230M 8, 10, 12, 13	1025P PH0, PH1, PH2, PH3	1145MR 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10
	2330M 5, 5.5, 6, 7, 8, 10, 12, 13, 14	1025H H2.5, H3, H4, H5, H6	1060 8, 10, 12, 13, 14, 15, 17, 18, 19
	4230M 14, 17, 19, 22	1025S 3, 4, 5, 6.5	4771-10GR 276A-04G
	4330MR 8, 10, 12, 13, 14, 15, 17, 18, 19, 22, 24, 27, 30	1025T T15, T20, T25, T27, T30	2178DF 6111-06 6211-06
	463014RC 463016RC	1025Z PZ1, PZ2	6516-10 79831
7510MR	2235M 8, 10, 12, 13	1636H H5, H6, H7, H8, H10, H12	4452-15FR 2452-05F
	2335M 5, 5.5, 6, 7, 8, 10, 12, 13, 14	1636M M6, M8, M10, M12	4251-05R 4251-10R 2221-04
	4235M 14, 17, 19, 22	1636T T30, T40, T45, T50, T55, T60	9DC22 7821-50
	4335MR 8, 10, 12, 13, 14, 15, 17, 18, 19, 22, 24, 27, 30	1421 No.1 x 80, No.2 x 100, No.2 x 38	4791R 2792 414810M
	463514RC 463516RC	1422 5.5 x 100, 6.5 x 150, 6.5 x 38	2141

Socket & Tool Set

7028MR | 7528MR | 7528MR01 1/4"+1/2"

Blow case size (mm) :
560 x 400 x 110 (0.87 Cuft)

128 PC.

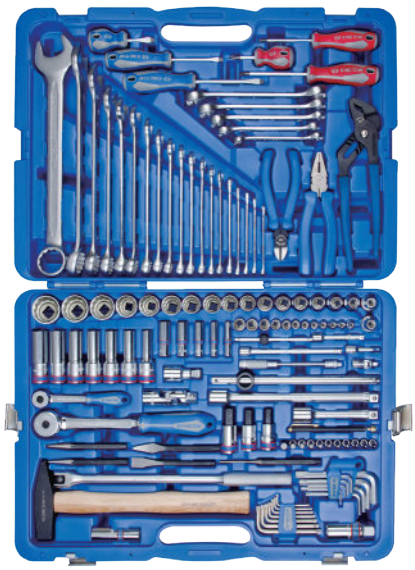

7028MR



7528MR



7528MR01

KT NO.	Contents			Kg 14.95	1 / 2
7028MR	2330M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13	2755-55G	1060	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16,17, 19, 21, 22, 24, 27, 30, 32
	2230M	7, 8, 10, 12, 13		1930	8 x 10, 9 x 11, 12 x 13, 14 x 17, 17 x 19
	4230M	10, 12, 13, 14, 15, 17, 19	4755-10G	1143	T10, T15, T20, T25, T27, T30, T40
	4330MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32		1145	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10
	463016RC	463021RC		1421	PH1 x 80, PH2 x 38, PH2 x 100
				1422	5 x 75, 6.5 x 38, 6.5 x 100
				2033	T10, T15, T20, T25, T27
				2035	H4, H5, H6, H7, H8, H10
				4025	H12, H14, H17
				7821-50	
				6111-07	
				6211-06	
				6511-10C	
				4452-15FR	
				2571-45	
				4572-10	
				2311-06	
				2293-02 2293-06	
				2221-03 2221-06	
				4251-05R 4251-10R	
				76215-05	
				76404-06	
				76505-05	
				76104-05	
				76303-05	
				2128-26	
				4223-02R	
				2792 4791R	
7528MR	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13	2755-55G		
	2235M	7, 8, 10, 12, 13	4755-10G		
	4235M	10, 12, 13, 14, 15, 17, 19			
7528MR01	4335MR	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32	2771-55G		
	463516RC	463521RC	4771-10GR		


Socket & Tool Set

7053MR01

Blow case size (mm) :
560 x 400 x 110 (0.87 cuft)

7553MR01 1/4"+1/2"

153 PC.

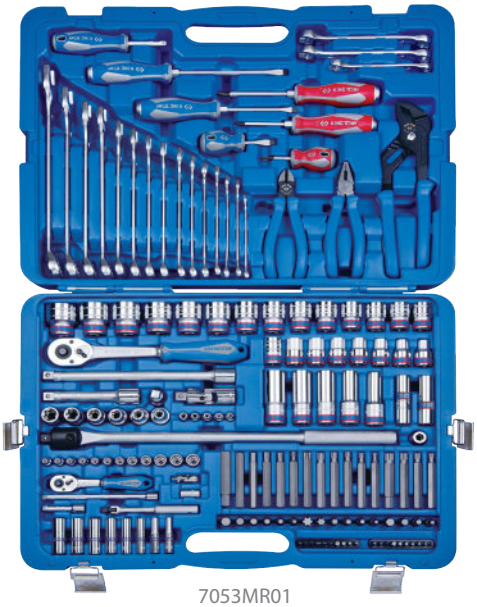

7053MR01



7553MR01

KT NO. | Contents | 14.17 | 1 / 2

7053MR01

- 2330M — 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13
- 4330MR — 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32
- 2230M — 6, 7, 8, 9, 10, 11, 12, 13
- 4230M — 13, 14, 17, 19, 22
- 2375M — E4, E5, E6, E7, E8
- 4375M — E10, E12, E14, E16, E18, E20
- 1461 — PH1 x 75, PH2 x 100
- 1462 — 5.5 x 100, 6.5 x 150
- 1421 — PH2 x 38
- 1422 — 6.5 x 38
- 1025S — 4, 5, 6.5
- 1025P — PH0, PH1, PH2
- 1025H — H3, H4, H5, H6
- 1025Z — PZ1, PZ2, PZ3
- 1025T — T10, T15, T20, T25, T27, T30, T40
- 1636H — H5, H6, H7, H8, H10, H12
- 1636M — M6, M8, M10, M12
- 1636T — T30, T40, T45, T50, T55, T60
- 1680H — H5, H6, H7, H8, H10, H12
- 1680M — M6, M8, M10, M12
- 1680T — T25, T30, T40, T45, T50, T55
- 463014RC
- 463016RC
- 1060 — 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27
- 1930 — 8x10, 11x13, 12x14
- 4771-10GR
- 2771-55G
- 6511-10
- 6111-06
- 6211-06
- 2178DF
- 4462-18FR
- 2452-05F
- 2221-02
- 2221-06
- 4251-05R
- 4251-10R
- 2792
- 4791R
- 4223-02R
- 2142
- 414810M

7553MR01

- 2335M — 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13
- 4335MR — 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32
- 2235M — 6, 7, 8, 9, 10, 11, 12, 13
- 4235M — 13, 14, 17, 19, 22

Socket & Wrench Set

9043MR

9543MR 1/4"+3/8"+1/2"

Blow case size (mm) :
560 x 400 x 110 (0.87 cuft)

143 PC.



9043MR



9543MR



13.7 1 / 2

KT NO.		Contents
9043MR	2330M 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10	2375M E4, E5, E6, E7, E8
	3330M 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17, 18, 19, 21, 22	4375M E10, E12, E14, E16, E20
	4330MR 8, 10, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 27, 30, 32	1025P PH0, PH1, PH2, PH3
	4630RC 16, 21	1025S 4, 5.5, 7
		1025U T10H, T15H, T20H, T25H, T27H, T30H, T40H
		1025H H2, H3, H4, H5, H6, H7, H8, H10
		1025Z PZ0, PZ1, PZ2, PZ3
9543MR	2335M 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10	1421 PH2 x 38, PH1 x 80
	3330M 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17, 18, 19, 21, 22	1461 PH2 x 100
	4335MR 8, 10, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 27, 30, 32	1422 6.5 x 38, 5.5 x 75
	4635RC 16, 21	1462 6.5 x 150
		1060 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24
		1930 8 x 10, 10 x 12, 11 x 13, 12 x 14, 17 x 19

1145MR H1.5, H2.0, H2.5, H3.0, H4.0, H5.0, H6.0, H8.0, H10

4771-10GR

2771-55G

2178DF

6111-07

3781-11F

4452-18FR

4581-10

6011-10R

4222-10

2312-06

2221-02
2221-04
2221-06

3221-03
3221-06

4251-03R

3824

3812

2141

2792
3792
4791R

7821-30

79093-03M


79831

Socket & Wrench Set

9519MR50 1/4"+3/8"+1/2"

Blow case size (mm) :
560 x 400 x 110 (0.87 cuft)

119 PC.

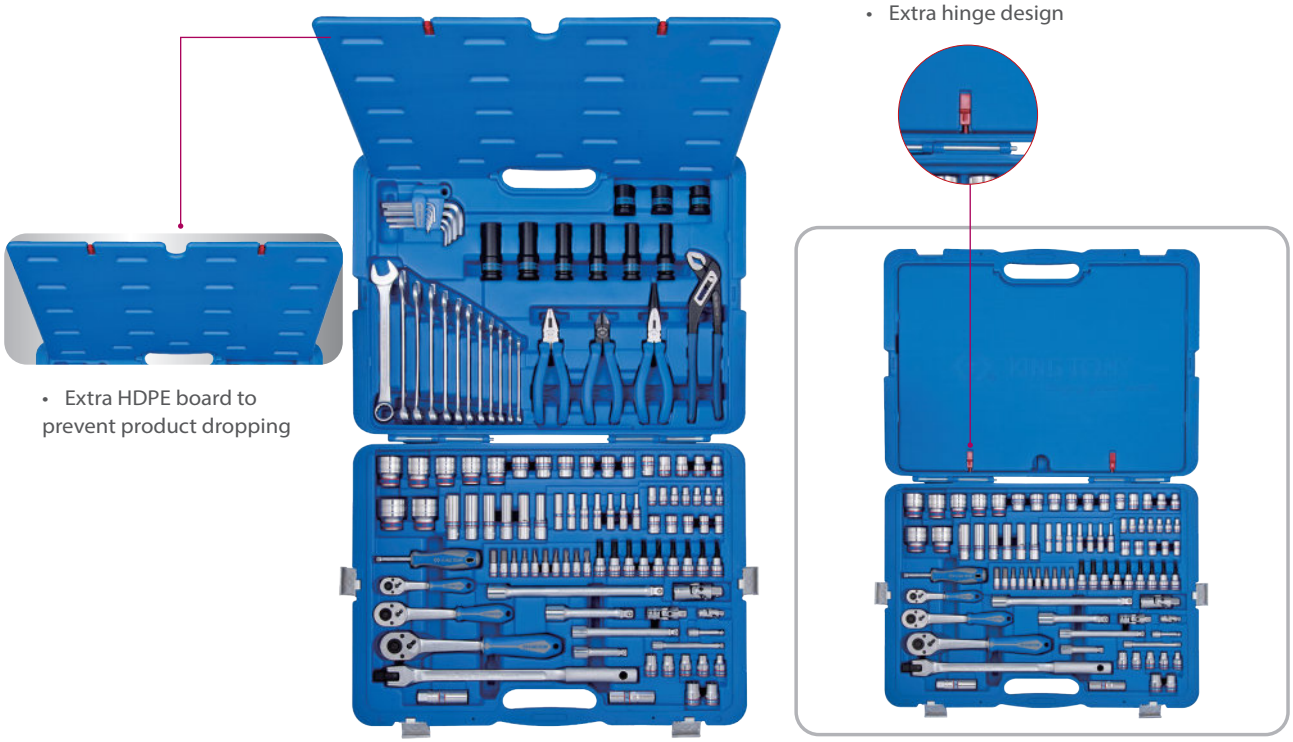


- Extra HDPE board to prevent product dropping
- Extra hinge design

Contents		
	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13
	3335M	9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19
	4335MR	20, 21, 22, 24, 27, 30, 32
	2235M	4, 4.5, 5, 5.5, 6, 7, 8
	3235M	10, 11, 12, 13, 14, 15
	3375M	E8, E10, E11, E12, E14, E16, E18
	2031	PH1, PH2, PH3
	2032	5.5, 6.5
	2035	H3, H4, H6, H8, H10
	3023	T10, T15, T20, T25, T27, T30, T40, T45, T50

Contents		
	4535M	17, 19, 21
	4435M	10, 12, 13, 14, 17, 19
	1060	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19

12.48 1 / 2

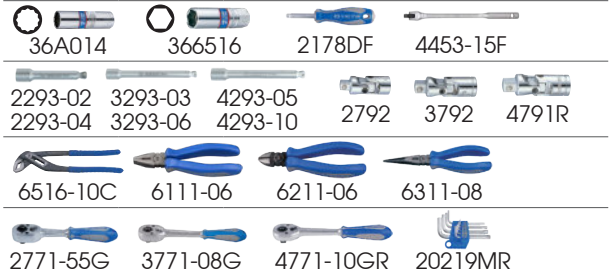

Tool Box Set

112 PC.

9052-002MRV

Plastic case size (mm) :
456 x 372 x 155 (0.93 cuft)



Pouch 1 — 13 PC.



Pouch 2 — 7 PC.



EVA foam(9-7592MPV) — 92 PC.



Pouch 1

Contents

1062	8, 9, 10, 11, 12, 13, 14, 16, 17, 18, 19, 22
9TA281	

Pouch 2

Contents



3611-10R | 6AB31-75 | 6211-06 | 6111-07



6311-08 | 6511-10 | 79095-05M

EVA foam(9-7592MPV)

Contents

10.46 CUFT 1.16

2335MR	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
4335MR	10, 13, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32
1147PR	T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H,T50H
1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10
20002UB	5 x 6mm, 8 x 10mm



1032CQ | 1005APR | 2792 4791R | 4251-10R | 2179DF



7821-30 | 4773-10GS | 2755-55G | 2142

Tools Bag Set

92543MR

Tool bag size (mm) :
250 x 400 x 30 (0.11 cuft)



92543MR

92543MR01 1/4"



92543MR01

43 PC.


KT NO.		Contents	2.49 / 1 / 10
92543MR	79093-03C 7978-07 2141	2335M 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14 1421 PH0 x 60, PH1 x 100, PH2 x 38, PH2 x 150 1422 3.0 x 75, 6.5 x 38, 6.5 x 150 1025Z PZ1, PZ2, PZ3 1025T T10, T15, T20, T25, T27, T30, T40	6511-10 6111-07 2178DF 3611-08P 20317MR 8720813 2792
92543MR01	79093-03M 7971-07 2142		

Axial Lock Nut Socket

44K9M 1/2"

- Specially for SKF bearing

64K9M 3/4"

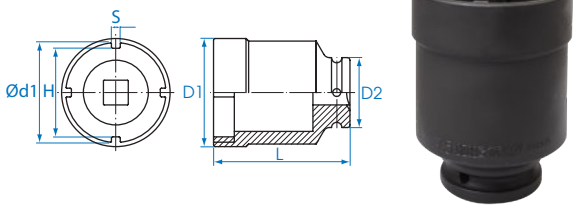



KT NO.	Designation	mm	DR.	H mm	S mm	D1 mm	D2 mm	Ød1 mm	L mm	g	
44K928M	TMFS 3	28	1/2	24.4	3.8	36	30	30	90	382	1 / 24
44K932M	TMFS 4	32	1/2	28.4	3.8	38	30	34	90	378	1 / 24
44K938M	TMFS 5	38	1/2	34.4	4.8	46	30	40	90	559	1 / 24
64K975M	TMFS 11	75	3/4	69.4	6.8	83.5	54	77	105	1645	1 / 6

External & Internal KM Locknut Socket


44K7 1/2" | 64K7 3/4" | 44K8 1/2" | 64K8 3/4"

- Specially for SKF bearing

KT NO.	Designation	mm	DR.	H mm	S mm	D1 mm	D2 mm	Ød1 mm	L mm	g	
44K732M	TMFS 4	32	1/2	28.3	3.7	37.3	30	28.3	60	207	1 / 24
44K738M	TMFS 5	38	1/2	34.3	4.7	44.3	30	34.3	60	259	1 / 24
44K745M	TMFS 6	45	1/2	41.3	4.7	52.3	30	41.3	60	321	1 / 24
44K752M	TMFS 7	52	1/2	48.3	4.7	59.3	30	48.3	60	350	1 / 20
44K758M	TMFS 8	58	1/2	53.5	4.7	65.5	30	53.5	60	422	1 / 20
64K765M	TMFS 9	65	3/4	60.5	5.7	73.5	42	60.5	68	601	1 / 20
64K770M	TMFS 10	70	3/4	65.5	5.7	78.5	42	65.5	68	625	1 / 12
64K775M	TMFS 11	75	3/4	69.5	6.7	82.6	42	59.5	68	664	1 / 12
64K780M	TMFS 12	80	3/4	74.5	6.7	87.7	42	74.5	68	691	1 / 12




44K7 & 64K7



KT NO.	Designation	mm	DR.	H mm	S mm	D1 mm	D2 mm	Ød1 mm	L mm	g	
44K832M	TMFS 4	32	1/2	28.3	3.7	41.5	30	34.5	60	282	1 / 24
44K838M	TMFS 5	38	1/2	34.3	4.7	49.5	30	40.7	60	365	1 / 24
44K845M	TMFS 6	45	1/2	41.3	4.7	59.0	30	48.0	60	474	1 / 24
44K852M	TMFS 7	52	1/2	48.3	4.7	66.0	30	54.8	60	540	1 / 20
44K858M	TMFS 8	58	1/2	53.5	5.7	73.0	30	60.8	60	582	1 / 20
64K865M	TMFS 9	65	3/4	60.5	5.7	80.0	42	67.7	68	915	1 / 20
64K870M	TMFS 10	70	3/4	65.5	5.7	86.0	42	72.7	68	1022	1 / 12
64K875M	TMFS 11	75	3/4	69.5	6.7	93.0	42	78.8	68	1167	1 / 12
64K880M	TMFS 12	80	3/4	74.5	6.7	98.0	42	83.5	68	1329	1 / 12



44K8 & 64K8



Application: Removal and installation of bearings, gear wheels, cone roll bearings, ball bearings etc.
Trucks, land and construction machines, municipally and forestery technology etc.

Internal KM Locknut Socket Set

7K09MP

1/2"+3/4"

- For loosening and tightening groove nuts DIN 981 on crimping or clamping sleeves
- Minimum space on nut size
- Use in conjunction with extensions, ratchets etc.
- Working range KM4 to KM12 (nuts of ball bearing)

Contents		7.90 kg	1 / 3
44K8	TMFS 4, 5, 6, 7, 8		
64K8	TMFS 9, 10, 11, 12		



9 PC.

External KM Locknut Socket Set

7K09MP01

1/2"+3/4"

- For loosening and tightening groove nuts DIN 981 on crimping or clamping sleeves
- Minimum space on nut size
- Slim design
- Working range KM4 to KM12 (nuts of ball bearing)

Contents		5.33 kg	1 / 3
44K7	TMFS 4, 5, 6, 7, 8		
64K7	TMFS 9, 10, 11, 12		



9 PC.


KINGTONY
KINGTONY
KINGTONY


38 KING TONY
KING TONY CR-MO
KING TONY

IMPACT SOCKETS & ACCESSORIES

Professional production & quality control






KING TONY impact socket 50% higher torque on performance.

Quality control also ensure that a sufficient level of production output. King Tony uses advance technology to inspect tiny difference on each step. Our Impact socket reach 50% higher torque than DIN standards.

Standard Impact Socket & Rail Set

2535M — 1/4"

- DIN 3129, ISO 2725-2





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
253504M	4	7.5	13	4	23	12	20 / 600
253545M	4.5	8.1	13	5	23	12	20 / 600
253505M	5	8.8	13	6	23	11	20 / 600
253555M	5.5	9.4	13	6	23	12	20 / 600
253506M	6	10.0	13	7	23	13	20 / 600
253507M	7	11.3	13	7	23	13	20 / 600
253510M	10	15.0	13	9	23	17	12 / 360
253513M	13	18.8	13	9	23	22	12 / 360
253514M	14	19.8	13	9	23	23	10 / 300


Standard Impact Socket

3535M — 3/8"

- DIN 3129, ISO 2725-2

3535S — 3/8"

- ANSI / ASME B107.2





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
353506M	6	10.6	19	5	32	33	12 / 360
353507M	7	11.8	19	5	32	33	12 / 360
353508M	8	13.2	19	6	32	35	12 / 360
353509M	9	14.5	19	6	32	36	12 / 360
353510M	10	15.5	19	7	32	37	12 / 360
353511M	11	17.0	19	7	32	39	12 / 360
353512M	12	18.2	19	8	32	39	12 / 360
353513M	13	19.4	22	9	32	53	10 / 200
353514M	14	20.7	22	9	32	54	10 / 200
353515M	15	22.0	22	10	32	56	10 / 200
353516M	16	23.8	22	10	32	57	10 / 200
353517M	17	24.8	22	11	32	58	10 / 200
353518M	18	25.8	22	11	32	62	10 / 200
353519M	19	27.6	22	13	32	63	10 / 160

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
353508S	1/4	10.8	19	5	32	32	12 / 360
353510S	5/16	13.0	19	6	32	36	12 / 360
353512S	3/8	15.3	19	7	32	38	12 / 360
353514S	7/16	17.0	19	7	32	38	12 / 360
353516S	1/2	18.2	19	9	32	53	12 / 360
353518S	9/16	20.7	22	9	32	53	10 / 200
353520S	5/8	23.8	22	10	32	57	10 / 200
353522S	11/16	24.5	22	11	32	60	10 / 200
353524S	3/4	27.0	22	11	32	61	10 / 160

Impact Accessory

2863P — 1/4"

- Adapter
- Convert to 3/8" drive
- DIN 3121



KT NO.	Spec.	D mm	g	
2863P	1/4"F x 3/8"M	14	20	12 / 360


Deep Impact Socket

3435M — 3/8"

- DIN 3121

3435S — 3/8"

- ANSI / ASME B107.2





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
343506M	6	10.6	19	10	65	50	6 / 120
343507M	7	11.8	19	10	65	55	6 / 120
343508M	8	13.2	19	12	65	68	6 / 120
343509M	9	14.5	19	12	65	65	6 / 120
343510M	10	15.5	19	12	65	82	6 / 120
343511M	11	17.0	19	13	65	75	6 / 120
343512M	12	18.2	19	14	65	89	6 / 120
343513M	13	19.4	22	14	65	111	6 / 120
343514M	14	20.7	22	14	65	109	6 / 120
343515M	15	22.0	22	16	65	112	6 / 120
343516M	16	23.8	22	16	65	126	6 / 96
343517M	17	24.8	22	17	65	143	6 / 96
343518M	18	25.8	22	18	65	133	6 / 96
343519M	19	27.6	22	20	65	171	6 / 96
343520M	20	28.3	22	20	65	154	6 / 96
343521M	21	29.5	22	22	65	161	6 / 96
343522M	22	30.8	22	22	65	178	5 / 60
343523M	23	32.0	22	24	65	177	5 / 60
343524M	24	32.5	22	24	65	176	5 / 60


KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
343508S	1/4	10.8	19	10	63.5	62	6 / 120
343510S	5/16	13.0	19	12	63.5	71	6 / 120
343512S	3/8	15.3	19	12	63.5	82	6 / 120
343514S	7/16	17.0	19	13	63.5	84	6 / 120
343516S	1/2	18.2	19	14	63.5	113	6 / 120
343518S	9/16	20.7	22	14	65	114	6 / 120
343520S	5/8	23.8	22	16	65	126	6 / 96
343522S	11/16	24.5	22	17	65	138	6 / 96
343524S	3/4	27.0	22	20	65	154	6 / 96
343526S	13/16	29.5	22	22	65	156	6 / 96
343528S	7/8	30.8	22	22	65	172	5 / 60

Impact Star Socket

3575M — 3/8"

- For torx external screw
- DIN 3121

KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm	g	
357505M	E5	9.6	19	4.0	32	31	12 / 360
357506M	E6	10.2	19	5.0	32	31	12 / 360
357507M	E7	10.8	19	6.0	32	33	12 / 360
357508M	E8	11.5	19	6.5	32	35	12 / 360
357510M	E10	12.0	19	7.0	32	33	12 / 360
357512M	E12	14.0	19	9.0	32	34	12 / 360
357514M	E14	17.0	19	9.5	32	40	12 / 360





Impact Bit Socket

KT No. & D1



CAUTION

1. Air pressure must not exceed 90PSI (6.3bar)
2. Adjust your air tool to its lowest torque output, should this torque level not be enough, increase it gradually

3051 — 3/8"

- For phillips head screw
- DIN 3121



KT NO.	No.	L mm	g	
305101	PH1	55	33	12 / 360
305102	PH2	55	35	12 / 360
305103	PH3	55	40	12 / 360
305104	PH4	55	45	12 / 360

3052 — 3/8"

- For slotted head screw
- DIN 3121



KT NO.	Tip widh mm	L mm	g	
305255	5.5	55	32	12 / 360
305208	8	55	39	12 / 360
305210	10	55	45	12 / 360

3055M — 3/8"

- For hexagon head screw
- DIN 3121



KT NO.	mm	L mm	Max. torq N·m	g	
305504M	H4	55	20.8	34	12 / 360
305505M	H5	55	36.0	38	12 / 360
305506M	H6	55	62.4	40	12 / 360
305507M	H7	55	97.0	43	12 / 360
305508M	H8	55	144.0	46	12 / 360
305510M	H10	55	264.0	55	12 / 360
305512M	H12	55	480.0	65	12 / 360
305514M	H14	55	650.0	77	12 / 288
305516M	H16	55	680.0	91	12 / 288
305517M	H17	55	715.0	99	12 / 288

3055S — 3/8"

- For hexagon head
- DIN 3121



KT NO.	inch	L mm	Max. torq N·m	g	
305504S	1/8	55	18.8	34	12 / 360
305545S	9/64	55	20.8	34	12 / 360
305505S	5/32	55	22.5	36	12 / 360
305506S	3/16	55	36.0	36	12 / 360
305507S	7/32	55	62.4	38	12 / 360
305508S	1/4	55	93.6	41	12 / 360
305510S	5/16	55	144.0	46	12 / 360
305512S	3/8	55	264.0	54	12 / 360
305516S	1/2	55	518.0	71	12 / 360

3065M — 3/8"

- For hexagon head screw
- DIN 3121



KT NO.	mm	L mm	Max. torq N·m	g	
306504M	H4	90	20.8	39	8 / 160
306505M	H5	90	36.0	44	8 / 160
306506M	H6	90	62.4	50	8 / 160
306508M	H8	90	144.0	66	8 / 160
306510M	H10	90	264.0	86	8 / 160

Impact Bit Socket

KT No. & D1

3053 / 3063 — 3/8"

- For torx internal screw
- DIN 3121



3053



3063

KT NO.	Size	L mm	g	
305310	T10	55	35	12 / 360
305315	T15	55	34	12 / 360
305320	T20	55	35	12 / 360
305325	T25	55	36	12 / 360
305327	T27	55	36	12 / 360
305330	T30	55	36	12 / 360
305340	T40	55	39	12 / 360
305345	T45	55	43	12 / 360
305350	T50	55	44	12 / 360
305355	T55	55	52	12 / 288
305360	T60	55	60	12 / 288
306320	T20	90	42	8 / 160
306325	T25	90	42	8 / 160
306327	T27	90	43	8 / 160
306330	T30	90	45	8 / 160
306340	T40	90	50	8 / 160
306345	T45	90	57	8 / 160
306350	T50	90	64	8 / 160
306355	T55	90	82	8 / 160

Impact Accessory

3862P — 3/8"

- Adapter
- Convert to 1/4" drive
- 3862P → Max. torque : 62 N·m
- DIN 3121



KT NO.	Spec.	D mm	g	
3862P	3/8"F x 1/4"M	20.8	32	24 / 384

3864P — 3/8"

- Adapter
- Convert to 1/2" drive
- DIN 3121



KT NO.	Spec.	D mm	g	
3864P	3/8"F x 1/2"M	20.8	53	24 / 384

Impact Accessory

3147 — 3/8"

- Bit holder



KT NO.	Size	L mm	g	
314708S	1/4"	40	41	12 / 420
314710S	5/16"	40	43	12 / 420
314710M	10mm	40	42	12 / 420

3260P — 3/8"


- Extension bar
- DIN 3121



KT NO.	Overall length inch	Overall length mm	g	
3260-03P	3	75	98	6 / 120
3260-04P	4	100	121	8 / 160
3260-05P	5	125	147	8 / 144
3260-06P	6	150	169	5 / 100
3260-08P	8	200	217	6 / 72
3260-10P	10	250	264	6 / 54

3796P — 3/8"

- Universal joint
- DIN 3121





KT NO.	Overall length inch	Overall length mm	D mm	g	
3796P	2	50	22	87	10 / 200

90608 — 3/8"

- Locking pin
- Chrome vanadium steel
- DIN 3129

90609 — 3/8"



KT NO.	Desp.	ø	d / ℓ	Applied to socket sizes
90608	pin	2.5	14	3535M (6~12 mm)3535S (1/4~1/2 inch) 3435M (6~12 mm) 3435S (1/4~1/2 inch) 3055M (4~12 mm) 3055S (3/16~1/2inch) 3065M (4~10 mm) 3053 (T10~T15) 3575M (E5~E14) 3053.3055.3065.3147.3862.3864
90609	pin	2.5	16	3535M (13~19 mm) 3535S (9/16~3/4inch) 3435M (13~24 mm) 3435S (9/16~7/8inch) 3260.3796

Impact Bit Socket Set

3406MP 3/8"

- For hexagon head screw
- 55mmL

6 PC.

Metal case size (mm) :
203 x 79 x 41 (0.023 cuft)



Contents	0.72	1 / 20
3055M	H4, H5, H6, H8, H10, H12	

3419PP 3/8"

- For torx internal head
- 55mmL

9 PC.

Metal case size (mm) :
203 x 79 x 41 (0.023 cuft)



Contents	0.62	1 / 20
3053	T10, T15, T20, T25, T27, T30, T40, T45, T50	




Standard Impact Socket

KT No. & D1

4530M 1/2"

- DIN 3129, ISO 2725-2






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
453008M	8	15.0	25	7	38	65	10 / 200
453009M	9	16.3	25	7	38	68	10 / 200
453010M	10	17.6	25	8	38	68	10 / 200
453011M	11	18.8	25	8	38	69	10 / 200
453012M	12	20.0	25	9	38	73	10 / 200
453013M	13	21.2	25	10	38	71	10 / 200
453014M	14	22.5	25	10	38	78	10 / 200
453015M	15	23.8	30	11	38	111	10 / 160
453016M	16	25.0	30	11	38	118	10 / 160
453017M	17	26.2	30	12	38	116	10 / 160
453018M	18	27.5	30	13	38	115	10 / 160
453019M	19	28.8	30	13	38	114	10 / 160
453020M	20	29.5	30	13	38	117	10 / 160
453021M	21	30.0	30	14	40	121	8 / 160
453022M	22	32.4	30	14	40	129	8 / 160
453023M	23	33.2	30	15	40	130	8 / 160
453024M	24	34.4	30	15	42	147	6 / 120
453025M	25	36.0	30	15	42	164	6 / 120
453026M	26	37.0	30	15	42	168	6 / 120
453027M	27	38.0	30	16	44	170	6 / 120
453028M	28	41.0	30	16	44	205	6 / 120
453029M	29	41.0	30	17	44	184	6 / 120
453030M	30	42.0	30.5	17	44	197	6 / 120
453032M	32	46.0	30	19	44	226	6 / 120
453033M	33	46.0	30	19	46	246	6 / 96
453034M	34	46.0	30	20	46	217	6 / 96
453036M	36	47.0	30	20	46	214	6 / 96
453038M	38	50.0	30	21	50	279	6 / 60
453041M	41	56.0	30	22	52	402	6 / 60

4530S 1/2"

- ANSI / ASME B107.2






KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
453016S	1/2	20	25	10	38	72	10 / 200
453018S	9/16	22	25	10	38	76	10 / 200
453020S	5/8	24	25	11	38	78	10 / 200
453022S	11/16	26	30	12	38	116	10 / 160
453024S	3/4	28.8	30	13	38	120	10 / 160
453026S	13/16	30	30	14	40	122	8 / 160
453028S	7/8	32	30	14	40	138	8 / 160
453030S	15/16	34	30	15	42	148	6 / 120
453032S	1	36	30	15	42	162	6 / 120
453034S	1-1/16	38	30	16	44	167	6 / 120
453036S	1-1/8	41	30	17	44	189	6 / 120
453038S	1-3/16	42	30.5	17	44	203	6 / 120

Stubby Impact Socket

4525M — 1/2"

- For impact wrench use
- DIN 3129, ISO 2725-2



19, 22, 24 mm




KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
452513M	13	20	26	5.5	28.5	57	10 / 160
452514M	14	22	26	5.5	28.5	61	10 / 160
452517M	17	26	26	5.5	28.5	64	10 / 160
452519M	19	28	26	10	28.5	63	10 / 160
452521M	21	30	30	10	28.5	81	8 / 160
452522M	22	32	30	10	28.5	87	8 / 160
452524M	24	34	30	10	28.5	80	6 / 120

Standard Impact Socket

4535M — 1/2"

- DIN 3129, ISO 2725-2






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
453508M	8	15.0	25	7	38	67	10 / 200
453509M	9	16.3	25	7	38	69	10 / 200
453510M	10	17.6	25	8	38	70	10 / 200
453511M	11	18.8	25	8	38	71	10 / 200
453512M	12	20.0	25	9	38	73	10 / 200
453513M	13	21.2	25	10	38	75	10 / 200
453514M	14	22.5	25	10	38	78	10 / 200
453515M	15	23.8	30	11	38	117	10 / 160
453516M	16	25.0	30	11	38	118	10 / 160
453517M	17	26.2	30	12	38	121	10 / 160
453518M	18	27.5	30	13	38	123	10 / 160
453519M	19	28.8	30	13	38	117	10 / 160
453520M	20	29.5	30	13	38	115	10 / 160
453521M	21	30.0	30	14	40	118	8 / 160
453522M	22	31.8	30	14	40	132	8 / 160
453523M	23	33.8	30	15	40	144	8 / 160
453524M	24	33.8	30	15	42	139	6 / 120
453525M	25	35.8	30	15	42	156	6 / 120
453526M	26	37.8	30	15	42	173	6 / 120
453527M	27	37.8	30	16	44	175	6 / 120
453528M	28	39.8	30	16	44	204	6 / 120
453529M	29	39.8	30	17	44	198	6 / 120
453530M	30	41.8	30.5	17	44	206	6 / 120
453532M	32	46.0	30	19	44	239	6 / 120
453533M	33	46.0	30	19	46	246	6 / 96
453534M	34	46.0	30	20	46	240	6 / 96
453535M	35	46.0	30	20	46	227	6 / 96
453536M	36	47.0	30	20	46	243	6 / 96
453537M	37	49.0	30	21	48	271	6 / 60
453538M	38	50.0	30	21	50	291	6 / 60
453539M	39	51.0	30	22	50	306	6 / 60
453541M	41	56.0	30	22	52	403	6 / 60
453546M	46	64.0	30	23	55	595	4 / 32

4535S — 1/2"

- ANSI / ASME B107.2





KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
453510S	5/16	15	25	7	38	66	10 / 200
453512S	3/8	17	25	7	38	70	10 / 200
453514S	7/16	18	25	8	38	70	10 / 200
453516S	1/2	20	25	10	38	72	10 / 200
453518S	9/16	22	25	10	38	77	10 / 200
453520S	5/8	24	25	11	38	80	10 / 160
453522S	11/16	26	30	12	38	116	10 / 160
453524S	3/4	28.8	30	13	38	116	10 / 160
453526S	13/16	30	30	14	40	127	8 / 160
453528S	7/8	32	30	14	40	136	8 / 160
453530S	15/16	34	30	15	42	152	6 / 120
453532S	1	36	30	15	42	164	6 / 120
453534S	1-1/16	38	30	16	44	180	6 / 120
453536S	1-1/8	41	30	17	44	199	6 / 120
453538S	1-3/16	42	30.5	17	44	208	6 / 120
453540S	1-1/4	46	30	18	44	237	6 / 120

Impact Socket Set

4472MP

- Standard impact socket

Stand size (mm) :
415 x 336 x 320

4472SP — 1/2"



4472MP / 4472SP

KT NO.	PC.		Contents	Each Q'ty
4472MP	158	4535M	8, 9, 10, 11, 12, 13, 14	8
			15, 16, 17, 18, 19, 20, 21	6
			22, 23, 24	7
			25, 26, 27, 28	6
			29, 30, 32	5
4472SP	106	4535S	5/16, 3/8, 7/16, 1/2, 9/16	8
			5/8, 11/16, 3/4, 13/16	6
			7/8, 15/16,	7
			1, 1-1/16, 1-1/8	6
			1-3/16, 1-1/4	5


KT NO.	Spec.	kg	Cuft
4472MP-A	87103	6.37	0.67
4472MP-D	158 PC. socket content	19.63	0.54
4472SP-A	87103	6.37	0.67
4472SP-D	106 PC. socket content	20.4	0.37

Deep Impact Socket

KT No. & D1

4430M 1/2"

- DIN 3121






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
443008M	8	15.0	24.8	12	78	125	6 / 120
443009M	9	16.3	24.8	12	78	135	6 / 120
443010M	10	17.6	24.8	12	80	153	6 / 120
443011M	11	18.8	24.8	13	80	150	6 / 120
443012M	12	20.0	24.8	14	80	166	6 / 120
443013M	13	21.2	24.8	14	80	158	6 / 120
443014M	14	22.5	24.8	14	80	172	6 / 120
443015M	15	23.8	29.8	16	80	233	6 / 96
443016M	16	25.0	29.8	16	80	232	6 / 96
443017M	17	26.2	29.8	16	80	240	6 / 96
443018M	18	27.5	29.8	17	80	253	6 / 96
443019M	19	28.8	29.8	18	80	272	6 / 96
443020M	20	29.5	29.8	20	80	253	6 / 96
443021M	21	29.8	29.8	20	80	254	6 / 96
443022M	22	32.4	30.0	22	80	296	5 / 60
443023M	23	33.2	30.0	24	80	291	5 / 60
443024M	24	34.4	30.0	24	80	299	5 / 60
443027M	27	38.0	30.0	27	80	343	5 / 60
443030M	30	42.0	30.5	30	80	397	5 / 50
443032M	32	46.0	30.0	32	80	454	1 / 24
443036M	36	47.0	30.0	36	80	422	1 / 24

4430S 1/2"

- ANSI / ASME B107.2






KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
443020S	5/8	24.0	24.8	16	80	179	6 / 96
443024S	3/4	28.8	29.8	18	80	258	6 / 96
443028S	7/8	32.0	30.0	22	80	284	5 / 60
443030S	15/16	34.0	30.0	24	80	297	5 / 60
443032S	1	36.0	30.0	24	80	328	5 / 60
443034S	1-1/16	38.0	30.0	27	80	340	5 / 60
443036S	1-1/8	41.0	30.0	27	80	394	5 / 50
443040S	1-1/4	46.0	30.0	32	80	477	1 / 24
443042S	1-5/16	46.0	30.0	34	80	440	1 / 24
443048S	1-1/2	50.0	30.0	34	80	454	1 / 24

4435M 1/2"

- DIN 3121






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
443508M	8	15.0	24.8	12	78	124	6 / 120
443509M	9	16.3	24.8	12	78	137	6 / 120
443510M	10	17.6	24.8	12	80	149	6 / 120
443511M	11	18.8	24.8	13	80	153	6 / 120
443512M	12	20.0	24.8	14	80	164	6 / 120
443513M	13	21.2	24.8	14	80	169	6 / 120
443514M	14	22.5	24.8	14	80	168	6 / 120
443515M	15	23.8	29.8	16	80	225	6 / 96
443516M	16	25.0	29.8	16	80	233	6 / 96
443517M	17	26.2	29.8	16	80	239	6 / 96
443518M	18	27.5	29.8	17	80	246	6 / 96
443519M	19	28.8	29.8	18	80	254	6 / 96
443520M	20	29.0	29.8	20	80	244	6 / 96
443521M	21	29.8	29.8	20	80	247	6 / 96
443522M	22	31.8	30.0	22	80	278	5 / 60
443523M	23	33.8	30.0	24	80	316	5 / 60
443524M	24	33.8	30.0	24	80	297	5 / 60
443525M	25	35.8	30.0	24	80	326	5 / 60
443526M	26	37.8	30.0	27	80	367	5 / 60
443527M	27	37.8	30.0	27	80	364	5 / 60
443528M	28	39.8	30.0	27	80	424	5 / 50
443529M	29	39.8	30.0	27	80	407	5 / 50
443530M	30	41.8	30.5	30	80	422	5 / 50
443532M	32	46.0	30.0	32	80	503	1 / 24
443533M	33	46.0	30.0	32	80	471	1 / 24
443534M	34	46.0	30.0	33	80	466	1 / 24
443536M	36	47.0	30.0	36	80	445	1 / 24
443538M	38	50.0	30.0	38	80	515	1 / 24
443541M	41	56.0	30.0	38	80	689	1 / 24
443546M	46	64.0	30.0	40	80	943	1 / 24

4435S 1/2"

- ANSI / ASME B107.2





KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
443510S	5/16	14.0	24.8	12	78	123	6 / 120
443512S	3/8	17.0	24.8	12	80	151	6 / 120
443514S	7/16	18.0	24.8	13	80	151	6 / 120
443516S	1/2	20.0	24.8	14	80	157	6 / 120
443518S	9/16	22.0	24.8	14	80	175	6 / 120
443520S	5/8	24.0	24.8	16	80	182	6 / 96
443522S	11/16	26.0	29.8	17	80	247	6 / 96
443524S	3/4	28.8	29.8	18	80	254	6 / 96
443526S	13/16	29.8	29.8	20	80	263	6 / 96
443528S	7/8	32.0	30.0	22	80	294	5 / 60
443530S	15/16	34.0	30.0	24	80	308	5 / 60
443532S	1	36.0	30.0	24	80	337	5 / 60

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
443534S	1-1/16	38.0	30.0	27	80	364	5 / 60
443536S	1-1/8	41.0	30.0	27	80	407	5 / 50
443538S	1-3/16	42.0	30.5	30	80	418	5 / 50
443540S	1-1/4	46.0	30.0	32	80	499	1 / 24
443542S	1-5/16	46.0	30.0	34	80	471	1 / 24

Impact Socket Set

4466MP

4466SP 1/2"

- Deep impact socket

Stand size (mm) :
415 x 336 x 320



4466MP / 4466SP

KT NO.	PC.		Contents	Each Q'ty
4466MP	166	4435M	8, 9, 10, 11, 12, 13, 14	8
			15, 16, 17, 18, 19, 20	7
			21, 22, 23, 24	7
			25, 26, 27, 28, 29	6
			30, 32	5
4466SP	110	4435S	5/16, 3/8, 7/16,	8
			1/2, 9/16	8
			5/8, 11/16, 3/4,	7
			13/16, 7/8, 15/16	7
			1, 1-1/16, 1-1/8	6
			1-3/16, 1-1/4	5


Packing NO.	Spec.	Kg	Cuft
4466MP-A	87103	5.87	0.54
4466MP-DA	166 PC. socket content	21.63	0.44
4466MP-DB		23.40	0.37
4466SP-A	87103	6.37	0.67
4466SP-D	110 PC. socket content	28.0	0.47

Impact Thin Wall Socket

KT No. & D1

4835M 1/2"

- DIN 3121






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
483510M	10	16	25.0	20	52	93	10 / 180
483511M	11	17	25.0	20	52	88	10 / 180
483512M	12	18	25.0	20	52	92	10 / 180
483513M	13	19	25.0	20	52	95	10 / 180
483514M	14	21	25.0	20	52	99	10 / 180
483516M	16	23	25.0	20	52	101	8 / 80
483517M	17	25	25.0	23	52	106	8 / 80
483519M	19	27	30.0	23	52	150	8 / 80
483521M	21	29	30.0	25	52	142	8 / 80
483522M	22	31	30.0	25	52	158	8 / 80
483523M	23	32	30.0	26	52	172	8 / 80
483524M	24	33	30.0	26	52	165	8 / 80
483526M	26	36	30.0	27	65	241	6 / 60
483527M	27	37	30.0	27	65	249	6 / 60
483530M	30	41	30.5	27	65	294	5 / 50
483535M	35	46	30.0	32	70	367	1 / 24

4930M 1/2"

- DIN 3121






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
493008M	8	13.2	25	12	78	118	6 / 120
493009M	9	14.0	25	12	78	118	6 / 120
493010M	10	15.5	25	12	80	134	6 / 120
493011M	11	16.7	25	13	80	136	6 / 120
493012M	12	18.0	25	14	80	142	6 / 120
493013M	13	19.0	25	14	80	165	6 / 120
493014M	14	20.5	25	14	80	153	6 / 120
493015M	15	21.5	30	16	80	204	6 / 96
493016M	16	23.0	30	16	80	219	6 / 96
493017M	17	24.5	30	16	80	218	6 / 96
493018M	18	25.5	30	17	80	267	6 / 96
493019M	19	27.0	30	18	80	241	6 / 96
493020M	20	28.0	30	20	80	235	6 / 96
493021M	21	29.0	30	20	80	241	6 / 96
493022M	22	30.5	30	22	80	252	5 / 60
493023M	23	32.0	30	24	80	267	5 / 60
493024M	24	33.0	30	24	80	277	5 / 60
493027M	27	37.0	30	27	80	318	5 / 60
493030M	30	40.5	30	30	80	355	5 / 50
493032M	32	42.5	30	32	80	356	5 / 50
493036M	36	45.5	30	36	80	361	1 / 24

4935M 1/2"

- DIN 3121






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
493510M	10	15.5	25	12	80	133	6 / 120
493511M	11	16.7	25	13	80	134	6 / 120
493512M	12	18.0	25	14	80	140	6 / 120
493513M	13	19.0	25	14	80	142	6 / 120
493514M	14	20.5	25	14	80	142	6 / 120

KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm		
493516M	16	23.0	30	16	80	201	6 / 96
493517M	17	24.5	30	16	80	211	6 / 96
493519M	19	27.0	30	18	80	222	6 / 96
493521M	21	29.0	30	20	80	230	6 / 96
493522M	22	30.5	30	22	80	261	5 / 60
493523M	23	32.0	30	24	80	273	5 / 60
493524M	24	33.0	30	24	80	285	5 / 60
493526M	26	35.5	30	27	80	303	5 / 60
493527M	27	37.0	30	27	80	335	5 / 60
493530M	30	40.5	30	30	80	376	5 / 50

Impact Thin Wall Socket

4935S 1/2"

- ANSI / ASME B107.2






KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm		
493510S	5/16	13.0	25.0	12	80	129	6 / 120
493512S	3/8	16.0	25.0	12	80	144	6 / 120
493514S	7/16	16.7	25.0	13	80	148	6 / 120
493516S	1/2	19.0	25.0	14	80	159	6 / 120
493518S	9/16	20.5	25.0	14	80	165	6 / 120
493520S	5/8	23.0	25.0	16	80	167	6 / 96
493522S	11/16	24.5	30.0	17	80	235	6 / 96
493524S	3/4	27.0	30.0	18	80	224	6 / 96
493526S	13/16	29.0	30.0	20	80	250	6 / 96
493528S	7/8	30.5	30.0	22	80	260	5 / 60
493530S	15/16	33.0	30.0	24	80	336	5 / 60
493532S	1	34.0	30.0	24	80	356	5 / 60
493534S	1-1/16	37.0	30.0	27	80	405	5 / 60
493536S	1-1/8	39.0	30.5	27	80	355	5 / 50
493538S	1-3/16	40.5	30.0	30	80	417	5 / 50
493540S	1-1/4	42.5	30.0	32	80	389	5 / 50

Extra Thin Wall Impact Socket

4415M 1/2"

- Finishing - phosphate sunk
- For aluminum alloy wheel
- Material - chrome molybdenum alloy steel
- Super thin wall version has less strength than a standard deep one
- DIN 3121

Thin walled design (D1)





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm		
441517M	17	23.8	25	17	80	163	6 / 96
441519M	19	25.8	30	20	80	214	6 / 96
441521M	21	27.8	30	22	80	221	6 / 96
441522M	22	29.5	30	24	80	238	6 / 96


Wheel Nut Impact Socket KT No. & D1

- Material - chrome molybdenum alloy steel
- Durable outer sleeve protects polished wheels and lug nuts
- Plastic sleeve thin wall version





4945M 1/2"






15mm 17mm 19mm 21mm 22mm

KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm		
494515M	15	25.0	26.0	25	85	160	5 / 60
494517M	17	27.3	30.0	26	85	213	5 / 60
494519M	19	29.3	30.0	26	85	232	5 / 60
494521M	21	30.9	30.0	26	85	243	5 / 60
494522M	22	32.0	31.5	25	85	266	5 / 60

4955MX 1/2"

- Plastic insert to protect the surface of the wheel rim
- 17MX: Especially for wheel mounting and dismounting on AMG-rims and/or alloy rims with deeply located wheel bolts
- 19MX: Particularly suitable for wheel mounting and assembly on SUVs e.g. PORSCHE Cayenne, Macan, AUDI Q7, Q5, VW Touareg
- 21MX: Particularly for wheel mounting and installation of aluminium rims to HYUNDAI, KIA, TOYOTA, MAZDA, TESLA






17mm 19mm 21mm

KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm		
495517MX	17	27.3	30	25	150	310	2 / 48
495519MX	19	29.3	30	25	150	339	2 / 48
495521MX	21	30.9	30	25	150	413	2 / 48

Double - Ended Impact Socket

4915M



4915S 1/2"




KT NO.	mm / inch	D1 mm	D2 mm	L mm	L1 mm	L2 mm		
49151719M	17 x 19	26	28	77	22	26	210	6 / 96
49151921M	19 x 21	26	28	77	23	26	200	6 / 96
49152122M	21 x 22	30	32	77	20	26	310	5 / 60
49152123M	21 x 23	30	32	77	22	26	310	5 / 60
49152426S	3/4" x 13/16"	26	28	77	23	26	200	6 / 96

Impact Star Socket

4575M — 1/2"

- For torx external screw
- DIN 3121

KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm	g	
457510M	E10	14.0	25.0	7.5	38	68	10 / 200
457512M	E12	15.9	25.0	9.0	38	68	10 / 200
457514M	E14	17.7	25.0	10.0	38	71	10 / 200
457516M	E16	20.0	25.0	11.0	38	75	10 / 200
457518M	E18	22.0	25.0	12.5	38	78	10 / 200
457520M	E20	24.5	30.0	14.0	38	120	10 / 160





CAUTION

1. Air pressure must not exceed 90PSI (6.3bar)
2. Adjust your air tool to its lowest torque output, should this torque level not be enough, increase it gradually

Impact Bit Socket

4015M / 4015S — 1/2"

- Hexagon head
- DIN 3121



KT NO.	mm	L mm	Max. torq N·m	g	
401505M	H5	80	36.0	73	6 / 120
401506M	H6	80	62.4	77	6 / 120
401507M	H7	80	97.0	84	6 / 120
401508M	H8	80	144.0	86	6 / 120
401509M	H9	80	229.0	97	6 / 120
401510M	H10	80	264.0	100	6 / 120
401512M	H12	80	480.0	117	6 / 120
401513M	H13	80	518.0	128	6 / 120
401514M	H14	80	650.0	137	6 / 120
401517M	H17	80	715.0	217	6 / 96
401519M	H19	80	786.0	246	6 / 96

KT NO.	inch	L mm	Max. torq N·m	g	
401508S	1/4	80	93.6	77	6 / 120
401510S	5/16	80	144.0	86	6 / 120
401512S	3/8	80	264.0	100	6 / 120
401516S	1/2	80	518.0	126	6 / 120

4053 / 4063 — 1/2"

- For torx internal screw
- DIN 3121



4053



4063

KT NO.	Size	L mm	g	
405320	T20	60	64	10 / 180
405325	T25	60	65	10 / 180
405327	T27	60	66	10 / 180
405330	T30	60	66	10 / 180
405340	T40	60	68	10 / 180
405345	T45	60	73	10 / 180
405350	T50	60	78	10 / 180
405355	T55	60	87	10 / 180
405360	T60	60	93	10 / 180
405370	T70	60	104	10 /180
406325	T25	100	72	6 / 120
406327	T27	100	76	6 / 120
406330	T30	100	78	6 / 120
406340	T40	100	81	6 / 120
406345	T45	100	88	6 / 120
406350	T50	100	97	6 / 120
406355	T55	100	117	6 / 120
406360	T60	100	137	6 / 120

4055M — 1/2"

- Hexagon head
- DIN 3121



KT NO.	mm	L mm	Max. torq N·m	g	
405504M	H4	60	20.8	64	10 / 180
405505M	H5	60	36.0	67	10 / 180
405506M	H6	60	62.4	71	10 / 180
405507M	H7	60	97.0	74	10 / 180
405508M	H8	60	144.0	79	10 / 180
405510M	H10	60	264.0	87	10 / 180
405512M	H12	60	480.0	98	10 / 180
405513M	H13	60	518.0	104	10 / 180
405514M	H14	60	650.0	110	10 / 180
405516M	H16	60	680.0	125	10 / 180
405517M	H17	60	715.0	178	10 / 80
405518M	H18	60	740.0	186	10 / 80
405519M	H19	60	786.0	195	10 / 80

4055S — 1/2"

- Hexagon head
- ANSI / ASME B107.2



KT NO.	inch	L mm	Max. torq N·m	g	
405506S	3/16	60	36.0	65	10 / 180
405508S	1/4	60	93.6	72	10 / 180
405510S	5/16	60	144.0	78	10 / 180
405512S	3/8	60	264.0	86	10 / 180
405514S	7/16	60	420.0	93	10 / 180
405516S	1/2	60	518.0	104	10 / 180

4056M — 1/2"

- Spline head
- DIN 3121




KT NO.	Size	L mm	Max. torq N·m	g	
405608M	M 8	60	62.4	73	10 / 180
405610M	M10	60	144.0	81	10 / 180
405612M	M12	60	229.0	88	10 / 180

Impact Universal Joint Socket

4B55M 4B55S 1/2"

- Special design for confined spaces
- DIN 3121







• Standard Length

KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
4B5510M	10	17.0	27.5	12	64	167	10 / 120
4B5511M	11	19.0	27.5	12	64	166	10 / 120
4B5512M	12	19.0	27.5	12	64	165	10 / 120
4B5513M	13	21.8	27.5	12	64	171	10 / 120
4B5514M	14	22.0	27.5	12	64	178	10 / 120
4B5515M	15	22.0	27.5	12	64	175	10 / 120
4B5516M	16	23.9	27.5	12	64	182	10 / 120
4B5517M	17	25.0	27.5	12	64	190	10 / 120
4B5521M	21	30.0	27.5	12	64	202	10 / 120
4B5522M	22	31.7	27.5	12	64	208	10 / 120

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
4B5512S	3/8	17.0	27.5	12	64	161	10 / 120
4B5514S	7/16	19.0	27.5	12	64	166	10 / 120
4B5516S	1/2	21.8	27.5	12	64	176	10 / 120
4B5518S	9/16	22.0	27.5	12	64	174	10 / 120
4B5520S	5/8	23.9	27.5	12	64	180	10 / 120
4B5522S	11/16	25.0	27.5	12	64	173	10 / 120
4B5526S	13/16	30.0	27.5	12	64	190	10 / 120
4B5528S	7/8	31.7	27.5	12	64	196	10 / 120
4B5530S	15/16	35.8	27.5	12	64	217	6 / 96

Impact Accessory

4147 1/2"

- Bit holder
- DIN 3121



KT NO.	Size	Overall length mm	g	
414708S	1/4"	48	73	12 / 216
414710S	5/16"	48	79	12 / 216
414710M	10 mm	48	79	12 / 216

414A08S 1/2"

- Quick-release
- Bit holder
- DIN 3121





KT NO.	Size	Overall length mm	g	
414A08S	1/4"	50	93.6	10 / 180

4260P 1/2"

- Extension bar
- DIN 3121



KT NO.	Overall length inch	Overall length mm	g	
4260-03P	3	75	198	4 / 80
4260-04P	4	100	240	4 / 80
4260-05P	5	125	278	2 / 40
4260-06P	6	150	324	4 / 80
4260-08P	8	200	402	4 / 48
4260-10P	10	250	487	4 / 48
4260-12P	12	300	573	2 / 40
4260-16P	16	400	746	2 / 20

Impact Bit Socket

KT No. & D1



CAUTION

1. Air pressure must not exceed 90PSI (6.3bar)
2. Adjust your air tool to its lowest torque output, should this torque level not be enough, increase it gradually

1740

409616M 1/2"


- Hex bit & bit holder
- DIN 3121





409616M

1740

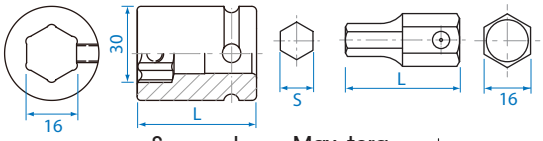

KT NO.	S mm	L mm	Max. torq N·m	g	
174010H	H10	40	264.0	46	20 / 400
174012H	H12	40	480.0	52	20 / 400
174014H	H14	40	684.0	60	20 / 200
174017H	H17	40	680.0	73	20 / 200
174019H	H19	40	680.0	80	20 / 200
174022H	H22	40	680.0	97	12 / 120
409616M	16	38	680.0	145	10 / 160

4065M 1/2"

- Hexagon head
- DIN 3121



KT NO.	mm	L mm	Max. torq N·m	g	
406504M	H4	100	20.8	73	6 / 120
406505M	H5	100	36.0	78	6 / 120
406506M	H6	100	62.4	85	6 / 120
406508M	H8	100	144.0	95	6 / 120
406510M	H10	100	264.0	114	6 / 120
406512M	H12	100	480.0	138	6 / 120
406514M	H14	100	650.0	164	6 / 120

4075M 1/2"

- Hexagon head
- DIN 3121



KT NO.	mm	L mm	Max. torq N·m	g	
407505M	H5	150	36.0	115	6 / 120
407506M	H6	150	62.4	115	6 / 120
407508M	H8	150	144.0	116	6 / 120
407510M	H10	150	264.0	148	6 / 120
407512M	H12	150	480.0	187	6 / 120
407514M	H14	150	650.0	231	6 / 120

Impact Accessory & Set

4269 — 1/2"

- Torque extension bar
- Color coded and engraved with N·m and lbf·ft setting
- Helps to eliminate overtorqued lug nut


KT NO.	Color	Max. torq N·m	Max. torq lbf·ft	Overall length inch	Overall length mm	g
4269-08-90		90	65	7-11/16	195	192
4269-08-A0		100	75	7-11/16	195	201
4269-08-B0		110	80	7-11/16	195	217
4269-08-C0		120	90	7-11/16	195	224
4269-08-D5		135	100	7-11/16	195	238
4269-08-F0		150	110	7-11/16	195	263
4269-08-G0		160	120	7-11/16	195	304
4269-08-H5		175	130	7-11/16	195	284
4269-08-J0		190	140	7-11/16	195	331
4269-08-K0		200	150	7-11/16	195	344





How to use torque extension bar

1. Use with 1/2"DR. impact wrench, don't use by hand.
2. Set air pressure 0.6 MPa(90 PSI) and adjust torque value between 190 N·m and 210 N·m.
3. Select suitable torque extension bar according to wheel nut size and indicated tightening torque.
4. Attach the torque extension bar with socket to impact wrench and apply load.
5. Check the actual tightening torque value by torque wrench.
6. Adjust air pressure or torque value according to the result of above.
7. Tight other wheel nuts in diagonal order.

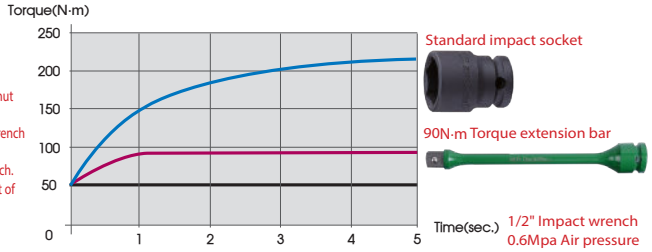

4481PP1 — 1/2"

- Torque extension bar set


Contents			Kg 2.58	1 / 6
	4269-08-90	90 N·m		
	4269-08-A0	100 N·m		
	4269-08-B0	110 N·m		
	4269-08-C0	120 N·m		
	4269-08-D5	135 N·m		
	4269-08-F0	150 N·m		
	4269-08-G0	160 N·m		
	4269-08-H5	175 N·m		
	4269-08-J0	190 N·m		
	4269-08-K0	200 N·m		



9TE41

- Hook for torque extension bar
- Groove capacity : 22 mm



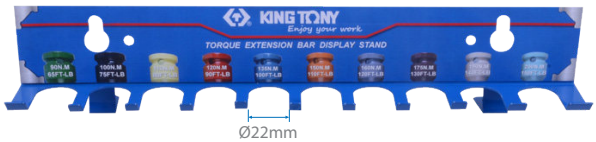


KT NO.	Overall length (mm)	g	
9TE41	311	196.4	1 / 24

Impact Accessory

KT No. & D1

4796P 1/2"

- Universal joint
- DIN 3121






KT NO.	Overall length inch	Overall length mm	D mm	g	
4796P	2-3/8	59	25	124	6 / 96

4797P 1/2"

- Universal joint
- DIN 3121






KT NO.	Overall length inch	Overall length mm	D mm	g	
4797P	2-1/2	65	29.1	168	6 / 96

4798P 1/2"

- Universal joint






KT NO.	Overall length inch	Overall length mm	D mm	D1 mm	g	
4798P	3	74	29.1	29.1	213	6 / 96

4799P 1/2"

- Universal joint
- Durable pinless hex ball locking design
- DIN 3121






KT NO.	Overall length inch	Overall length mm	D mm	g	
4799P	2-3/8	60	30	170	6 / 96

4873P 1/2"

- Adapter
- Convert to 3/8"
- 4873P → Max. torque : 202 N·m
- DIN 3121






KT NO.	Spec.	D mm	g	
4873P	1/2"F x 3/8"M	25	66	10 / 160

4863P 1/2"

- Adapter
- Convert to 3/8", 3/4" drive
- 4863P → Max. torque : 202 N·m
- DIN 3121





4863P & 4866P


KT NO.	Spec.	g	
4863P	1/2"F x 3/8"M	97	10 / 160
4866P	1/2"F x 3/4"M	147	8 / 160

90401 90402 1/2"

- Locking ring
- High tensile rubber material

90601 90602 1/2"

- Locking pin
- Chrome vanadium steel
- DIN 3129



90401
90402



90601
90602

KT NO.	Type	Ø	d / ℓ	Applied to socket sizes
90401	ring	3.5	19	4535M (8~14mm) 4535S (15/16"~9/16") 4435M (8~14mm) 4435S (15/16"~9/16") 4015M (5~14mm) 4015S (1/4"~1/2") 4055M (4~14mm) 4055S (3/16"~1/2") 4935M (10~14mm) 4935S (7/16"~9/16") 4415M (17mm) 4575 (E10~E18) 4835M (10~17mm) 4530M (8~14mm)
90601	pin	3.0	20	414A08S.4053.4063.4065.4075.4873.4015 4147.4055.4056
90402	ring	3.5	23	4535M (15~46mm) 4535S (11/16"~1-1/4") 4435M (15~46mm) 4435S (5/8"~1-1/4") 4935M (16~30mm) 4935S (11/16"~1-1/4") 4015M (17.19mm) 4415M (19.21mm) 4530M (15~36mm) 4575M (E20) 4835M (19~30mm)
90602	pin	3.0	25	4260.4796.4797.4863.4873.4866

Impact Socket Rail Set

4423MP 1/2"

▪ Thin wall version



3 PC.

Contents			0.45 kg	48
○	4835M	17, 19, 21		

7411PP 1/2"



11 PC.

Contents			0.76 kg	4 / 32
✪	3575M	E5, E6, E7, E8		
✪	4575M	E10, E12, E14, E16, E18, E20		
	4863P	1/2"F x 3/8"M		

Impact Socket Set

4408MP 1/2"

Metal case size (mm) :
270 x 73 x 46 (0.032 cuft)



8 PC.

Contents			1.3 kg	1 / 20
○	4535M	10, 12, 13, 14, 17, 19, 21, 24		

Impact Socket Set

4408SP 1/2"

Metal case size (mm) :
270 x 73 x 46 (0.032 cuft)



8 PC.

Contents			1.3 kg	1 / 20
○	4535S	3/8, 7/16, 1/2, 9/16, 11/16, 3/4, 13/16, 15/16		

4412MP 1/2"

Metal case size (mm) :
224 x 94 x 40 (0.03 cuft)



11 PC.

Contents			1.61 kg	1 / 8
○	4535M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21		

4414MP 4414SP 1/2"

Metal case size (mm) :
270 x 100 x 49 (0.047 cuft)



14 PC.

4414MP



4414SP

KT NO.	Contents		kg	
4414MP	○ 4535M	10, 11, 12, 13, 14, 15, 16, 17,18, 19, 21, 22, 24, 27	2.25	1 / 8
4414SP	○ 4535S	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4	2.4	

Impact Socket Set

4419MP 1/2"

Metal case size (mm) :
445 x 135 x 50 (0.021 cuft)

19 PC.

Contents	2.7	1 / 6
4535M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 26, 27, 30, 32	
4260-05P		



4410MP

Metal case size (mm) :
246 x 103 x 38 (0.034 cuft)

4410MP01

4410SP 1/2"



4410MP / 4410MP01



4410SP

8 PC.

KT NO.	Contents	2.3	1 / 12
4410MP	4435M	12, 13, 14, 17, 19, 21, 22, 23	
4410MP01	4435M	12, 13, 14, 17, 19, 21, 22, 24	
4410SP	4435S	1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16	

4416SP 1/2"

Metal case size (mm) :
445 x 135 x 50 (0.021 cuft)



14 PC.

Contents	4.8	1 / 6
4435S	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4	

4413MP 1/2"

Metal case size (mm) :
270 x 73 x 46 (0.032 cuft)



8 PC.

Contents	1.37	1 / 20
4835M	10, 12, 13, 14, 17, 19, 21, 24	

4415MP

Metal case size (mm) :
445 x 135 x 50 (0.021 cuft)



4415MP

4415MP03 1/2"



4415MP03

15 PC.

KT NO.	Contents	4.9	1 / 6
4415MP	4435M	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 24, 26, 29, 32	
4415MP03		10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 24, 27, 30, 32	

Impact Socket Set

4815MP04

Metal case size (mm) :
445 x 135 x 50 (0.021 cuft)

4815MP05 1/2"



15 PC.

4815MP04 / 4815MP05

KT NO.		Contents	Kg	
4815MP04	4430M	10, 12, 13, 14, 15, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32	5.1	1 / 6
4815MP05		8, 9, 10, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24	4.3	1 / 6

Wheel Nut Impact Socket Set

44905MP 1/2"

- Thin wall impact socket set with plastic sleeve
- Durable outer sleeve protects polished wheels and lug nuts

Blow case size (mm) :
149 x 132 x 45 (0.031 cuft)



3 PC.

Contents — Kg 0.89 / 1 / 16

494517M	17 mm	
494519M	19 mm	
494521M	21 mm	

Impact Socket Set

44906MP 1/2"

- Wheel nut impact socket
- Torque extension bar

Metal case size (mm) :
296 x 130 x 41 (0.056 cuft)



6 PC.

Contents — Kg 2.13 / 1 / 10


494517M	17 mm	
494519M	19 mm	
494521M	21 mm	
4269-08-90	90 N·m	
4269-08-B0	110 N·m	
4269-08-D5	135 N·m	

Wheel Nut Impact Socket Set

44904MP 1/2"

- Material - chrome molybdenum alloy steel
- Idling type protective sleeve design, reduce sheath wear and avoid damage to aluminum alloy rims
- With color management, easy to recognize the sizes

Blow case size (mm) :
160 x 135 x 50 (0.038 cuft)
Kg 1.06 / 1 / 20





4 PC.

Contents	DR.	Applicable vehicle	Size mm	L mm
494515M	1/2"	Smart	15	85.0
494522M	1/2"	Opel	22	85.0
9BW4501	1/2"	Mercedes Benz	17	85.5
9BW4502	1/2"	Hyundai/Kia	21	85.5

4405MXL 1/2"

- Thin wall impact socket set with plastic sleeve
- Durable outer sleeve protects polished wheels and lug nuts

Blow case size (mm) :
206 x 147 x 50 (0.053 cuft)



3 PC.

Contents — Kg 1.20 / 1 / 20

495517MX	17 mm, 150mmL	
495519MX	19 mm, 150mmL	
495521MX	21 mm, 150mmL	

Impact Bit Socket Set

4407MP 1/2"

- For hexagon head screw
- 60mmL

Metal case size (mm) :
198 x 105 x 32 (0.023 cuft)



7 PC.

Contents — 0.94 kg / 1 / 20

4055M	H4, H5, H6, H8, H10, H12, H14

4457MP 1/2"

- For hexagon head screw
- 100mmL

Metal case size (mm) :
244 x 118 x 37 (0.038 cuft)



7 PC.

Contents — 1.44 kg / 1 / 18

4065M	H4, H5, H6, H8, H10, H12, H14

4476MP 1/2"

- For hexagon head screw
- 150mmL

Metal case size (mm) :
244 x 118 x 37(0.038 cuft)



6 PC.

Contents — 1.47 kg / 1 / 18

4075M	H5, H6, H8, H10, H12, H14

4418MP 1/2"

- For hexagon head screw
- 60mmL

Metal case size (mm) :
270 x 73 x 46 (0.032 cuft)



8 PC.

Contents — 1.34 kg / 1 / 20

4055M	H5, H6, H8, H10, H12, H14, H17, H19

4417PP 1/2"

- For torx internal screw
- 60mmL

Metal case size (mm) :
198 x 105 x 32 (0.023 cuft)



7 PC.

Contents — 0.94 kg / 1 / 20

4053	T25, T30, T40, T45, T50, T55, T60

4467PP 1/2"

- For torx internal screw
- 100mmL

Metal case size (mm) :
244 x 118 x 37 (0.038 cuft)



7 PC.

Contents — 1.31 kg / 1 / 18


4063	T25, T30, T40, T45, T50, T55, T60

Standard Impact Socket

KT No. & D1

6510M 3/4"

- Lightweight type
- DIN 3121






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
651017M	17	29.0	38	10	50	225	8 / 96
651018M	18	30.0	38	10	50	230	8 / 96
651019M	19	32.0	38	10	50	240	8 / 96
651021M	21	35.0	38	13	50	252	8 / 96
651022M	22	36.0	38	13	50	255	8 / 96
651023M	23	37.0	38	15	50	256	8 / 96
651024M	24	38.0	38	15	50	265	8 / 96
651026M	26	38.0	38	15	53	257	6 / 48
651027M	27	42.0	38	18	53	299	6 / 48
651028M	28	44.0	38	18	53	325	6 / 48
651029M	29	45.0	38	18	53	330	6 / 48
651030M	30	46.0	38	20	53	337	6 / 48

Standard Impact Socket

KT No. & D1

6515M — 3/4"

- Lightweight type
- DIN 3121






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
651514M	14	25.0	38	10	50	206	8 / 96
651515M	15	26.0	38	10	50	210	8 / 96
651516M	16	27.5	38	10	50	216	8 / 96
651517M	17	29.0	38	10	50	228	8 / 96
651518M	18	30.0	38	10	50	232	8 / 96
651519M	19	32.0	38	10	50	241	8 / 96
651521M	21	35.0	38	13	50	254	8 / 96
651522M	22	36.0	38	13	50	260	8 / 96
651523M	23	37.0	38	15	50	261	8 / 96
651524M	24	38.0	38	15	50	265	8 / 96
651525M	25	38.0	38	15	53	275	8 / 96
651526M	26	38.0	38	15	53	259	6 / 48
651527M	27	42.0	38	18	53	311	6 / 48
651528M	28	44.0	38	18	53	332	6 / 48
651529M	29	45.0	38	18	53	345	6 / 48
651530M	30	46.0	38	20	53	348	6 / 48

6530M — 3/4"

- DIN 3129, ISO 2725-2






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
653017M	17	29.0	44	10	50	319	6 / 48
653019M	19	32.0	44	10	50	322	6 / 48
653021M	21	35.0	44	13	50	333	6 / 48
653022M	22	36.0	44	13	50	335	6 / 48
653023M	23	37.0	44	15	50	335	6 / 48
653024M	24	38.0	44	15	50	338	6 / 48
653026M	26	40.0	44	15	53	360	6 / 48
653027M	27	42.0	44	18	53	361	6 / 48
653028M	28	44.0	44	18	53	384	6 / 48
653029M	29	45.0	44	18	53	387	6 / 48
653030M	30	46.0	44	20	53	390	6 / 48
653032M	32	48.0	44	20	57	440	6 / 36
653033M	33	50.0	44	20	57	476	6 / 36
653034M	34	51.0	44	22	57	479	6 / 36
653035M	35	52.0	44	22	57	488	6 / 36
653036M	36	53.0	44	22	57	489	6 / 36
653038M	38	56.0	44	22	57	534	4 / 32
653040M	40	58.0	44	22	58	577	4 / 32
653041M	41	59.0	44	24	58	573	4 / 32
653042M	42	61.0	44	24	58	610	2 / 24
653046M	46	66.0	44	24	62	723	2 / 24
653063M	63	84.5	54	40	80	1352	1 / 12
653065M	65	86.5	54	43	80	1381	1 / 12
653070M	70	92.0	54	45	83	1445	1 / 12

6535M — 3/4"

- DIN 3121





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
653513M	13	22.0	38	16	50	205	8 / 96
653517M	17	29.0	44	10	50	309	6 / 48
653518M	18	30.0	44	10	50	314	6 / 48
653519M	19	32.0	44	10	50	323	6 / 48
653521M	21	35.0	44	13	50	336	6 / 48
653522M	22	36.0	44	13	50	340	6 / 48
653523M	23	37.0	44	15	50	339	6 / 48
653524M	24	38.0	44	15	50	343	6 / 48
653526M	26	40.0	44	15	53	364	6 / 48
653527M	27	42.0	44	18	53	379	6 / 48
653528M	28	44.0	44	18	53	390	6 / 48
653529M	29	45.0	44	18	53	399	6 / 48
653530M	30	46.0	44	20	53	349	6 / 48
653531M	31	47.0	44	20	53	413	6 / 48
653532M	32	48.0	44	20	57	456	6 / 36
653533M	33	50.0	44	20	57	481	6 / 36
653534M	34	51.0	44	22	57	488	6 / 36
653535M	35	52.0	44	22	57	499	6 / 36
653536M	36	53.0	44	22	57	508	6 / 36
653538M	38	56.0	44	22	57	553	4 / 32
653540M	40	58.0	44	22	58	590	4 / 32
653541M	41	59.0	44	24	58	584	4 / 32
653542M	42	61.0	44	24	58	622	2 / 24
653543M	43	62.0	44	24	58	638	2 / 24
653544M	44	64.0	44	24	62	706	2 / 24
653545M	45	64.0	44	24	62	704	2 / 24
653546M	46	66.0	44	24	62	730	2 / 24
653548M	48	68.0	44	26	65	807	2 / 24
653550M	50	71.0	44	26	65	870	1 / 20
653552M	52	74.0	54	30	68	1083	1 / 20
653554M	54	76.0	54	30	68	1151	1 / 20
653555M	55	77.0	54	30	70	1196	1 / 20
653557M	57	79.0	54	32	70	1211	1 / 20
653558M	58	81.0	54	32	70	1275	1 / 20
653560M	60	84.0	54	32	70	1424	1 / 20
653563M	63	83.5	54	40	80	1317	1 / 12
653565M	65	85.5	54	43	80	1324	1 / 12
653570M	70	92.0	54	45	83	1571	1 / 12


Standard Impact Socket

KT No. & D1

6535S

3/4"

- ANSI / ASME B107.2





KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
653522S	11/16	29	38	10	50	226	8 / 96
653524S	3/4	32	38	10	50	240	8 / 96
653526S	13/16	35	38	13	50	254	8 / 96
653528S	7/8	36	38	13	50	259	8 / 96
653530S	15/16	37	38	15	50	256	8 / 96
653532S	1	38	38	15	53	274	8 / 96
653534S	1-1/16	42	40	18	53	328	6 / 48
653536S	1-1/8	44.7	40	18	53	360	6 / 48
653538S	1-3/16	46	40	20	53	368	6 / 48
653540S	1-1/4	48	44	20	57	459	6 / 36
653542S	1-5/16	50	44	20	57	485	6 / 36
653544S	1-3/8	52	44	22	57	495	6 / 36
653546S	1-7/16	54	44	22	57	526	6 / 36
653548S	1-1/2	56	44	22	57	545	4 / 32
653550S	1-9/16	58	44	22	58	596	4 / 32
653552S	1-5/8	59	44	24	58	588	4 / 32
653554S	1-11/16	63.5	44	25	58	681	2 / 24


KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
653556S	1-3/4	64	44	25	62	710	2 / 24
653558S	1-13/16	66	44	25.5	62	718	2 / 24
653560S	1-7/8	68	44	27	65	806	2 / 24
653562S	1-15/16	70	44	27	65	951	1 / 20
653564S	2	72	54	28	68	1048	1 / 20
653566S	2-1/16	74	54	30	68	1078	1 / 20
653568S	2-1/8	76	54	30	68	1142	1 / 20
653570S	2-3/16	77	54	30.5	70	1141	1 / 20
653572S	2-1/4	79	54	32.5	70	1178	1 / 20
653574S	2-5/16	81	54	32.5	70	1266	1 / 20
653576S	2-3/8	84	54	33.5	70	1346	1 / 20

Deep Impact Socket

6435M

3/4"

- DIN 3121






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
643519M	19	32	44	16	90	546	1 / 24
643521M	21	35	44	18	90	567	1 / 24
643522M	22	36	44	18	90	578	1 / 24
643523M	23	37	44	23	90	596	1 / 24
643524M	24	38	44	23	90	598	1 / 24
643525M	25	40	44	25	90	630	1 / 24
643526M	26	40	44	25	90	600	1 / 24
643527M	27	42	44	27	90	625	1 / 24
643528M	28	44	44	27	90	666	1 / 24
643529M	29	45	44	27	90	666	1 / 24
643530M	30	46	44	27	90	693	1 / 24
643532M	32	48	44	30	90	727	1 / 24
643533M	33	50	44	30	90	792	1 / 24
643534M	34	51	44	32	90	795	1 / 24
643535M	35	52	44	32	90	811	1 / 24
643536M	36	53	44	32	90	818	1 / 24
643538M	38	56	44	34	90	882	1 / 24
643540M	40	58	44	34	90	926	1 / 24
643541M	41	59	44	34	90	936	1 / 24
643542M	42	61	44	36	95	1047	1 / 24
643543M	43	62	44	38	95	1092	1 / 10
643544M	44	64	44	38	95	1159	1 / 10
643546M	46	66	44	38	95	1239	1 / 10
643548M	48	68	44	40	95	1218	1 / 10
643550M	50	71	44	40	95	1317	1 / 10
643555M	55	77	54	45	100	1799	1 / 10
643560M	60	84.5	54	50	100	2042	1 / 6
643565M	65	86.5	54	54	100	1904	1 / 6

6435S

3/4"

- ANSI / ASME B107.2






KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
643524S	3/4	32	38	16	90	432	1 / 24
643526S	13/16	35	38	18	90	473	1 / 24
643528S	7/8	36	38	18	90	495	1 / 24
643530S	15/16	37	38	23	90	495	1 / 24
643532S	1	38	38	25	90	478	1 / 24
643534S	1-1/16	42	44	27	90	624	1 / 24
643536S	1-1/8	44.7	44	27	90	665	1 / 24
643538S	1-3/16	46	44	27	90	692	1 / 24
643540S	1-1/4	48	44	30	90	725	1 / 24
643542S	1-5/16	50	44	30	90	782	1 / 24
643544S	1-3/8	52	44	32	90	807	1 / 24
643546S	1-7/16	54	44	32	90	845	1 / 24
643548S	1-1/2	56	44	34	90	874	1 / 24
643550S	1-9/16	58	44	34	90	923	1 / 24
643552S	1-5/8	59	44	34	90	924	1 / 24
643554S	1-11/16	63.5	44	38	95	1181	1 / 10
643556S	1-3/4	64	44	38	95	1139	1 / 10
643558S	1-13/16	66	44	38	95	1212	1 / 10
643560S	1-7/8	68	54	40	95	1354	1 / 10
643562S	1-15/16	70	54	40	95	1256	1 / 10
643564S	2	72	54	40	95	1476	1 / 10

Thin Wall Impact Socket

KT No. & D1

6835M — 3/4"

- DIN 3121






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
683517M	17	28.0	44	16	60	346	6 / 48
683519M	19	30.0	44	16	60	351	6 / 48
683521M	21	33.0	44	18	60	369	6 / 48
683522M	22	34.0	44	18	60	372	6 / 48
683523M	23	35.0	44	23	60	373	6 / 48
683524M	24	36.5	44	23	60	382	6 / 48
683526M	26	39.0	44	25	80	397	1 / 24
683527M	27	40.0	44	26	80	424	1 / 24
683529M	29	43.0	44	26	80	455	1 / 24
683530M	30	44.0	44	26	80	555	1 / 24
683532M	32	46.5	44	26	80	512	1 / 24

6935M — 3/4"

- DIN 3121






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
693519M	19	30.0	44	16	90	513	1 / 24
693521M	21	33.0	44	18	90	546	1 / 24
693522M	22	34.0	44	18	90	541	1 / 24
693523M	23	35.0	44	23	90	519	1 / 24
693524M	24	36.5	44	23	90	573	1 / 24
693526M	26	39.0	44	25	90	578	1 / 24
693527M	27	40.0	44	27	90	574	1 / 24
693529M	29	43.0	44	27	90	578	1 / 24
693530M	30	44.0	44	27	90	622	1 / 24
693532M	32	46.5	44	30	90	683	1 / 24

6935S — 3/4"

- ANSI / ASME B107.2






KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
693524S	3/4	30.0	38	16	90	370	1 / 24
693526S	13/16	33.0	38	18	90	380	1 / 24
693528S	7/8	34.0	38	18	90	385	1 / 24
693530S	15/16	36.5	38	23	90	415	1 / 24
693532S	1	38.0	38	23	90	500	1 / 24
693534S	1-1/16	40.0	44	25	90	654	1 / 24
693536S	1-1/8	43.0	44	25	90	680	1 / 24
693538S	1-3/16	44.0	44	27	90	684	1 / 24
693540S	1-1/4	46.5	44	30	90	733	1 / 24

Impact Star Socket

6575M — 3/4"

- For torx external screw
- DIN 3121






KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm	g	
657524M	E24	32.5	44.0	17.0	50	334	6 / 48
657526M	E26	35.0	44.0	19.0	60	402	6 / 48
657528M	E28	36.5	44.0	25.5	60	401	6 / 48
657530M	E30	37.5	44.0	27.0	65	428	1 / 24
657532M	E32	39.5	44.0	29.0	65	447	1 / 24

Deep Impact Star Socket

6475M — 3/4"

- For torx external screw
- DIN 3121
- For the operation of cylinder head bolts
- E18 application MAN M 2000 / Bus with D 08 engine
- E20 application MAN F 2000 / F 90/ F 8/ Bus with D 25 and D 28 engines
- E24 application MAN D20 engine






KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm	g	
647518M	E18	26.5	44.0	12.5	110	592	1 / 10
647520M	E20	29.0	44.0	14.0	110	627	1 / 10
647522M	E22	31.0	44.0	15.0	110	662	1 / 10
647524M	E24	32.5	44.0	17.0	110	693	1 / 10

Rear Wheel Socket

KT No. & D1

6514M — 3/4"

- 4 points
- DIN 3121





KT NO.	Size	D1 mm	D2 mm	ℓ mm	L mm	g	
651417M	17	39.8	34	28	53	353	1 / 24
651419M	19	39.8	34	28	53	339	1 / 24
651420M	20	41.8	36	28	53	381	1 / 24
651421M	21	41.8	36	28	53	369	1 / 24

Impact Bit Socket

KT No. & D1

6015M 3/4"


- Hexagon head
- DIN 3121



KT NO.	mm	L mm	Max. torq N·m	g	
601514M	H14	87	684	310	2 / 48
601517M	H17	87	1136	342	2 / 48
601519M	H19	87	1577	365	2 / 48
601521M	H21	87	2134	508	1 / 24
601522M	H22	87	2436	524	1 / 24
601524M	H24	87	2436	546	1 / 24
601527M	H27	87	2436	597	1 / 24
601530M	H30	87	2436	710	1 / 24
601532M	H32	87	2436	750	1 / 24

609616MxxH 609622MxxH 3/4"

- DIN 3121





609616MxxH



609622MxxH

KT NO.	S mm	mm	L (mm)	Max. torq N·m	g	
609616M10H	H10	16	77	264	416	4 / 40
609616M12H	H12	16	77	480	422	4 / 40
609616M14H	H14	16	77	684	430	4 / 40
609616M17H	H17	16	77	880	443	4 / 40
609616M19H	H19	16	77	880	450	4 / 40
609616M22H	H22	16	77	880	473	4 / 40
609622M19H	H19	22	93	1577	670	1 / 24
609622M22H	H22	22	93	2436	692	1 / 24
609622M24H	H24	22	93	2436	706	1 / 24
609622M27H	H27	22	93	2436	730	1 / 24
609622M30H	H30	22	93	2436	744	1 / 24
609622M32H	H32	22	93	2436	783	1 / 24

1740 609616M 3/4"


- Hex bit & bit holder
- DIN 3121



1740



609616M



KT NO.	S mm	L mm	Max. torq N·m	g	
174010H	H10	40	264	46	20 / 400
174012H	H12	40	480	55	20 / 400
174014H	H14	40	684	61	20 / 200
174017H	H17	40	880	72	20 / 200
174019H	H19	40	880	83	20 / 200
174022H	H22	40	880	102	12 / 120
609616M	16	52	-	370	6 / 48

1954 609622M 3/4"


- Hex bit & bit holder
- DIN 3121




1954XXH



609622M






195404R

KT NO.	S mm	L mm	Max. torq N·m	g	
195419H	H19	54.5	1577	159	12 / 120
195422H	H22	54.5	2436	176	12 / 120
195424H	H24	54.5	2436	191	10 / 100
195427H	H27	54.5	2436	217	10 / 100
195430H	H30	54.5	2436	248	6 / 60
195432H	H32	54.5	2436	276	6 / 60
609622M	22	60.0	-	530	6 / 48
195404R	1/2"M	54.5	-	133	12 / 120

Impact Accessory

6797P 3/4"

- Universal joint
- DIN 3121






6797P

KT NO.	Overall length inch	Overall length mm	D mm	g	
6797P	4-1/2	114	44	738	2 / 20

6798P 3/4"

- Universal joint
- DIN 3121





6798P

KT NO.	Overall length inch	Overall length mm	D (mm)	D1 (mm)	g	
6798P	4-1/4	108	44	44	749	2 / 20

Impact Accessory

KT No. & D1

6260 6260P 3/4"

- Extension bar
- DIN 3121



6260




6260P

KT NO.	Overall length inch	Overall length mm	g	
6260-04	4	100	566	2 / 20
6260-07	7	175	864	2 / 20
6260-10	10	250	1145	1 / 16
6260-13	13	330	1450	1 / 10
6260-04P	4	100	566	2 / 20
6260-07P	7	175	864	2 / 20
6260-10P	10	250	1145	1 / 16
6260-13P	13	330	1450	1 / 10

6864 6864P

6868 6868P 3/4"

- Adapter
- Convert to 1/2" drive
- 6864 → Max. torque : 512 N·m
- DIN 3121



6864 / 6864P
6868 / 6868P



6864 &6868




6864P &6868P

KT NO.	Spec.	D (mm)	g	
6864	3/4"F x 1/2"M	44	311	6 / 48
6868	3/4"F x 1"M	44	445	6 / 48
6864P	3/4"F x 1/2"M	44	311	6 / 48
6868P	3/4"F x 1"M	44	445	6 / 48

6874 6874P 3/4"

- Adapter
- Convert to 1/2" drive
- 6874 → Max. torque : 512 N·m
- DIN 3121



6874 / 6874P



6874



6874P

KT NO.	Spec.	D (mm)	g	
6874	3/4"F x 1/2"M	38	233	6 / 48
6874P	3/4"F x 1/2"M	38	233	6 / 48

90403 90404 90405 3/4"


- Locking ring
- High tensile rubber material

90603 90604 90607 3/4"

- Locking pin
- Chrome vanadium steel
- DIN 3129



90603
90604
90607



90403
90404
90405

KT NO.	Type	ø	d / ℓ	Applied to socket sizes
90403	ring	3.5	33	6015M (14~19mm) 6435S (3/4"~1") 6510M (17~30mm) 6535S (11/16"~1-3/16") 6515M (17~30mm) 6935S (3/4"~1")
90607	pin	3.0	30	6874
90404	ring	5.5	37	6535M (17~46mm) 6535S (1-1/4" ~1-13/16") 6435M (19~46mm) 6435S (1-1/16"~1-13/16") 6935M (19~32mm) 6935S (1-1/16"~1-1/4")
90603	pin	4.0	35	6015M (21~27mm) 6260.6797.6798.6864 6530M (17~46mm) 6868 6835M (17~32mm) 609616M.609622M
90405	ring	5.5	44	6535M (48~65mm) 6535S (1-7/8" ~ 2-3/8") 6435M (48~50mm) 6435S (1-7/8" ~ 2")
90604	pin	4.0	45	

Impact Bit Socket Set

6411MP 3/4"

Metal case size (mm) :
270 x 100 x 49 (0.048 cuft)



11 PC.

Contents — Kg 2.77 — 1 / 8

	6096M	16, 22
	1740	H10, H12, H14, H17
	1954	H19, H22, H24, H27, H32

Impact Socket Set

6408MP | 6408MP10 | 6408SP10 3/4"

Metal case size (mm) :
241 x 124 x 68 (0.07 cuft)



8 PC.

6408MP / 6408MP10 / 6408SP10

KT NO.		Contents	Kg	
6408MP	○ 6535M	19, 22, 24, 27, 30, 32, 36, 38	3.9	1 / 6
6408MP10	○ 6515M	19, 22, 24, 27, 30	3.9	
	○ 6535M	32, 36, 38		
6408SP10	○ 6535S	3/4, 7/8, 15/16, 1-1/16, 1-3/16, 1-1/4, 1-7/16, 1-1/2	3.8	

6409MP | 6409MP03 | 6409SP10 3/4"

Metal case size (mm) :
445 x 100 x 65 (0.10 cuft)



6409MP / 6409MP03



6409SP10

8 PC.

KT NO.		Contents	Kg	
6409MP	○ 6535M	26, 29, 30, 32, 34, 35, 36, 38	4.7	1 / 2
6409MP03	○ 6535M	21, 22, 24, 27, 30, 32, 36, 41	4.7	
6409SP10	○ 6535S	1, 1-1/16, 1-1/8, 1-1/4, 1-5/16, 1-3/8, 1-7/16, 1-1/2	4.8	

6410MP | 6410SP 3/4"

Metal case size (mm) :
445 x 100 x 65 (0.10 cuft)



6410MP



6410SP


8 PC.

KT NO.		Contents	Kg 7.1	1 / 2
6410MP	○ 6435M	26, 29, 30, 32, 34, 35, 36, 38		
6410SP	○ 6435S	1, 1-1/16, 1-1/8, 1-1/4, 1-5/16, 1-3/8, 1-7/16, 1-1/2		

Standard Impact Socket

8535M — 1"

- DIN 3129, ISO 2725-2






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
853519M	19	35	54	15	58	508	1 / 24
853521M	21	37	54	15	58	537	1 / 24
853522M	22	38	54	15	58	548	1 / 24
853523M	23	39	54	17	58	544	1 / 24
853524M	24	41	54	17	58	562	1 / 24
853525M	25	42	54	17	58	562	1 / 24
853526M	26	43	54	19	58	564	1 / 24
853527M	27	44	54	19	58	565	1 / 24
853528M	28	45	54	19	58	570	1 / 24
853529M	29	47	54	19	58	591	1 / 24
853530M	30	48	54	20	60	592	1 / 24
853532M	32	51	54	20	62	647	1 / 24
853533M	33	52	54	20	62	662	1 / 24
853534M	34	53	54	20	62	665	1 / 24
853535M	35	54	54	20	62	665	1 / 24
853536M	36	56	54	20	65	721	1 / 24
853537M	37	56	54	22	65	698	1 / 24
853538M	38	58	54	22	65	733	1 / 24
853540M	40	60	54	22	65	758	1 / 24
853541M	41	61	54	22	70	824	1 / 24
853542M	42	64	54	22	70	905	1 / 20
853544M	44	67	54	26	70	978	1 / 20
853545M	45	67	54	26	70	960	1 / 20
853546M	46	68	54	26	75	1033	1 / 20
853548M	48	70	54	26	75	1061	1 / 20
853550M	50	73	54	26	75	1170	1 / 20
853552M	52	75	54	30	80	1244	1 / 12
853553M	53	76	54	30	80	1278	1 / 12
853554M	54	78	54	30	80	1351	1 / 12
853555M	55	79	54	32	83	1435	1 / 12
853558M	58	83	54	32	83	1514	1 / 12
853560M	60	86	54	32	87	1693	1 / 12
853563M	63	90	54	34	87	1750	1 / 12
853565M	65	92	54	34	90	1750	1 / 12
853566M	66	94	54	34	90	1889	1 / 12
853568M	68	95	54	34	90	1963	1 / 12
853570M	70	97	54	34	93	2036	1 / 8
853571M	71	99	86	36	93	2917	1 / 8
853575M	75	104	86	36	95	3120	1 / 8
853580M	80	110	86	43	95	3387	1 / 4
853585M	85	115	86	43	95	3532	1 / 4
853590M	90	122	86	43	100	4004	1 / 4
853595M	95	130	95	52	105	4924	1 / 2
8535A0M	100	136	95	51	105	4972	1 / 2

8535S — 1"

- ANSI / ASME B107.2






KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
853524S	3/4	35	54	15	58	528	1 / 24
853526S	13/16	37	54	15	58	548	1 / 24
853528S	7/8	38	54	15	58	538	1 / 24
853530S	15/16	41	54	17	58	568	1 / 24
853532S	1	42	54	17	58	559	1 / 24
853534S	1-1/16	44	54	19	58	566	1 / 24
853536S	1-1/8	47	54	19	58	586	1 / 24
853538S	1-3/16	48	54	20	60	600	1 / 24
853540S	1-1/4	51	54	20	62	659	1 / 24
853542S	1-5/16	52	54	20	62	660	1 / 24
853544S	1-3/8	54	54	20	62	660	1 / 24
853546S	1-7/16	56	54	20	65	713	1 / 24
853548S	1-1/2	58	54	22	65	728	1 / 24
853550S	1-9/16	60	54	22	65	758	1 / 24
853552S	1-5/8	61	54	22	70	822	1 / 24
853554S	1-11/16	64	54	22	70	886	1 / 20
853556S	1-3/4	67	54	26	70	968	1 / 20
853558S	1-13/16	68	54	26	75	1075	1 / 20
853560S	1-7/8	70	54	26	75	1057	1 / 20
853562S	1-15/16	72	54	26	75	1100	1 / 20
853564S	2	74	54	30	75	1170	1 / 20
853566S	2-1/16	75	54	30	80	1225	1 / 12
853568S	2-1/8	78	54	30	80	1355	1 / 12
853570S	2-3/16	79	54	32	83	1423	1 / 12
853572S	2-1/4	82	54	32	83	1486	1 / 12
853574S	2-5/16	83	54	32	83	1459	1 / 12
853576S	2-3/8	86	54	32	87	1681	1 / 12
853578S	2-7/16	88	54	34	87	1681	1 / 12
853580S	2-1/2	90	54	34	87	1704	1 / 12
853582S	2-9/16	92	54	34	90	1881	1 / 12
853584S	2-5/8	94	54	34	90	1795	1 / 12
853586S	2-11/16	95	54	34	90	1931	1 / 12
853588S	2-3/4	97	54	34	93	2114	1 / 8
853590S	2-13/16	99	86	36	93	2869	1 / 8
853592S	2-7/8	102	86	36	93	2997	1 / 8
853594S	2-15/16	104	86	36	95	3161	1 / 8
853596S	3	106	86	36	95	3279	1 / 8
8535A0S	3-1/8	110	86	43	95	3386	1 / 4
8535A4S	3-1/4	112	86	43	95	3342	1 / 4
8535A8S	3-3/8	117	86	43	100	3873	1 / 4
8535B2S	3-1/2	122	86	43	100	4148	1 / 4

Deep Impact Socket

8435M — 1"

- DIN 3121






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
843524M	24	41	54	25	90	874	1 / 24
843527M	27	44	54	25	90	871	1 / 24
843528M	28	45	54	25	90	887	1 / 24
843530M	30	48	54	28	90	908	1 / 24
843532M	32	51	54	28	90	953	1 / 24
843533M	33	52	54	28	92	1016	1 / 24
843534M	34	53	54	28	92	988	1 / 24
843535M	35	54	54	28	92	1020	1 / 24
843536M	36	56	54	32	92	1034	1 / 24
843538M	38	58	54	32	92	1048	1 / 24
843540M	40	60	54	32	92	1094	1 / 24
843541M	41	61	54	32	92	1103	1 / 24
843542M	42	64	54	32	92	1236	1 / 24
843546M	46	68	54	35	95	1329	1 / 10
843548M	48	70	54	35	95	1378	1 / 10
843550M	50	73	54	35	95	1484	1 / 10
843552M	52	75	54	40	100	1594	1 / 6
843554M	54	78	54	40	100	1714	1 / 6
843555M	55	79	54	40	100	1706	1 / 6
843558M	58	83	54	42	100	1887	1 / 6
843560M	60	86	54	42	100	2022	1 / 6
843565M	65	92	54	50	110	2133	1 / 6
843570M	70	97	54	59	110	2285	1 / 6

8435S — 1"

- ANSI / ASME B107.1






KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	
843530S	15/16	40.8	54	25	90	872	1 / 24
843532S	1	42	54	25	90	847	1 / 24
843534S	1-1/16	44	54	25	90	868	1 / 24
843536S	1-1/8	46.3	54	25	90	911	1 / 24
843538S	1-3/16	48	54	28	90	926	1 / 24
843540S	1-1/4	51	54	28	90	980	1 / 24
843542S	1-5/16	52	54	28	92	1010	1 / 24
843544S	1-3/8	54	54	28	92	1022	1 / 24
843546S	1-7/16	56	54	32	92	1017	1 / 24
843548S	1-1/2	58	54	32	92	1048	1 / 24
843550S	1-9/16	60	54	32	92	1096	1 / 24
843552S	1-5/8	61	54	32	92	1097	1 / 24
843554S	1-11/16	64	54	32	92	1211	1 / 24
843556S	1-3/4	67	54	32	92	1312	1 / 12
843558S	1-13/16	68	54	35	95	1322	1 / 12
843560S	1-7/8	70	54	35	95	1382	1 / 6
843562S	1-15/16	72	54	35	95	1450	1 / 6
843564S	2	74	54	35	95	1510	1 / 6
843566S	2-1/16	75	54	40	100	1589	1 / 6
843568S	2-1/8	78	54	40	100	1729	1 / 6
843570S	2-3/16	79	54	40	100	1646	1 / 6
843572S	2-1/4	82	54	42	100	1837	1 / 6

Thin Wall Impact Socket

8835M — 1"

- Thin wall version
- 6 points
- Metric size
- DIN 3121





KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
883524M	24	38.0	54	26	80	690	1 / 24
883527M	27	42.0	54	26	80	710	1 / 24
883529M	29	44.0	54	26	80	750	1 / 24
883530M	30	46.0	54	30	80	750	1 / 24
883532M	32	48.0	54	30	80	743	1 / 24
883533M	33	49.0	54	30	80	776	1 / 24
883534M	34	50.0	54	30	80	761	1 / 24
883535M	35	52.0	54	32	80	800	1 / 24
883536M	36	53.0	54	32	80	781	1 / 24
883538M	38	56.0	54	32	80	831	1 / 24
883541M	41	59.5	54	32	80	882	1 / 24

Rear Wheel Socket

8514M — 8514S — 8524M — 1"

- 4 points
- DIN 3121




8514M



8524M



8514S




KT NO.	SQ	D1 mm	D2 mm	ℓ mm	L mm	g	
851417M	17	40.0	54	30.0	60	612	1 / 24
851419M	19	42.0	54	30.0	60	611	1 / 24
851420M	20	43.0	54	30.0	60	625	1 / 24
851421M	21	44.0	54	30.0	60	618	1 / 24
851422M	22	45.5	54	30.0	60	629	1 / 24
852421M	21	44.0	48	30.0	60	502	1 / 24
851426S	13/16	44	54	30.0	60	617	1 / 24

Rear Wheel Socket

8534M — 1"

- 4 points
- DIN 3121






KT NO.	SQ	D1 mm	D2 mm	ℓ mm	L mm	g	
853417M	17	38.0	54	23.5	76	658	1 / 24
853419M	19	43.0	54	23.5	76	717	1 / 24
853421M	21	47.0	54	23.5	76	773	1 / 24

8545M — 1"


- DIN 3121
- 17SQ x35MM Isuzu, Mitsubishi, Nissan, Mazda
- 19SQ x41MM Mazda
- 20SQ x38MM Hino, Toyota, Daihatsu
- 20SQ x41MM Hino, Toyota, Daihatsu
- 21SQ x41MM Scania, Isuzu, Hino, Mitsubishi, Nissan







Use for

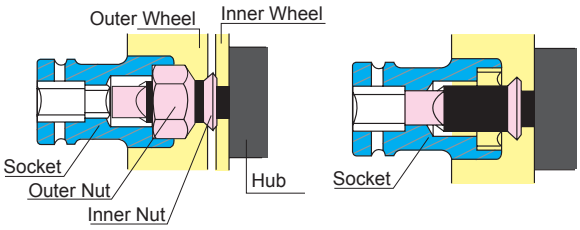

The wheel nut socket fits onto both outer nut and inner nut

KT NO.	SQ	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
85451735M	17	x 35	54	54	13	83	857	1 / 24
85451941M	19	x 41	55	54	14	87	924	1 / 24
85452038M	20	x 38	58	54	14	83	796	1 / 24
85452041M	20	x 41	58	54	14	87	1086	1 / 24
85452141M	21	x 41	58	54	14	87	1017	1 / 24

Impact Bit Socket

1954 — 809622M 1"


- Hex bit & bit holder
- DIN 3121



1954




809622M

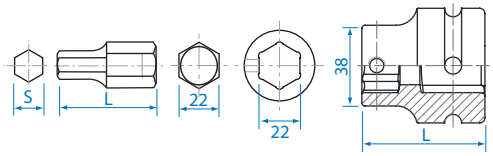

KT NO.	S mm	L mm	Max. torq N·m	g	
195419H	H19	54.5	1577	140	12 / 120
195422H	H22	54.5	2436	162	12 / 120
195424H	H24	54.5	2436	176	10 / 100
195427H	H27	54.5	2436	200	10 / 100
195430H	H30	54.5	2436	232	6 / 60
195432H	H32	54.5	2436	243	6 / 60
809622M	22	58.0	-	547	1 / 24

809622MxxH — 1"

- Hexagon head
- DIN 3121






KT NO.	S mm	mm	L (mm)	Max. torq N·m	g	
809622M19H	H19	22	93	1577	896	1 / 10
809622M22H	H22	22	93	2436	918	1 / 10
809622M24H	H24	22	93	2436	932	1 / 10
809622M27H	H27	22	93	2436	956	1 / 10
809622M30H	H30	22	93	2436	988	1 / 10
809622M32H	H32	22	93	2436	999	1 / 10



Impact Accessory

8260 / 8260P 1"

- Extension bar
- DIN 3121

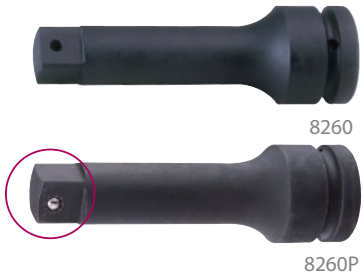

KT NO.	Overall Length inch	Overall Length mm	g	
8260-07	7	175	1400	1 / 12
8260-10	10	250	1932	1 / 12
8260-13	13	330	2458	1 / 8
8260-07P	7	175	1400	1 / 12
8260-10P	10	250	1932	1 / 12
8260-13P	13	330	2458	1 / 8

8869 / 8869P 1"


- Adapter
- Convert to 1-1/2" drive
- DIN 3121



KT NO.	Spec.	g	
8869	1" F x 1-1/2"M	941	1 / 24
8869P	1" F x 1-1/2"M	941	1 / 24

8797 / 8797P 1"

- Universal joint
- DIN 3121





KT NO.	Overall Length inch	Overall Length mm	D mm	g	
8797	5	125	60	1491	1 /18
8797P	5	125	60	1491	1 /18

8866 / 8866P 1"

- Adapter
- Convert to 3/4" drive
- 8866 → Max. torque : 1412 N·m
- DIN 3121




KT NO.	Spec.	g	
8866	1"F x 3/4"M	606	4 / 32
8866P	1"F x 3/4"M	606	4 / 32

90405 / 90406 1"


- Locking ring
- High tensile rubber material

90605 / 90606 1"

- Locking pin
- Chrome vanadium steel
- DIN 3129



90605
90606



90405
90406

KT NO.	Type	ø	d / ℓ	Applied to socket sizes
90405	ring	5.5	44	8535M (19~70mm) 8535S (3/4"~2-3/4") 8435M (24~60mm) 8435S (15/16"~2-1/4") 8835M (24~60mm) 8514M.8514S.8534M.806519M 8260.8797.8866.8869
90605	pin	5.0	45	
90406	ring	10	75	8535M (71~90mm) 8535S (2-13/16"~3-1/2")
90606	pin	5.0	75	

Impact Socket Set

8404MP 1"

Metal case size (mm) :
241 x 124 x 68 (0.51 cuft)



4 PC.

Contents	4.65 kg	1 / 4
8435M	27, 30, 32, 33	

8409MP 1"

Metal case size (mm) :
445 x 100 x 65 (0.104 cuft)

8 PC.



Contents	8.9 kg	1 / 2
8435M	24, 27, 30, 32, 33, 36, 38, 41	

8408MP 8408MP02 1"

- 6 PC. thin wall deep version
- 2 PC. rear wheel, square

Metal case size (mm) :
445 x 120 x 68 (0.128 cuft)

8 PC.



KT NO.	Contents			6.4 kg	1 / 4
8408MP	8835M	24, 27, 32, 36, 38, 41	8534M		17, 21
8408MP02					19, 21

8410MP 8410SP 1"

Metal case size (mm) :
280 x 130 x 74 (0.095 cuft)



8 PC.

KT NO.	Contents		6.4 kg	1 / 4
8410MP	8535M	24, 27, 30, 32, 33, 36, 38, 41		
8410SP	8535S	15/16, 1-1/16, 1-3/16, 1-1/4, 1-5/16, 1-7/16, 1-1/2, 1-5/8		

Impact Accessory

9260 9260P 1-1/2"

- Extension bar
- DIN 3121



9260



9260P

KT NO.	Overall length inch	mm	g	
9260-13	13	330	5900	1 / 4
9260-13P	13	330	5900	1 / 4

9868 9868P 1-1/2"

- Adapter
- Convert to 1" drive
- Max. → torque : 2515 N·m
- DIN 3121



9868




9868P

KT NO.	Spec.	g	
9868	1-1/2" F x 1"M	2250	1 / 6
9868P	1-1/2" F x 1"M	2250	1 / 6

Standard Impact Socket

9535M — 1-1/2"

- DIN 3129






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	Kg	
953532M	32	56	86	23	80	1.393	1 / 6
953533M	33	57	86	23	80	1.952	1 / 6
953534M	34	58	86	24	80	1.923	1 / 6
953536M	36	62	86	26	80	1.994	1 / 6
953538M	38	64	86	26	80	2.001	1 / 6
953541M	41	68	86	28	80	2.056	1 / 6
953542M	42	70	86	28	80	2.081	1 / 6
953546M	46	73	86	30	85	2.154	1 / 6
953550M	50	78	86	32	85	2.246	1 / 6
953555M	55	85	86	36	93	2.520	1 / 6
953560M	60	90	86	40	95	2.757	1 / 6
953565M	65	96	86	42	100	3.134	1 / 6
953570M	70	103	86	46	103	3.529	1 / 6
953575M	75	108	86	48	105	3.713	1 / 4
953580M	80	115	86	52	105	3.934	1 / 4
953585M	85	121	86	55	110	4.467	1 / 4
953590M	90	127	86	58	110	4.652	1 / 4
953595M	95	134	127	50	110	7.224	1 / 1
9535A0M	100	140	127	53	115	7.729	1 / 1
9535A5M	105	146	127	53	115	7.856	1 / 1
9535B0M	110	152	127	56	125	8.845	1 / 1
9535B5M	115	160	127	60	125	9.454	1 / 1
9535C0M	120	166	127	62	130	9.960	1 / 1
9535C5M	125	172	127	65	135	10.826	1 / 1
9535D0M	130	180	127	68	140	12.423	1 / 1
9535D5M	135	185	127	70	145	13.240	1 / 1
9535E0M	140	190	127	75	150	13.570	1 / 1
9535F0M	150	200	127	80	155	14.270	1 / 1



9535S — 1-1/2"

- ANSI / ASME B107.1






KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	Kg	
953564S	2	81	86	35	85	2.305	1 / 6
953566S	2-1/16	82	86	36	85	2.364	1 / 6
953568S	2-1/8	84	86	36	90	2.508	1 / 6
953570S	2-3/16	85	86	43	93	3.204	1 / 6
953572S	2-1/4	87	86	43	93	5.209	1 / 6
953574S	2-5/16	89	86	43	93	2.560	1 / 6
953576S	2-3/8	90	86	45	95	2.622	1 / 6
953578S	2-7/16	93	86	44	95	2.711	1 / 6
953580S	2-1/2	95	86	46	97	2.833	1 / 6
953582S	2-9/16	96	86	49	100	2.863	1 / 6
953584S	2-5/8	99	86	48	100	2.958	1 / 6
953586S	2-11/16	101	86	48	100	3.055	1 / 6
953588S	2-3/4	103	86	48	103	3.217	1 / 6
953590S	2-13/16	105	86	50	105	3.306	1 / 6
953592S	2-7/8	107	86	50	105	3.600	1 / 6
953594S	2-15/16	108	86	50	105	3.455	1 / 6
953596S	3	111	86	50	105	3.590	1 / 4
953598S	3-1/16	114	86	52	105	3.931	1 / 4
9535A0S	3-1/8	116	86	53	105	4.123	1 / 4
9535A2S	3-3/16	118	86	53	105	4.089	1 / 4
9535A4S	3-1/4	120	86	54	105	4.829	1 / 4
9535A6S	3-5/16	122	86	56	105	4.207	1 / 4
9535A8S	3-3/8	123	86	56	105	4.306	1 / 4
9535B0S	3-7/16	125	86	57	105	4.256	1 / 4
9535B2S	3-1/2	129	86	60	110	4.905	1 / 4
9535B4S	3-9/16	130	86	60	110	5.435	1 / 4
9535B6S	3-5/8	131	86	60	110	4.894	1 / 4
9535B8S	3-11/16	133	86	62	113	5.468	1 / 1
9535C0S	3-3/4	136	127	62	113	3.741	1 / 1
9535C2S	3-13/16	138	127	64	120	9.098	1 / 1
9535C4S	3-7/8	139	127	66	120	8.954	1 / 1
9535C6S	3-15/16	140	127	66	120	8.931	1 / 1
9535C8S	4	142	127	66	120	7.886	1 / 1
9535D0S	4-1/16	143	127	68	120	7.843	1 / 1
9535D2S	4-1/8	146	127	68	120	8.003	1 / 1
9535D4S	4-3/16	146	127	70	120	7.851	1 / 1
9535D6S	4-1/4	150	127	72	124	8.385	1 / 1
9535D8S	4-5/16	154	127	72	124	8.973	1 / 1
9535E0S	4-3/8	155	127	72	124	8.923	1 / 1
9535E2S	4-7/16	155	127	75	128	9.033	1 / 1
9535E4S	4-1/2	159	127	75	128	9.258	1 / 1
9535E8S	4-5/8	164	127	79	132	13.730	1 / 1
9535F2S	4-3/4	167	127	79	132	10.386	1 / 1
9535F6S	4-7/8	171	127	79	136	10.930	1 / 1
9535G0S	5	174	127	79	140	11.338	1 / 1
9535G4S	5-1/8	180	127	80	143	12.279	1 / 1
9535G8S	5-1/4	184	127	80	145	12.728	1 / 1
9535J2S	6	203	127	85	165	14.270	1 / 1

Standard Impact Socket

A535M — 2-1/2"

- DIN 3129






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	Kg	
A535041M	41	78	127	39	115	5.98	1 / 4
A535046M	46	83	127	39	115	5.97	1 / 4
A535050M	50	88	127	39	115	6.05	1 / 4
A535051M	51	89	127	39	115	6.06	1 / 4
A535055M	55	94	127	42	115	6.14	1 / 4
A535057M	57	96	127	42	115	6.18	1 / 4
A535060M	60	100	127	45	125	6.87	1 / 2
A535065M	65	105	127	48	125	6.90	1 / 2
A535070M	70	110	127	50	125	6.93	1 / 2
A535075M	75	115	127	55	125	7.14	1 / 2
A535076M	76	120	127	55	125	7.14	1 / 2
A535077M	77	120	127	55	125	7.15	1 / 2
A535080M	80	123	127	57	125	7.22	1 / 2
A535085M	85	127	127	60	130	7.54	1 / 2
A535086M	86	127	127	60	130	7.47	1 / 2
A535090M	90	135	127	65	130	7.90	1 / 2
A535095M	95	140	127	70	140	8.61	1 / 2
A535100M	100	145	127	70	140	8.81	1 / 2
A535105M	105	155	127	70	142	10.18	1 / 2
A535110M	110	160	127	76	155	11.50	1 / 2
A535115M	115	165	127	78	155	18.39	1 / 2
A535120M	120	175	127	80	160	13.18	1 / 1
A535125M	125	180	127	82	165	19.87	1 / 1
A535130M	130	185	127	85	170	20.64	1 / 1
A535135M	135	190	127	90	175	21.75	1 / 1
A535140M	140	200	127	95	180	24.06	1 / 1
A535145M	145	205	127	95	183	24.96	1 / 1
A535150M	150	210	127	100	190	26.91	1 / 1
A535155M	155	215	175	100	195	27.99	1 / 1
A535160M	160	225	175	100	200	31.13	1 / 1
A535165M	165	230	175	105	205	32.45	1 / 1
A535170M	170	235	175	105	205	33.15	1 / 1
A535175M	175	240	175	110	210	34.52	1 / 1
A535180M	180	250	175	110	213	38.23	1 / 1
A535185M	185	255	175	110	213	39.84	1 / 1
A535190M	190	265	175	115	220	41.49	1 / 1
A535200M	200	275	175	120	225	44.44	1 / 1
A535210M	210	285	175	125	235	48.78	1 / 1
A535215M	215	290	175	125	240	51.21	1 / 1
A535225M	225	305	175	135	250	57.57	1 / 1
A535235M	235	315	175	140	260	62.92	1 / 1

(Make - to - order production)

A535S — 2-1/2"

- ANSI / ASME B107.1






KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	Kg	
A535076S	2-3/8	100	127	45	125	6.89	1 / 2
A535078S	2-7/16	103	127	45	125	6.93	1 / 2
A535080S	2-1/2	103	127	48	125	6.85	1 / 2
A535082S	2-9/16	105	127	48	125	6.90	1 / 2
A535084S	2-5/8	107	127	50	125	6.94	1 / 2
A535088S	2-3/4	110	127	50	125	6.93	1 / 2
A535090S	2-13/16	115	127	50	125	7.04	1 / 2
A535094S	2-15/16	115	127	55	125	7.16	1 / 2
A535096S	3	120	127	55	125	7.20	1 / 2
A535100S	3-1/8	123	127	57	125	7.26	1 / 2
A535108S	3-3/8	127	127	60	130	7.48	1 / 2
A535112S	3-1/2	135	127	65	130	7.98	1 / 2
A535120S	3-3/4	140	127	70	140	8.56	1 / 2
A535124S	3-7/8	145	127	70	140	8.65	1 / 2
A535126S	3-15/16	145	127	70	140	8.76	1 / 2
A535132S	4-1/8	155	127	70	142	9.91	1 / 2
A535136S	4-1/4	160	127	75	155	11.74	1 / 2
A535138S	4-5/16	160	127	75	155	12.52	1 / 2
A535144S	4-1/2	165	127	78	155	12.61	1 / 2
A535148S	4-5/8	175	127	80	160	19.18	1 / 1
A535156S	4-7/8	180	127	82	165	19.87	1 / 1
A535160S	5	185	127	82	165	20.02	1 / 1
A535164S	5-1/8	185	127	85	170	20.42	1 / 1
A535168S	5-1/4	190	127	90	175	21.81	1 / 1
A535172S	5-3/8	200	127	95	180	23.90	1 / 1
A535180S	5-5/8	205	127	95	183	24.43	1 / 1
A535184S	5-3/4	205	127	95	183	26.30	1 / 1
A535188S	5-7/8	210	127	100	190	26.62	1 / 1
A535192S	6	215	175	100	195	29.10	1 / 1
A535196S	6-1/8	220	175	100	195	28.69	1 / 1
A535200S	6-1/4	220	175	100	195	28.58	1 / 1
A535204S	6-3/8	225	175	100	200	30.77	1 / 1
A535208S	6-1/2	230	175	105	205	31.05	1 / 1
A535212S	6-5/8	235	175	105	205	32.17	1 / 1
A535216S	6-3/4	235	175	105	205	33.68	1 / 1
A535220S	6-7/8	240	175	110	210	32.41	1 / 1
A535224S	7	245	175	110	210	35.53	1 / 1
A535240S	7-1/2	265	175	115	220	41.16	1 / 1
A535244S	7-5/8	265	175	115	220	41.52	1 / 1
A535252S	7-7/8	275	175	120	225	44.46	1 / 1
A535256S	8	280	175	120	230	45.89	1 / 1

(Make - to - order production)

Standard Impact Socket

B535M — 3-1/2"

- DIN 3129






KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	Kg	
B535105M	105	165	175	70	175	18.73	1 / 1
B535110M	110	170	175	75	175	19.19	1 / 1
B535115M	115	175	175	78	180	19.74	1 / 1
B535120M	120	180	175	80	185	20.24	1 / 1
B535125M	125	185	175	82	185	21.86	1 / 1
B535130M	130	190	175	85	194	22.70	1 / 1
B535135M	135	200	175	90	200	24.24	1 / 1
B535140M	140	205	175	95	205	25.59	1 / 1
B535145M	145	210	175	95	210	31.12	1 / 1
B535150M	150	215	175	100	210	32.38	1 / 1
B535160M	160	230	175	100	220	35.85	1 / 1
B535165M	165	235	175	105	224	37.92	1 / 1
B535170M	170	240	175	105	225	38.71	1 / 1
B535175M	175	245	175	110	230	40.05	1 / 1
B535180M	180	255	200	110	230	43.77	1 / 1
B535185M	185	260	200	110	235	46.94	1 / 1
B535190M	190	270	200	115	240	50.60	1 / 1
B535200M	200	280	200	120	245	52.90	1 / 1
B535210M	210	290	200	125	250	57.50	1 / 1
B535215M	215	300	200	125	250	60.06	1 / 1
B535225M	225	310	200	135	265	61.50	1 / 1
B535235M	235	315	200	140	267	67.91	1 / 1

(Make - to - order production)

B535S — 3-1/2"

- ANSI / ASME B107.1






KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	Kg	
B535132S	4-1/8	165	175	70	175	18.74	1 / 1
B535136S	4-1/4	168	175	75	175	19.08	1 / 1
B535140S	4-3/8	170	175	75	175	19.74	1 / 1
B535144S	4-1/2	175	175	78	180	19.72	1 / 1
B535148S	4-5/8	175	175	80	180	19.95	1 / 1
B535152S	4-3/4	180	175	80	185	20.14	1 / 1
B535156S	4-7/8	185	175	82	185	22.04	1 / 1
B535160S	5	190	175	82	194	21.59	1 / 1
B535164S	5-1/8	190	175	85	194	22.64	1 / 1
B535168S	5-1/4	200	175	90	200	23.59	1 / 1
B535172S	5-3/8	200	175	95	200	24.64	1 / 1
B535176S	5-1/2	205	175	95	205	25.57	1 / 1
B535180S	5-5/8	205	175	95	205	30.53	1 / 1
B535184S	5-3/4	210	175	95	210	31.92	1 / 1
B535188S	5-7/8	215	175	100	210	32.50	1 / 1
B535192S	6	220	175	100	215	33.43	1 / 1
B535196S	6-1/8	220	175	100	215	34.28	1 / 1
B535200S	6-1/4	230	175	100	220	35.13	1 / 1
B535204S	6-3/8	230	175	100	220	36.51	1 / 1
B535208S	6-1/2	235	175	105	224	37.76	1 / 1
B535212S	6-5/8	235	175	105	224	37.98	1 / 1
B535216S	6-3/4	240	175	105	225	38.70	1 / 1
B535220S	6-7/8	245	175	110	230	39.87	1 / 1
B535224S	7	250	200	110	230	41.99	1 / 1
B535228S	7-1/8	255	200	110	230	44.24	1 / 1
B535232S	7-1/4	260	200	110	235	46.61	1 / 1
B535236S	7-3/8	270	200	115	240	48.11	1 / 1
B535240S	7-1/2	270	200	115	240	50.65	1 / 1
B535244S	7-5/8	275	200	115	240	51.49	1 / 1
B535248S	7-3/4	280	200	120	245	52.11	1 / 1
B535252S	7-7/8	280	200	120	245	53.59	1 / 1
B535256S	8	285	200	120	245	55.59	1 / 1
B535260S	8-1/8	290	200	120	250	56.25	1 / 1
B535264S	8-1/4	290	200	125	250	57.50	1 / 1
B535268S	8-3/8	300	200	125	250	59.14	1 / 1
B535272S	8-1/2	300	200	125	250	59.43	1 / 1
B535276S	8-5/8	305	200	135	260	61.94	1 / 1
B535280S	8-3/4	310	200	135	265	64.58	1 / 1
B535284S	8-7/8	315	200	140	267	66.14	1 / 1

(Make - to - order production)


PNEUMATIC TOOLS



New Twin Hammer




Twin Hammer



Jumbo Hammer

Mechanical Structure



Twin Dog




Pinless Hammer


OIL DAILY

What you need to know

Air supply system :

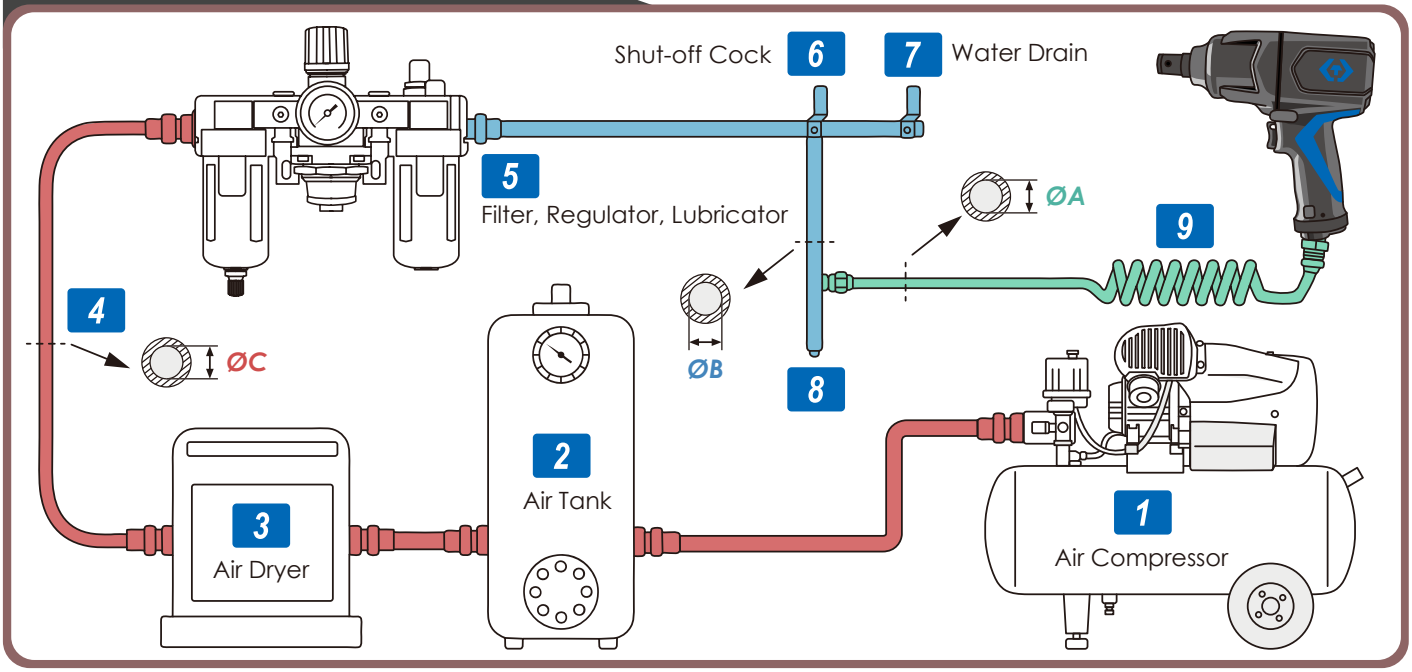

Piping diameters and length requirement :


ØA = Follow air tools specification table, length should be less than 4.5m.

ØB = 2 times tools hose size. (ØB = 2xØA)

ØC = 3 times tools hose size. (ØC = 3xØA)

KING TONY®


Preparation



▪ Set the air pressure




▪ Oil for pneumatic tool SAE#10

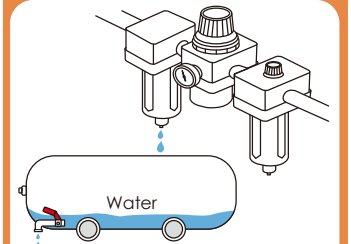


▪ Drain the water




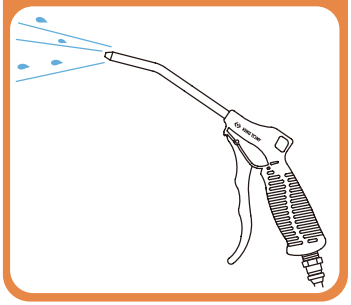


▪ Handle the air tool correctly




Operation






▪ Select the direction



▪ Adjust the torque

Maintenance

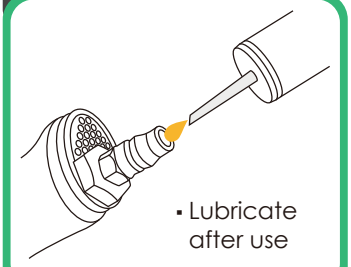

▪ Lubricate after use



▪ Store




▪ Dispose

KT NO.	Drive	Max. torque ft·lb	Max. torque N·m	Type: Standard	Type: Lightweight	Type: Mini.	Working place	Anvil: STD	Anvil: Long	Page
33491-030 33491-031	1/2"	300	407					○		269
33431-050 33431-051		500	678					○		270
33411-040 33411-041		500	678					○		271
33421-040 33421-041		500	678					○		271
33411-050 33411-051		650	881					○		271
33412-050 33412-051		650	881						2"	271
33431-065		650	881					○		272
33461-100 33461-101		1000	1356					○		268
33481-095 33481-096		950	1288					○		273
33611-055 33611-056	3/4"	700	949					○		272
33621-075 33621-076		800	1085					○		272
33622-075 33622-076		800	1085						6"	272
33681-100 33681-101		1100	1491					○		273
33631-110 33631-111		1100	1491					○		273
33632-110 33632-111		1100	1491						6"	273
33671-160 33672-160		1600	2170					○	6"	275
33851-120 33851-121		1200	1626					○		274
33852-120 33852-121		1200	1626						6"	274
33811-150 33812-150		1500	2033					○	6"	276
33871-160 33872-160	1"	1600	2170					○	6"	275
33841-180 33842-180		1800	2440					○	6"	274
33831-180 33832-180		1800	2440					○	6"	276
33861-200 33862-200		2000	2712					○	6"	277
33851-250 33852-250		2500	3388					○	8"	278
33911-250 33912-250	1-1/2"	2500	3388					○	8"	278
33921-300 33922-300		3000	4065					○	8"	278

1/2" DR. Super Duty Composite Impact Wrench



33461-100
33461-101








- TPR ergonomic handle material reduces vibration



- 3-speed power setting, full speed in reverse



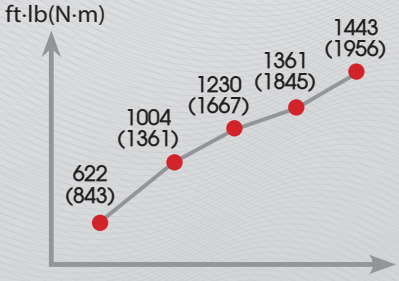


KT NO.	Square drive inch	Square drive mm	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33461-100	1/2"	12.70	1"	M24	9500	1000	1356	7.5	190	1/4" BSPT	3/8"	6.2	90	207	7.3	99.2	13.32	2.30	5.28	1 / 8
33461-101	1/2"	12.70	1"	M24	9500	1000	1356	7.5	190	1/4" NPT	3/8"	6.2	90	207	7.3	99.2	13.32	2.30	5.28	1 / 8

Ultra Compact Angle Impact Wrench

33491-030

- Easy to work in confined space, head length 88mm
- Ergonomic handle in hand and great power setting
- Lightweight : 1.4Kg
- Max. torque : 350ft·lb (475N·m) in reverse

Jumbo Hammer



1/2"

33491





- 3-speed power setting

3 2 1

- Full speed in reverse

3






- 360˚ swivel exhaust deflector



- Gearless hammer design Reduces vibration by 50%, Increases torque by 20%



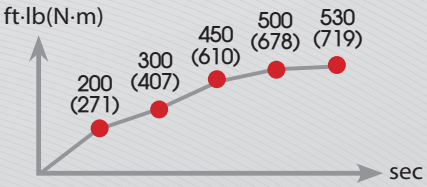

KT NO.	Square drive inch	Square drive mm	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33491-030	1/2"	12.70	9/16"	M14	6,500	300	407	9-64/49"	248	1/4"BSPT	3/8"	6.2	90	119	4.2	94.00	7.48	1.40	3.09	1/12
33491-031	1/2"	12.70	9/16"	M14	6,500	300	407	9-64/49"	248	1/4"NPT	3/8"	6.2	90	119	4.2	94.00	7.48	1.40	3.09	1/12

Mini Impact Wrench

33431-050

- Mini design, overall length 109mm with 1.35kg
- Nickel chrome molybenum square drive
- Improved jumbo hammer design : 30% higher torque
- One hand operation




1/2"
33431





- One-hand control forward & reverse switch



- Convenient to switch on both sides



- 3-speed regulator for precise control



- Ergonomic design interchangeable rubber grip


- 360 rotation air inlet connector design



- Air exhaust away from the operator

-15% length



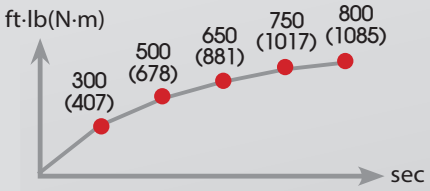


KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33431-050	1/2"	12.70	Std.anvil	5/8"	M16	9000	500	678	4-19/64"	109	1/4"BSPT	3/8"	6.2	90	142	5.0	101.02	8.70	1.35	2.98	1 / 12
33431-051	1/2"	12.70	Std.anvil	5/8"	M16	9000	500	678	4-19/64"	109	1/4"NPT	3/8"	6.2	90	142	5.0	101.02	8.70	1.35	2.98	1 / 12

Impact Wrench

33421


- Nickel chrome molybdenum square drive
- Variable speed trigger
- Muffled on front exhaust





KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33421-040	1/2"	12.70	Std.anvil	5/8"	M16	8000	500	678	6-3/4"	171	1/4"BSPT	3/8"	6.2	90	113	4.0	101.02	8.70	2.56	5.64	1 / 8
33421-041	1/2"	12.70	Std.anvil	5/8"	M16	8000	500	678	6-3/4"	171	1/4"NPT	3/8"	6.2	90	113	4.0	101.02	8.70	2.56	5.64	1 / 8

33411-040





33411-050 / 33412-050








KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33411-040	1/2"	12.70	Std. anvil	5/8"	M16	8000	500	678	7-23/64"	187	1/4"BSPT	3/8"	6.2	90	113	4.0	95.22	4.85	2.60	5.73	1 / 8
33411-041	1/2"	12.70	Std. anvil	5/8"	M16	8000	500	678	7-23/64"	187	1/4"NPT	3/8"	6.2	90	113	4.0	95.22	4.85	2.60	5.73	1 / 8
33411-050	1/2"	12.70	Std. anvil	3/4"	M19	8000	650	881	7-41/64"	194	1/4"BSPT	3/8"	6.2	90	125	4.4	96.50	8.13	2.80	6.17	1 / 8
33411-051	1/2"	12.70	Std. anvil	3/4"	M19	8000	650	881	7-41/64"	194	1/4"NPT	3/8"	6.2	90	125	4.4	96.50	8.13	2.80	6.17	1 / 8
33412-050	1/2"	12.70	Long anvil	3/4"	M19	8000	650	881	9-23/64"	238	1/4"BSPT	3/8"	6.2	90	125	4.4	96.19	6.84	3.20	7.05	1 / 8
33412-051	1/2"	12.70	Long anvil	3/4"	M19	8000	650	881	9-23/64"	238	1/4"NPT	3/8"	6.2	90	125	4.4	96.19	6.84	3.20	7.05	1 / 8


Impact Wrench

CAUTION Please wear proper safety gear while working.

33431

- One-handed F / R control
- Convenient to switch on both sides
- 3-speed regulator for precise control
- Ergonomic design interchangeable rubber grip



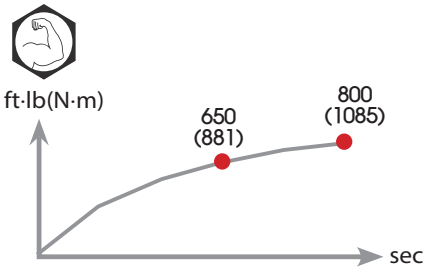



KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33431-065	1/2"	12.70	Std.anvil	3/4"	M19	8000	650	881	6-7/8"	175	1/4"BSPT	3/8"	6.2	90	139	4.9	101.50	9.37	2.58	5.69	1 / 8

33611

- Nickel chrome molybdenum square drive
- Variable speed trigger
- Muffled on handle exhaust





33621 / 33622





KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33611-055	3/4"	19.05	Std. anvil	7/8"	M20	6500	700	949	7-13/32"	188	1/4"BSPT	3/8"	6.2	90	125	4.4	96.56	8.64	3.00	6.61	1 / 8
33611-056	3/4"	19.05	Std. anvil	7/8"	M20	6500	700	949	7-13/32"	188	1/4"NPT	3/8"	6.2	90	125	4.4	96.56	8.64	3.00	6.61	1 / 8
33621-075	3/4"	19.05	Std. anvil	1"	M24	6500	800	1085	8-63/64"	228	1/4"BSPT	3/8"	6.2	90	198	7.0	97.28	6.89	4.50	9.92	1 / 4
33621-076	3/4"	19.05	Std. anvil	1"	M24	6500	800	1085	8-63/64"	228	1/4"NPT	3/8"	6.2	90	198	7.0	97.28	6.89	4.50	9.92	1 / 4
33622-075	3/4"	19.05	Long anvil	1"	M24	6500	800	1085	12-63/64"	330	1/4"BSPT	3/8"	6.2	90	198	7.0	96.68	6.46	5.00	11.02	1 / 4
33622-076	3/4"	19.05	Long anvil	1"	M24	6500	800	1085	12-63/64"	330	1/4"NPT	3/8"	6.2	90	198	7.0	96.68	6.46	5.00	11.02	1 / 4

Composite Impact Wrench

CAUTION Please wear proper safety gear while working.

33481

- One-handed F / R control
- 4-speed power setting, full speed in reverse
- TPR ergonomic handle material reduces vibration





lightweight

20% - 48%

33681





1/2" 33481

3/4" 33681

KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33481-095	1/2"	12.70	Std.anvil	1"	M24	8000	950	1288	7-3/4"	197	1/4"BSPT	3/8"	6.2	90	190	6.7	96.00	8.10	2.25	4.96	1 / 8
33481-096	1/2"	12.70	Std.anvil	1"	M24	8000	950	1288	7-3/4"	197	1/4"NPT	3/8"	6.2	90	190	6.7	96.00	8.10	2.25	4.96	1 / 8
33681-100	3/4"	19.05	Std.anvil	1-3/16"	M30	8000	1100	1491	8-3/8"	211	1/4"BSPT	3/8"	6.2	90	190	6.7	96.00	8.98	2.35	5.20	1 / 8
33681-101	3/4"	19.05	Std.anvil	1-3/16"	M30	8000	1100	1491	8-3/8"	211	1/4"NPT	3/8"	6.2	90	190	6.7	96.00	8.98	2.35	5.20	1 / 8

33631 / 33632

- Nickel chrome molybdenum square drive
- Variable speed trigger
- Muffled on handle exhaust







3/4" 33631



3/4" 33632

KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. Bolt Size inch	Std. Bolt Size mm	Free Speed R.P.M	Max. Torque ft·lb	Max. Torque N·m	Overall Length inch	Overall Length mm	Air Inlet inch	Air Hose ID	Air Pressure bar	Air Pressure psi	Avg. Air Consumption L/min	Avg. Air Consumption CFM	Sound DBA	Vib M/S2	Net Weight kgs	Net Weight lbs	
33631-110	3/4"	19.05	Std. anvil	1-3/16"	M30	5500	1100	1491	8-43/64"	220	3/8"BSPT	1/2"	6.2	90	269	9.5	98.35	5.31	5.60	12.35	1 / 4
33631-111	3/4"	19.05	Std. anvil	1-3/16"	M30	5500	1100	1491	8-43/64"	220	3/8"NPT	1/2"	6.2	90	269	9.5	98.35	5.31	5.60	12.35	1 / 4
33632-110	3/4"	19.05	Long anvil	1-3/16"	M30	5500	1100	1491	14-55/64"	377	3/8"BSPT	1/2"	6.2	90	269	9.5	97.20	7.90	6.04	13.32	1 / 4
33632-111	3/4"	19.05	Long anvil	1-3/16"	M30	5500	1100	1491	14-55/64"	377	3/8"NPT	1/2"	6.2	90	269	9.5	97.20	7.90	6.04	13.32	1 / 4

Impact Wrench

33851 / 33852

- Nickel chrome molybdenum square drive
- Variable speed trigger
- Muffled on handle exhaust





1"
33851



1"
33852

33841 / 33842





1"
33841




1"
33842


KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33851-120	1"	25.40	Std. anvil	1-17/64"	M32	5500	1200	1626	8-53/64"	224	3/8"BSPT	1/2"	6.2	90	269	9.5	99.75	6.57	5.64	12.43	1 / 4
33851-121	1"	25.40	Std. anvil	1-17/64"	M32	5500	1200	1626	8-53/64"	224	3/8"NPT	1/2"	6.2	90	269	9.5	99.75	6.57	5.64	12.43	1 / 4
33852-120	1"	25.40	Long anvil	1-17/64"	M32	5500	1200	1626	14-1/64"	356	3/8"BSPT	1/2"	6.2	90	269	9.5	98.00	8.40	6.04	13.32	1 / 4
33852-121	1"	25.40	Long anvil	1-17/64"	M32	5500	1200	1626	14-1/64"	356	3/8"NPT	1/2"	6.2	90	269	9.5	98.00	8.40	6.04	13.32	1 / 4
33841-180	1"	25.40	Std. anvil	1-27/64"	M36	4000	1800	2440	12-3/32"	307	1/2" BSPT / NPT	3/4"	6.2	90	255	9.0	101.56	4.37	10.62	23.41	1 / 2
33842-180	1"	25.40	Long anvil	1-27/64"	M36	4000	1800	2440	20-5/64"	510	1/2" BSPT / NPT	3/4"	6.2	90	255	9.0	99.85	5.87	12.52	27.60	1 / 2


Impact Wrench

33671 / 33672

- Lightweight durable composite housing
- Nickel chrome molybenum square drive
- Comfortable rubber handle



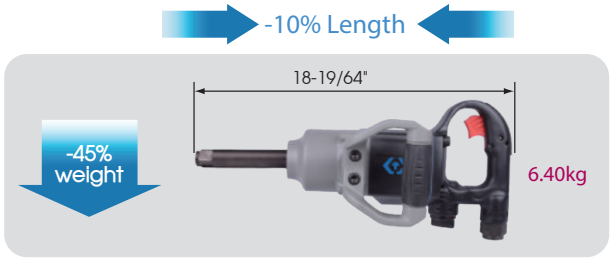

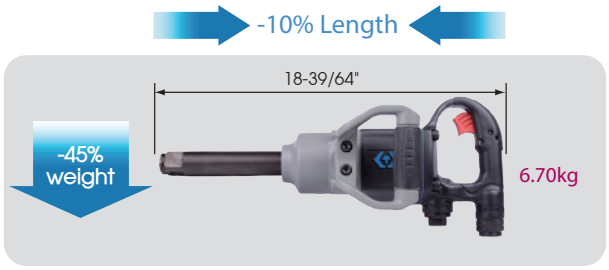

33871 / 33872





3/4"

33671-160



3/4"

33672-160



1"

33871-160



1"

33872-160

KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. Bolt Size inch	Std. Bolt Size mm	Free Speed R.P.M	Max. Torque ft·lb	Max. Torque N·m	Overall Length inch	Overall Length mm	Air inlet inch	Air Hose ID	Air Pressure bar	Air Pressure psi	Avg. Air Consumption L/min	Avg. Air Consumption CFM	Sound DBA	Vib M/S2	Net Weight kgs	Net Weight lbs	
33671-160	3/4"	19.05	Std. anvil	1-3/16"	M30	5500	1600	2170	12-1/2"	318	1/2" BSPT / NPT	3/4"	6.2	90	241	8.5	105.00	15.40	5.70	12.57	1 / 2
33672-160	3/4"	19.05	Long anvil	1-3/16"	M30	5500	1600	2170	18-19/64"	465	1/2" BSPT / NPT	3/4"	6.2	90	241	8.5	106.00	13.80	6.40	14.11	1 / 2
33871-160	1"	25.40	Std. anvil	1-3/16"	M30	5500	1600	2170	12-45/64"	323	1/2" BSPT / NPT	3/4"	6.2	90	241	8.5	106.00	13.70	5.80	12.79	1 / 2
33872-160	1"	25.40	Long anvil	1-3/16"	M30	5500	1600	2170	18-39/64"	473	1/2" BSPT / NPT	3/4"	6.2	90	241	8.5	104.00	14.98	6.70	14.77	1 / 2

Impact Wrench

33811 / 33812

- Nickel chrome molybdenum square drive
- Variable speed trigger
- Muffled on handle exhaust




33831 / 33832

1"
33811-150



1"
33812-150

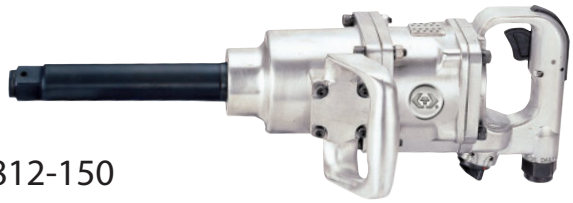

1"
33831-180



1"
33832-180





KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. Bolt Size inch	Std. Bolt Size mm	Free Speed R.P.M	Max. Torque ft·lb	Max. Torque N·m	Overall Length inch	Overall Length mm	Air Inlet inch	Air Hose ID	Air Pressure bar	Air Pressure psi	Avg. Air Consumption L/min	Avg. Air Consumption CFM	Sound DBA	Vib M/S2	Net Weight kgs	Net Weight lbs	
33811-150	1"	25.40	Std. anvil	1-1/4"	M36	4000	1500	2033	14-19/32"	371	1/2" BSPT / NPT	3/4"	6.2	90	255	9.0	101.17	10.77	10.30	22.71	1 / 1
33812-150	1"	25.40	Long anvil	1-1/4"	M36	4000	1500	2033	20-19/32"	523	1/2" BSPT / NPT	3/4"	6.2	90	255	9.0	100.40	6.13	11.30	24.91	1 / 1
33831-180	1"	25.40	Std. anvil	1-1/2"	M38	4000	1800	2440	14-19/32"	371	1/2" BSPT / NPT	3/4"	6.2	90	255	9.0	102.11	8.84	11.50	25.35	1 / 1
33832-180	1"	25.40	Long anvil	1-1/2"	M38	4000	1800	2440	20-19/32"	523	1/2" BSPT / NPT	3/4"	6.2	90	255	9.0	103.99	6.60	12.50	27.56	1 / 1

Impact Wrench

33861 / 33862

- Light weight durable composite housing
- Nickel chrome molybdenum square drive
- Comfortable rubber handle



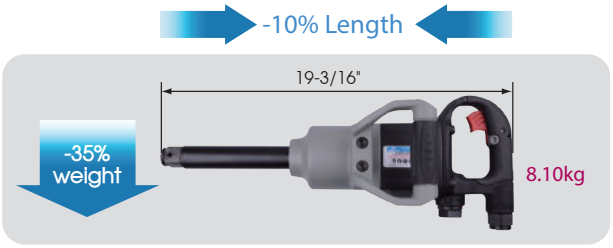





KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
33861-200	1"	25.40	Std. anvil	1-27/64"	M36	5000	2000	2712	13-43/64"	347	1/2" BSPT / NPT	3/4"	6.2	90	255	9.0	106.00	17.20	7.40	16.31	1 / 2
33862-200	1"	25.40	Long anvil	1-27/64"	M36	5000	2000	2712	19-3/16"	487	1/2" BSPT / NPT	3/4"	6.2	90	255	9.0	104.00	14.50	8.10	17.86	1 / 2



Impact Wrench

33851 / 33852

33911 / 33912

33921 / 33922

- Nickel chrome molybdenum square drive
- Variable speed trigger
- Muffled on handle exhaust

New Twin Hammer



1"

33851-250



1"

33852-250



1-1/2"

33911-250

33921-300



1-1/2"

33912-250

33922-300



KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. Bolt Size inch	Std. Bolt Size mm	Free Speed R.P.M	Max. Torque ft·lb	Max. Torque N·m	Overall Length inch	Overall Length mm	Air inlet inch	Air Hose ID	Air Pressure bar	Air Pressure psi	Avg. Air Consumption L/min	Avg. Air Consumption CFM	Sound DBA	Vib M/S2	Net Weight kgs	Net Weight lbs	
33851-250	1"	25.40	Std. anvil	1-25/32"	M45	3000	2500	3388	17-11/64"	436	1/2" BSPT / NPT	3/4"	6.2	90	411	14.5	101.15	6.30	15.80	34.83	1 / 1
33852-250	1"	25.40	Long anvil	1-25/32"	M45	3000	2500	3388	24-7/8"	632	1/2" BSPT / NPT	3/4"	6.2	90	411	14.5	101.91	6.49	18.70	41.23	1 / 1
33911-250	1-1/2"	38.10	Std. anvil	1-25/32"	M45	3000	2500	3388	17-53/64"	453	1/2" BSPT / NPT	3/4"	6.2	90	411	14.5	104.13	6.32	15.80	34.83	1 / 1
33912-250	1-1/2"	38.10	Long anvil	1-25/32"	M45	3000	2500	3388	23-53/64"	605	1/2" BSPT / NPT	3/4"	6.2	90	411	14.5	103.90	6.53	18.70	41.23	1 / 1
33921-300	1-1/2"	38.10	Std. anvil	2"	M50	3000	3000	4065	17-3/4"	451	1/2" BSPT / NPT	3/4"	6.2	90	453	16.0	104.52	8.86	19.70	43.43	1 / 1
33922-300	1-1/2"	38.10	Long anvil	2"	M50	3000	3000	4065	25-15/32"	647	1/2" BSPT / NPT	3/4"	6.2	90	453	16.0	104.52	7.12	22.80	50.27	1 / 1

Impact Socket & Wrench Set

44116MP

1/2"



Blow case size (mm) :
315 x 250 x 120 (0.334 cuft)

- 10 PC. impact sockets 9~27mm
- 3 PC. thin wall impact sockets 17, 19, 21mm
- 1 PC. impact wrench
- 1 PC. extension bar
- 1 PC. universal joint
- 2 PC. ring Ø 3.5 x 19mm & Ø 3.5 x 23mm
- 2 PC. pin Ø 3 x 20 & Ø 3 x 25 (6150)
- 1 PC. air inlet adapter

21 PC.

KT NO.	Contents	6.1	1 / 4
44116MP	 4535M 9, 10, 11, 13, 14, 17, 19, 22, 24, 27	 33411-040	 SY-221M (1/4"BSPT)
44116MP04	 4415M 17, 19, 21		 SY-2-11M (1/4"BSPT)
44116MP10	 4260-05  4797 90601 90602  90401 90402	 33411-041	 SY-231M (1/4"NPT)

44118MP

1/2"



Blow case size (mm) :
420 x 315 x 100 (0.475 cuft)

- 14 PC. deep impact sockets 10~27mm
- 1 PC. impact wrench
- 2 PC. extension bars, 3" & 5" L
- 1 PC. universal joint
- 2 PC. ring Ø 3.5 x 19mm & Ø 3.5 x 23mm
- 2 PC. pin Ø 3 x 20mm & Ø 3 x 25mm (6150)
- 1 PC. air inlet adapter

23 PC.

KT NO.	Contents	8.4	1 / 2
44118MP	 4435M 10, 11, 12, 13, 14, 16, 17, 19, 21, 22, 23, 24, 26, 27	 33411-040	 SY-221M (1/4"BSPT)
44118MP04	 4260-03 4260-05  4797		 SY-211M (1/4"BSPT)
44118MP10	 90601 90602  90401 90402	 33411-041	 SY-231M (1/4"NPT)

Impact Socket & Wrench Set

44106AMP01

1/2"



Blow case size (mm) :
422 x 275 x 85 (0.35 cuft)

- 10 PC. impact sockets 9~27mm
- 3 PC. thin wall impact sockets 17, 19, 21mm
- 1 PC. impact wrench
- 1 PC. extension bar & with ball
- 1 PC. universal joint
- 1 PC. air inlet adapter

17 PC.

Contents

6.32 | 1 / 2

	4535M	9, 10, 11, 13, 14, 17, 19, 22, 24, 27
	4415M	17, 19, 21
	4260-05P	5"
	4799P	
	33411-050	
	SY-211M	(1/4"BSPT)

44108AMP01

1/2"



Blow case size (mm) :
422 x 275 x 85 (0.35 cuft)

- 14 PC. deep impact sockets 8~27mm
- 1 PC. impact wrench
- 2 PC. extension bar & with ball, 3" & 5" L
- 1 PC. universal joint
- 1 PC. air inlet adapter

19 PC.

Contents

7.92 | 1 / 2

	4435M	8, 10, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27
	4260P	3", 5"
	4799P	
	33411-050	
	SY-211M	(1/4"BSPT)

Impact Socket & Wrench Set

44801FMP — 1/2"



- 12 PC. standard impact sockets 10~24mm
- 1 PC. impact wrench
- 3 PC. thin wall impact sockets with plastic sleeve 17, 19, 21mm
- 1 PC. extension bar 3" L
- 1 PC. universal joint
- 1 PC. air inlet adapter
- 1 PC. lube

Blow case size (mm) :
422 x 275 x 85mm (0.35cuff)

20 PC.

KT NO.	Contents	5.79	1 / 4
44801FMP	4535M: 10, 11, 12, 13, 14, 16, 17, 18, 19, 21, 22, 24 4945M: 17, 19, 21 4260-03P 4797P LUBE15	33481-095	SY-221M (1/4"BSPT)
44801AMP			SY-211M (1/4"BSPT)
44801BMP		33481-096	SY-231M (1/4"NPT)

44801FMP01 — 1/2"



- 12 PC. standard impact sockets 10~24mm
- 1 PC. impact wrench
- 3 PC. thin wall impact sockets with plastic sleeve 17, 19, 21mm
- 1 PC. extension bar 3" L
- 1 PC. universal joint
- 1 PC. air inlet adapter
- 1 PC. lube

Blow case size (mm) :
422 x 275 x 85mm (0.35cuff)

20 PC.

KT NO.	Contents	6.03	1 / 4
44801FMP01	4535M: 10, 11, 12, 13, 14, 16, 17, 18, 19, 21, 22, 24 4945M: 17, 19, 21 4260-03P 4797P LUBE15	33431-065	SY-221M (1/4"BSPT)
44801AMP01			SY-211M (1/4"BSPT)

44802FMP — 1/2"



- 11 PC. standard impact sockets 10~24mm
- 1 PC. impact wrench
- 1 PC. extension bar
- 1 PC. universal joint
- 1 PC. air inlet adapter
- 1 PC. lube

Blow case size (mm) :
340 x 263 x 80mm (0.253 cuft)

16 PC.

KT NO.	Contents	3.9	1 / 3
44802FMP	4535M: 10, 12, 13, 14, 16, 17, 18 ,19, 21, 22, 24, 4260-05P 4796P LUBE15	33431-050	SY-221M (1/4"BSPT)
44802AMP			SY-211M (1/4"BSPT)
44802BMP		33431-051	SY-231M (1/4"NPT)

Impact Socket & Wrench Set

44803FMP — 1/2"



- 7 PC. standard impact sockets 17~27mm
- 1 PC. impact wrench
- 3 PC. deep impact sockets 17, 19, 21mm
- 1 PC. extension bar 5" L
- 1 PC. universal joint
- 1 PC. air inlet adapter
- 1 PC. lube

Blow case size (mm) :
422 x 275 x 85mm (0.35cuff)

15 PC.

KT NO.	Contents	5.7	1 / 4
44803FMP	4535M 17, 18, 19, 21, 22, 24, 27	 33461-100	 SY-221M (1/4"BSPT)
44803AMP	 4435M 17, 19, 21		 SY-211M (1/4"BSPT)
44803BMP	 4260-05P 4799P LUBE15	 33461-101	 SY-231M (1/4"NPT)

64801FMP — 3/4"



- 8 PC. standard impact sockets 19~38mm
- 1 PC. impact wrench
- 1 PC. extension bar 7" L
- 1 PC. universal joint
- 1 PC. air inlet adapter
- 1 PC. lube

Blow case size (mm) :
422 x 275 x 85mm(0.35 cuff)

13 PC.

KT NO.	Contents	8.48	1 / 2
64801FMP	6515M 19, 22, 24, 27, 30	 33681-100	 SY-221M (1/4"BSPT)
64801AMP	6535M 32, 36, 38		 SY-211M (1/4"BSPT)
64801BMP	 6260-07P 6797P LUBE15	 33681-101	 SY-231M (1/4"NPT)

64114FMP — 3/4"



- 11 PC. impact sockets 19~38mm
- 1 PC. impact wrench
- 1 PC. extension bar, 7" L (w/o ball)
- 1 PC. universal joint
- 1 PC. ring Ø 5.5 x 37mm
- 1 PC. pin Ø 4.0 x 35mm
- 1 PC. air inlet adapter
- 1 PC. lube

Blow case size (mm) :
422 x 360 x 110 (0.59 cuft)

18 PC.

KT NO.	Contents	12.32	1 / 2
64114FMP	6535M 19, 22, 24, 27, 28, 30, 32, 33, 34, 36, 38	 33621-075	 SY-221M (1/4"BSPT)
64114AMP	 6260-07 90603 LUBE15 6797 90404		 SY-211M (1/4"BSPT)

Impact Screwdriver

3312



1/4"

33121
33122




KT NO.	Collect Size inch	mm	Std. bolt size inch	mm	Free speed R.P.M	Max. torque lbf·ft	N·m	Overall length inch	mm	Air inlet inch	Air hose ID	Air pressure bar	psi	Avg. air consumption L/min	CFM	Sound DBA	Vib M/S2	Net weight kgs	lbs	
33121	1/4"	6.35	3/16"	M5	11000	75	102	7-1/4"	183	1/4"BSPT	3/8"	6.2	90	96	3.4	92.8	3.83	0.82	1.81	1 / 20
33122	1/4"	6.35	3/16"	M5	11000	75	102	7-1/4"	183	1/4"NPT	3/8"	6.2	90	96	3.4	92.8	3.83	0.82	1.81	1 / 20

Air Ratchet Wrench

37221 / 37321

- Ergonomically enhanced composite handle
- Dual pawl design provides higher torque





- Dust-free design
- Prevents deformation and triples the life of the parts

37334 / 37434

1/4" & 3/8"

37221
37321

3/8" & 1/2"

37334
37434



KT NO.	Square drive inch	mm	Type Std/Long anvil	Std. bolt size inch	mm	Free speed R.P.M	Max. torque ft·lb	N·m	Overall length inch	mm	Air inlet inch	Air hose ID	Air pressure bar	psi	Avg. air consumption L/min	CFM	Sound DBA	Vib M/S2	Net weight kgs	lbs	
37221-030	1/4"	6.35	Std. anvil	1/4"	M6	250	30	41	8-1/16"	205	1/4"BSPT	3/8"	6.2	90	79	2.8	86.00	2.32	0.67	1.48	1 / 30
37221-031	1/4"	6.35	Std. anvil	1/4"	M6	250	30	41	8-1/16"	205	1/4"NPT	3/8"	6.2	90	79	2.8	86.00	2.32	0.67	1.48	1 / 30
37321-050	3/8"	9.53	Std. anvil	5/16"	M8	270	50	68	8-1/16"	205	1/4"BSPT	3/8"	6.2	90	79	2.8	93.00	2.26	0.67	1.48	1 / 30
37321-051	3/8"	9.53	Std. anvil	5/16"	M8	270	50	68	8-1/16"	205	1/4"NPT	3/8"	6.2	90	79	2.8	93.00	2.26	0.67	1.48	1 / 30
37334-080	3/8"	9.53	Std. anvil	3/8"	M10	210	80	108	10-39/64"	268	1/4"BSPT	3/8"	6.2	90	127	4.5	93.00	3.58	1.25	2.76	1 / 10
37334-081	3/8"	9.53	Std. anvil	3/8"	M10	210	80	108	10-39/64"	268	1/4"NPT	3/8"	6.2	90	127	4.5	93.00	3.58	1.25	2.76	1 / 10
37434-080	1/2"	12.70	Std. anvil	3/8"	M10	210	80	108	10-39/64"	268	1/4"BSPT	3/8"	6.2	90	127	4.5	92.00	3.91	1.26	2.78	1 / 10
37434-081	1/2"	12.70	Std. anvil	3/8"	M10	210	80	108	10-39/64"	268	1/4"NPT	3/8"	6.2	90	127	4.5	92.00	3.91	1.26	2.78	1 / 10

Super Duty Air Ratchet Wrench

37323

- Ergonomically enhanced composite handle
- 360° exhaust rotation leads the air away from working area
- Unique head design: dust free and prevent deformation and triples the life of parts
- Dual pawl design provides higher torque



37423



3/8" & 1/2"

37323
37423

KT NO.	Square drive inch	Square drive mm	Type Std/Long anvil	Std. bolt size inch	Std. bolt size mm	Free speed R.P.M	Max. torque ft·lb	Max. torque N·m	Overall length inch	Overall length mm	Air inlet inch	Air hose ID	Air pressure bar	Air pressure psi	Avg. air consumption L/min	Avg. air consumption CFM	Sound DBA	Vib M/S2	Net weight kgs	Net weight lbs	
37323-080	3/8"	9.53	Std. anvil	3/8"	M10	280	80	108	11"	279	1/4"BSPT	3/8"	6.2	90	113	4.0	94.00	2.52	1.25	2.76	1 / 12
37323-081	3/8"	9.53	Std. anvil	3/8"	M10	280	80	108	11"	279	1/4"NPT	3/8"	6.2	90	113	4.0	94.00	2.52	1.25	2.76	1 / 12
37423-080	1/2"	12.70	Std. anvil	3/8"	M10	280	80	108	11"	279	1/4"BSPT	3/8"	6.2	90	113	4.0	93.00	2.07	1.25	2.76	1 / 12
37423-081	1/2"	12.70	Std. anvil	3/8"	M10	280	80	108	11"	279	1/4"NPT	3/8"	6.2	90	113	4.0	93.00	2.07	1.25	2.76	1 / 12

Air Ratchet Wrench

37235 / 37335 / 37435

- Working around tightly packed engines, machinery and equipment

1/4" & 3/8"

37235
37335



3/8"

37335

1/2"

37435



KT NO.	Square drive inch	Square drive mm	Free Speed R.P.M	Max. Torque ft·lb	Max. Torque N·m	Overall Length inch	Overall Length mm	Air inlet inch	Air Hose ID	Air Pressure bar	Air Pressure psi	Avg. Air Consumption L/min	Avg. Air Consumption CFM	Sound DBA	Vib M/S2	Net Weight kgs	Net Weight lbs	
37235-030	1/4"	6.35	230	30	41	6-1/8"	155	1/4"BSPT	3/8"	6.2	90	71	2.5	92.00	10.50	0.49	1.08	1 / 20
37235-031	1/4"	6.35	230	30	41	6-1/8"	155	1/4"NPT	3/8"	6.2	90	71	2.5	92.00	10.50	0.49	1.08	1 / 20
37335-030	3/8"	9.53	230	30	41	6-1/8"	155	1/4"BSPT	3/8"	6.2	90	71	2.5	92.00	10.50	0.49	1.08	1 / 20
37435-075	1/2"	12.70	200	75	102	10-1/4"	260	1/4"BSPT	3/8"	6.2	90	113	4.0	92.00	10.50	1.20	2.64	1 / 20
37435-076	1/2"	12.70	200	75	102	10-1/4"	260	1/4"NPT	3/8"	6.2	90	113	4.0	92.00	10.50	1.20	2.64	1 / 20

Continuous Flow Air Grease Gun

9BV14

- Ideal for machine, automobile, farm and garden equipments, vehicles etc.
- 360° rotating handle





KT NO.	Air inlet (inch)	Screw Thread	Air Source Range input (psi/bar)	Air Source Range output (psi/bar)	Recommended Air Source input (psi/bar)	Recommended Air Source output (psi/bar)	Capacity c.c.	Capacity oz	Kg	
9BV1420	1/4"BSPT	M10 x 1.0P	60~150 psi (4.2~10.3 bar)	2400~6000 psi (165~413 bar)	90 psi (6.2 bar)	3600 psi (250 bar)	400	14	1.7	1 / 10

9BV1420 For Germany, South Africa, Egypt, etc.

Continuous Flow Air Grease Gun with 12" Tube

9BV14T

- Ideal for machine, automobile, farm and garden equipments, vehicles etc.
- 360° rotating handle



9BU8109
9BU8209
9BU8112
9BU8212




KT NO.	Air inlet (inch)	Screw Thread	Air Source Range input (psi/bar)	Air Source Range output (psi/bar)	Recommended Air Source input (psi/bar)	Recommended Air Source output (psi/bar)	Capacity c.c.	Capacity oz	Kg	
9BV1420T	1/4"BSPT	M10 x 1.0P	60~150 psi (4.2~10.3 bar)	2400~6000 psi (165~413 bar)	90 psi (6.2 bar)	3600 psi (250 bar)	400	14	1.7	1 / 10
9BU8109	9" length	1/8"-28NPT								
9BU8209	9" length	M10 x 1.0P								
9BU8112	12" length	1/8"-28NPT								
9BU8212	12" length	M10 x 1.0P								


9BV1420T For Germany, South Africa, Egypt, etc.

Air Blow Gun

7990

- Ideal for cleaning
- Steel nozzle & nylon fiber handle
- Air pressure : 90 psi recommended
- Air consumption : 1/4" hose-13cfm-350l/min, 3/8" hose-15cfm-430l/min
- Sound pressure : 85~90 dB
- Working pressure : 75~120 psi/5.3~8.4 kgf/cm^2
- Max pressure : 200 psi/ 14.07 kgf/cm^2



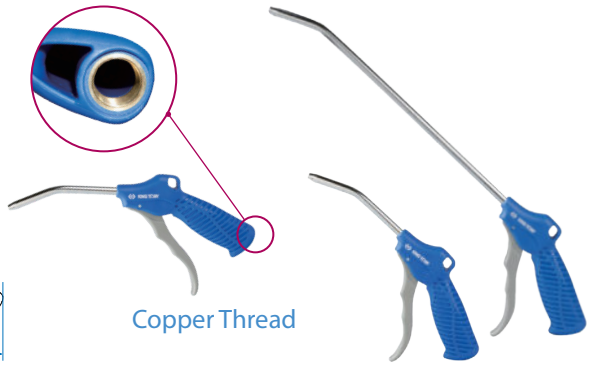

KT NO.	Air inlet inch	ℓ inch	ℓ mm	L (mm)	g	
79900-04	1/4"BSPT	4	100	245	200	20 / 100
79900-10	1/4"BSPT	10	250	420	240	25 / 50
79900-13	1/4"BSPT	13	330	475	260	25 / 50
79900-20	1/4"BSPT	20	500	650	300	25 / 50

KT NO.	Air inlet inch	ℓ inch	ℓ mm	L (mm)	g	
79901-04	1/4"NPT	4	100	245	200	20 / 100
79901-10	1/4"NPT	10	250	420	240	25 / 50
79901-13	1/4"NPT	13	330	475	260	25 / 50
79901-20	1/4"NPT	20	500	650	300	25 / 50

Spray Gun

79982

- Suitable for spraying a wide range of oils, cleaning agents and rustproofing liquids
- Fitted with fluid/air control valve



79982-06



79982-10

KT NO.	Max Capacity	Working Pressure(psi)	Air inlet connection	g	
79982-06	600 c.c	90-150	1/4" BSPT(EU)	600	1 / 10
79982-10	1000 c.c	90-150	1/4" BSPT(EU)	800	1 / 10

3-In-1 Inflator


9BM

- Diaphragm pressure gauge
- Accuracy: ANSI B40.100 ±3% ~ ±2% ~ ±3%
- Special rubber housing protects manometer against light impacts
- 3 functions(check, release, inflator) all together on the press handle
- Variable trigger, two control positions for inflate/deflate level
- Flexible 400MM high pressure rubber hose with clip-on air tire chuck
- Pressure Range:
  0-160 psi (9BM21) / 0-220 psi (9BM22)
- Built in hang-up hook allows easy storage



9BM2110
9BM2111
9BM2210
9BM2211



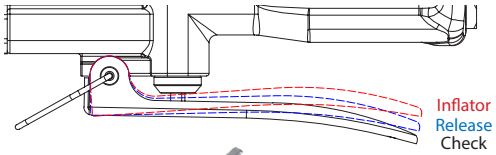




9BM2110A
9BM2111A



9BM2-01



9BM2-02



KT NO.	Pressure range (psi)	Air Inlet (BSPT/NPT)	L (mm) L1	L2	Air hose (ID)	g	
9BM2110	160	1/4"BSPT	Ø13 x 400	180	3/8"	500	1 / 12
9BM2111	160	1/4"NPT	Ø13 x 400	180	3/8"	500	1 / 12
9BM2210	220	1/4"BSPT	Ø13 x 400	180	3/8"	520	1 / 12
9BM2211	220	1/4"NPT	Ø13 x 400	180	3/8"	520	1 / 12
9BM2210A	220	1/4"BSPT	Ø13 x 400	180	3/8"	600	1 / 12
9BM2211A	220	1/4"NPT	Ø13 x 400	180	3/8"	600	1 / 12
9BM2-01	(included in all 9BM series)		20		-	25	-
9BM2-02	(included in 9BM2210A & 11A only)		185		-	105	-

PU Air Spiral Hose

79953

79960

79962

- Super mechanical strength and excellent abrasive resistance
- Superior heat and cold resistance
- Oil resistance
- Light weight
- Temperature resistance from -20° C ~ +60° C



79953



79960



79962

KT NO.	Hose I.D. (mm)	Hose O.D. (mm)	Hose Length (M)	Working Pressure (psi)	(bar)	Maximum Pressure (psi)	(bar)	Type	Male PT Fitting (inch)	Weight (kgs)	(lbs)	
79953-10	8	12	10	108	7.4	320	22.2	-	1/4"BSPT	0.80	1.76	1 / 20
79953-15	8	12	15	108	7.4	320	22.2	-	1/4"BSPT	1.30	2.87	1 / 16
79960-10	8	12	10	160	11.0	640	44.1	Asian	1/4"BSPT	0.93	2.05	1 / 20
79960-15	8	12	15	160	11.0	640	44.1	Asian	1/4"BSPT	1.31	2.87	1 / 16
79960-20	8	12	20	160	11.0	640	44.1	Asian	1/4"BSPT	1.66	3.64	1 / 10
79962-10	8	12	10	160	11.0	640	44.1	EU	1/4"BSPT	0.92	2.02	1 / 20
79962-15	8	12	15	160	11.0	640	44.1	EU	1/4"BSPT	1.31	2.87	1 / 16
79962-20	8	12	20	160	11.0	640	44.1	EU	1/4"BSPT	1.63	3.78	1 / 10

Air Hose Reel

7991

- Automatic rewind with SK5 alloy steel spring
- 16 teeth gear-stop ensures safety
- 300 psi working pressure allowed
- Sturdy structure with 0.7mm thick steel rail stored in iron case
- Replaceable air house design & hanging rack



CAUTION
Do not pull the air hose when seeing tag STOP



• Pull the air hose to the end till it shows joint replacement



• Install new air hose





• Dismantle connection



• 16 teeth gear design can spread stress evenly and stop returning


1 Bar = 1.01972 kgf/cm^2
1 Bar = 14.5036 psi

KT NO.	Hose I.D. mm	Hose O.D. mm	Hose length (M)	Type	Air Inlet / outlet inch	Working pressure psi	kg	
79910-10	8	12	10	Asian	1/4"BSPT	300	5.5	1 / 2
79910-15	8	12	15	Asian	1/4"BSPT	300	6.5	1 / 2
79911-10	8	12	10	US	1/4"NPT	300	5.5	1 / 2
79911-15	8	12	15	US	1/4"NPT	300	6.5	1 / 2
79912-10	8	12	10	EU	1/4"BSPT	300	5.5	1 / 2
79912-15	8	12	15	EU	1/4"BSPT	300	6.5	1 / 2

Air Lubricator

799A

- Semi auto drain valve
- Steel guards offer better protection
- Easy installation and disassembly

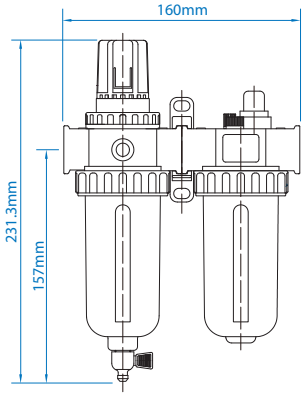



KT NO.	Port Size (inch)	Filter Element (μ)	Max Input Pressure (psi)	Max Output Pressure (psi)	Max Flow (L/min)	Operation Temperature Range (°C)	Drain Capacity (ml)	Oil Capactity (ml)	Air Inlet (inch)	Weight (Kgs)	(lbs)	
799A0-23C	1/4"	5	215	7~150	1750	5 ~ 60	80	150	1/4"BSPT	1.40	3.17	1 / 12
799A1-23C	1/4"	5	215	7~150	1750	5 ~ 60	80	150	1/4"NPT	1.42	3.17	1 / 12
799A0-33C	3/8"	5	215	7~150	2500	5 ~ 60	80	150	3/8"BSPT	1.14	2.51	1 / 12
799A1-33C	3/8"	5	215	7~150	2500	5 ~ 60	80	150	3/8"NPT	1.14	2.51	1 / 12
799A0-43C	1/2"	5	215	7~150	3000	5 ~ 60	80	150	1/2" BSPT / NPT	1.15	2.53	1 / 12

Air Quick Coupler

KT NO.	Size	Type		g	
SY-211M	1/4"BSPT	European		21.4	12 / 504
SY-211F				22.8	10 / 420
SY-210M				88.4	20 / 240
SY-221M	1/4"BSPT	Asian		24.4	12 / 504
SY-221F				28.6	10 / 420
SY-260M				81.6	20 / 240
SY-210H	1/4" hose	European		78.0	15 / 180
SY-211H				18.0	10 / 320
SY-220H		Asian		87.0	10 / 320
SY-221H				31.0	10 / 320
SY-231M	1/4"NPT	American		23.6	12 / 504
SY-231F				21.2	10 / 420
SY-230M				85.5	20 / 240
SY-310H	3/8" hose	European		75.0	15 / 180
SY-311H				22.0	10 / 320
SY-320H		Asian		78.0	15 / 180
SY-321H				23.0	10 / 320
SY-410H	1/2" hose	European		82.0	15 / 180
SY-411H				26.0	10 / 320
SY-421M	1/2" BSPT/NPT	Asian		24.4	12 / 504

Mini Lubricator

33411-71 1/4"



KT NO.	Size	g	
33411-71	1/4"-19BSPT	90	1 / 150

Repair Tools Set

14103GP

- 3 PC. Impact wrench repair tools set
- Suitable for 33411-040, 33411-050, 33412-050, 33611-055, 33621-075, 33622-075

3 PC.

Contents	kg 0.58	1 / 20
33011		
33012		
33013		

Impact Wrench Holder

9145

- Applied for 1/4" & 3/4" DR. air tools



KT NO.	Size	Type	g	
91451-01A	1/4" BSPT	European	268.8	1 / 48
91451-01B	1/4" NPT	American	271.2	1 / 48
91451-01F	1/4" BSPT	Asian	272.8	1 / 48

871061

- Applied for 3/8"&1/2" DR. air tools



KT NO.	Size	Type	g	
871061A	1/4" x 19 BSPT	European		
871061B	1/4" x 18 NPT	American	450	1 / 24
871061F	1/4" x 19 BSPT	Asian		

Tools Display Stand Set

87156A

- Overall Size - W 280 x D 170 x H 45 mm

Kg 1.9 1 / 1

Contents


87156



87154-01


SY-210M x3


SY-20A x6


SY-10A x3




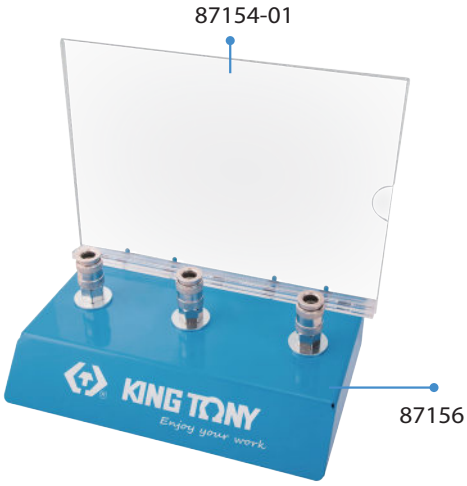




TORQUE CONTROL & MULTIPLIERS

Recyclable cylindrical package

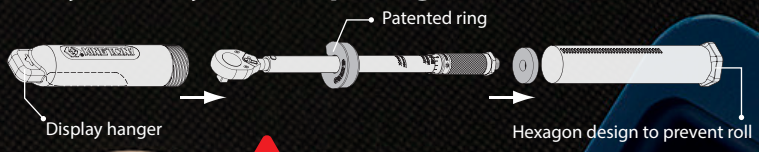

CAUTION

1. Do not use this torque wrench over its scale range.
2. Do not use this torque wrench as a normal hand tool.
3. Torque wrench need to be calibrated periodically for accuracy.

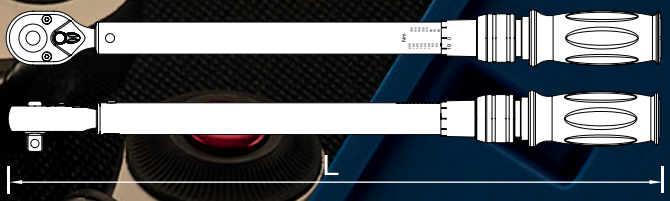

1 N·m = 0.738 ft·lb = 0.102 kgf·m
1 ft·lb = 1.356 N·m = 0.138 kgf·m
1 in·lb = 0.113 N·m = 1.152 kgf·cm

Calibration Instruction And Reminder of Torque Wrench

In test conditions, the torque wrench should remain within the tolerances laid down by DIN ISO 6789:2017 & ASME B107.300-2010 for 5000 cycles.

Practically, this may be affected and changed by ingress of dust, causing wear, or by damage caused by using the tool improperly such as to loosen fasteners or being dropped regularly.

Assume the users are trained to use the torque wrenches, and follow the manual, a period of twelve months is reasonable for torque wrenches used in non safety critical areas.

For those tools used in critical applications, a three month or even monthly check would be suggested.


KING TONY
Certificate of Calibration

Calibration Certificate

Master Torque Control

62 SERIES



Quick:

- Quick release and fine tooth gears design increases efficiency for safety tightening



Sound:

- Click sound and vibration reminds operator to stop in correct torque



Lubrication:

- Apply top industrial level lubrication to reduce friction and keep performance in good condition much longer



Spring:

- Made of high quality alloy steel to offer extended working cycles




Frame:

- Hardened tube provides extreme durability against friction to assure precision of tolerance



Easy:

- Auto lock design of torque adjustment provides quick and comfortable working experience




• ±3% tolerance of torque and 10,000 cycles durability performs better than international standard "DIN ISO 6789:2017 & ASME B107.300-2010" with ±4% tolerance and 5,000 cycles requirement

Heavy Duty Adjustable Torque Wrench

Design for easy torque adjustment
Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
Tolerance of torque ± 3%(CW)
CW/CCW Direction

Video QR Code



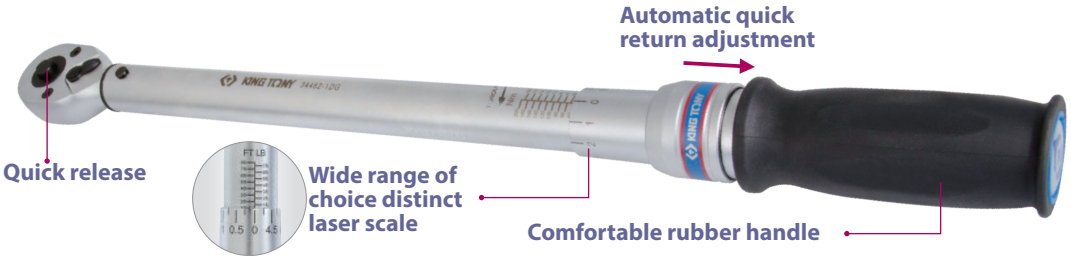

Dual Scale - English & Newton Meter (in·lb / ft·lb & N·m)

KT NO.	Gear teeth	Square drive	Torque range in·lb / ft·lb	Incr.	Torque range N·m	Incr.	Overall length mm	g	
34262-1CG	24	1/4"	40~200 in·lb	1 in·lb	5.1~22.0 N·m	0.12 N·m	324	640	1 / 12
34362-1CG	24	3/8"	40~200 in·lb	1 in·lb	5.1~22.0 N·m	0.12 N·m	324	640	1 / 12
34362-2CG	32	3/8"	15~80 ft·lb	0.5 ft·lb	23.7~105.1 N·m	0.7 N·m	435	1300	1 / 12
34462-1CG	32	1/2"	20~150 ft·lb	1 ft·lb	34~197 N·m	1.4 N·m	521	1590	1 / 12
34462-2CG	32	1/2"	50~250 ft·lb	1 ft·lb	75~332 N·m	1.4 N·m	613	1810	1 / 12
34662-1CG	24	3/4"	100~450 ft·lb	5 ft·lb	169~576 N·m	6.8 N·m	1048	5500	1 / 2
34662-2CG	24	3/4"	100~600 ft·lb	5 ft·lb	169~779 N·m	6.8 N·m	1234	5600	1 / 2
34662-3CG	24	3/4"	150~750 ft·lb	5 ft·lb	237~983 N·m	6.8 N·m	1238	6150	1 / 2
34862-1CG	24	1"	150~750 ft·lb	5 ft·lb	237~983 N·m	6.8 N·m	1238	6150	1 / 2

Single scale - Newton Meter (N·m)

KT NO.	Gear teeth	Square drive	Torque range N·m	Incr.	Overall length mm	g	
34262-1DG	24	1/4"	4~20 N·m	0.1 N·m	324	640	1 / 12
34262-2DG	24	1/4"	2~10 N·m	0.1 N·m	281	560	1 / 12
34262-3DG	24	1/4"	5~30 N·m	0.5 N·m	325	640	1 / 12
34362-1DG	24	3/8"	4~20 N·m	0.1 N·m	324	640	1 / 12
34362-2DG	32	3/8"	20~100 N·m	0.5 N·m	435	1300	1 / 12
34362-3DG	32	3/8"	10~60 N·m	0.5 N·m	325	700	1 / 12
34462-1DG	32	1/2"	40~200 N·m	1 N·m	521	1590	1 / 12
34462-2DG	32	1/2"	60~340 N·m	2 N·m	613	1810	1 / 12
34462-3DG	32	1/2"	20~100 N·m	1 N·m	436	1300	1 / 12
34462-4DG	32	1/2"	80~400 N·m	2 N·m	613	1970	1 / 12
34662-1DG	24	3/4"	100~600 N·m	5 N·m	1048	5500	1 / 2
34662-2DG	24	3/4"	150~800 N·m	5 N·m	1234	5600	1 / 2
34662-3DG	24	3/4"	200~1000 N·m	5 N·m	1238	6150	1 / 2
34862-1DG	24	1"	200~1000 N·m	5 N·m	1238	6150	1 / 2

- 34262-1DK
- 34362-1DK
- 34362-2DK: 34362-2xx / 3xx
- 34462-1DK
- 34462-3DK: 34462-3DG / 3GG
- 34662-1DK
- 34662-3DK1: 34662-3xxx series
- 34862-2DK: series



Single scale - English (in·lb / ft·lb)

KT NO.	Gear teeth	Square drive	Torque range in·lb / ft·lb	Incr.	Overall length mm	g	
34662-4EG	24	3/4"	60~300 ft·lb	2 ft·lb	614	1800	1 / 12
34862-1EG	24	1"	150~750 ft·lb	5 ft·lb	1238	6150	1 / 2

Dual Scale - Newton Meter & English (N·m & ft·lb)

KT NO.	Gear teeth	Square drive	Torque range N·m	Incr.	Torque range ft·lb	Incr.	Overall length mm	g	
34462-2FG	32	1 / 2"	60~340 N·m	2 N·m	51.6~243.4 ft·lb	1.5 ft·lb	613	1720	1 / 12
34862-1FG	24	1"	200~1000 N·m	5 N·m	166~719 ft·lb	5 ft·lb	1238	6150	1 / 2

Dual Scale - Kilogram-force Centimeter / Kilogram-force meter & Newton Meter (kgf·cm / kgf·m & N·m)


KT NO.	Gear teeth	Square drive	Torque range kgf·cm / kgf·m	Incr.	Torque range N·m	Incr.	Overall length mm	g	
34262-1GG	24	1/4"	40~200 Kgf·cm	1 Kgf·cm	4.4~19.1 N·m	0.92 N·m	324	640	1 / 12
34362-1GG	24	3/8"	40~200 Kgf.cm	1 Kgf·cm	4.4~19.1 N·m	0.92 N·m	324	640	1 / 12
34362-2GG	32	3/8"	200~1000 Kgf.cm	5 Kgf·cm	22.1~95.6 N·m	0.46 N·m	435	1300	1 / 12
34462-1GG	32	1/2"	400~2000 Kgf·cm	10 Kgf·cm	44.1~191.2 N·m	0.46 N·m	521	1590	1 / 12
34462-2GG	32	1/2"	6~34 Kgf·m	0.2 Kgf·m	68.6~323.6 N·m	1.82 N·m	613	1810	1 / 12
34462-3GG	32	1/2"	200~1000 Kgf·cm	5 Kgf·cm	22.1~95.6 N·m	4.9 N·m	436	1470	1 / 12
34662-1GG	24	3/4"	10~60 Kgf·m	0.5 Kgf·m	123~564 N·m	4.9 N·m	1048	5500	1 / 2
34662-2GG	24	3/4"	15~80 Kgf·m	0.5 Kgf·m	172~760 N·m	4.9 N·m	1234	5600	1 / 2
34662-3GG	24	3/4"	20~100 Kgf·m	0.5 Kgf·m	221~956 N·m	4.9 N·m	1238	6150	1 / 2
34862-1GG	24	1"	20~100 Kgf·m	0.5 Kgf·m	221~956 N·m	4.9 N·m	1238	6150	1 / 2

Heavy Duty Adjustable Torque Wrench

Design for easy torque adjustment
Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
Tolerance of torque ± 3%(CW)
CW/CCW Direction

34862-2CF, 34862-2DF
34862-2EF, 34862-2FF





In order to ensure correct torque
the extension bar must be used

34862-2CG, 34862-2DG
34862-2EG, 34862-2FG
34862-2GG



Dual Scale - English & Newton Meter (ft·lb & N·m)

KT NO.	Square drive	Torque Rrange ft·lb	Incr.	Torque range N·m	Incr.	Overall length mm	kg	
34862-2CG	1"	200~1000 ft·lb	5 ft·lb	305~1322 N·m	6.8 N·m	1850	12.20	1 / 2
34862-2CF	1"	200~1000 ft·lb	5 ft·lb	305~1322 N·m	6.8 N·m	1850	12.20	1 / 2

Single scale - Newton Meter (N·m)

KT NO.	Square drive	Torque range N·m	Incr.	Overall length mm	kg	
34862-2DF	1"	300~1500 N·m	10 N·m	1850	12.20	1 / 2
34862-2DG	1"	300~1500 N·m	10 N·m	1850	12.20	1 / 2

Single scale - English (ft·lb)

KT NO.	Square drive	Torque Rrange ft·lb	Incr.	Overall length mm	kg	
34862-2EG	1"	200~1000 ft·lb	5 ft·lb	1850	12.20	1 / 2
34862-2EF	1"	200~1000 ft·lb	5 ft·lb	1850	12.20	1 / 2



34862-2DK-series

Dual Scale - Newton Meter & English (N·m & ft·lb)

KT NO.	Square drive	Torque range N·m	Incr.	Torque range ft·lb	Incr.	Overall length mm	kg	
34862-2FF	1"	300~1500 N·m	10 N·m	258~1070 ft·lb	7.4 ft·lb	1850	12.20	1 / 2
34862-2FG	1"	300~1500 N·m	10 N·m	258~1070 ft·lb	7.4 ft·lb	1850	12.20	1 / 2

Dual Scale - Kilogram-force meter & Newton Meter (kgf·m & N·m)


KT NO.	Square drive	Torque range kgf·m	Incr.	Torque range N·m	Incr.	Overall length mm	kg	
34862-2GG	1"	30~150 Kgf·m	1 Kgf·m	343~1422 N·m	5 N·m	1850	12.20	1 / 2





Heavy Duty Adjustable Torque Wrench

Design for easy torque adjustment
Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
Tolerance of torque ± 3%(CW)
CW/CCW Direction



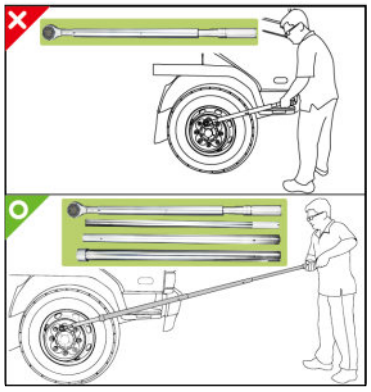

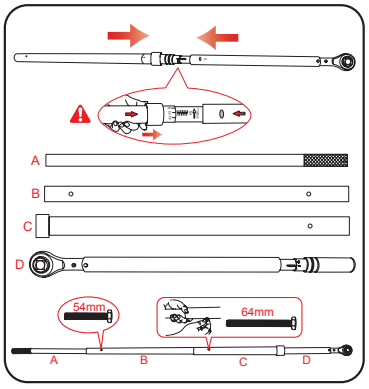

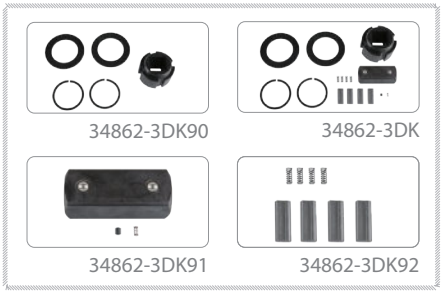

Dual Scale - English & Newton Meter (ft·lb & N·m)


KT NO.	Square drive	Torque range ft·lb	Incr.	Torque range N·m	Incr.	Overall length mm	kg	
34862-3CF	1"	400~2000 ft·lb	10 ft·lb	610~2644 N·m	13.55 N·m	2755	23.99	1 / 1

KT NO.	Square drive	Torque range N·m	Incr.	Torque range ft·lb	Incr.	Overall length mm	kg	
34862-3FF	1"	500~2500 N·m	20 N·m	443~1771 ft·lb	14.77 ft·lb	2755	25.38	1 / 1

Heavy Duty Mini-type Torque Wrench

Industrial application
Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
Tolerance of torque ±3%(CW)
CW/CCW Direction



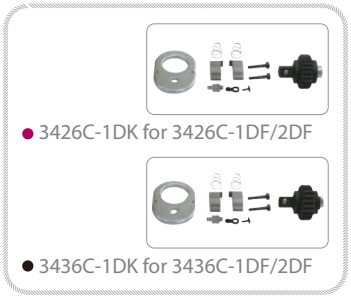


Single scale - Newton Meter (N·m)

	KT NO.	Square drive	Torque range N·m	Incr.	Overall length mm	g	
●	3426C-1DF	1/4"	3~15 N·m	0.1 N·m	211	330	24
●	3426C-2DF	1/4"	5~25 N·m	0.2 N·m	249	430	24
●	3436C-1DF	3/8"	3~15 N·m	0.1 N·m	211	450	24
●	3436C-2DF	3/8"	5~25 N·m	0.2 N·m	249	550	24

Heavy Duty 72 Teeth Adjustable Torque Wrench

Colorful quick release button design
Fixed head version allows using in narrow spaces
Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
Tolerance of torque ± 3%(CW)
CW/CCW Direction

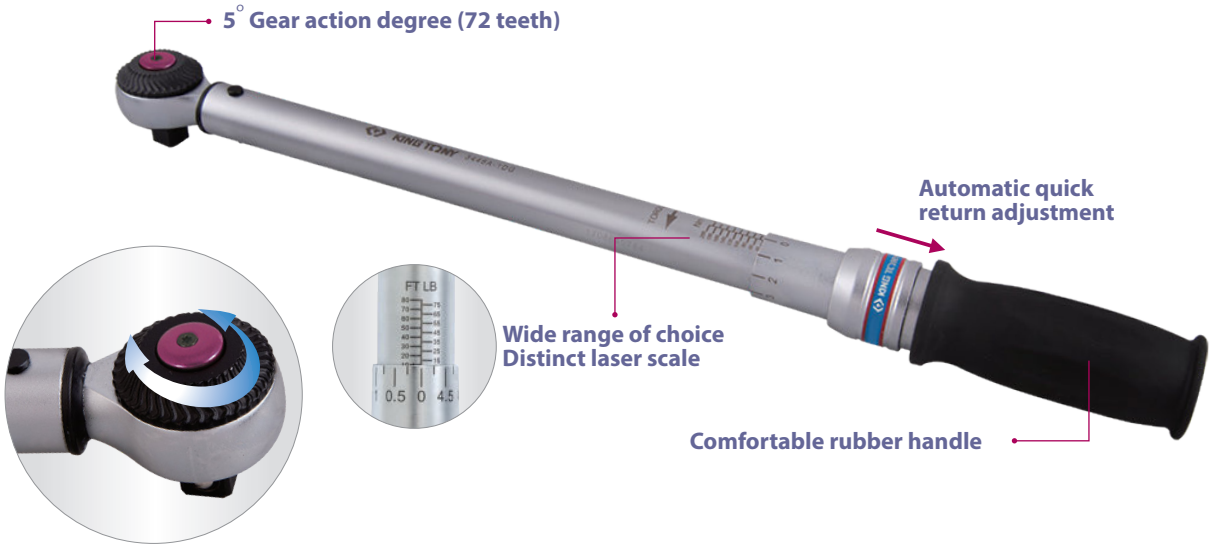

Single scale - Newton Meter (N·m)

KT NO.	Square drive	Torque range N·m	Incr.	Overall length mm	g	
3426A-1DG	1/4"	2~10 N·m	0.1 N·m	285	560	1 / 24
3426A-2DG	1/4"	4~20 N·m	0.1 N·m	325	640	1 / 24
3436A-2DG	3/8"	20~100 N·m	0.5 N·m	430	1300	1 / 12
3446A-1DG	1/2"	40~200 N·m	1 N·m	490	1460	1 / 12
3446A-2DG	1/2"	60~340 N·m	2 N·m	590	1750	1 / 12

Single scale - English (in·lb/ft·lb)


KT NO.	Square drive	Torque range in·lb / ft·lb	Incr.	Overall length mm	g	
3426A-1EG	1/4"	20~100 in·lb	1 in·lb	285	560	1 / 24
3426A-2EG	1/4"	40~200 in·lb	1 in·lb	325	640	1 / 24
3436A-2EG	3/8"	15~80 ft·lb	0.5 ft·lb	430	1300	1 / 12
3446A-1EG	1/2"	20~150 ft·lb	1 ft·lb	490	1460	1 / 12
3446A-2EG	1/2"	50~250 ft·lb	1 ft·lb	590	1750	1 / 12



- 3/8"-3426A-2DK03
- 1/2"-3446A-1DK03
- 3/4"-3446A-1DK02
  series No. before 2019








Heavy Duty Interchangeable Torque Wrench

Using standard insert head
Positive button design which removes the insert head easily
Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
Tolerance of torque ± 3%(CW)
CW/CCW Direction

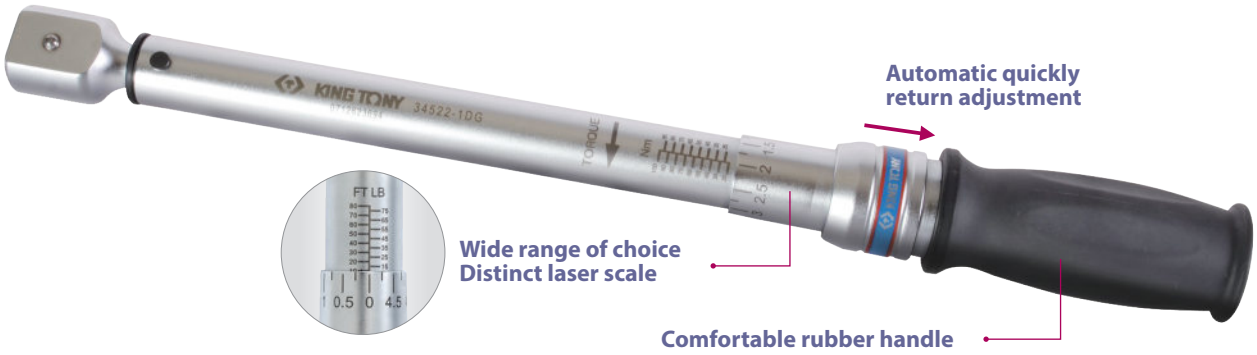

Dual Scale - English & Newton Meter (in·lb/ft·lb & N·m)

KT NO.	Size mm	Torque range in·lb / ft·lb	Incr.	Torque range N·m	Incr.	Overall length mm	g	
34512-1CG	9 x 12	20~100 in·lb	1 in·lb	2.8~10.7 N·m	0.12 N·m	261	510	1 / 12
34512-2CG	9 x 12	40~200 in·lb	1 in·lb	5.1~22.0 N·m	0.12 N·m	306	590	1 / 12
34512-3CG	9 x 12	15~80 ft·lb	0.5 ft·lb	23.7~105.1 N·m	0.7 N·m	430	1270	1 / 12
34522-1CG	14 x 18	15~80 ft·lb	0.5 ft·lb	23.7~105.1 N·m	0.7 N·m	430	1270	1 / 12
34522-2CG	14 x 18	20~150 ft·lb	1 ft·lb	34~197 N·m	1.4 N·m	485	1410	1 / 12
34522-3CG	14 x 18	50~250 ft·lb	1 ft·lb	75~332 N·m	1.4 N·m	580	1590	1 / 12

Single scale - Newton Meter (N·m)

KT NO.	Size mm	Torque range N·m	Incr.	Overall length mm	g	
34512-1DG	9 x 12	2~10 N·m	0.1 N·m	261	510	1 / 12
34512-2DG	9 x 12	4~20 N·m	0.1 N·m	306	590	1 / 12
34512-4DG	9 x 12	10~60 N·m	0.5 N·m	306	590	1 / 12
34512-3DG	9 x 12	20~100 N·m	0.5 N·m	430	1270	1 / 12
34522-1DG	14 x 18	20~100 N·m	0.5 N·m	430	1270	1 / 12
34522-2DG	14 x 18	40~200 N·m	1 N·m	485	1410	1 / 12
34522-3DG	14 x 18	60~340 N·m	2 N·m	580	1590	1 / 12
34522-4DG	14 x 18	100~600 N·m	5 N·m	1015	6200	1 / 2
34522-5DG	14 x 18	10~60 N·m	0.5 N·m	360	1270	1 / 12
34522-6DG	14 x 18	150~800 N·m	5 N·m	1195	6620	1 / 2
34522-7DG	14 x 18	70~350 N·m	2 N·m	580	1800	1 / 12
34522-8DG	14 x 18	200~1000 N·m	5 N·m	1200	6620	1 / 2
34522-9DG	14 x 18	80~400 N·m	2 N·m	580	1780	1 / 12

Single scale - English (in·lb/ft·lb)

KT NO.	Size mm	Torque range in·lb / ft·lb	Incr.	Overall length mm	g	
34512-1EG	9 x 12	20~100 in·lb	1 in·lb	261	510	1 / 12
34512-2EG	9 x 12	40~200 in·lb	1 in·lb	306	590	1 / 12
34512-3EG	9 x 12	15~80 ft·lb	0.5 ft·lb	430	1270	1 / 12
34522-1EG	14 x 18	15~80 ft·lb	0.5 ft·lb	430	1270	1 / 12
34522-2EG	14 x 18	20~150 lbf·ft	1 ft·lb	485	1410	1 / 12
34522-3EG	14 x 18	50~250 ft·lb	1 ft·lb	580	1590	1 / 12

Dual Scale - Newton Meter & English (N·m & in·lb/ft·lb)

KT NO.	Size mm	Torque range N·m	Incr.	Torque range in·lb / ft·lb	Incr.	Overall length mm	g	
34512-1FG	9 x 12	2~10 N·m	0.1 N·m	22.1~84.1 in·lb	0.9 in·lb	261	510	1 / 12
34512-2FG	9 x 12	4~20 N·m	0.1 N·m	39.8~172.6 in·lb	0.9 in·lb	306	590	1 / 12
34512-3FG	9 x 12	20~100 N·m	0.5 N·m	16.6~71.9 ft·lb	0.4 ft·lb	430	1270	1 / 12
34522-1FG	14 x 18	20~100 N·m	0.5 N·m	16.6~71.9 ft·lb	0.4 ft·lb	430	1270	1 / 12
34522-2FG	14 x 18	40~200 N·m	1 N·m	33.2~143.8 ft·lb	0.8 ft·lb	485	1410	1 / 12
34522-3FG	14 x 18	60~340 N·m	2 N·m	51.6~243.4 ft·lb	1.5 ft·lb	580	1590	1 / 12


Insert Tool

345031

• Chrome plated


- Ratchet insert tool
- Square drive size : 9 x 12
- 5° gear action degree (72 teeth)
- Interchageable head for interchangeable torque wrenches







●3426A-1DK
●3436A-1DK
●3446A-1DK
series No. before 17086A



●3426A-1DK01
●3436A-1DK01
●3446A-1DK01
series No. after 17086A



●3426A-1DK02
●3436A-1DK02
●3446A-1DK02
series No. after 19106A


KT NO.	Size	Maximum Torque N·m	Lw* mm	L mm	g	
34503102R	1/4" DR.	62	17.0	46.0	68	12 / 192
34503103R	3/8" DR.	202	17.6	49.0	99	10 / 160
34503104R	1/2" DR.	512	25.0	61.9	216	6 / 96

345032

• Chrome plated

- Ratchet insert tool
- Square drive size : 14 x 18
- 5° gear action degree (72 teeth)
- Interchageable head for interchangeable torque wrenches







●3436A-2DK
●3446A-1DK
series No. before 17086A



●3466A-1DK
series No. before 17086A
●3466A-1DK01
series No. after 17086A




●3436A-2DK02
●3446A-1DK02
series No. after 19106A

KT NO.	Size	Maximum Torque N·m	Lw* mm	L mm	g	
34503203R	3/8" DR.	202	25	70.0	239	6 / 96
34503204R	1/2" DR.	512	25	70.0	248	6 / 96
34503206R	3/4" DR.	800	25	71.5	353	4 / 64

345011

• Chrome plated

- Open end insert tool
- Square drive size : 9 x 12





KT NO.	Size mm	Maximum Torque N·m	Lw* mm	L mm	g	
34501107M	7	10	17.5	37.4	36	12 / 192
34501108M	8	13	17.5	37.9	38	12 / 192
34501109M	9	19	17.5	37.9	38	12 / 192
34501110M	10	25	17.5	38.2	41	12 / 192
34501111M	11	33	17.5	39.0	39	12 / 192
34501112M	12	42	17.5	39.0	41	12 / 192
34501113M	13	52	17.5	39.3	44	12 / 192
34501114M	14	64	20	43.1	54	12 / 192
34501115M	15	77	20	43.4	58	12 / 192
34501116M	16	93	20	43.9	57	12 / 192
34501117M	17	110	20	44.4	61	12 / 192
34501118M	18	130	20	45.3	62	12 / 192
34501119M	19	150	20	45.0	66	12 / 192
34501121M	21	198	25	52.4	118	10 / 160
34501122M	22	225	25	53.1	124	10 / 160
34501124M	24	287	25	54.1	128	8 / 128
34501127M	27	400	32.5	60.1	198	8 / 128
34501130M	30	537	32.5	60.9	195	10 / 80
34501132M	32	644	32.5	62.6	213	10 / 80
34501136M	36	762	32.5	64.8	213	10 / 80

KT NO.	Size inch	Maximum Torque N·m	Lw* mm	L mm	g	
34501108S	1/4	10	17.5	37.4	36	12 / 192
34501110S	5/16	13	17.5	37.9	38	12 / 192
34501112S	3/8	25	17.5	38.2	40	12 / 192
34501114S	7/16	33	17.5	39.0	41	12 / 192
34501116S	1/2	52	17.5	39.3	43	12 / 192
34501118S	9/16	64	20.0	43.1	53	12 / 192
34501120S	5/8	93	20.0	43.9	59	12 / 192
34501122S	11/16	110	20.0	44.4	63	12 / 192
34501124S	3/4	150	20.0	45.0	64	12 / 192


Insert Tool

345014

• Chrome plated

▪ Square drive size : 9 x 12

KT NO.	Size mm	Maximum Torque N·m	Lw* mm	L mm	g	
34501410M	10	25	17.5	42.4	53	12 / 192
34501411M	11	33	17.5	43.0	53	12 / 192
34501412M	12	42	17.5	43.8	53	12 / 192
34501413M	13	52	17.5	43.9	54	12 / 192
34501414M	14	64	17.5	44.3	57.6	12 / 192
34501416M	16	93	17.5	45.0	61	12 / 192
34501417M	17	110	17.5	45.4	62	12 / 192
34501418M	18	130	17.5	46.0	67	12 / 192
34501419M	19	150	17.5	46.7	70	12 / 192
34501421M	21	198	17.5	47.6	72	12 / 192
34501422M	22	225	17.5	48.5	74	12 / 192






345021

• Chrome plated

▪ Ring insert tool

▪ Square drive size : 9 x 12

KT NO.	Size mm	Maximum Torque N·m	Lw* mm	L mm	g	
34502107M	7	26	17.5	39.8	37	12 / 288
34502108M	8	35	17.5	40.5	37	12 / 288
34502110M	10	60	17.5	41.6	40	12 / 288
34502111M	11	73	17.5	43.3	42	12 / 288
34502112M	12	90	17.5	43.8	51	12 / 288
34502113M	13	108	17.5	44.5	52	12 / 288
34502114M	14	128	17.5	45.2	53	12 / 288
34502115M	15	152	17.5	45.9	55	12 / 288
34502116M	16	175	17.5	46.3	57	12 / 288
34502117M	17	202	17.5	47.0	55	12 / 192
34502118M	18	230	17.5	47.4	61	12 / 192
34502119M	19	262	17.5	49.2	63	12 / 192
34502121M	21	330	17.5	50.3	68	12 / 192
34502122M	22	360	17.5	51.2	73	12 / 192





KT NO.	Size inch	Maximum Torque N·m	Lw* mm	L mm	g	
34502108S	1/4	26	17.5	39.8	38	12 / 288
34502110S	5/16	35	17.5	40.5	37	12 / 288
34502112S	3/8	60	17.5	41.6	42	12 / 288
34502114S	7/16	73	17.5	43.3	42	12 / 288
34502116S	1/2	108	17.5	44.5	52	12 / 288
34502118S	9/16	152	17.5	45.2	53	12 / 288
34502120S	5/8	175	17.5	46.3	58	12 / 288
34502122S	11/16	202	17.5	47.0	62	12 / 192
34502124S	3/4	262	17.5	49.2	65	12 / 192
34502126S	13/16	330	17.5	50.3	72	12 / 192
34502128S	7/8	360	17.5	51.2	70	12 / 192


345012

• Chrome plated

▪ Open end insert tool

▪ Square drive size : 14 x 18

KT NO.	Size mm	Maximum Torque N·m	Lw* mm	L mm	g	
34501213M	13	52	25	57.5	114	12 / 192
34501214M	14	64	25	58.0	115	12 / 192
34501215M	15	77	25	58.0	118	12 / 192
34501216M	16	93	25	58.5	125	10 / 160
34501217M	17	110	25	59.5	135	10 / 160
34501218M	18	130	25	60.0	134	10 / 160
34501219M	19	150	25	60.5	136	10 / 160
34501221M	21	198	25	61.0	153	6 / 96
34501222M	22	225	25	62.0	158	6 / 96
34501223M	23	255	25	63.1	166	6 / 96
34501224M	24	287	25	63.1	163	6 / 96
34501225M	25	322	25	69.0	162	6 / 96
34501226M	26	359	30	69.0	230	6 / 96
34501227M	27	400	32.5	69.0	239	6 / 96
34501230M	30	537	32.5	70.6	239	6 / 96
34501232M	32	644	32.5	72.1	248	6 / 72
34501234M	34	762	32.5	73.2	246	6 / 72
34501236M	36	800	32.5	73.3	244	6 / 72
34501238M	38	800	32.5	72.7	222	6 / 72
34501240M	40	800	37	80.5	321	6 / 72
34501241M	41	800	37	80.5	315	6 / 72





KT NO.	Size inch	Maximum Torque N·m	Lw* mm	L mm	g	
34501216S	1/2	52	25	57.5	117	12 / 192
34501218S	9/16	64	25	58.0	121	12 / 192
34501220S	5/8	93	25	58.5	127	10 / 160
34501222S	11/16	110	25	59.5	135	10 / 160
34501224S	3/4	150	25	60.5	140	10 / 160
34501226S	13/16	198	25	61.0	156	6 / 96
34501228S	7/8	225	25	62.0	162	6 / 96
34501230S	15/16	287	25	63.1	168	6 / 96
34501232S	1	322	25	69.0	232	6 / 96
34501236S	1-1/8	537	32.5	70.6	243	6 / 96
34501240S	1-1/4	644	32.5	72.1	242	6 / 96
34501248S	1-1/2	800	32.5	72.7	226	6 / 96


Insert Tool

345022

- Chrome plated

- Square drive size : 14 x 18


KT NO.	Size mm	Maximum Torque N·m	Lw* mm	L mm	g	
34502213M	13	108	25	62.2	129	12 / 192
34502214M	14	128	25	63.2	128	12 / 192
34502215M	15	152	25	63.3	125	12 / 192
34502216M	16	175	25	63.1	137	12 / 192
34502217M	17	202	25	65.0	134	12 / 192
34502218M	18	230	25	65.0	134	10 / 160
34502219M	19	262	25	66.7	135	10 / 160
34502221M	21	330	25	67.3	151	10 / 160
34502222M	22	368	25	68.5	156	6 / 96
34502224M	24	452	25	69.9	156	6 / 96
34502227M	27	595	31	78.0	201	6 / 96
34502230M	30	762	31	79.6	198	6 / 96
34502232M	32	800	31	81.0	201	6 / 96
34502234M	34	800	31	82.4	225	6 / 90
34502236M	36	800	31	83.7	230	6 / 90
34502241M	41	800	31	86.6	235	6 / 90






KT NO.	Size inch	Maximum Torque N·m	Lw* mm	L mm	g	
34502216S	1/2	108	25	62.2	128	12 / 192
34502218S	9/16	128	25	63.2	128	12 / 192
34502220S	5/8	175	25	63.1	132	12 / 192
34502224S	3/4	262	25	66.7	141	10 / 160


34505102R






KT NO.	▭ mm	▬ mm	L1 mm	L mm	g	
34505102R	9 x 12	14 x 18	20.5	45.5	82.2	12 / 144

34505201R






KT NO.	▭ mm	▬ mm	L1 mm	L mm	g	
34505201R	14 x 18	9 x 12	33.5	49.5	131.8	12 / 144

Hook Wrench Head & Set

345042M

- Square drive size: 14 x 18

KT NO.	Size mm	Capacity mm	Maximum Torque N·m	Lw* mm	L mm	g	
34504236M	36	28-36	354	77	121	248.20	12 / 72
34504245M	45	40-45	377	77	129	274.00	12 / 72
34504255M	55	50-55	398	77	129	263.20	12 / 72
34504262M	62	58-62	421	77	134	278.20	12 / 72
34504275M	75	68-75	444	77	139	294.60	12 / 72
34504290M	90	80-90	465	77	142	288.80	12 / 72

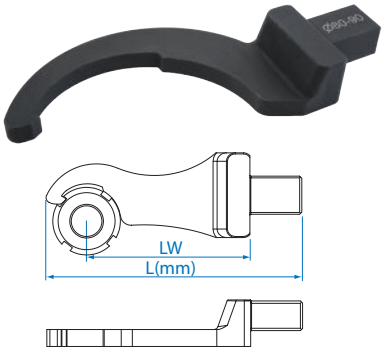

3452407MR

- Suitable for tightening round nuts with radial notches
- Applied with interchangeable torque wrench
- Widely used in automobile, machine tool building and petroleum industries

Contents	kg 2.48	▭/▦ 1 / 6
34505201R	14 x 18(F) → 9 x 12(M)	
345042M	36, 45, 55, 62, 75, 90	



7 PC.



Interchangeable Torque Wrench Set

34510

34520



KT NO.	mm	Contents								
345102D08MR	9 x 12	34512-2DG	4~20 N·m		34503102R	1/4" DR.	345011M 10, 13, 17	345021M 10, 13, 17	1.3	1 / 15
345104D08MR		34512-4DG	10~60 N·m		34503103R	3/8" DR.			1.3	1 / 15
345101E08MR		34512-1EG	20~100 in·lb		34503102R	1/4" DR.			1.2	1 / 15
345102E08MR		34512-2EG	40~200 in·lb		34503102R	1/4" DR.			1.3	1 / 15


KT NO.	mm	Contents							
345202C11MR	14 x 18	34522-2CG	20~150 ft·lb 34~197 N·m		34503204R	1/2" DR.	345012M 13, 14, 15, 17, 19, 22, 24, 27, 30	3.8	1/6
345201D11MR		34522-1DG	20~100 N·m		34503203R	3/8" DR.		3.7	1 / 6
345202D11MR		34522-2DG	40~200 N·m		34503204R	1/2" DR.		3.8	1 / 6
345203D11MR		34522-3DG	60~340 N·m		34503204R	1/2" DR.		4	1 / 6
345201E11MR		34522-1EG	15~80 ft·lb		34503203R	3/8" DR.		3.7	1 / 6
345202E11MR		34522-2EG	20~150 ft·lb		34503204R	1/2" DR.		3.8	1 / 6
345203E11MR		34522-3EG	50~250 ft·lb		34503204R	1/2" DR.		4	1 / 6




Classic Type Adjustable Torque Wrench

Design for easy torque adjustment
Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
Tolerance of torque ± 4%(CW)
CW/CCW Direction

1 N·m = 0.738 ft·lb = 0.102 kgf·m
1 ft·lb = 1.356 N·m = 0.138 kgf·m
1 in·lb = 0.113 N·m = 1.152 kgf·cm

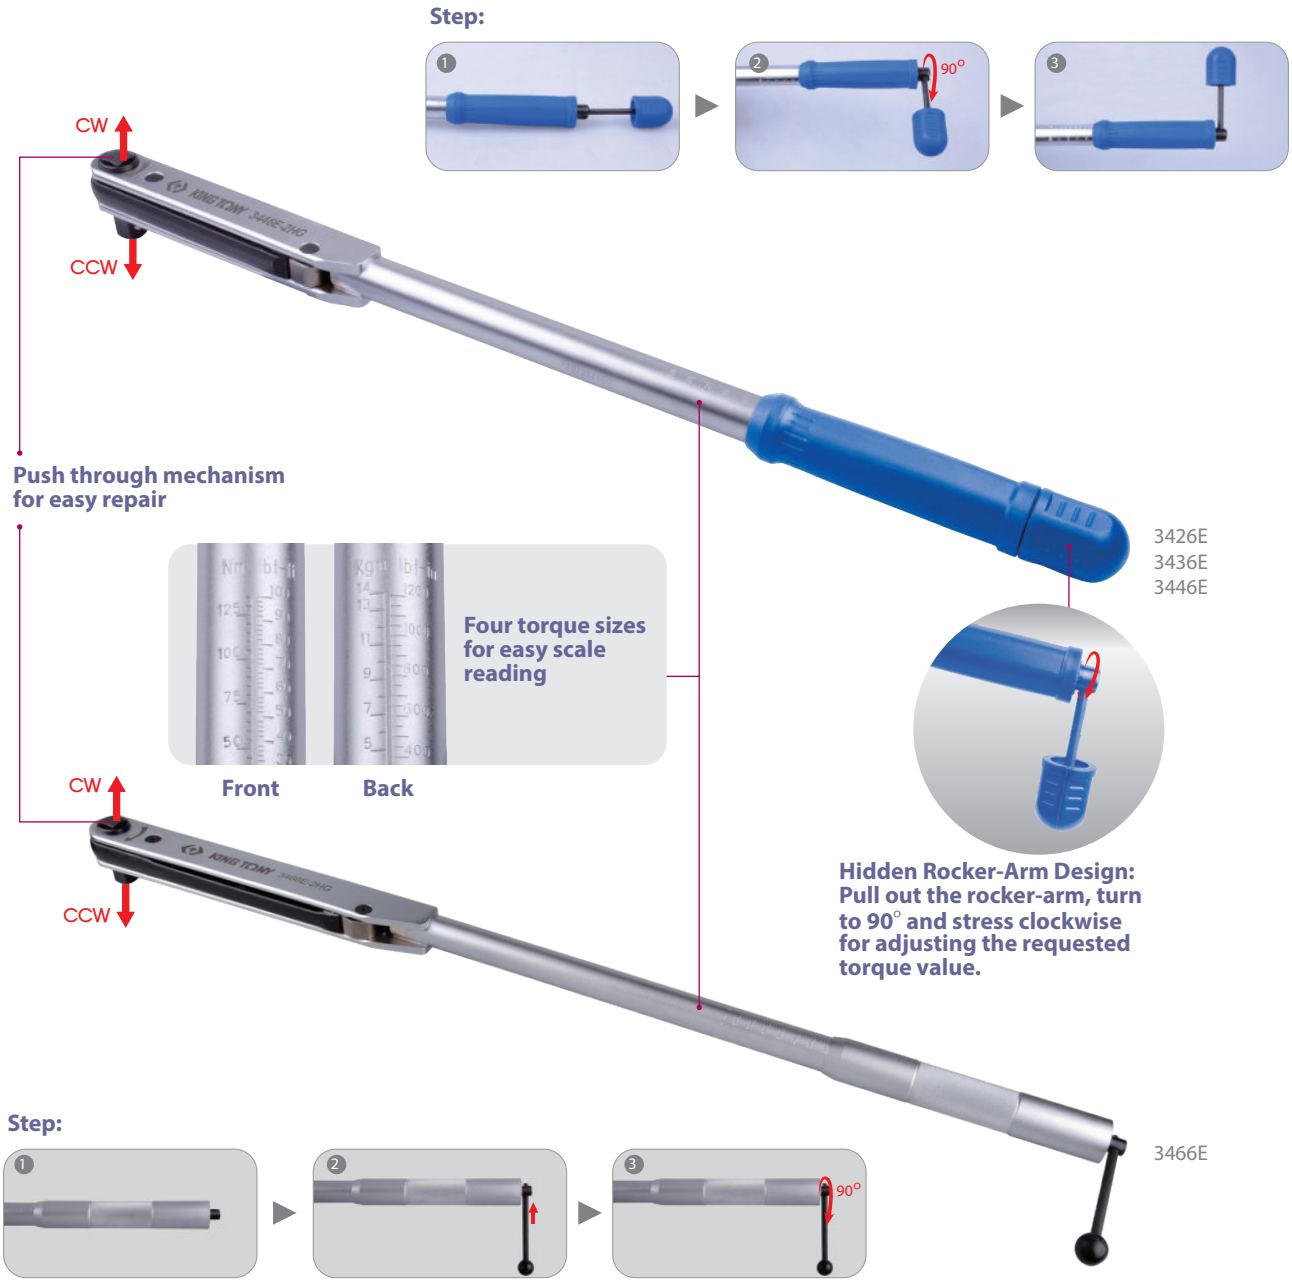



Dual Scale - Newton Meter & English & Kilogram-force meter (N·m / ft·lb / in·lb & kgf·m)

KT NO.	Square drive	Torque range N·m	Incr.	ft·lb	Incr.	in·lb	Incr.	kgf·m	Incr.	Overall length mm	g	
● 3426E-1HG	1/4"	2.5~11 N·m	0.5	2~8 ft·lb	1	20~100 in·lb	10	0.3~1.2 kgf·m	0.1	352	630	1 / 12
● 3436E-1HG	3/8"	2.5~11 N·m	0.5	2~8 ft·lb	1	20~100 in·lb	10	0.3~1.2 kgf·m	0.1	352	740	1 / 12
● 3436E-2HG	3/8"	7~33 N·m	1	5~24 ft·lb	1	60~300 in·lb	10	0.7~3.4 kgf·m	0.1	450	870	1 / 12
● 3436E-3HG	3/8"	14~68 N·m	2	10~50 ft·lb	5	125~600 in·lb	25	1.4~7 kgf·m	0.2	505	1210	1 / 12
● 3446E-1HG	1/2"	25~135 N·m	5	20~100 ft·lb	2	200~1200 in·lb	50	3~14 kgf·m	1	555	1640	1 / 12
● 3446E-2HG	1/2"	50~225 N·m	5	40~160 ft·lb	5	400~2000 in·lb	50	5~23 kgf·m	1	590	1710	1 / 12
● 3446E-3HG	1/2"	70~330 N·m	10	50~250 ft·lb	5	600~3000 in·lb	100	7~35 kgf·m	1	803	3440	1 / 6
● 3466E-1HG	3/4"	140~560 N·m	10	100~410 ft·lb	10	1200~5000 in·lb	100	14~57 kgf·m	1	977	8480	1 / 2
● 3466E-2HG	3/4"	200~800 N·m	20	150~600 ft·lb	20	1800~7200 in·lb	200	22~82 kgf·m	2	1033	8860	1 / 2

Window Type Adjustable Torque Wrench

Adjustable torque wrench with window dual scale
Tolerance of torque ± 3% clockwise
Dual scale in N·m and ft·lb conversion table on window
Grip handle and large number NM on center handle for setup required torque
Simple lock and unlock knob for quick in adjustment
Durable mechanism with over 10,000 cycles within accuracy
Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
The 3/4" torque wrenches have a cylinder body

1 N·m = 0.738 ft·lb = 0.102 kgf·m
1 ft·lb = 1.356 N·m = 0.138 kgf·m
1 in·lb = 0.113 N·m = 1.152 kgf·cm



Dual Scale - Newton Meter & English (N·m / ft·lb)

KT NO.	Gear teeth	Square drive	Torque range N·m	Incr.	Torque range ft·lb	Overall length mm	g	
34266-1FG	24	1/4"	5-25 N·m	0.1 N·m	3.6-18 ft·lb	296	410	1 / 12
34366-1FG	32	3/8"	10-50 N·m	0.25 N·m	7.4-37 ft·lb	333	470	1 / 12
34466-1FG	32	1/2"	20-100 N·m	0.5 N·m	15-75 ft·lb	398	820	1 / 12
34466-2FG	32	1/2"	40-200 N·m	1 N·m	30-150 ft·lb	500	1300	1 / 12
34466-3FG	32	1/2"	60-300 N·m	1 N·m	45-220 ft·lb	633	1470	1 / 12
34666-1FG	24	3/4"	100~600 N·m	2 N·m	75~440 ft·lb	1040	4650	1 / 2
34666-2FG	24	3/4"	150~800 N·m	2 N·m	110~590 ft·lb	1235	5450	1 / 2
34666-3FG	24	3/4"	200~1000 N·m	2 N·m	150~740 ft·lb	1238	5450	1 / 2



34362-1DK 34462-3DK 34666-3DK
34462-1DK 34666-1DK 2761DK

CAUTION

1. Do not use this torque wrench over its scale range.
2. Do not use this torque wrench as a normal hand tool.
3. Torque wrench need to be calibrated periodically for accuracy.



Click Type Adjustable Torque Wrench

Industrial application with durability
Loud click sound and strong impulse when required torque is reached
Tolerance of torque ± 3%(CW)
Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
Ideal for using on oily, chemical and noisy assembling working field
CW/CCW Direction



Design for easy torque setting by graduation

The mechanism of flat metal tube and window scale-reading
Easy torque value setting with external scale and knob

3432F-1DK / 3442F-1DK

Dual Scale - Kilogram-force Centimeter(kgf·cm)

KT NO.	Gear teeth	Square drive	Torque range kgf·cm	Incr.	Overall length mm	g	
3432F-1KF	24	3/8"	50-250 kgf·cm	2.5 kgf·cm	240	450	1 / 24
3432F-3KF	24	3/8"	200-1000 kgf·cm	10 kgf·cm	342	800	1 / 12
3442F-1KF	24	1/2"	200-1000 kgf·cm	10 kgf·cm	342	800	1 / 12
3442F-3KF	24	1/2"	400-2000 kgf·cm	20 kgf·cm	498	1500	1 / 12

Adjustable Torque Wrench

Design for easy torque adjustment
Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
Tolerance of torque ± 4%(CW)
CW/CCW Direction




Comfortable rubber handle

Automatic quick return adjustment

Quick release



- The production of injection molding helps it against come off



- One hand operation
- Quick torque set
- Automatic torque locking




34464-1DK

Dual Scale - Newton Meter & English (N·m / ft·lb)

KT NO.	Gear teeth	Square drive	Torque range N·m / ft·lb	Incr.	Overall length mm	g	
34464-1FG	24	1/2"	40-210 N·m (33.2-151.2 ft·lb)	1.0 N·m	470	1250	1 / 12
34464-2FG	24	1/2"	70-340 N·m (62.7-239.7 ft·lb)	3.0 N·m	590	1590	1 / 12

Adjustable Torque Wrench

Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
Tolerance of torque ± 4%(CW)
CW/CCW Direction

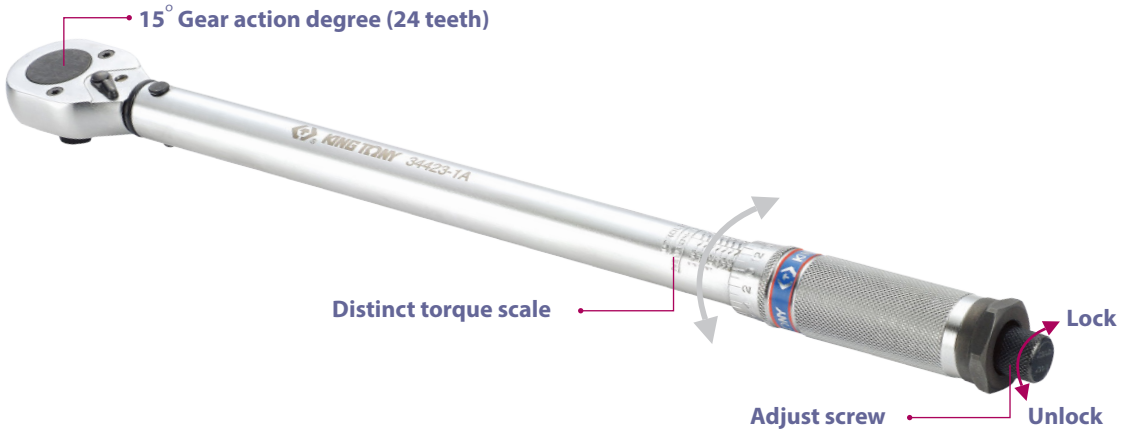

Dual Scale - Newton Meter & Kilogram-force Centimeter / Kilogram-force meter (N·m & kgf·cm / kgf·m)

KT NO.	Square drive	Torque range N·m	Incr.	Torque range kgf·cm / kgf·m	Incr.	Overall length mm	g	
34223-1A	1/4"	5~25 N·m	0.1 N·m	51~255 kgf·cm	1 kgf·cm	280	595	1 / 12
34323-1A	3/8"	5~25 N·m	0.1 N·m	51~255 kgf·cm	1 kgf·cm	280	595	1 / 12
34323-2A	3/8"	20~110 N·m	1 N·m	2.04~11.22 kgf·m	0.1 kgf·m	370	820	1 / 12
34423-1A	1/2"	42~210 N·m	1 N·m	4.3~21.4 kgf·m	0.41 kgf·m	450	1340	1 / 12
34423-2A	1/2"	70~340 N·m	3 N·m	7.1~34.7 kgf·m	0.27 kgf·m	570	2400	1 / 12

Dual Scale - English & Kilogram-force Centimeter / Kilogram-force meter (in·lb / ft·lb & kgf·cm / kgf·m)

KT NO.	Square drive	Torque range in·lb / ft·lb	Incr.	Torque range kgf·cm / kgf·m	Incr.	Overall length mm	g	
34223-1B	1/4"	55~250 in·lb	1.5 in·lb	63~288 kgf·cm	1.13 kgf·cm	280	595	1 / 12
34323-1B	3/8"	55~250 in·lb	1.5 in·lb	63~288 kgf·cm	1.13 kgf·cm	280	595	1 / 12
34323-2B	3/8"	15~80 ft·lb	0.5 ft·lb	2.1~11.10 kgf·m	0.07 kgf·m	370	820	1 / 12
34423-1B	1/2"	30~150 ft·lb	1 ft·lb	4.2~20.8 kgf·m	0.14 kgf·m	450	1340	1 / 12
34423-2B	1/2"	50~250 ft·lb	2 ft·lb	6.9~34.6 kgf·m	0.27 kgf·m	570	2400	1 / 12

Dual Scale - Newton Meter & English (N·m & in·lb / ft·lb)

KT NO.	Square drive	Torque range in·lb / ft·lb	Incr.	Torque range N·m	Incr.	Overall length mm	g	
34223-1C	1/4"	55~250 in·lb	1 in·lb	6.2~28.2 N·m	0.17 N·m	280	595	1 / 12
34323-1C	3/8"	55~250 in·lb	1 in·lb	6.2~28.2 N·m	0.17 N·m	280	595	1 / 12
34323-2C	3/8"	15~80 ft·lb	0.5 ft·lb	20.3~108.5 N·m	0.68 N·m	370	820	1 / 12
34423-1C	1/2"	30~150 ft·lb	1 ft·lb	40.7~203.4 N·m	1.35 N·m	450	1658	1 / 12
34423-2C	1/2"	50~250 ft·lb	2 ft·lb	67.8~339 N·m	2.71 N·m	570	2400	1 / 12


● 34223-1DK1


● 34323-1DK1
● 34323-2DK1


● 34423-1DK1(24T)
-series NO. before 090923xxxx


● 34423-3DK(24T)
-series NO. after 1309230001

Adjustable Torque Wrench Set

344251A12MR 1/2"

Blow case size (mm) :
500 x 125 x 70 (0.15cuft)


Contents			Kg 2.85	1 / 10
		34423-1A	42~210 N·m	
		4335MR	13, 14, 15, 16, 17, 18, 19, 21, 22, 24	
		4251-04R		




12 PC.


Heavy Duty Adjustable Aluminum Torque Wrench

Industrial application
Lightweight and robust housing made by aluminium alloy
Multi-lever mechanism brings length independence and accurate torque
Loud click sound and string impulse when torque value reached
Easy lock and adjustment design
Tolerance of torque ± 3%(CW)
Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010

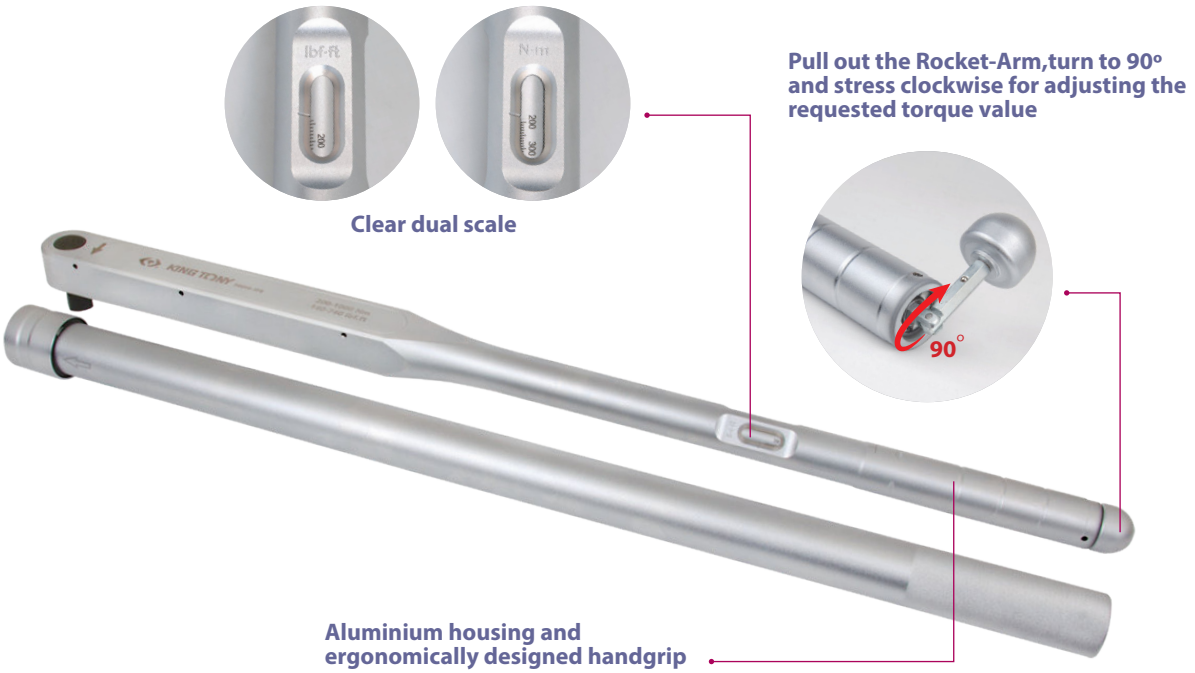

Step:

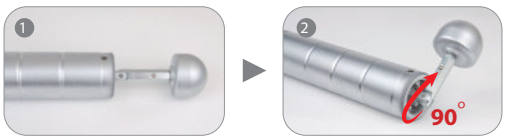

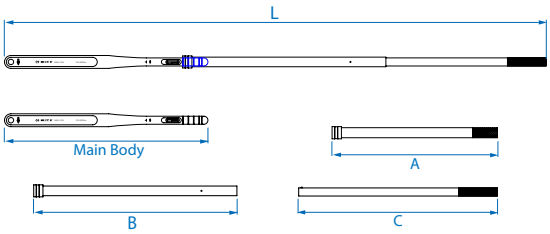

Dual Scale - Newton Meter & English (N·m & ft·lb)

KT NO.	Square drive	Torque range N·m	Incr.	ft·lb	Incr.	Main Body	A	B	C	Overall length mm	kg	
3445G-1FB	1/2"	40~200 N·m	5	30~150 ft·lb	5	563	-	-	-	563	1.50	1 / 12
3465G-1FB	3/4"	110~550 N·m	10	80~400 ft·lb	10	827	-	-	-	827	3.00	1 / 2
3465G-2FB	3/4"	140~760 N·m	10	100~560 ft·lb	10	827	-	-	-	827	3.00	1 / 2
3465G-3FB	3/4"	200~1000 N·m	10	140~740 ft·lb	10	808	762	-	-	1413	3.80	1 / 2
3485G-1DB	1"	600~1500 N·m	25	-	-	945	-	771	362	1615	10.90	1 / 1
3485G-2DB	1"	750~2000 N·m	50	-	-	947	-	945	924	2370	16.30	1 / 1

Torque Angle Adapter

34417-1A

▪ Specifications:

Accuracy	Clockwise:±2% Anti-Clockwise:±2%				
Memory	10				
Unit Selection	N·m	ft·lb	In·lb	Kgf·m	Kgf·cm
Display Resolution	0.1	0.1	1	0.01	1
Operation Mode	Torque / Angle / Torque+Angle				
Battery	DC3V, CR2032				
Battery Life	4hrs (continuous operation)				
Operating Ambient Temperature	-10°C - 60°C (14°F - 140°F)				
Storage Temperature	-20°C - 70°C (-4°F - 158°F)				
Operating Relative Humidity	15 to 90% noncondensing				
Switch Off Automatically	100 seconds				
Warning Light	Green, Yellow, Red				
Overload Alarm	200 N·m (147.5 ft·lb)				



4 PC.



Calibration adapter




Torque Angle Adapter






- The LED screen is backlit for easier reading



- The ring-shaped warning light can provide an immediate visual cue for the torque values



- The body can be rotated 240° for easier reading

Dual Scale - Newton Meter & English & Kilogram-force meter (N·m / ft·lb & kgf·m)

KT NO.	Square drive	Torque range N·m	Torque range ft·lb	Torque range kgf·m		
34417-1A	1/2"	40 ~200 N·m	29.5~147.5 ft·lb	4.08~20.38 kgf·m	620	1 / 12

Electronic Torque Wrench

Electronic torque value readout
Peak and trace mode selection
Buzzer and LED indicator for presetting target torque
Engineering units (N·m, ft·lb, in·lb, kgf·m) adjustment
Switch off automatically after 60 seconds
DIN ISO 6789:2017 & ASME B107.300-2010
CW ± 2% and CCW ± 2.5% operation






Display :
LCD display (± 2 digit) with measuring ranges that can be selected for N·m, ft·lb, in·lb, kg·m



LED warning light

Signal :
3-way signal when the maximum torque value is reached, as a result the wrench can be used in noisy places.

- Electronic Torque Wrench

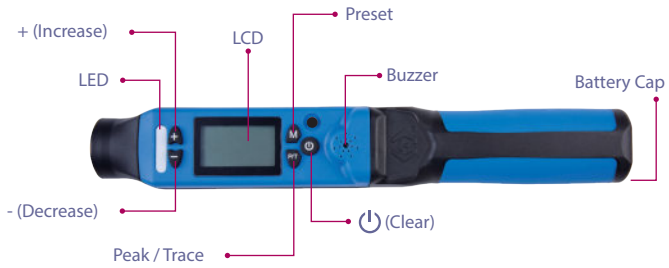

Torque Accuracy	CW ± 2% / CCW ± 2.5%
Preset Function	10
Display Resolution	0.1 N·m/ ft·lb , 1.0 in·lb, 0.01 kgf·m
Operation Mode	Peak/Trace
Battery	AAAx3
Backlight	Yes (Nagative)
Alert	LED & Buzzer
Operating Ambient Temperature	-10°C ~ 60°C
Storage Temperature	-20°C ~ 70°C
Operation Relative Humidity	15 to 90% noncodensing



● 34367-2DK
● 34467-1DK

Dual Scale - Newton Meter & English & Kilogram-force meter (N·m / in·lb / ft·lb & kgf·m)

KT NO.	Gear teeth	Square drive	Torque range N·m	Torque range in·lb	Torque range ft·lb	Torque range kgf·m	Overall length mm	g	
● 34367-2AG	72	3/8"	27-135 N·m	239~1195 in·lb	19.9-99.6 ft·lb	2.75~13.76 kgf·m	460	1400	3 / 6
● 34467-1AG	36	1/2"	40-200 N·m	354~1770 in·lb	29.5-147.5 ft·lb	4.08~20.38 kgf·m	530	1500	3 / 6

Electronic Torque Adapter

34207-1A | 34307-1A | 34407-1A CE

▪ Specifications:

Accuracy	± 2%
Memory	50
Display Resolution	0.1 N·m /ft·lb ,0.01 kgf·m
Operation Mode	Peak/Trace
Unit Selection	kgf·m, ft·lb, N·m
Battery	AAA x 2 PC.
Battery Life	110hrs (continuous operation)
Operating Ambient Temperature	-10°C - 60°C (13.9°F - 139.9°F)
Storage Temperature	-20°C - 70°C (-4°F - 157.9°F)
Operating Relative Humidity	15 to 90% noncondensing
Switch Off Automatically	70 seconds (if do not use electronic torque adapter.)
LED Indicator	Green. Red
Overload Alarm	34207-1A: 37.5 N·m (27.6 ft·lb) 34307-1A: 168.8 N·m(124.5 ft·lb) 34407-1A: 250 N·m (184.4 ft·lb)





Dual Scale - Newton Meter & English & Kilogram-force meter (N·m / ft·lb & kgf·m)

KT NO.	Square drive	Torque range N·m	Torque range ft·lb	Torque range kgf·m	Size mm	g	
34207-1A	1/4"	6~30 N·m	4.4~22.1 ft·lb	0.61~3.06 kgf·m	L75 x W45 x H40	124	12 / 48
34307-1A	3/8"	27~135 N·m	19.9~99.6 ft·lb	2.75~13.76 kgf·m	L75 x W45 x H40	198	12 / 48
34407-1A	1/2"	40~200 N·m	29.5~147.5 ft·lb	4.08~20.38 kgf·m	L75 x W45 x H40	199	12 / 48

34407T-1A

Accuracy	± 2%
Memory	50
Display Resolution	0.1 N·m /ft·lb ,0.01 kgf·m 1Psi /0.001 Bar /0.001 kgf·cm² /0.01 Kpa
Operation Mode	Peak/Trace
Unit Selection	in·lb, ft·lb, Kgf·m, Kgf·cm, N·m Kpa, Bar, psi, kgf·cm²
Battery	AAA x 2 PC.
Battery Life	50hrs (continuous operation)
Operating Ambient Temperature	-10°C - 60°C (13.9°F - 139.9°F)
Storage Temperature	-20°C - 70°C (-4°F - 157.9°F)
Operating Relative Humidity	15 to 90% noncondensing
Auto Shut Off	60 seconds







Dual Scale - Newton Meter & English & Kilogram-force meter (N·m / lbf·ft & kgf·m)


KT NO.	Square drive	Torque range N·m	Torque range ft·lb	Torque range kgf·m	Pressure range	Size mm	g	
34407T-1A	1/2"	40-200 N·m	29.5-147.5 ft·lb	4.08~20.38 kgf·m	1-100 psi (0.069~6.6bar)	L75 x W67 x H46 mm	343	1 / 24

Electronic Torque Adapter

34607-1A

- Specifications:

Accuracy	± 2%
Memory	50
Display Resolution	0.1 N·m / ft·lb , 0.01 kgf·m
Operation Mode	Peak/Trace
Unit Selection	kgf·m, ft·lb, N·m
Battery	AA x 2 PC.
Battery Life	110hrs (continuous operation)
Operating Ambient Temperature	-10°C - 60°C (13.9°F - 139.9°F)
Storage Temperature	-20°C - 70°C (-4°F - 157.9°F)
Operating Relative Humidity	15 to 90% noncondensing
Switch Off Automatically	70 seconds (if do not use electronic torque adapter.)
LED Indicator	Green. Red
Overload Alarm	1250 N·m (922 ft·lb)

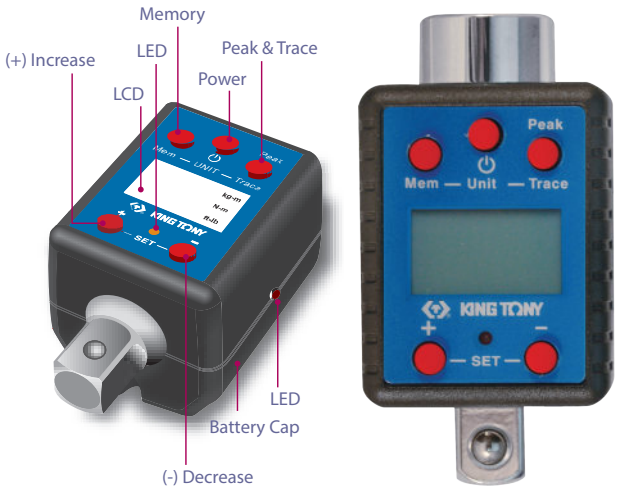

Dual Scale - Newton Meter & English & Kilogram-force meter (N·m / ft·lb & kgf·m)

KT NO.	Square drive	Torque range N·m	Torque range ft·lb	Torque range kgf·m	Size mm	g	
34607-1A	3/4"	200 ~1000 N·m	147.6~738 ft·lb	20.4~102 kgf·m	L110 x W56 x H60	585	6 / 24

Torque Screwdriver

34211

- Suitable for 1/4" Hex insert bit; 1/4" socket
- Automatic adjustment knob design
- Easy-to-read laser scale
- Ergonomic comfort rubber grip
- Tolerance of torque ± 5%(CW)
- Quality meets DIN ISO 6789:2017 & ASME B107.300-2010



►Quick-Release

34011



34211



34011

KT NO.	Spec.	Torque range cN·m / N·m / in·lb	Incr.	Overall length mm	g	
34211-3DG	■	4~9 N·m	0.1 N·m	196	475	1 / 24
34011-1DG	○	30~120 cN·m	1 cN·m	180	207	1 / 24
34011-1EG	○	3~15 in·lb	0.1 in·lb	180	207	1 / 24
34011-2DG	○	1.5~6.5 N·m	0.1 N·m	196	475	1 / 24
34011-2EG	○	10~50 in·lb	1.0 in·lb	196	475	1 / 24


Torque Angle Gauge

34440 | 34440A | 34660 | 34660A


- Square Drive :
  34440 (1/2" x 1/2")
  34660 (3/4" x 3/4")
- 360° angle scale- clearly marked in 2° increments, and in intervals of 10° and 30°
- Indicator etched on clear plastic plate, protects angle scale from dirt and grease
- Adjustable arm keeps angle scale stationary
- Arm has two lengths for additional flexibility in placement against components
- Tough composite dial and rotating index allow operator to accurately tighten to meet standard







KT NO.	Spec.	g	
34440	1/2"F x 1/2"M	190	12 / 48
34440A	1/2"F x 1/2"M	375	6 / 24
34660	3/4"F x 3/4"M	666	6 / 12
34660A	3/4"F x 3/4"M	908	6 / 12



- Step 1 : Set up the torque value by torque wrench




- Step 2 : Adjust the angle by angle gauge

Torque Multiplier

34486 | 34488 | 34688

- Torque multiplication with 5:1, accuracy guaranteed better than ± 5%
- Reaction bar supplied in two styles for maximum versatility
- Ideal construction offers minimal maintenance and extended life
- Portable package brings convenience for use in different working places

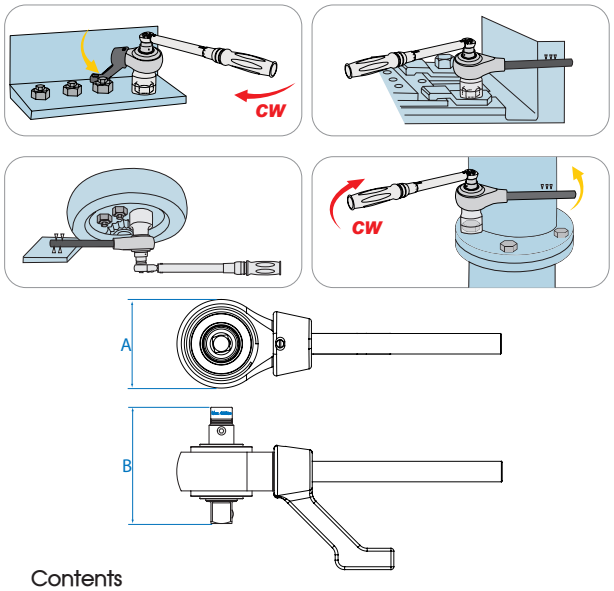







Contents

	34486-05A 34488-05A 34688-05A	Multiplier head 1 PC.
	34688-P01	Reaction bar 1 PC.
	34688-P02	Reaction bar 1 PC.
	34486-P03 34488-P03 34688-P03	Torque-Limit Adapter 1 PC.



KT NO.	Ratio	Input square	Output square	Max input torque N·m /ft·lb	Max output torque N·m / ft·lb	A mm	B mm	kg	
34486	5 : 1	1/2"	3/4"	300 / 220	1500 / 1100	108	136.3	7.1	1 / 2
34488	5 : 1	1/2"	1"	400 / 290	2000 / 1450	108	140.3	7.5	1 / 2
34688	5 : 1	3/4"	1"	540 / 400	2700 / 2000	108	161.0	7.7	1 / 2

Torque Multiplier

34488-26

- Torque multiplication with 26:1, accuracy guaranteed better than ± 5%
- Reaction bar supplied in two styles for maximum versatility
- High ratios offers an idea to replace long lever arm and heavy wrench
- Ideal construction offers minimal maintenance and extended life
- Portable package brings convenience for use in different working places
- Anti-backlash device







34488-26DK

Contents



Multiplier head 1 PC.



Reaction bar 2 PC.









KT NO.	Ratio	Input square	Output square	Max input torque N·m / ft·lb	Max output torque N·m / ft·lb	kg	
34488-26	26 : 1	1/2"	1"	175 / 130	4500 / 3300	15.7	1 / 1



Universal Torque Converter Set


3488A03MP

- It is a newly designed wheel wrench for truck or car tires by using less labor to reach a sufficient output torque
- Suitable for trucks, buses, and other heavy duty vehicles



Contents

	Power enhanced device 1 PC.
	Prolonged pole 1 PC.
	Handle 1 PC.
 8835M	32, 33

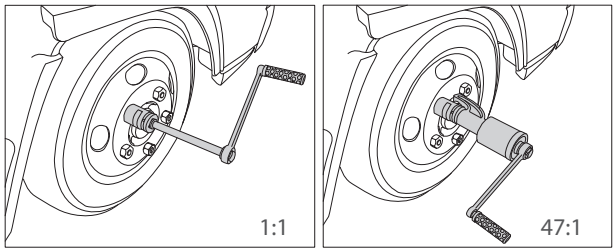

KT NO.	Ratio	Input square	Output square	Max output torque N·m / ft·lb	kg	
3488A03MP	47 : 1	1"	1"	4700 / 3466	9.3	1 / 2



Torque Tester

ZV011

7.7 kg | 1 / 1

Calibration Range	2~60 N·m
Accuracy	± 0.5%
Units of Measurement	in·lb, ft·lb, Kgf·m, Kgf·cm, N·m, N·cm
Input Hex A/F (mm)	10mm
Square Drive Adaptor (inch)	1/4", 3/8", 1/2"
Operating Temperature Range	+5°C~ +40°C
Storage Temperature Range	+0°C~ +70°C
Power Input	100-240V DC9.0V⎓1.66A, 15W MAX
Base Material / Finish	Aluminum Alloy / Painting
Dimension	210(L) x 150(W) x 140(H) mm


233510M


333510M


433510MR



ZV011A		Europe
ZV011B		America & Asia
ZV011D		Australia & New Zealand

ZV012

8.1 kg | 1 / 1

Calibration Range	8~400 N·m
Accuracy	± 0.5%
Units of Measurement	in·lb, ft·lb, Kgf·m, Kgf·cm, N·m, N·cm
Input Hex A/F (mm)	22mm
Square Drive Adaptor (inch)	3/8", 1/2", 3/4"
Operating Temperature Range	+5°C~ +40°C
Storage Temperature Range	+0°C~ +70°C
Power Input	100-240V DC9.0V⎓1.66A, 15W MAX
Base Material / Finish	Aluminum Alloy / Painting
Dimension	210(L) x 150(W) x 140(H) mm


333522M


433522MR


633522M



ZV012A		Europe
ZV012B		America & Asia
ZV012D		Australia & New Zealand

ZV013

8.9 kg | 1 / 1

Calibration Range	100~1500 N·m
Accuracy	± 0.5%
Units of Measurement	in·lb, ft·lb, Kgf·m, Kgf·cm, N·m
Input Hex A/F (mm)	36mm
Square Drive Adaptor (inch)	3/4"
Operating Temperature Range	+5°C~ +40°C
Storage Temperature Range	+0°C~ +70°C
Power Input	100-240V DC9.0V⎓1.66A, 15W MAX
Base Material / Finish	Aluminum Alloy / Painting
Dimension	210(L) x 150(W) x 140(H) mm


633536M



ZV013A		Europe
ZV013B		America & Asia
ZV013D		Australia & New Zealand


TORQUE WRENCH TESTER
KING TONY
ZV01
P.PEAK LATCHED
ZERO RESET
UNIT
MODE
PRINT
KING TONY 34454-1DG
KING TONY 34454-1DG
KING TONY 3445G-1FB
40-200 Nm
30-150 Lbf.ft


WRENCHES



Φ12mm - 28mm
KING TONY 3616S-08P
KING TONY 5753A
19
19

KING TONY UNIT DRIVE Profile

1. A large contact surface provides a secure force closure even for bolts whose sizes are out of the tolerances.
2. Radiate distribution of the force on the bolt flanks, reducing notch effect, which prevents the bolt from being rounded.
3. Gentle torque transfer enables worn bolts to be loosened.
4. Optimally distributed force up to 20 % higher torques can be transferred.

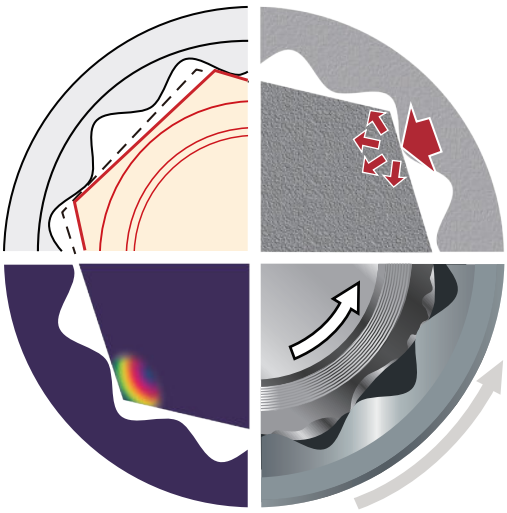

The KING TONY UNIT DRIVE prevents the bolts from being damaged by using of a wave form without any tipped or sharp edges.
Enlarged, round contact surfaces ensure that torque is reliably transferred - acting radiately, as it does, on the bolt.
Minimising notch effect prevents any damage to the bolt.

Wrench Made



1 Raw material

2 Hot forge



3 Barreling



4 Polishing



5 Punching & Broaching



6 Marking



7 Heat treatment



8 Vibrating



9 Sand blast



10 Plating

Advanced structure saves time

There are more and more improved tool structures come out every year. King Tony selects useful idea and engineering function on developing new product within quality and economic concern. Every piece of component is designed for the comfort to users.








King Tony



Other brand

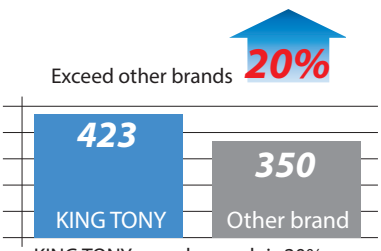

KING TONY speed wrench is 20% stronger than others.

Ultra-Light & Long Combination Wrench & Set


KT No. & D1



1061

PAT.

- New forge technologies I-Beam shank offers 20% lightweight and better strength
- 15° open slimline type
- 13° ring end offset from shaft
- Chrome vanadium alloy steel
- Chrome plated
- DIN 3113 from A / ISO 7738

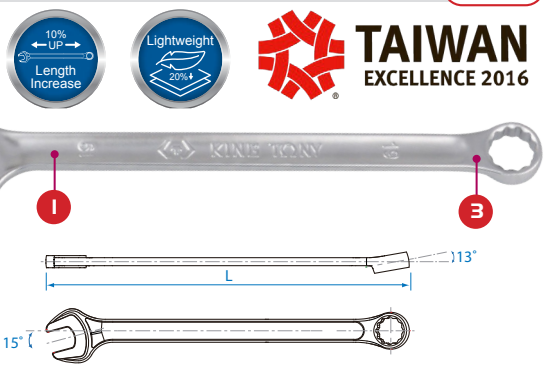



New slimline I-Beam shank offers superior strength with less effort



More powerful open end with big thumb point delivers more torque



13 degree offset ring provides better accessibility





KT NO.	Size mm	L mm	g	
1061-06	6	128	19	12 / 768
1061-07	7	148	31	12 / 576
1061-08	8	148	29	12 / 576
1061-09	9	167	46	12 / 384
1061-10	10	167	47	12 / 384
1061-11	11	186	58	12 / 240
1061-12	12	196	62	12 / 192
1061-13	13	205	85	12 / 192
1061-14	14	223	101	12 / 120
1061-15	15	233	121	12 / 144
1061-16	16	243	135	12 / 144
1061-17	17	262	168	12 / 96
1061-18	18	272	187	12 / 96

KT NO.	Size mm	L mm	g	
1061-19	19	281	203	12 / 96
1061-20	20	301	273	8 / 48
1061-21	21	301	269	8 / 48
1061-22	22	319	304	8 / 48
1061-23	23	319	301	8 / 48
1061-24	24	338	370	5 / 40
1061-25	25	358	450	5 / 40
1061-26	26	358	431	5 / 40
1061-27	27	383	510	5 / 40
1061-28	28	383	508	5 / 40
1061-29	29	408	617	5 / 20
1061-30	30	408	599	5 / 20
1061-32	32	433	789	5 / 20



► Pouch material : Tetoron

KT NO.	PC.		Contents	Kg	
12C7MRN01	7		8, 10, 12, 13, 14, 17, 19	0.77	1 / 24
12C8MRN	8		6, 7, 8, 9, 10, 11, 12, 13	0.77	1 / 24
12A0MRN	10		10, 11, 12, 13, 14, 15, 16, 17, 18, 19	1.35	1 / 12
12A1MRN	11	1061	8, 10, 12, 13, 14, 16, 17, 18, 19, 22, 24	2.06	1 / 12
12A3MRN	13		8, 10, 11, 12, 13, 14, 15, 16 ,17, 18, 19, 22, 24	2.16	1 / 12
12A4MRN	14		8, 10, 11, 12, 13, 14, 15, 16 ,17, 18, 19, 21, 22, 24	2.44	1 / 8
12B4MRN	24		6, 8, 10, 11, 12, 13, 14, 15, 16 ,17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32	7	1 / 2

Combination Wrench




1062 PAT.



New slimline I-Beam shank offers superior strength with less effort



More powerful open end with big thumb point delivers more torque



13 degree offset ring provides better accessibility

- 15° open end reinforcement design in slim profile
- 13° ring end high relief zone design with thin wall access ability
- Chrome vanadium alloy steel
- Metric - DIN 3113 from A, ISO 7738



KT NO.	Size mm	L mm	g	
1062-06	6	105	17	12 / 504
1062-07	7	115	19	12 / 504
1062-08	8	125	27	12 / 504
1062-09	9	135	28	12 / 504
1062-10	10	145	36	12 / 504
1062-11	11	155	45	12 / 504
1062-12	12	165	58	12 / 216
1062-13	13	175	73	12 / 216
1062-14	14	185	88	12 / 216
1062-15	15	195	94	12 / 192
1062-16	16	205	108	12 / 192
1062-17	17	215	129	12 / 192
1062-18	18	225	151	12 / 144

KT NO.	Size mm	L mm	g	
1062-19	19	235	159	12 / 144
1062-20	20	245	186	12 / 144
1062-21	21	255	203	12 / 96
1062-22	22	265	221	12 / 96
1062-23	23	275	262	12 / 96
1062-24	24	285	281	6 / 54
1062-25	25	295	309	6 / 54
1062-26	26	305	343	6 / 54
1062-27	27	315	393	6 / 54
1062-28	28	325	416	6 / 48
1062-29	29	335	456	6 / 48
1062-30	30	345	491	6 / 48
1062-32	32	365	573	6 / 48

Combination Wrench Set



► MRN / SRN : Tetoron pouch bag



► 12D21MRN


Protection cover

KT NO.	PC.		Contents	Package	Kg	
12D09MRN	9	1062	8, 9, 10, 11, 12, 13, 14, 17, 19	Tetoron	0.80	1 / 24
12D10MRN	10		8, 10, 12, 13, 14, 17, 19, 21, 22, 24	Tetoron	1.44	1 / 16
12D13MRN	13		6, 8, 10, 11, 12, 13, 14, 15, 17, 19, 21, 22, 24	Tetoron	1.68	1 / 12
12D14MRN05	14		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19	Tetoron	1.27	1 / 12
12D15MRN	15		10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 24, 27, 30, 32	Tetoron	3.32	1 / 8
12D15MRN01	14		8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24	Tetoron	1.96	1 / 12
12D18MRN	18		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24	Tetoron	2.36	1 / 8
12D21MRN	21		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32	Tetoron	4.10	1 / 6
12D26MRN	26		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32	Tetoron	5.20	1 / 4

Portable Wrench Set

12D06MRS

KT NO.	PC.		Contents	Package	Kg	
12D06MRS	6	1062	10, 12, 13, 14, 17, 19	color box	0.82	1 / 16

6 PC.



Portable Wrench Set



▪ Easy to recognize



▪ One-handed carry



▪ Quick storage



▪ Elastic structure design



▪ Hanging hole

12 PC.



▪ Wrench safely locked in support

KT NO.	PC.		Contents	Package	Kg	
12A2MRS02	12	1061	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22	color box	1.8	1 / 8
12A09MRS01	9		6, 8, 10, 11, 13, 14, 15, 17, 19	color box	1.20	1 / 20
12D12MRS	12	1062	8, 9, 10, 11, 12, 13, 14, 16, 17, 18, 19, 22	color box	1.4	1 / 12
12D12MRS01	12		8, 9, 10, 11, 12, 13, 14, 16, 17,18, 19, 21	color box	1.4	1 / 12
12D09MRS01	9		6, 8, 10, 11, 13, 14, 15, 17, 19	color box	0.85	1 / 24
12112MRS02	12	3731M	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22	color box	1.6	1 / 12
12109MRS01	9		8, 10, 11, 12, 13, 14, 15, 17, 19	color box	0.95	1 / 24
122A12MRS02	12	373AM	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22	color box	1.6	1 / 12
122A09MRS01	9		8, 10, 11, 12, 13, 14, 15, 17, 19	color box	1.00	1 / 24
12208SRS	8	3732S	5/16", 3/8", 7/16",1/2", 9/16", 5/8", 11/16", 3/4"	color box	0.90	1 / 24

Combination Wrench

KT No. & D1



1060

- European slimline type
- 15° open end angle
- 15° ring end offset from shaft
- Chrome vanadium alloy steel
- Chrome plated
- Metric - DIN 3113 from A, ISO 7738
- Inch - ANSI / ASME B107.6


KT NO.	Size mm	L mm	g	
1060-55	5.5	105	17	12 / 504
1060-06	6	105	16	12 / 504
1060-07	7	115	22	12 / 504
1060-08	8	125	24	12 / 504
1060-09	9	135	32	12 / 504
1060-10	10	145	41	12 / 504
1060-11	11	155	46	12 / 504
1060-12	12	165	59	12 / 216
1060-13	13	175	70	12 / 216
1060-14	14	185	87	12 / 216
1060-15	15	195	96	12 / 192
1060-16	16	205	111	12 / 192
1060-17	17	215	131	12 / 192
1060-18	18	225	156	12 / 144
1060-19	19	235	163	12 / 144
1060-20	20	245	189	12 / 144
1060-21	21	255	206	12 / 96
1060-22	22	265	243	12 / 96
1060-23	23	275	258	12 / 96
1060-24	24	285	290	6 / 54
1060-25	25	295	312	6 / 54
1060-26	26	305	349	6 / 54
1060-27	27	315	367	6 / 54
1060-28	28	325	415	6 / 48
1060-29	29	335	463	6 / 48
1060-30	30	345	492	6 / 48
1060-32	32	365	566	6 / 48

1071

- Jumbo type
- 15° open end angle
- 15° ring end offset from shaft
- Polished, chrome plated
- Metric - DIN 3113 from A, ISO 7738
- Inch - ANSI / ASME B107.6

KT NO.	Size mm	L mm	g	
1071-33	33	410	802	5 / 20
1071-34	34	410	819	5 / 20
1071-35	35	425	920	5 / 20
1071-36	36	425	918	5 / 20
1071-38	38	455	1079	5 / 20
1071-41	41	495	1464	5 / 15
1071-42	42	495	1448	5 / 15
1071-44	44	495	1584	5 / 15
1071-46	46	495	1581	5 / 15
1071-48	48	563	2235	5 / 10
1071-50	50	563	2180	5 / 10
KT NO.	Size mm	L mm	g	
1071-55	55	610	2260	5
1071-60	60	645	3523	5
1071-65	65	670	3346	5
1071-70	70	708	5672	2
1071-75	75	708	5770	2
1071-80	80	730	7778	2
1071-85	85	730	7575	2

5060

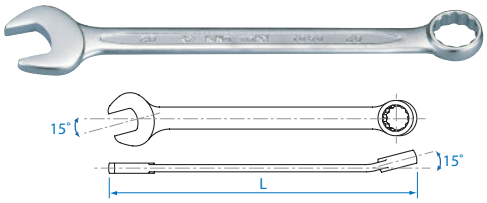

KT NO.	Size inch	L mm	g	
5060-08	1/4	105	17	12 / 504
5060-10	5/16	125	24	12 / 504
5060-12	3/8	145	40	12 / 504
5060-14	7/16	155	47	12 / 504
5060-16	1/2	175	70	12 / 216
5060-18	9/16	185	87	12 / 216
5060-20	5/8	205	113	12 / 192
5060-22	11/16	215	136	12 / 192
5060-24	3/4	235	175	12 / 144
5060-26	13/16	255	214	12 / 96
5060-28	7/8	265	234	12 / 96
5060-30	15/16	285	280	6 / 54
5060-32	1	295	309	6 / 54
5060-34	1-1/16	315	370	6 / 54
5060-36	1-1/8	335	462	6 / 48
new 5060-38	1-3/16	345	470	6 / 48
5060-40	1-1/4	365	560	6 / 48

5071



1071-33~50
5071-42~64




1071-55~85



KT NO.	Size inch	L mm	g	
5071-42	1-5/16	410	816	5 / 20
5071-44	1-3/8	425	951	5 / 20
5071-46	1-7/16	425	920	5 / 20
5071-48	1-1/2	455	1085	5 / 20
5071-50	1-9/16	495	1532	5 / 15
5071-52	1-5/8	495	1520	5 / 15
5071-54	1-11/16	495	1598	5 / 15
5071-56	1-3/4	495	1609	5 / 15
5071-58	1-13/16	495	1554	5 / 15
5071-60	1-7/8	563	2317	5 / 10
5071-62	1-15/16	563	2245	5 / 10
5071-64	2	563	2248	5 / 10
5071-72	2-1/4"			
5071-80	2-1/2"			
5071-88	2-3/4"			
5071-96	3"			

Combination Wrench Set

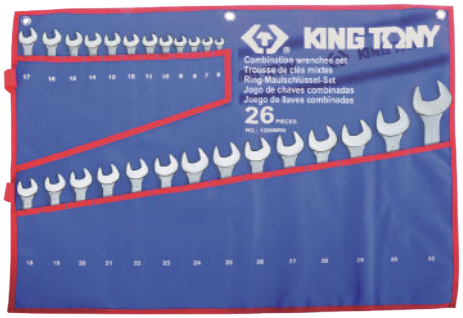

► MRN / SRN : Tetoron pouch bag




► MR / SR : Nylon pouch bag

KT NO.	PC.		Contents	Package	Kg	
1207MR	7		10, 11, 12, 13, 14, 17, 19	Nylon	0.71	1 / 30
1208MR	8		10, 11, 12, 13, 14, 17, 19, 22	Nylon	0.95	1 / 24
1210MR	10		8, 10, 12, 13, 14, 17, 19, 21, 22, 24	Nylon	1.38	1 / 16
1211MR	11		8, 9, 10, 11, 12, 13, 14, 17, 19, 22, 24	Nylon	1.33	1 / 16
1212MR	12		8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 22	Nylon	1.28	1 / 16
1212MR01	12		6, 8, 10, 12, 13, 14, 17, 19, 24, 27, 30, 32	Nylon	3.23	1 / 8
1214MR	14		10, 11, 12, 13, 14, 16, 17, 19, 21, 22, 24, 27, 30, 32	Nylon	3.18	1 / 8
1214MRN	14		10, 11, 12, 13, 14, 16, 17, 19, 21, 22, 24, 27, 30, 32	Tetoron	3.31	1 / 8
1214MR01	14		10, 11, 13, 14, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32	Nylon	3.25	1 / 8
1215MR	14	1060	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 24	Nylon	1.86	1 / 12
1215MR01	14		8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24	Nylon	3.22	1 / 12
1215MR02	15		6, 7, 8, 10, 11, 12, 13, 14, 17, 19, 22, 24, 27, 30, 32	Nylon	2.92	1 / 8
1211MRN	11		8, 9, 10, 11, 12, 13, 14, 17, 19, 22, 24	Tetoron	1.33	1 / 16
1214MRN05	14		6, 7 ,8 ,9 ,10 ,11 ,12 ,13 ,14 ,15, 16, 17, 18, 19	Tetoron	1.24	1 / 12
1215MRN01	14		8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24	Tetoron	1.92	1 / 12
1215MRN02	15		6, 7, 8, 10, 11, 12, 13, 14, 17, 19, 22, 24, 27, 30, 32	Tetoron	2.92	1 / 8
1218MR01	18		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24	Nylon	2.5	1 / 9
1218MRN	18			Tetoron	1.34	1 / 9
1226MR	26		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32	Nylon	5.67	1 / 4
1226MRN	26			Tetoron	5.67	1 / 4
1207SR	7		3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4	Nylon	0.61	1 / 30
1211SR	11		1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 11/16, 3/4, 13/16, 7/8, 15/16	Nylon	1.48	1 / 16
1211SR01	11		1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 7/8, 1	Nylon	1.46	1 / 16
1211SR02	11		3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1	Nylon	1.63	1 / 12
1214SR	14	5060	5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/8, 1-1/4	Nylon	3.02	1 / 8
1216SR	16		1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4	Nylon	3.44	1 / 8
1216SRN	16		1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4	Tetoron	3.63	1 / 6
1213SRN	13		1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1	Tetoron	1.96	1 / 10
1214SRN01	14		3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4	Tetoron	3.54	1 / 8
1296MRN	6	1071	34, 36, 38, 41, 46, 50	Tetoron	8.87	1 / 2
1224CRN	24	1060	7, 8, 10, 11, 12, 13, 14, 15, 16, 17 19, 22	Tetoron	2.93	1 / 6
		5060	1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16			

Offset Combination Wrench & Set

1063

- Chrome vanadium alloy steel
- Offset ring ideal for deep-seated nuts or bolts
- 15° open end angle
- Chrome plated
- Metric - DIN 3113 from B, ISO 7738, ISO 3318



KT NO.	Size mm	L mm	g	
1063-06	6	110	17	20 / 360
1063-08	8	130	32	20 / 320
1063-11	11	160	50	20 / 320
1063-14	14	190	93	15 / 240
1063-15	15	200	105	15 / 180
1063-16	16	210	118	15 / 180

5063




KT NO.	Size mm	L mm	g	
1063-18	18	230	165	12 / 96
1063-21	21	260	226	10 / 80
1063-22	22	270	252	10 / 80
1063-30	30	350	535	6 / 48
1063-32	32	370	596	6 / 48

KT NO.	Size inch	L mm	g	
5063-14	7/16	160	59	20 / 320
5063-16	1/2	180	78	20 / 240
5063-18	9/16	190	103	15 / 240

1067

- Chrome vanadium alloy steel
- Offset ring ideal for deep-seated nuts or bolts
- 15° open end angle
- Chrome plated
- DIN 3113 from B, ISO 7738, ISO 3318





KT NO.	Size mm	L mm	g	
1067-06	6	105	18	10 / 640
1067-07	7	115	23	10 / 640
1067-08	8	125	32	10 / 640
1067-09	9	135	37	10 / 480
1067-10	10	145	45	6 / 288
1067-11	11	155	56	12 / 240
1067-12	12	165	61	10 / 200
1067-13	13	175	73	8 / 160
1067-14	14	185	96	10 / 160
1067-15	15	195	105	10 / 160
1067-16	16	205	122	10 / 160
1067-17	17	215	138	8 / 128
1067-18	18	225	161	12 / 144

KT NO.	Size mm	L mm	g	
1067-19	19	235	192	10 / 120
1067-20	20	235	256	10 / 80
1067-21	21	265	248	10 / 80
1067-22	22	265	252	10 / 80
1067-23	23	290	316	8 / 64
1067-24	24	290	307	8 / 64
1067-25	25	300	327	10 / 60
1067-26	26	320	423	10 / 40
1067-27	27	320	402	10 / 40
1067-28	28	330	494	10 / 40
1067-29	29	350	402	6 / 48
1067-30	30	350	522	6 / 48
1067-32	32	370	621	4 / 32



► MRN / SRN : Tetoron pouch bag



► MR / SR : Nylon pouch bag

KT NO.	PC.		Contents	Package	Kg	
1271MR	11	1067	6, 8, 9, 10, 11, 12, 13, 14, 17, 19, 22	Nylon	1.23	1 / 15
1271MRN	11			Tetoron		
1272MR	12		6, 7, 8, 9, 10, 11, 12, 13, 14, 17, 19, 22	Nylon	1.21	1 / 15
1275MR	15		6, 7, 8, 10, 11, 12, 13, 14, 17, 19, 22, 24, 27, 30, 32	Nylon	3.3	1 / 8
1275MRN	15			Tetoron		
1266MR	26		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32	Nylon	6.85	1 / 2


Stubby Combination Wrench & Set

KT No. & D1



10D0

- Short pattern design enables greater access in confined spaces
- Chrome vanadium alloy steel
- Chrome plated
- DIN 3113 from A





KT NO.	Size mm	D1	D2	H1	H2	L mm	g	
10D0-08	8	18.1	13.8	4.6	6.0	85	20	20 / 360
10D0-09	9	19.3	14.5	4.8	6.4	90	23	20 / 360
10D0-10	10	20.5	15.1	4.8	6.4	95	28	20 / 360
10D0-11	11	22.7	16.7	5.9	7.9	100	45	20 / 360
10D0-12	12	24.7	18.0	6.2	8.3	105	46	20 / 360
10D0-13	13	27.2	19.1	6.5	8.7	110	56	20 / 360
10D0-14	14	28.8	21.4	7.0	9.2	115	69	15 / 270
10D0-15	15	31.0	22.4	7.4	9.7	120	76	15 / 270
10D0-16	16	33.0	23.8	7.8	10.3	125	93	15 / 270
10D0-17	17	35.0	26.2	8.1	10.7	130	106	15 / 180
10D0-18	18	37.0	27.3	8.6	11.3	135	126	15 / 180
10D0-19	19	39.0	28.6	9.0	11.8	140	143	12 / 144

1282MR

Contents	Kg	
10D0 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19	1.03	1 / 24



12 PC.


► Nylon pouch bag

Single Open End Wrench

CAUTION Please wear proper safety gear while working.

10F0

- Features : The open end is thicker for very high tightening torques. Examples : public work, rail worksite, naval construction, agriculture, oil platforms, metallic construction
- Hanging hole at end of handle: wrenches stored on panel or hung to avoid loss or fall
- Chrome vanadium alloy steel
- Finished with phosphate sunk
- DIN 894






KT NO.	Size mm	L mm	g	
10F0-17P	17	178	107	10 / 120
10F0-19P	19	178	107	10 / 120
10F0-21P	21	203	161	10 / 100
10F0-22P	22	203	161	10 / 100
10F0-23P	23	220	203	8 / 80
10F0-24P	24	220	203	8 / 80
10F0-26P	26	240	290	6 / 60
10F0-27P	27	240	290	6 / 60
10F0-29P	29	267	341	6 / 48
10F0-30P	30	267	335	6 / 48
10F0-32P	32	285	410	5 / 30

KT NO.	Size mm	L mm	g	
10F0-36P	36	317	556	5 / 30
10F0-38P	38	320	740	5 / 30
10F0-41P	41	340	875	4 / 24
10F0-46P	46	395	1060	3 / 12
10F0-50P	50	425	1402	1 / 12
10F0-55P	55	425	1403	1 / 12
10F0-60P	60	470	2544	1 / 6
10F0-65P	65	470	2441	1 / 6
10F0-70P	70	500	3457	1 / 6
10F0-75P	75	500	3333	1 / 6

Open End Wrench & Set

1900

- European slimline type
- 15° open end angle
- Chrome vanadium alloy steel
- Chrome plated
- Metric - DIN 3110
- Inch - ANSI / ASME B107.6



KT NO.	Size mm	L mm	g	
19005507	5.5 x 7	123	20	12 / 576
19000607	6 x 7	123	23	12 / 576
19000708	7 x 8	140	33	12 / 576
19000809	8 x 9	140	32	12 / 576
19000810	8 x 10	140	33	12 / 576
19000911	9 x 11	156	56	12 / 288
19001011	10 x 11	156	46	12 / 288
19001012	10 x 12	156	45	12 / 288
19001113	11 x 13	172	65	12 / 288
19001213	12 x 13	172	80	12 / 288
19001214	12 x 14	172	64	12 / 288
19001314	13 x 14	172	81	12 / 288
19001317	13 x 17	195	104	12 / 192
19001415	14 x 15	188.5	89	12 / 192
19001417	14 x 17	195	106	12 / 192
19001617	16 x 17	204	122	12 / 192
19001618	16 x 18	221	158	12 / 144
19001719	17 x 19	221	158	12 / 144
19001819	18 x 19	221	160	12 / 144
19001921	19 x 21	237	207	12 / 144
19001922	19 x 22	237	203	12 / 144
19002022	20 x 22	237	209	12 / 144
19002123	21 x 23	247	241	6 / 72
19002224	22 x 24	247	235	6 / 72
19002326	23 x 26	263	305	6 / 72
19002426	24 x 26	263	295	6 / 72
19002427	24 x 27	263	301	6 / 72

5900



KT NO.	Size mm	L mm	g	
19002430	24 x 30	263	306	6 / 72
19002528	25 x 28	279	348	6 / 48
19002632	26 x 32	285	438	6 / 48
19002729	27 x 29	279	348	6 / 48
19002730	27 x 30	285	431	6 / 48
19002732	27 x 32	285	434	6 / 48
19003032	30 x 32	298	439	6 / 48
19003036	30 x 36	351	715	6 / 36
19003236	32 x 36	351	723	5 / 30
19003436	34 x 36	351	717	5 / 30
19003641	36 x 41	380	998	4 / 24
19004146	41 x 46	430	1337	4 / 16

KT NO.	Size inch	L mm	g	
59000810	1/4 x 5/16	123	23	12 / 576
59001012	5/16 x 3/8	140	32	12 / 576
59001214	3/8 x 7/16	156	45	12 / 288
59001416	7/16 x 1/2	172	69	12 / 288
59001618	1/2 x 9/16	172	70	12 / 288
59001820	9/16 x 5/8	188.5	88	12 / 192
59002022	5/8 x 11/16	204	120	12 / 192
59002224	11/16 x 3/4	221	163	12 / 144
59002628	13/16 x 7/8	237	202	12 / 144
59003032	15/16 x 1	247	311	6 / 72
59003034	15/16 x 1-1/16	263	304	6 / 72
59003236	1 x 1-1/8	279	341	6 / 48
59003640	1-1/8 x 1-1/4	298	431	6 / 48



► MRN / SRN : Tetoron pouch bag



► MR / SR : Nylon pouch bag

KT NO.	PC.		Contents	Package	Kg	
1106MR	6	1900	8 x 9, 10 x 12, 12 x 14, 14 x 17, 17 x 19, 21 x 23	Nylon	0.83	1 / 24
1106MR01	6		8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19	Nylon	0.81	1 / 24
1108MR	8		6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22	Nylon	0.91	1 / 24
1110MR	10		6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22, 24 x 27, 25 x 28	Nylon	1.67	1 / 16
1112MR	12		6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22, 21 x 23, 24 x 27, 25 x 28, 30 x 32	Nylon	2.37	1 / 10
1112MRN	12			Tetoron	2.45	
1108SR	8	5900	1/4 x 5/16, 5/16 x 3/8, 3/8 x 7/16, 7/16 x 1/2, 9/16 x 5/8, 5/8 x 11/16, 11/16 x 3/4, 13/16 x 7/8	Nylon	0.91	1 / 24
1112SR	12		1/4 x 5/16, 5/16 x 3/8, 3/8 x 7/16, 7/16 x 1/2, 9/16 x 5/8, 5/8 x 11/16, 11/16 x 3/4, 13/16 x 7/8, 15/16 x 1, 15/16 x 1-1/16, 1 x 1-1/8, 1-1/8 x 1-1/4	Nylon	2.5	1 / 10


45° Offset Ring Wrench & Set



KT No. & D1

1960

- 45° offset ring
- Thin wall rings
- Chrome vanadium alloy steel
- Chrome plated
- Metric - DIN 838
- Inch - ANSI / ASME B107.6



KT NO.	Size mm	L mm	g	
19600607	6 x 7	165	47	12 / 360
19600809	8 x 9	175	55	12 / 360
19600810	8 x 10	185	70	12 / 360
19601011	10 x 11	195	90	12 / 360
19601012	10 x 12	185	90	12 / 360
19601113	11 x 13	205	105	12 / 240
19601213	12 x 13	205	103	12 / 240
19601214	12 x 14	220	126	12 / 240
19601415	14 x 15	235	138	12 / 144
19601417	14 x 17	235	156	12 / 144
19601617	16 x 17	240	180	12 / 144
19601719	17 x 19	250	204	6 / 72
19601819	18 x 19	250	210	6 / 72

5960



KT NO.	Size mm / inch	L mm	g	
19601921	19 x 21	270	253	6 / 72
19602022	20 x 22	270	242	6 / 72
19602123	21 x 23	320	460	6 / 48
19602224	22 x 24	320	372	6 / 48
19602326	23 x 26	360	451	6 / 48
19602426	24 x 26	360	460	6 / 48
19602427	24 x 27	360	437	6 / 48
19602732	27 x 32	385	658	6 / 36
19603032	30 x 32	392	697	6 / 36
59601214	3/8 x 7/16	185	79	12 / 360
59601618	1/2 x 9/16	220	122	12 / 240
59602022	5/8 x 11/16	240	167	12 / 144
59602428	3/4 x 7/8	270	243	6 / 72
59603032	15/16 x 1	360	420	6 / 48




► Nylon pouch bag

KT NO.	PC.		Contents	Kg	
1606MR	6	1960	10 x 12, 12 x 14, 14 x 17, 17 x 19, 19 x 21, 23 x 26	1.6	1 / 16
1611MR	11		6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22, 21 x 23, 24 x 26, 30 x 32	3.0	1 / 16




1961

- Mini type
- 45° offset ring
- Thin wall rings
- Chrome vanadium steel
- Chrome plated
- Metric - DIN 838



KT NO.	Size mm	L mm	g	
19611415	14 x 15	140	87	12 / 240



KT NO.	Size mm	L mm	g	
19611617	16 x 17	150	96	10 / 200
19611819	18 x 19	157	115	6 / 120

75° Offset Ring Wrench & Set

1970

- European slimline type
- 75° deep ring offset
- Thin wall rings
- Chrome vanadium alloy steel
- Chrome plated
- Metric - DIN 838
- Inch - ANSI / ASME B107.6

5970



KT NO.	Size mm	L mm	g	
19700607	6 x 7	168	46	12 / 360
19700809	8 x 9	183	69	12 / 360
19700810	8 x 10	183	68	12 / 360
19701011	10 x 11	198	95	12 / 240
19701012	10 x 12	198	87	12 / 240
19701113	11 x 13	217	129	12 / 144
19701213	12 x 13	217	125	12 / 144
19701214	12 x 14	217	125	12 / 144
19701314	13 x 14	217	124	12 / 144
19701415	14 x 15	239	175	12 / 144
19701417	14 x 17	260	191	6 / 96
19701617	16 x 17	260	225	6 / 96
19701719	17 x 19	292	297	6 / 72
19701819	18 x 19	292	289	6 / 72
19701921	19 x 21	318	340	6 / 60
19701922	19 x 22	318	318	6 / 60
19702022	20 x 22	318	319	6 / 60
19702123	21 x 23	330	379	6 / 60
19702224	22 x 24	330	370	6 / 60
19702326	23 x 26	345	451	6 / 48
19702426	24 x 26	345	477	6 / 48
19702427	24 x 27	345	469	6 / 48
19702528	25 x 28	350	503	6 / 48
19703032	30 x 32	362	638	6 / 36

KT NO.	Size inch	L mm	g	
59700810	1/4 x 5/16	168	49	12 / 360
59701012	5/16 x 3/8	183	63	12 / 360
59701214	3/8 x 7/16	198	93	12 / 240
59701416	7/16 x 1/2	217	123	12 / 144
59701618	1/2 x 9/16	217	126	12 / 144
59701820	9/16 x 5/8	260	158	12 / 96
59702022	5/8 x 11/16	260	223	6 / 96
59702224	11/16 x 3/4	292	277	6 / 96
59702428	3/4 x 7/8	318	319	6 / 60
59702628	13/16 x 7/8	330	377	6 / 60
59703032	15/16 x 1	345	460	6 / 48
59703436	1-1/16 x 1-1/8	350	515	6 / 48
59703640	1-1/8 x 1-1/4	362	703	6 / 48
59703842	1-3/16 x 1-5/16	375	750	5 / 30





KT NO.	PC.		Contents	Package	Kg	
1706MR	6	1970	6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17	Nylon	0.88	1 / 24
1708MR	8		6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 21 x 23	Nylon	1.64	1 / 12
1708MR01	8		6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22	Nylon	1.52	1 / 12
1710MR	10		6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 21 x 23, 24 x 27, 30 x 32	Nylon	2.83	1 / 8
1712MR	12		6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22, 21 x 23, 24 x 26, 25 x 28, 30 x 32	Nylon	3.78	1 / 6
1712MRN	12			Tetoron	3.78	1 / 6
1712MRN01	12		6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22, 21 x 23, 24 x 27, 25 x 28, 30 x 32	Tetoron	3.78	1 / 6
1707SR	7	5970	1/4 x 5/16, 3/8 x 7/16, 1/2 x 9/16, 5/8 x 11/16, 3/4 x 7/8, 15/16 x 1, 1-1/16 x 1-1/8	Nylon	2.0	1 / 12





Straight Ring Wrench & Set

KT No. & D1

19C0

- Thin wall rings
- Chrome vanadium alloy steel
- Chrome plated
- DIN 837

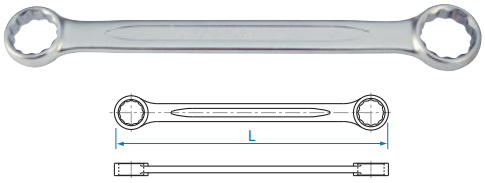



KT NO.	Size mm	L mm	g	
19C00607	6 x 7	121	20	20 / 480
19C00809	8 x 9	137	33	20 / 480
19C01011	10 x 11	154	52	20 / 320
19C01213	12 x 13	164	69	20 / 240
19C01415	14 x 15	182	85	20 / 240
19C01617	16 x 17	211	127	12 / 144
19C01819	18 x 19	226	160	12 / 144
19C02022	20 x 22	240	208	10 / 120
19C02123	21 x 23	255	238	10 / 120
19C02426	24 x 26	270	316	6 / 72
19C02528	25 x 28	285	368	6 / 72
19C03032	30 x 32	335	540	5 / 40




► Nylon pouch bag

KT NO.	PC.		Contents	Kg	
1C08MR	8	19C0	6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22	0.79	1 / 24
1C12MR	12		6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22, 21 x 23, 24 x 26, 25 x 28, 30 x 32	2.23	1 / 12

0° Offset Ring Wrench

19B0

- Ideal for crowded or confined spaces
- Ultra-compact ring head
- Chrome molybdenum alloy steel
- Chrome plated
- DIN 3113

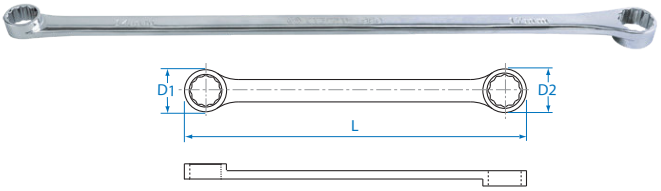





KT NO.	Size mm	D1 mm	D2 mm	L mm	g	
19B00810	8 x 10	12.5	15	235	72	12 / 240
19B01011	10 x 11	14.3	17	291	95	12 / 192
19B01012	10 x 12	14.3	17	291	95	12 / 192
19B01113	11 x 13	17.8	20.3	328	157	12 / 120
19B01214	12 x 14	17.8	20.3	328	157	12 / 120
19B01315	13 x 15	20.2	23.3	368	217	12 / 96
19B01417	14 x 17	20.2	23.3	368	217	12 / 96
19B01618	16 x 18	23.7	26.6	407	284	12 / 72
19B01719	17 x 19	23.7	26.6	407	284	12 / 72
19B01921	19 x 21	27.5	29.7	415	376	8 / 64
19B02224	22 x 24	31.3	34.0	430	482	6 / 48

0° Offset Ring Wrench Set

1F06MRN

Contents			
19B0	10 x 11, 12 x 14, 13 x 15, 16 x 18, 17 x 19, 22 x 24	1.81	1 / 8




► Tetoron pouch bag


6 PC.

Half Moon Ring Wrench & Set

1950

- Short pattern design enables greater access in confined spaces
- Chrome vanadium alloy steel
- Chrome plated
- DIN 3113







KT NO.	Size mm	D1 mm	D2 mm	L mm	H1 mm	H2 mm	H mm	g	
19500810	8 x 10	15.6	14.3	137	6.5	6.2	42	40	12 / 288
19501012	10 x 12	15.6	18.2	141	6.6	6.5	50	61	12 / 288
19501113	11 x 13	18.2	21.0	166	8.2	8.0	63	101	8 / 128
19501214	12 x 14	18.2	21.0	166	8.2	8.0	63	95	8 / 128
19501315	13 x 15	22.0	25.0	190	9.2	8.2	75	133	6 / 72
19501417	14 x 17	22.0	25.0	190	9.2	8.2	75	130	6 / 72
19501618	16 x 18	25.5	28.0	220	9.6	8.8	79	164	6 / 72
19501719	17 x 19	25.5	28.0	220	9.6	8.8	79	163	6 / 72
19501922	19 x 22	28.6	32.5	256	11.1	10.1	91	257	6 / 48




KT NO.	PC.		Contents		
9-1905MR	5	1950	10 x 12, 11 x 13, 14 x 17, 16 x 18, 19 x 22	0.82	1 / 10



Crowfoot Wrench & Set

1031

- 12 points
- For union nuts and tube connections
- With square mount







KT NO.	Size mm	Drive square	D mm	T mm	L mm	Lw mm	g	
1031-10R	10	3/8"	27.0	9.2	36.5	17.1	40	12 / 192
1031-11R	11	3/8"	27.0	9.2	36.5	17.0	40	12 / 192
1031-12R	12	3/8"	27.5	9.2	36.5	16.8	40	12 / 192
1031-13R	13	3/8"	27.2	9.3	36.5	16.7	40	12 / 192
1031-14R	14	3/8"	29.8	9.6	42.0	20.0	42	12 / 192
1031-15R	15	3/8"	31.4	9.2	42.0	19.2	44	12 / 192
1031-16R	16	3/8"	30.2	10.1	42.0	19.5	48	12 / 192
1031-17R	17	3/8"	34.0	11.4	45.6	23.5	68	12 / 192
1031-18R	18	3/8"	33.6	10.0	45.6	22.5	63	12 / 192
1031-19R	19	3/8"	33.7	10.8	45.8	23.0	63	12 / 192
1031-22R	22	1/2"	38.5	13.0	55.0	23.0	82	15 / 180
1031-24R	24	1/2"	38.5	12.5	55.0	24.5	74	15 / 180
1031-26R	26	1/2"	42.5	13.5	60.0	24.0	105	15 / 180
1031-27R	27	1/2"	42.5	13.5	61.0	25.0	98	15 / 180
1031-30R	30	1/2"	49.0	14.0	68.5	30.0	136	12 / 144
1031-32R	32	1/2"	50.0	14.0	70.0	30.0	136	12 / 144

- Use to reach limit place with extension bar
- Use with torque wrench and 90° extension bar, will not effectively change the torque value

KT NO.	Size mm	Drive square	D mm	T mm	L mm	Lw mm	g	
1031-34R	34	3/4"	55.6	22.5	84.5	38.0	345	12 / 60
1031-35R	35	3/4"	55.6	22.5	84.5	39.0	334	12 / 60
1031-36R	36	3/4"	55.6	22.5	84.5	39.0	315	12 / 60
1031-38R	38	3/4"	61.7	23.0	90.5	43.0	346	12 / 60
1031-41R	41	3/4"	61.7	23.0	90.5	43.0	357	12 / 60
1031-46R	46	3/4"	70.0	25.0	101	47.0	517	12 / 24
1031-48R	48	3/4"	75.5	28.5	104	47.0	482	12 / 24
1031-50R	50	3/4"	75.5	28.5	104	48.0	587	12 / 24




KT NO.	PC.		Contents	Kg	
1E10MR	10	1031	10, 11, 12, 13, 14, 15, 16, 17, 18, 19	0.59	1 / 30
1E11MR	11		10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22	0.68	1 / 30

Star Box End Wrench & Set

1920

- Chrome vanadium alloy steel
- Chrome plated
- ANSI / ASME B107.6





KT NO.	Size	L mm	g	
19200608	E6 x E8	114.0	21	12 / 504
19200711	E7 x E11	126.5	31	12 / 504
19201012	E10 x E12	142.5	43	12 / 384
19201418	E14 x E18	183.0	90	12 / 240
19201622	E16 x E22	205.0	114	12 / 192
19202024	E20 x E24	225.0	159	12 / 144

1406PR

Metal case size (mm):
280 x 130 x 41 (0.053 cuft)



6 PC.


Contents — Kg 0.46 — 1 / 15

1920	E6 x E8, E7 x E11, E10 x E12, E14 x E18, E16 x E22, E20 x E24

Flare Nut Wrench

1930

- 6 points
- 12° ring offset
- Chrome vanadium alloy steel
- Chrome plated
- Metric - DIN 3118
- Inch - ANSI / ASME B107.6

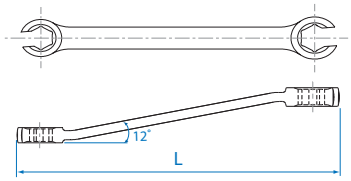

KT NO.	Size mm	L mm	g	
19300810	8 x 10	130	56	12 / 216
19300911	9 x 11	150	74	12 / 216
19301011	10 x 11	150	76	12 / 192
19301012	10 x 12	150	73	12 / 192
19301113	11 x 13	170	96	12 / 144
19301213	12 x 13	170	102	12 / 144
19301214	12 x 14	170	100	12 / 144
19301315	13 x 15	178	122	12 / 144
19301417	14 x 17	190	138	12 / 144
19301719	17 x 19	210	170	8 / 128
19301922	19 x 22	230	245	9 / 108

5930



KT NO.	Size inch	L mm	g	
59301012	5/16 x 3/8	130	60	12 / 216
59301214	3/8 x 7/16	150	76	12 / 192
new 59301416	7/16 x 1/2	170	106	12 / 144
59301618	1/2 x 9/16	170	125	12 / 144
59301820	9/16 x 5/8	190	169	12 / 144
59302224	11/16 x 3/4	210	184	6 / 96
59302428	3/4 x 7/8	230	249	6 / 72



► MRN / SRN : Tetoron pouch bag



► MR / SR : Nylon pouch bag



► 1305SR : Nylon pouch bag


KT NO.	PC.		Contents	Package	Kg	
1306MR	6	1930	8 x 10, 10 x 12, 11 x 13, 12 x 14, 17 x 19, 19 x 22	Nylon	0.90	1 / 30
1306MRN	6			Tetoron	0.90	1 / 30
new 1305SR	5	5930	5/16 x 3/8, 7/16 x 1/2, 9/16 x 5/8, 11/16 x 3/4, 3/4 x 7/8	Nylon	0.82	1 / 24

Flare Nut Wrench & Set

KT No. & D1

1931

- 12 points
- 12° ring offset
- Chrome vanadium alloy steel
- Chrome plated
- DIN 3118

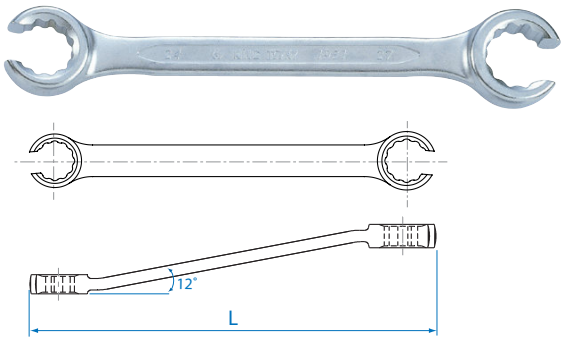


KT NO.	Size mm	L mm	g	
19312224	22 x 24	250	309	6 / 72
19312427	24 x 27	270	406	6 / 48
19313032	30 x 32	290	546	5 / 40

Flexible Head Wrench & Set

1020

- Combination flexible head wrench with 12 points thin wall socket
- 180° swivel head for better accessibility
- Chrome vanadium alloy steel
- Chrome plated



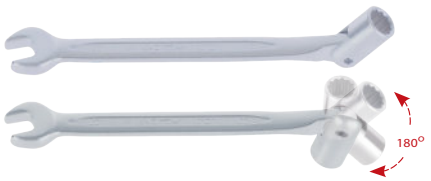



KT NO.	Size mm	L mm	g	
1020-08	8	170	64	10 / 180
1020-09	9	170	68	10 / 180
1020-10	10	180	81	10 / 160
1020-11	11	188	106	10 / 160
1020-12	12	190	107	10 / 120
1020-13	13	206	135	10 / 120


KT NO.	Size mm	L mm	g	
1020-14	14	225	167	10 / 120
1020-15	15	225	193	6 / 72
1020-16	16	234	224	6 / 72
1020-17	17	234	237	4 / 48
1020-18	18	252	295	4 / 48
1020-19	19	250	290	4 / 48

1910

- Double end flexible head wrench with 12 points thin wall socket
- 180° swivel head for better accessibility
- Chrome vanadium alloy steel
- Chrome plated





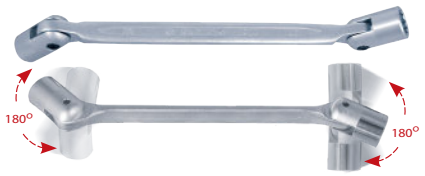

KT NO.	Size mm	L mm	g	
19100607	6 x 7	182	76	12 / 216
19100809	8 x 9	182	81	12 / 216
19100810	8 x 10	185	88	10 / 160
19101011	10 x 11	200	109	10 / 160
19101012	10 x 12	205	122	10 / 120
19101213	12 x 13	220	158	10 / 120
19101214	12 x 14	225	178	10 / 80
19101415	14 x 15	240	232	10 / 120
19101417	14 x 17	244	256	10 / 120
19101617	16 x 17	259	317	10 / 80

KT NO.	Size mm	L mm	g	
19101719	17 x 19	260	341	10 / 80
19101819	18 x 19	275	393	6 / 54
19101921	19 x 21	300	526	6 / 36
19102022	20 x 22	305	579	6 / 36
19102123	21 x 23	305	631	6 / 36
19102427	24 x 27	335	797	6 / 24

KT NO.	PC.		Contents	Kg	
1B06MR	6	1020	10, 12, 13, 14, 17, 19	1.06	1 / 24
1A06MR	6	1910	8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19	1.49	1 / 16




► Nylon pouch bag

Slogging Wrench

CAUTION Please wear proper safety gear while working.

10A0

- Open end slogging
- Finished with phosphate sunk
- DIN 133






KT NO.	Size mm	L mm	D mm	H mm	g	
10A0-24	24	178	52	15	286	6 / 72
10A0-27	27	180	55	16	339	6 / 72
10A0-30	30	190	60	16	416	6 / 60
10A0-32	32	190	61	17	401	6 / 60
10A0-36	36	215	72	17	573	6 / 24
10A0-41	41	233	83	19	855	5 / 20
10A0-46	46	255	94	20	1102	4 / 16
10A0-50	50	275	105	22	1502	2 / 16
10A0-55	55	298	115	24	2161	2 / 12
10A0-60	60	320	127	24	2374	1 / 10
10A0-65	65	340	138	27	3204	1 / 8
10A0-70	70	370	156	32	3785	1 / 5
10A0-75	75	372	153	31	3715	1 / 5
10A0-80	80	395	175	33	6820	1 / 4
10A0-85	85	395	175	33	6300	1 / 4
10A0-90	90	440	197	38	9270	1 / 2
10A0-95	95	440	197	38	8700	1 / 2
10A0-A0	100	480	230	45	10500	1 / 2
10A0-A5	105	480	230	45	10300	1 / 2
10A0-B0	110	505	238	47	14420	1 / 1
10A0-B5	115	505	250	53	14420	1 / 1
10A0-C0	120	530	258	53	15450	1 / 1
10A0-C5	125	530	258	56	15015	1 / 1

10B0

- Ring slogging
- Finished with phosphate sunk
- DIN 7444





KT NO.	Size mm	L mm	D mm	H mm	g	
10B0-24	24	162	42	16	238	6 / 72
10B0-26	26	180	46	17	341	6 / 72
10B0-27	27	180	46	17	330	6 / 72
10B0-30	30	190	52	18	431	6 / 72
10B0-32	32	190	52	18	404	6 / 60
10B0-36	36	205	58	19	534	6 / 36
10B0-41	41	230	66	21	728	6 / 24
10B0-46	46	240	74	23	877	4 / 16
10B0-50	50	250	82	23	1085	4 / 16
10B0-55	55	265	88	24	1429	2 / 16
10B0-60	60	275	95	26	1644	2 / 12
10B0-65	65	295	104	28	1875	2 / 12
10B0-70	70	325	112	33	2965	1 / 8
10B0-75	75	325	115	33	2735	1 / 8
10B0-80	80	345	128	36	3675	1 / 6
10B0-85	85	345	130	36	3710	1 / 6
10B0-90	90	380	152	40	5850	1 / 4
10B0-95	95	380	152	40	5350	1 / 4
10B0-A0	100	410	161	43	6445	1 / 4
10B0-A5	105	415	172	45	6500	1 / 3
10B0-B0	110	440	172	47	8000	1 / 3
10B0-B5	115	440	172	47	7500	1 / 3
10B0-C0	120	470	194	53	9000	1 / 2

Heavy Duty Offset Ring Wrench

10C0

- To be used with extension tubes item "11"
- Chrome vanadium alloy steel
- Chrome plated



KT NO.	Size mm	L mm	Applied tube	g	
10C0-24	24	178	111946	463	6 / 48
10C0-27	27	188	111946	523	6 / 48
10C0-30	30	198	111946	579	4 / 36
10C0-32	32	233	112261	841	4 / 24
10C0-36	36	241	112261	946	4 / 24
10C0-41	41	260	112261	1099	2 / 16
10C0-46	46	277	112576	1365	2 / 16
10C0-50	50	287	112576	1642	2 / 16
10C0-55	55	298	112576	1766	1 / 12
10C0-60	60	345	113086	2800	1 / 9
10C0-65	65	356	113086	3183	1 / 4

11

- Tube for item 10C0
- Chrome plated




KT NO.	⌀ mm	L mm	Applied wrench size	g	
111946	19	460	24mm, 27mm, 30mm	1050	20
112261	22	610	32mm, 36mm, 41mm	1450	16
112576	24	760	46mm, 50mm, 55mm	2400	6
113086	30	860	60mm, 65mm	2610	4


End Tubular Wrench

19A0

- Chrome vanadium alloy steel
- Chrome plated

KT NO.	mm	D1 mm	D2 mm	L2 mm	L3 mm	L mm	g		
19A00607	6 x 7	10	11	5	6	105	41	30 / 180
19A00809	8 x 9	13	14	6	7	110	55	30 / 180
19A01011	10 x 11	15	16	7.5	8	120	84	24 / 144
19A01213	12 x 13	18	19	9	9.5	140	141	18 / 144
19A01415	14 x 15	20	22	10	11	145	137	12 / 96
19A01617	16 x 17	23	24	11	12	155	186	10 / 90
19A01819	18 x 19	25	26	13	15	165	240	8 / 72
19A02022	20 x 22	28	30	15	16	170	291	8 / 72
19A02123	21 x 23	29	31	15	17	185	346	6 / 54
19A02426	24 x 26	33	35	19	21	190	425	4 / 36
19A02528	25 x 28	34	37	19	21	205	497	4 / 24
19A02729	27 x 29	37	39	21	22	210	590	2 / 12
19A03032	30 x 32	40	42	22	26	210	680	2 / 12

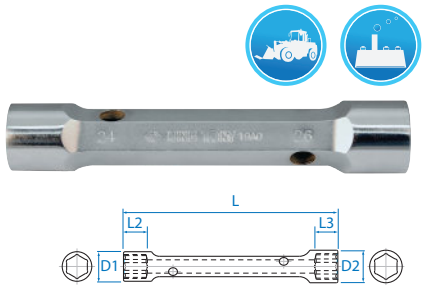




- Double end socket wrench for the hollow tube design, a long-type screw may be used.

19A0-09

19A0-15



KT NO.	L mm	Ø mm	Ø1 mm	Ø2 mm	Ø3 mm	Ø4 mm	Applied to socket wrench sizes
19A0-09	220	7.8	6.75	4.75	5.75	2.8	19A00607~19A02022
19A0-15	300	12.7	11.75	9.75	-	-	19A02123~19A03032



Flexible Speed Wrench & Set


KT No. & D1

3730M

- Flexible head, open end and ratchet ring - wrench
- 5° gear action (72 teeth)
- Chrome vanadium alloy steel
- Chrome plated

KT NO.	Size mm	D1 mm	D2 mm	H1 mm	H2 mm	L mm	g	
373008M	8	16.2	16.7	4.3	6.5	127.0	35	12 / 432
373009M	9	18.2	18.6	4.6	6.9	131.5	42	12 / 384
373010M	10	20.3	20.0	5.0	7.3	136.0	55	12 / 384
373011M	11	22.5	21.8	5.4	7.7	141.0	65	10 / 320
373012M	12	24.3	23.0	5.8	8.2	147.5	80	10 / 240
373013M	13	26.8	25.2	6.1	8.6	154.0	93	10 / 240
373014M	14	28.7	26.8	6.4	9.0	160.0	109	10 / 200
373015M	15	30.5	28.3	6.9	9.4	169.0	129	10 / 160
373016M	16	32.9	29.8	7.2	9.9	179.0	149	10 / 160
373017M	17	34.5	31.8	7.6	10.3	190.0	178	10 / 160
373018M	18	37.0	32.8	8.0	10.7	203.0	201	10 / 160
373019M	19	39.2	33.9	8.6	11.2	215.0	231	10 / 80
373021M	21	46.0	40.0	9.0	13.0	274.0	392	6 / 54
373022M	22	46.0	40.0	9.0	13.0	274.0	392	6 / 54
373024M	24	52.2	46.0	10.0	14.5	296.0	547	6 / 54







Flexible Speed Wrench & Set

13012MR

Blow case size (mm) :
275 x 310 x 65 (1.68 Cuft)



12 PC.

Contents — 2.17 kg — 1 / 6

3730M	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19

13013MR

Blow case size (mm) :
303 x 228 x 50 (1.35 Cuft)



13 PC.

Contents — 1.66 kg — 1 / 8

3730M	8, 10, 12, 13, 14, 16, 17, 18, 19


02H 02R 03R 04R

Speed Wrench & Set

KT No. & D1

3731M

- Open end and ratchet ring - wrench
- 5° gear action (72 teeth)
- Chrome vanadium alloy steel
- Chrome plated





KT NO.	Size mm	D1 mm	D2 mm	H1 mm	H2 mm	L mm	g	
373108M	8	16.7	17.0	4.0	6.5	140.0	30	12 / 384
373109M	9	18.7	18.6	4.4	6.9	149.0	39	12 / 384
373110M	10	20.8	20.2	4.8	7.3	158.0	49	12 / 240
373111M	11	23.0	22.0	5.2	7.7	165.0	60	12 / 240
373112M	12	24.6	23.4	5.5	8.2	171.0	74	12 / 240
373113M	13	26.8	25.5	5.8	8.6	178.0	83	10 / 160
373114M	14	29.0	26.9	6.2	9.0	190.0	98	10 / 160
373115M	15	31.0	28.3	6.5	9.4	199.0	123	10 / 160
373116M	16	33.0	29.8	6.8	9.9	208.0	134	10 / 160

KT NO.	Size mm	D1 mm	D2 mm	H1 mm	H2 mm	L mm	g	
373117M	17	35.5	31.8	7.2	10.3	225.0	164	6 / 60
373118M	18	37.5	32.7	7.7	10.7	236.0	193	6 / 60
373119M	19	39.4	34.0	8.2	11.2	247.0	215	6 / 60
373121M	21	45.8	40.1	9.0	13.0	287.8	322	6 / 54
373122M	22	45.8	40.1	9.0	13.0	287.8	315	6 / 54
373124M	24	51.8	46.5	10.0	14.5	321.0	476	6 / 54
373127M	27	56.4	52.4	10.5	15.5	356.6	637	6 / 36
373130M	30	62.7	58.1	11.4	17.0	400.7	856	4 / 24
373132M	32	66.4	61.9	12.5	17.5	423.5	1011	4 / 24

KT NO.	PC.		Contents	kg	
12107MRN	7	3731M	10, 11, 12, 14, 15, 17, 19	0.91	1 / 24
12107MRN01	7		8, 10, 11, 12, 13, 17, 19	0.84	1 / 24
12114MRN	14		8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22, 24	2.50	1 / 12
12112MRN	12		8, 9, 10, 11, 12, 13, 14, 15, 17, 19, 22, 24	1.95	1 / 8



► Tetoron pouch bag

13113MR

Blow case size (mm) :
303 x 228 x 50 (1.35 Cuft)

Contents — 1.64 kg — 1 / 8

3731M	8, 10, 12, 13, 14, 16, 17, 18, 19

02H 02R 03R 04R





13 PC.

Reversible Speed Wrench


373AM

- Ringstop function
- Open end and ratchet ring - wrench
- 5° gear action (72 teeth)
- Reversible
- Take - up : 13°
- Chrome vanadium alloy steel
- Chrome plated












KT NO.	Size mm	D1 mm	D2 mm	H1 mm	H2 mm	L mm	
373A07M	7	16.7	16.6	4.6	6.5	140	12 / 384
373A08M	8	16.7	16.6	4.6	6.5	140	12 / 384
373A09M	9	18.8	18.4	4.9	6.9	150	12 / 384
373A10M	10	20.8	20.0	5.3	7.3	159	12 / 240
373A11M	11	23.0	21.8	5.6	7.7	165	12 / 240
373A12M	12	25.0	22.7	6.0	8.2	172	12 / 240
373A13M	13	27.1	24.7	6.4	8.6	178	10 / 160
373A14M	14	29.2	27.0	6.8	9.0	191	10 / 160
373A15M	15	31.3	28.3	7.0	9.4	200	10 / 160
373A16M	16	33.4	30.0	7.2	9.9	208	10 / 60
373A17M	17	35.5	31.8	7.7	10.3	226	6 / 60
373A18M	18	37.6	32.6	8.2	10.7	237	6 / 60
373A19M	19	39.7	33.8	8.8	11.2	248	6 / 60
373A21M	21	46.0	40.0	9.0	13.0	290	6 / 54
373A22M	22	46.0	40.0	9.0	13.0	290	6 / 54
373A24M	24	52.2	46.0	10.0	14.5	323	6 / 54

Speed Wrench

KT No. & D1

3732S

- Open end and ratchet ring - wrench
- 5° gear action (72 teeth)
- Reversible
- Take - up : 13°
- Chrome vanadium alloy steel
- Chrome plated





KT NO.	Size inch	D1 mm	D2 mm	H1 mm	H2 mm	L mm	g	
373210S	5/16	16.7	16.6	4.6	6.5	140	32	12 / 384
373212S	3/8	20.8	20.0	5.3	7.3	159	48	12 / 240
373214S	7/16	23.8	21.8	5.6	7.7	165	60	12 / 240
373216S	1/2	27.1	24.7	6.4	8.6	178	86	10 / 160
373218S	9/16	29.2	27.0	6.8	9.0	191	102	10 / 160
373220S	5/8	33.4	30.0	7.2	9.9	208	146	10 / 60
373222S	11/16	35.5	31.8	7.7	10.3	226	169	6 / 60
373224S	3/4	39.7	33.8	8.8	11.2	248	216	6 / 60
373228S	7/8	46.0	40.0	9.0	13.0	290	364	6 / 54
373230S	15/16	52.5	46.0	10.0	14.5	323	496	6 / 54

Reversible Speed Wrench Set

KT NO.	PC.		Contents	Kg	
122A07MRN01	7	373AM	8, 10, 11, 12, 13, 17, 19	0.91	1 / 24
122A07MRN02	7		8, 10, 12, 13, 14, 17, 19	0.97	1 / 16
122A14MRN	14		8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22, 24	2.50	1 / 12
122A12MRN	12		8, 9, 10, 11, 12, 13, 14, 15, 17, 19, 22, 24	2.06	1 / 8
12207SRN	7	3732S	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4	0.91	1 / 24



► Tetoron pouch bag

132A13MR

Blow case size (mm) :
303 x 228 x 50 (1.35 Cuft)

Contents — Kg 1.64 — 1 / 8

373AM: 8, 10, 12, 13, 14, 16, 17, 18, 19


02H


02R


03R


04R




13 PC.

Double End Speed Wrench

3736M

- 5° gear action (72 teeth)
- Chrome vanadium alloy steel
- Chrome plated






KT NO.	Size mm	D1 mm	D2 mm	H1 mm	H2 mm	L mm	g	
37360809M	8 x 9	16.8	20.2	6.5	6.9	128	42	10 / 320
37361011M	10 x 11	20.2	21.8	7.3	7.7	150	61	10 / 200
37361013M	10 x 13	20.2	24.8	7.3	8.6	150	75	10 / 200
37361213M	12 x 13	23.0	24.8	8.2	8.6	170	88	10 / 200
37361415M	14 x 15	26.5	29.5	9.0	9.4	190	126	10 / 160
37361618M	16 x 18	29.5	33.5	9.9	10.7	210	182	10 / 120
37361719M	17 x 19	31.5	33.5	10.3	11.2	230	206	10 / 120

Double End Speed Wrench & Set

3737M

- 5° gear action (72 teeth)
- Reversible
- Take-up :13°
- Chrome vanadium alloy steel
- Chrome plated






KT NO.	Size mm	D1 mm	D2 mm	H1 mm	H2 mm	L mm	g	
37370607M	6 x 7	14.2	17.2	6.3	6.5	115	32	10 / 320
37370809M	8 x 9	16.8	20.2	6.5	6.9	128	42	10 / 320
37371011M	10 x 11	20.2	21.8	7.3	7.7	150	59	10 / 200
37371213M	12 x 13	23.0	24.8	8.2	8.6	170	87	10 / 200
37371415M	14 x 15	26.5	29.5	9.0	9.4	190	127	10 / 160
37371618M	16 x 18	29.5	33.5	9.9	10.7	210	178	10 / 120
37372123M	21 x 23	40.0	46.0	13	14.5	260	413	8 / 64
37372224M	22 x 24	40.0	46.0	13	14.5	260	385	8 / 64

Stubby Speed Wrench & Set

3738M

- Open-ended and ratchet ring-wrench
- 5° gear action (72 teeth)
- Chrome vanadium alloy steel
- Chrome plated





KT NO.	Size mm	D1 mm	D2 mm	H1 mm	H2 mm	L mm	g	
373811M	11	23.8	23.0	5.1	8.0	103	55	15 / 360
373812M	12	26.0	24.8	5.3	8.5	106	65	15 / 360


KT NO.	Size mm	D1 mm	D2 mm	H1 mm	H2 mm	L mm	g	
373813M	13	27.5	26.1	5.6	8.7	108	75	15 / 360
373814M	14	30.5	27.6	6.0	9.3	115	88	15 / 360
373815M	15	31.8	29.2	6.3	9.9	119	104	15 / 360

Open-side Speed Wrench & Set

KT No. & D1


3721M

- Open-side speed wrench
- Torque rating exceeds ANSI specifications by 30% plus
- The special ratcheting open end design will not slip off the screw when torque is applied
- Chrome vanadium alloy steel
- Chrome plated



KT NO.	Size mm	D1 mm	D2 mm	H1 mm	H2 mm	L mm	g	
372111M	11	25.4	17.5	6.6	7.4	168	68	12 / 288
372112M	12	26.3	19.2	7.5	7.9	174	83	12 / 288
372115M	15	32.8	23.6	8.5	9.7	200	143	10 / 120
372116M	16	34.9	23.6	9.0	10.8	207	171	10 / 120
372118M	18	39.0	28.0	9.8	11.2	239	220	10 / 100

3721S

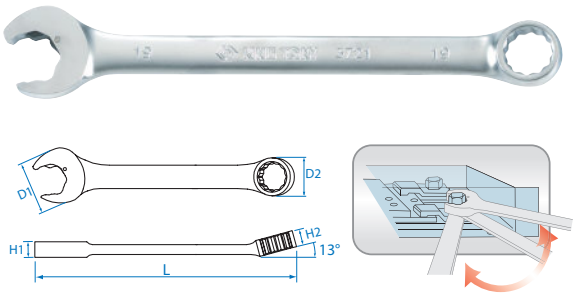

KT NO.	Size inch	D1 mm	D2 mm	H1 mm	H2 mm	L mm	g	
372110S	5/16	17.8	13.3	5.0	6.0	136	38	12 / 384
372112S	3/8	22.2	16.6	6.0	7.2	161	59	12 / 288
372114S	7/16	25.4	17.5	6.6	7.4	168	68	12 / 288
372116S	1/2	28.2	20.3	7.9	8.6	180	97	10 / 240
372118S	9/16	31.5	21.3	8.5	9.2	193	120	10 / 120
372120S	5/8	34.9	25.6	9.0	10.8	207	163	10 / 120
372122S	11/16	37.4	28.1	9.5	10.9	227	184	10 / 100
372124S	3/4	41.2	29.3	9.8	12.2	250	246	6 / 60



► Tetoron pouch bag

KT NO.	PC.		Contents	Kg	
14108SRN	8	3721S	5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4	1.11	1 / 16

Speed Wrench Adapter

H / R


KT NO.	Apply to speed wrench		Function
02H		10 mm	1/4" Bit
02R		10 mm	1/4" drive
03R		13 mm	3/8" drive
25H		13 mm	5/16" Bit
04R		19 mm	1/2" drive



Podger Ratchet Wrench

1500

- Double sizes ratchet head
- Reversible switch for tightening and loosening the screw
- Taper end bar
- For scaffolding construction work
- 32 teeth

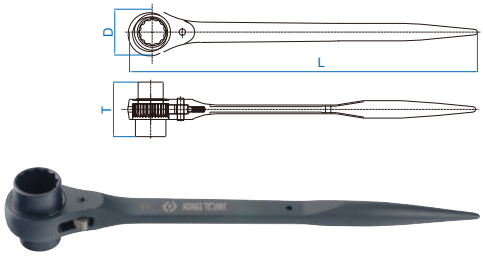

KT NO.	mm	T mm	D mm	L mm	g	
15001012P	10 x 12	38	31	241	209.4	2 / 120
15001113P	11 x 13	38	31	241	209.4	2 / 120
15001214P	12 x 14	38	31	241	220	2 / 120
15001317P	13 x 17	45	34	280	280	2 / 80
15001415P	14 x 15	45	34	280	280	2 / 80
15001417P	14 x 17	45	34	280	280	2 / 80
15001719P	17 x 19	50	42	320	506	2 / 40
15001721P	17 x 21	50	42	320	506	2 / 40
15001921P	19 x 21	50	42	320	506	2 / 40
15001922P	19 x 22	50	42	320	506	2 / 40
15001924P	19 x 24	56	51.5	365	820	2 / 24
15002123P	21 x 23	56	51.5	365	820	2 / 24
15002224P	22 x 24	56	51.5	365	830	2 / 24
15002326P	23 x 26	56	51.5	365	830	2 / 24
15002427P	24 x 27	56	51.5	365	870	2 / 24
15002430P	24 x 30	63	61.5	402	1110	2 / 16
15002632P	26 x 32	63	61.5	402	1150	2 / 16
15002730P	27 x 30	63	61.5	402	1150	2 / 16
15002732P	27 x 32	63	61.5	402	1150	2 / 16
15003032P	30 x 32	63	61.5	402	1150	2 / 16
15003236P	32 x 36	67	67	450	1525	2 / 8
15003638P	36 x 38	67	67	450	1525	2 / 8
15003641P	36 x 41	67	67	450	1525	2 / 8
15003841P	38 x 41	67	67	450	1470	2 / 8




Angled Socket Wrench & Set

1084

5084

- Conic profile and thin walled
- Convenient to facilitate the force-depth objects
- Chrome plated

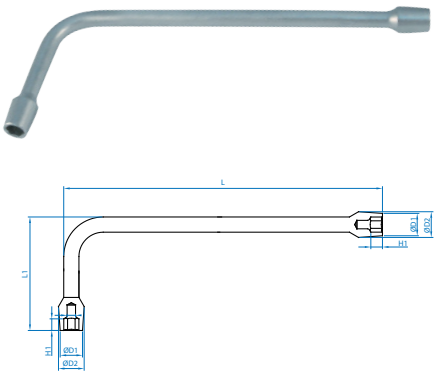

KT NO.	mm	D1 mm	D2 mm	H1 mm	L1 mm	L mm	g	
1084-08	8	12.5	14.0	10	88	230	152	12 / 48
1084-09	9	14.0	15.5	10	88	230	153	12 / 48
1084-10	10	15.0	16.5	10	88	230	187	10 / 40
1084-11	11	16.0	17.5	11	88	230	192	10 / 40
1084-12	12	17.4	19.5	12	98	245	298	6 / 30
1084-13	13	18.9	21.0	12	98	245	313	6 / 30
1084-14	14	19.8	22.0	12	98	260	332	6 / 24
1084-15	15	21.7	24.0	13	98	260	344	6 / 24
1084-16	16	22.2	24.5	13	98	260	350	6 / 24
1084-17	17	24.5	27.0	14	98	260	475	6 / 24
1084-18	18	25.5	28.0	15	98	260	484	6 / 24
1084-19	19	27.1	30.0	15	98	260	588	6 / 24

KT NO.	inch	D1 mm	D2 mm	H1 mm	L1 mm	L mm	g	
5084-16	1/2	18.9	21.0	23	12	245	315	6 / 30
5084-18	9/16	19.8	22.0	23	12	260	338	6 / 24




► Nylon pouch bag


KT NO.	PC.		Contents	Kg	
1842MR	12	1084	8, 9, 10, 11, 12, 13, 14 ,15, 16, 17, 18, 19	4.2	1 / 6

Angled Socket Wrench & Set

1080

- Angle and through-hole design
- Deep concave at one side and open end socket at the other, easily fit over protruding studs
- Chrome plated
- ISO 2236





1081



KT NO.	mm	B mm	P mm	H mm	C mm	L mm	g	
1080-06	6	11.0	7.0	18.5	29	110	43	12 / 240
1080-07	7	11.5	8.0	21.0	30.5	114	57	12 / 240
1080-08	8	13.0	10.0	21.5	30	120	68	12 / 216
1080-09	9	14.0	10.0	22.0	33	125	85	12 / 216
1080-10	10	15.0	11.0	25.5	35	131	102	6 / 60
1080-11	11	16.5	12.0	26.5	37	137	125	6 / 60
1080-12	12	17.5	12.0	27.0	40	144	143	6 / 60
1080-13	13	19.0	14.0	30.0	47	152.5	173	6 / 60
1080-14	14	20.0	14.0	33.0	48	160	191	6 / 60
1080-15	15	21.5	15.0	35.0	50	174	236	6 / 60
1080-16	16	22.5	17.0	39.5	54	185	281	6 / 60
1080-17	17	24.0	18.0	39.5	56	197	314	6 / 60
1080-18	18	25.0	19.5	42.0	58	211	336	4 / 40
1080-19	19	26.5	20.5	45.0	62	218	374	4 / 40
1080-20	20	27.5	21.5	45.0	63	222	445	2 / 20
1080-21	21	29.0	23.5	49.0	65	231	488	2 / 20
1080-22	22	30.0	23.5	49.0	67	247	537	2 / 16
1080-23	23	31.5	24.5	54.0	74	255	600	2 / 16
1080-24	24	32.5	25.5	56.0	77	266	657	2 / 16
1080-25	25	34.0	25.5	58.0	79	278	692	2 / 16
1080-26	26	35.0	25.5	59.0	80	289	863	2 / 16
1080-27	27	36.5	27.5	59.0	84	299	942	2 / 16
1080-28	28	37.5	27.5	60.0	86	310	1080	2 / 16
1080-29	29	39.0	28.5	62.0	90	319	1167	2 / 16
1080-30	30	40.0	28.5	65.0	93	332	1194	2 / 12
1080-32	32	42.5	28.5	69.0	95	353	1355	2 / 12

KT NO.	mm	B mm	P mm	H mm	C mm	L mm	g	
1081-06	6	11.0	7.0	18.5	29	110	44	12 / 240
1081-07	7	11.5	8.0	21.0	30.5	114	54	12 / 240
1081-08	8	13.0	10.0	21.5	30	120	69	12 / 216
1081-09	9	14.0	10.0	22.0	33	125	88	12 / 216
1081-10	10	15.0	11.0	25.5	35	131	105	6 / 60
1081-11	11	16.5	12.0	26.5	37	137	132	6 / 60
1081-12	12	17.5	12.0	27.0	40	144	148	6 / 60
1081-13	13	19.0	14.0	30.0	47	152.5	178	6 / 60
1081-14	14	20.0	14.0	33.0	48	160	185	6 / 60
1081-15	15	21.5	15.0	35.0	50	174	245	6 / 60
1081-16	16	22.5	17.0	39.5	54	185	285	6 / 60
1081-17	17	24.0	18.0	39.5	56	197	315	6 / 60
1081-18	18	25.0	19.5	42.0	58	211	355	4 / 40
1081-19	19	26.5	20.5	45.0	62	218	425	4 / 40
1081-20	20	27.5	21.5	45.0	63	222	441	2 / 20
1081-21	21	29.0	23.5	49.0	65	231	483	2 / 20
1081-22	22	30.0	23.5	49.0	67	247	589	2 / 16
1081-23	23	31.5	24.5	54.0	74	255	661	2 / 16
1081-24	24	32.5	25.5	56.0	77	266	658	2 / 16
1081-25	25	34.0	25.5	58.0	79	278	798	2 / 16
1081-26	26	35.0	25.5	59.0	80	289	825	2 / 16
1081-27	27	36.5	27.5	59.0	84	299	914	2 / 16
1081-28	28	37.5	27.5	60.0	86	310	1005	2 / 16
1081-29	29	39.0	28.5	62.0	90	319	1161	2 / 16
1081-30	30	40.0	28.5	65.0	93	332	1214	2 / 12
1081-32	32	42.5	28.5	69.0	95	353	1362	2 / 12



► MRN / SRN : Tetoron pouch bag



► MR / SR : Nylon pouch bag



► Color box

KT NO.	PC.		Contents	Package	Kg	
1805MR	5		10, 11, 13, 14, 17	Color box	1.12	1 / 22
1808MR	8	1080	8, 10, 11, 12, 13, 14, 17, 19	Nylon	1.73	1 / 18
1812MR	12		8, 10, 11, 12, 13, 14, 16, 17, 18, 19, 22, 24	Nylon	3.38	1 / 4
1826MR	26		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32	Color box	14.0	1 / 2
1912MR	12	1081	8, 10, 11, 12, 13, 14, 16, 17, 18, 19, 22, 24	Nylon	3.38	1 / 4
1912MRN	12			Tetoron	3.38	1 / 4
1926MR	26		6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32	Color box	15.0	1 / 2

Adjustable Wrench

3611

- Chrome vanadium alloy steel
- Polish, phosphate & chrome plated
- DIN 3117




3611R


3611HR


3611P


3611HP

KT NO.	mm	H1 mm	L mm	g	
3611-06R	20	7	150	136	12 / 108
3611-08R	25	8	200	245	12 / 48
3611-10R	30	11	250	415	10 / 60
3611-12R	35	13	300	713	5 / 40
3611-06P	20	7	150	127	12 / 108
3611-08P	25	8	200	246	12 / 48
3611-10P	30	11	250	415	10 / 60
3611-12P	35	13	300	691	5 / 40

KT NO.	mm	H1 mm	L mm	g	
3611-15HR	43	13	365	1351	1 / 20
3611-18HR	52	18	450	1877	1 / 6
3611-24HR	62	23	600	3720	1 / 6
3611-15HP	43	13	365	1348	1 / 20
3611-18HP	52	18	450	1750	1 / 6
3611-24HP	62	23	600	3669	1 / 6


Reversible Jaw Adjustable Wrench


3614-08R


- Chrome vanadium alloy steel
- Dual function wide jaws can be used as an adjustable wrench or pipe Wrench. On one side, the jaw is flat for traditional usage to avoid damaging the parts.
- On the other side, the jaw is finely serrated for powerful tightening on tubes and other parts requiring strong grip and high torque.
- Super wide jaw opening, 50% wider than regular adjustable wrenches
- Deep throat, 30% longer jaws than traditional adjustable wrenches
- Screw pin with front side metric or SAE scale
- 15°, perfectly matched knurl and teeth of jaw for smooth running
- TPR handle with end hole button







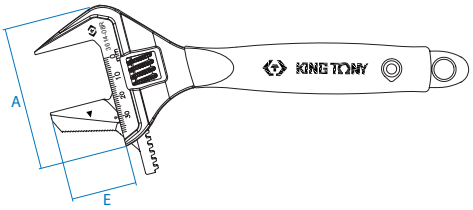





KT NO.	mm	A mm	E mm	H1 mm	H2 mm	L mm	g	
3614-08R	38	69	32.4	5.7	13.9	212	298.6	4 / 40

Ratcheting Adjustable Wrench

3631-10R

- Chrome vanadium alloy steel
- Magic button to switch ratchet function on/ off
- Wider jaw opening, comfortable & durability
- Excellent in each movement of knurl, tension enhanced and precise
- Patented, more than 130% of ASME standard



KT NO.	mm	Overall length mm	g	
3631-10R	32	257	470	6 / 36

Double Sides Self-Adjusting Wrench

3616-10

- Self-locking function grip, ideal for fastener 8~32mm
- Anti-slip teeth effective on worn screws
- Slim jaw allows for working in confined area
- Multi-purpose to all shape of fastener

KT NO.	Capacity mm	g	
3616-10	8~17 14~32	466	6 / 36

- Spline 12 points
- Square
- Torx
- Hexagon
- 70% Rounded bolt





Rapid Pipe Wrench

3616S

- Multi-purpose for all shape of fasteners and pipes
- Anti-slip teeth effective on worn screws
- Strong and durable CR-MO material

KT NO.	Capacity mm	g	
3616S-08P	12-28	345	1 / 48
3616S-14P	20-48	883	1 / 20





• Easy and quick to operate by one hand



• Rapid ratcheting action



• Special Jaw design provides extra strong grip


Adjustable Hook Wrench

3641

- The joint is equipped with a spring washer to ensure smooth and reliable operation
- Chrome vanadium alloy steel

KT NO.	Capacity mm	L	g	
3641-35	13-35	174	104	12 / 144
3641-50	35-50	212	170	12 / 108
3641-80	50-80	285	395	10 / 60
3641-C0	80-120	348	689	5 / 30
3641-I0	120-180	480	1554	4 / 16



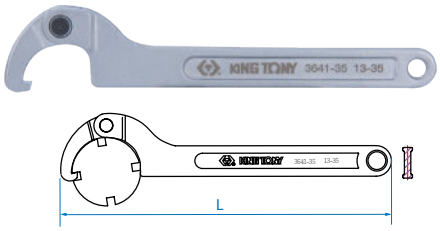

Chain Wrench

3204

- Chain wrench for oil filter





KT NO.	Overall length inch	Overall length mm	Capacity(M) mm	g	
3204	8-3/4	225	Ø 60~140	411	50

Strap Wrench

3203

- Strap wrench for oil filter





KT NO.	Overall length inch	Overall length mm	Capacity(M) mm	g	
3203	8-3/4	223	Ø 60~140	276	50
320300		Strap		46	80
3203A0	8-3/4	223	Ø 60~260	300	45
320301		Strap		73	80

Polyester Strap Wrench

32067A

- Aluminum alloy handle and strong polyester strap for tight grip
- Suitable for oil filter or any polished pipe








KT NO.	Overall Length inch	Overall Length mm	Capacity mm	g	
32067A	12	295	Ø 60~180	344	25 / 50
3206A00		Polyester strap		35	25 / 50

Wheel Nut Wrench

1991

- For most car wheel nuts in metric
- Chrome vanadium alloy steel
- Chrome plated
- DIN 3119, ISO 6788







KT NO.	■ inch	○ mm	L mm	g	
19911722	1/2	17, 19, 21, 22	400	1700	6
199104R	1/2	19	34	84	10 / 240

1993


- Designed for removing wheel nuts on cars and heavy vehicles
- Replaceable bit on wrenches featuring a square drive
- Chrome vanadium alloy steel
- Chrome plated







KT NO.	■ inch	○ mm	L mm	g	
19932427	3/4	24, 27, 32	700	4333	4





- T-type 90° universal joint driver

KT NO.	■ inch	○ mm	L mm	g	
19932433	3/4	24, 27, 30, 33	700	5.02	2
199306R	3/4	30	48	0.21	-


Assembling Wheel Nut Wrench

1996

PAT. 192461

- For most car wheel nuts in metric
- Chrome vanadium alloy steel
- Chrome plated



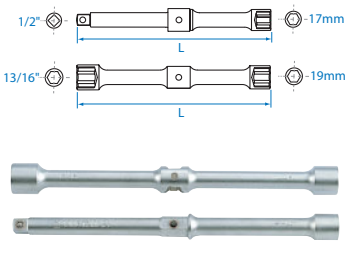



KT NO.	○ inch	■ inch	○ mm	L mm	g	
19961721	13/16	1/2	17, 19	300	1100	20

Double-End Truck Wrench & Set

1999A

- Chrome vanadium alloy steel
- Chrome plated



1999




1999R

Set KT NO.	g		Wrench KT NO.	Size mm	ø mm	Overall length mm	Tommy Bar KT NO.	Overall length mm
19991921A	1183	1 / 20	19991921	19 x 21	16	300	19980016	300
19992224A	2330	1 / 8	19992224	22 x 24	20	406	199920R	400
19992427A	2673	1 / 8	19992427	24 x 27	20	406	199920R	400
19992432A	2360	1 / 8	19992432	24 x 32	20	406	199920R	400
19992730A	2740	1 / 8	19992730	27 x 30	20	406	199920R	400
19992732A	2762	1 / 8	19992732	27 x 32	20	406	199920R	400
19992733A	2796	1 / 8	19992733	27 x 33	20	406	199920R	400
19992833A	2440	1 / 8	19992833	28 x 33	20	406	199920R	400
19993032A	2853	1 / 8	19993032	30 x 32	20	406	199920R	400
19993233A	2875	1 / 8	19993233	32 x 33	20	406	199920R	400
19993238A	3055	1 / 4	19993238	32 x 38	20	406	199920R	400
19993821A	3794	3	19993821	○38 x □21 SQ.	25	406	199925R	595
19993822A	3794	3	19993822	○38 x □22 SQ.	25	406	199925R	595
19994121LA	4074	3 / 3	19994121L	○41 x □21 SQ.	25	450	199925R	595

T-Spin Lug Wrench Set

4503MR01

- Fast spinning action extension wrench
- Reach deep area with soft grip handle
- Suitable for passenger vehicles



4506MR





4 PC.

4503MR01



6 PC.

4506MR






KT NO.	Size	ℓ mm	L mm	Kg	
4503MR01	■ 1/2" ○ 19, 21 mm 4335MR	300	265	1.36	12
4506MR	■ 1/2" ○ 17, 19, 21, 23 mm 4335MR			1.56	10

T-type Deep Socket Wrench

115HM


- Shank material - chrome vanadium alloy steel
- Shank finishing - chrome plated
- Grip material - PP

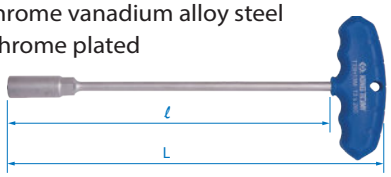

KT NO.	mm	ℓ mm	L mm	g	
115H05M-10	5	260	300	127	12 / 96
115H06M-10	6	260	300	147	12 / 96
115H07M-10	7	260	300	162	12 / 96
115H08M-10	8	260	300	158	12 / 96
115H09M-10	9	260	300	161	12 / 96
115H10M-10	10	260	300	170	12 / 96
115H11M-10	11	260	300	203	12 / 96
115H12M-10	12	260	300	205	12 / 96
115H13M-10	13	260	300	205	12 / 96
115H08M-14	8	350	394	212	10 / 60
115H10M-14	10	350	394	221	10 / 60
115H13M-14	13	350	394	233	8 / 32

1184M

- T-shaped deep socket wrench
- Chrome vanadium alloy steel
- DIN 475

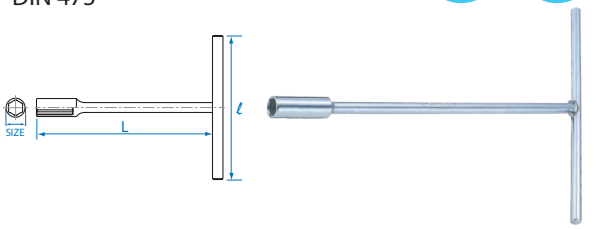


KT NO.	Size mm	ℓ mm	L mm	g	
118406M	6	120	190	59	10 / 40
118407M	7	120	190	77	10 / 40
118408M	8	200	300	306	10 / 60
118409M	9	200	300	306	10 / 60
118410M	10	200	300	317	10 / 60
118411M	11	200	300	323	10 / 60
118412M	12	200	300	326	10 / 60
118413M	13	200	300	333	10 / 60
118414M	14	200	300	344	10 / 60
118417M	17	250	300	599	6 / 36

T-type Standard Socket Wrench

1185M

- T-shaped standard socket wrench
- Chrome vanadium alloy steel
- DIN 475

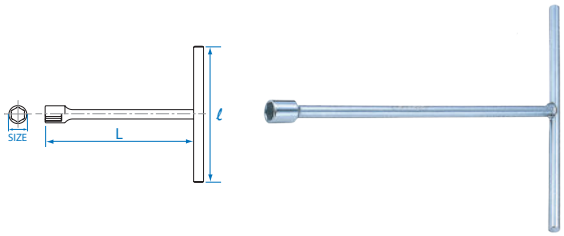


KT NO.	Size mm	ℓ mm	L mm	g	
118508M	8	200	250	186	10 / 100
118509M	9	200	250	230	10 / 100
118510M	10	200	250	230	10 / 100
118511M	11	200	250	234	10 / 100
118512M	12	250	250	390	10 / 60

KT NO.	Size mm	ℓ mm	L mm	g	
118513M	13	250	300	425	10 / 60
118514M	14	250	300	429	10 / 60
118517M	17	300	360	710	6 / 36
118519M	19	300	360	727	6 / 36

T-type Spark Plug Socket

1563


- T-type 25° universal spark plug socket (rubber)
- Chrome vanadium alloy steel

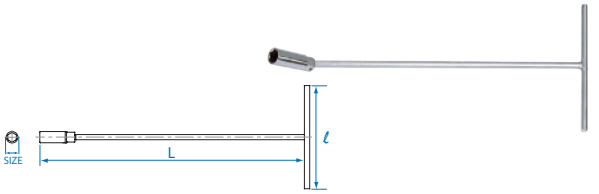

KT NO.	Size mm	ℓ mm	L mm	g	
15631612	16	200	300	363	10 / 40
15631615	16	200	385	400	10 / 40
15631618	16	200	460	450	10 / 40
15631818	18	200	460	450	10 / 40
15632112	21	200	300	388	10 / 40
15632115	21	200	385	438	10 / 40
15632118	21	200	460	488	10 / 40

1566

- T-type 25° universal spark plug socket with magnet
- Chrome vanadium alloy steel

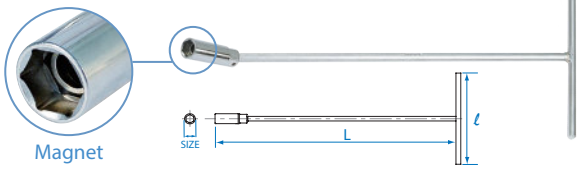

KT NO.	Size mm	ℓ mm	L mm	g	
15661615	16	200	385	420	10 / 40
15661618	16	200	460	460	10 / 40
15661818	18	200	460	450	10 / 40
15662115	21	200	385	460	10 / 40

T-type Universal Standard Socket Wrench

5722M


- T-type 25° universal standard socket wrench



KT NO.	Size mm	ℓ mm	L mm	g	10 / 60
572210M	10	150	170	400	10 / 60
572212M	12	150	170	400	10 / 60

5742M


- T-type 25° universal standard socket wrench

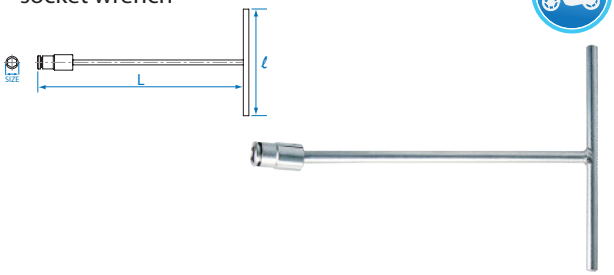

KT NO.	Size mm	ℓ mm	L mm	g	10 / 40
574208M	8	200	320	328	10 / 40
574212M	12	200	320	332	10 / 40
574213M	13	200	320	333	10 / 40
574214M	14	200	320	335	10 / 40

5752M


- T-type 25° universal standard socket wrench

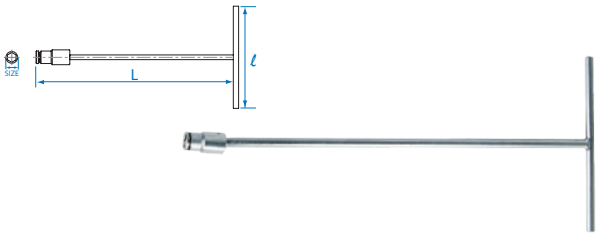

KT NO.	Size mm	ℓ mm	L mm	g	10 / 40
575208M	8	200	450	427	10 / 40
575210M	10	200	450	430	10 / 40
575212M	12	200	450	432	10 / 40
575213M	13	200	450	433	10 / 40
575214M	14	200	450	435	10 / 40
575217M	17	200	450	440	10 / 40

5762M


- T-type 25° universal standard socket wrench

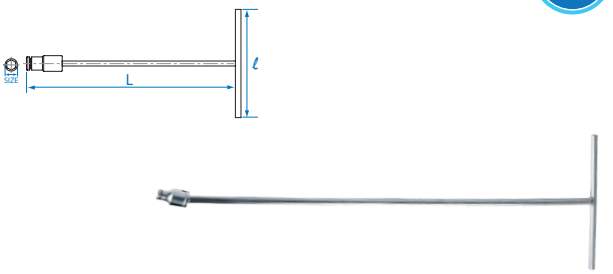

KT NO.	Size mm	ℓ mm	L mm	g	10 / 40
576208M	8	200	600	519	10 / 40
576210M	10	200	600	520	10 / 40
576213M	13	200	600	523	10 / 40
576214M	14	200	600	525	10 / 40
576217M	17	200	600	540	10 / 40

5774M

- T-type 90° universal standard socket wrench
- 2 PC. sliding handle for easy storage

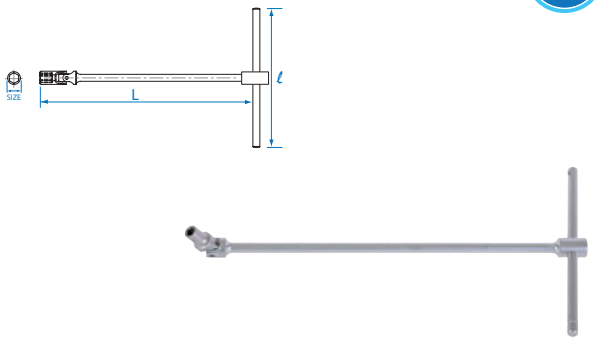


KT NO.	Size mm	ℓ mm	L mm	g	10 / 30
577406M	6	200	390	420	10 / 30
577407M	7	200	390	420	10 / 30
577408M	8	200	390	420	10 / 30
577409M	9	200	390	420	10 / 30
577410M	10	200	500	480	10 / 30
577411M	11	200	500	480	10 / 30
577412M	12	200	500	480	10 / 30
577413M	13	200	500	480	10 / 30
577414M	14	200	500	500	10 / 30
577415M	15	200	500	500	10 / 30
577416M	16	200	500	500	10 / 30
577417M	17	200	500	500	10 / 30
577418M	18	200	500	500	10 / 30
577419M	19	200	500	500	10 / 30

T-shaped Driver

- Chrome vanadium alloy steel
- Chrome plated

3511 3/8"


- Chrome vanadium alloy steel

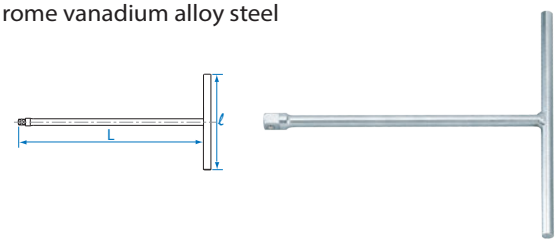

KT NO.	ℓ mm	L mm	g	
3511-06	170	268	324	5 / 30
3511-10	250	268	383	6 / 30

3795 3/8"


- T-type 90° universal joint driver
- Chrome vanadium alloy steel

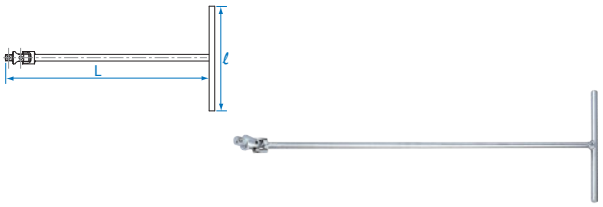

KT NO.	ℓ mm	L mm	g	
3795-18	200	455	425	10 / 40
3795-24	200	600	500	10 / 40
3795-30	200	750	600	10 / 30

4795 1/2"


- T-type 90° universal joint driver
- Chrome vanadium alloy steel

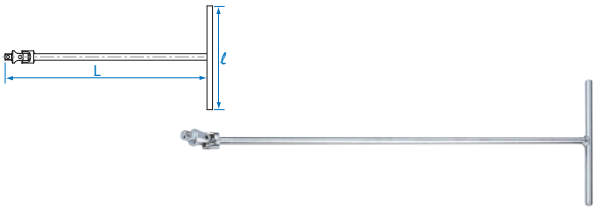

KT NO.	ℓ mm	L mm	g	
4795-18	200	460	567	10 / 30
4795-36	200	900	1000	10 / 20

4511 1/2"


- Chrome vanadium alloy steel

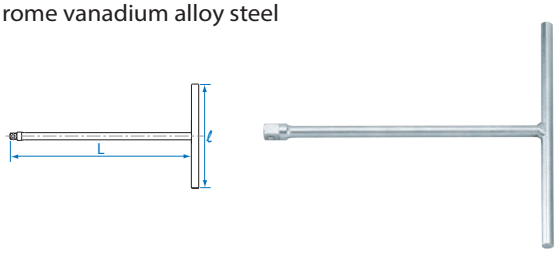

KT NO.	ℓ mm	L mm	g	
4511-06	170	268	396	5 / 30
4511-10	250	268	463	6 / 30

21A107

- Applied with power bit

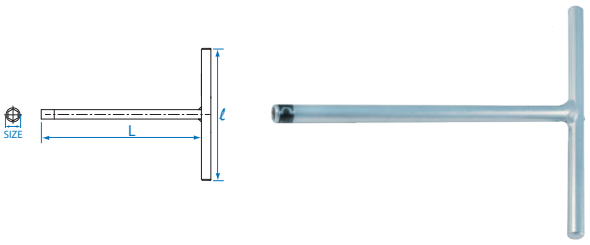

KT NO.	Size inch	ℓ mm	L mm	g	
21A107	1/4	150	175	194	10 / 60


KING TONY 3616S-08P
KING TONY 3614-08R
KING TONY 1062
KING TONY

PLIERS




6533-07
6133-08
KING TONY
6518-10
PUSH
PUSH
66HS-07




CUTTING EDGES
TECHNICAL BASICS

High performance for cutting

A greater hardness at the edge makes it very sharp and easy to cut. Wear-resistant design is for different purposes pliers and cutters. Our high leverage combination pliers quality is tested by cutting piano wire with sharp performance.


Over 2000 times cutting result for 1.6mm piano wire (2200N/mm2, HRC48)



King Tony Brand:
Wore down 0.19mm
(good)



Other Brand:
Wore down 0.33mm
(not good)

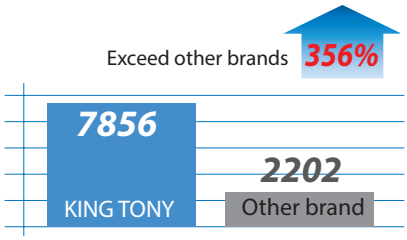

KING TONY combination pliers are sharp and triple of its life for cutting than others.

CUTTING EDGE SHAPES




With bevel
(outside bevel)





With very small bevel
(outside bevel)






With small bevel
(outside bevel)





Without bevel
(outside bevel)



WIRE CLASSES

Soft wire



Copper / Aluminium

Medium hard wire



Steel nail

Hard wire



Spring wire / Steel nail

Piano wire



Hardend spring steel

TECHNICAL BASICS

Thin serrated



Coarse serrated



With opening spring



JAWS TYPES

Round jaws



Half-round jaws



Flat & point jaws



GRIP MATERIAL

PP + TPR




item no. with "C" is made of
PVC



Mini Combination Pliers

6114

- Mini type
- DIN ISO 5746




KT NO.	L inch	L mm	Cutting capacities ø mm ⊙	●	g	
6114-05	5	122	3.0	2.0	87	8 / 160

Combination Pliers

6111

- Polished head
- DIN ISO 5746







KT NO.	L inch	L mm	Cutting capacities ø mm ⊙	◉	●	●	g	
6111-06	6-1/2	164	4.0	2.8	1.8	1.6	220	8 / 96
6111-07	7-1/2	180	4.0	3.0	2.0	1.6	294	8 / 48
6111-08	8-1/4	205	4.0	3.0	2.0	1.6	396	8 / 48

Hi-leverage Combination Pliers

6112

- Hi-leverage type
- Polished head



KT NO.	L inch	L mm	Cutting capacities ø mm ⊙	◉	●	●	g	
6112-09	9	232	4.0	3.0	2.2	2.0	395	6 / 60

Plastic Cutting Pliers


CAUTION

In order to get a normal product life of pliers, do not cut steel wire.

6921

- European type
- Polished head






KT NO.	L inch	L mm	g	
6921-05	5	122	106	6 / 120
6921-06	6	155	171	6 / 72
6921-07	7	170	268	6 / 60
6921-05C	5	122	91	6 / 120
6921-06C	6	155	200	8 / 96
6921-07C	7	178	220	6 / 60

Diagonal Cutting Pliers

6214

- Mini type







KT NO.	L inch	L mm	Ø Max. mm ◉ ø mm	g	
6214-45	4-1/2	115	0.6	83	8 / 160
6214-05	5	125	1.25	94	8 / 160

6211

- European type
- DIN 5749







KT NO.	L inch	L mm	Cutting capacities ø mm ⊙	◉	●	●	g	
6211-06	6-1/2	160	4.0	2.8	2.0	1.6	194	8 / 96

6213

- Japanese type







KT NO.	L inch	L mm	Cutting capacities ◉ ø mm	Wire stripper mm	g	
6213-06	6-1/2	168	1.25	1.4 / 1.6	175	8 / 96

Heavy Duty Diagonal Cutting Pliers

6232






KT NO.	L inch	L mm	Cutting capacities ø mm ⊙	◉	●	●	g	
6232-08	8	196	5.0	3.5	2.2	2.0	285	8 / 80

6231

- Heavy duty type
- DIN ISO 5749




KT NO.	L inch	L mm	Cutting capacities ø mm ⊙	◉	●	●	g	
6231-07	7-1/2	180	4.0	3.0	2.2	2.0	243	8 / 80

Mini Long Nose Pliers

6314

- Mini type
- DIN ISO 5745






KT NO.	L inch	L mm	ø mm Cutting capacities ⊙	⊙	⊙	g	
6314-05	5-1/2	136	3.0	2.0	1.6	94	8 / 160

Long Nose Pliers

6311

- European type
- DIN ISO 5745



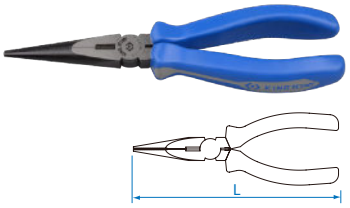


KT NO.	L inch	L mm	ø mm Cutting capacities ⊙	⊙	⊙	●	g	
6311-06	6-1/2	160	4.0	2.8	1.8	1.6	155	10 / 120
6311-08	8	200	4.0	3.0	2.0	1.6	220	8 / 80

6313

- Japanese type
- DIN ISO 5745



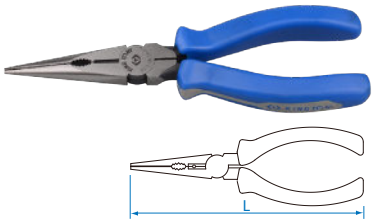


KT NO.	L inch	L mm	ø mm Cutting capacities ⊙	⊙	⊙	●	g	
6313-06	6-1/2	170	4.0	2.8	1.8	1.6	146	10 / 120

Extra Long Nose Pliers

6319

- Slim jaws design for gripping components in recessed areas

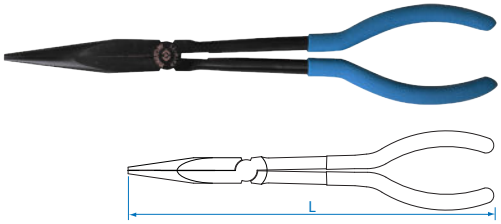

KT NO.	L inch	L mm	g	
6319-11C	11	280	292	6 / 48

Double Joint Long Nose Pliers


6329

- Double joint and slim profile, for working a greater width in a narrow space, even single-handed
- Serrated nose for good grip










KT NO.	L inch	L mm	A Up on jaw capacity (mm)	B Grip width (mm)	g	
6329-13C	13	340	50	110	355	5 / 40

Double Joint Bent Nose Pliers

6339

- Double joint and slim profile, for working a greater width in a narrow space, even single-handed
- Serrated nose for good grip






KT NO.	L inch	L mm	A Up on jaw capacity (mm)	B Grip width (mm)	g	
6339-13C	13	335	50	110	369	5 / 40

Mini Bent Nose Pliers

6334

- Mini type
- DIN ISO 5745






KT NO.	L inch	L mm	ø mm Cutting capacities ⊙	⊙	⊙	g	
6334-05	5	136	3.0	2.0	1.6	95	8 / 160

Bent Nose Pliers

6331

- European type
- DIN ISO 5745






KT NO.	L inch	L mm	ø mm Cutting capacities					
6331-06	6-1/2	160	4.0	2.8	1.8	1.6	142	10 / 120
6331-08	8	200	4.0	3.0	2.0	1.6	222	8 / 80

End Cutting Pliers

6411

- European type
- DIN ISO 5748






KT NO.	L inch	L mm	ø mm Cutting capacities					
6411-06	6-1/2	164	4.0	3.0	1.6	1.6	273	8 / 96

6431

- European type
- DIN ISO 9242



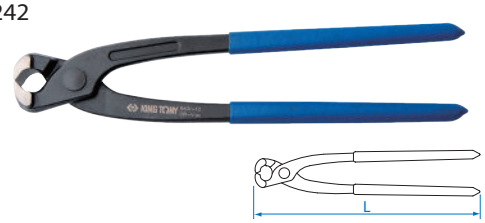


KT NO.	L inch	L mm	Cutting capacities			
6431-10C	10	254	2.0	1.6	441	6 / 48
6431-11C	11	280	2.2	1.8	507	6 / 48

Stripping Pliers

6711

- With spring and adjusting screw






KT NO.	L inch	L mm	ø mm	Wire stripper mm²		
6711-06	6	170	5	10	196	8 / 96

Slip Joint Pliers

6463

- 2 positions adjustment
- Serrate jaws



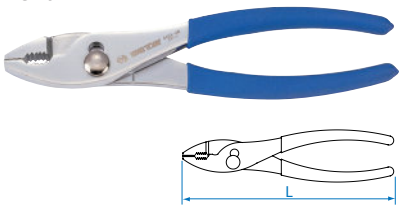

KT NO.	L inch	L mm		
6463-08C	8	210	290	8 / 80


Quick-Lock Groove Joint Pliers

6517

QUICK LOCK

- Quick lock
- Grip material-PVC
- DIN ISO 8976



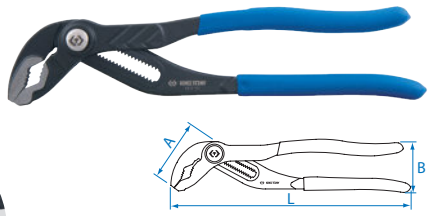



KT NO.	L inch	L mm	A mm	B mm		
6517-08C	8	200	40	54	44	190	10 / 40
6517-10C	10	250	60	68	56	361	6 / 48
6517-12C	12	310	70	89	73	570	5 / 40

Groove Joint Pliers

6516

- German type
- 7 positions opening
- DIN ISO 8976






6516-10



6516C




KT NO.	L inch	L mm	A mm	B mm		
6516-10	10	250	36	58	61	383	6 / 48
6516-10C	10	250	36	58	61	347	6 / 48

Groove Joint Pliers

6511

- 7 positions opening
- DIN ISO 8976








KT NO.	L inch	L mm	mm	A mm	B mm	g	
6511-10	10	253	50	33	61.5	435	6 / 48
6511-10C	10	253	50	33	58.5	400	6 / 48
6511-13C	13	325	65	43	74.0	808	2 / 16
6511-17C	17	425	100	58	55.0	1150	2 / 12

Bolt Cutter

6131

GS / TUV

- Chrome vanadium alloy steel
- Center cut

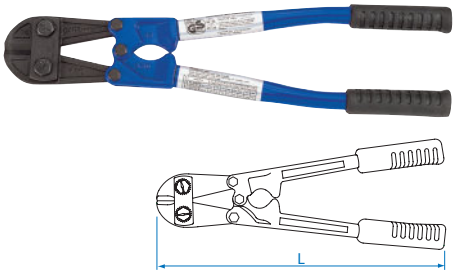

KT NO.	L inch	L mm	Cutting capacity 15(ø mm) HRC	Cutting capacity 35(ø mm) HRC	kg	
6131-12	12	300	ø5	ø4	0.74	1 / 20
6131-14	14	350	ø7	ø5	1.04	1 / 20
6131-18	18	450	ø8	ø6	1.45	1 / 12
6131-24	24	600	ø10	ø8	2.32	1 / 10
6131-30	30	750	ø13	ø10	3.74	1 / 6
6131-36	36	900	ø16	ø11	5.50	1 / 5
6131-42	42	1050	ø18	ø13	8.56	1 / 3

6131P01

- Spare blade for 6131
- Center cut




KT NO.	Overall length mm	Cutting capacity 15(ø mm) HRC	Cutting capacity 35(ø mm) HRC	kg	
6131-12P01	95 x 57	ø5	ø4	0.26	1 / 40
6131-14P01	110 x 65	ø7	ø5	0.40	1 / 40
6131-18P01	125 x 72	ø8	ø6	0.85	1 / 20
6131-24P01	150 x 86	ø10	ø8	0.87	1 / 20
6131-30P01	170 x 97	ø13	ø10	1.25	1 / 10
6131-36P01	190 x 112	ø16	ø11	1.85	1 / 10
6131-42P01	205 x 122	ø18	ø13	3.10	1 / 5

Compact Bolt Cutter

6133

- Heavy duty type
- DIN ISO 5749
- Center cut




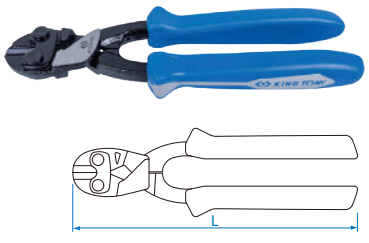

KT NO.	L inch	L mm	Cutting capacities ⊙ ø mm	⊙ ø mm	● ø mm	g	
6133-08	8	212	6.0	5.0	4.0	3.5	399.6	8 / 48

KING TONY

6518-10C
Pliers Wrench




Ratchet function allows quick and easy tighten or release bolts .



17 positions quick lock design with 42mm Max. jaws capacity .



Parallel jaws provide a more solid grip .

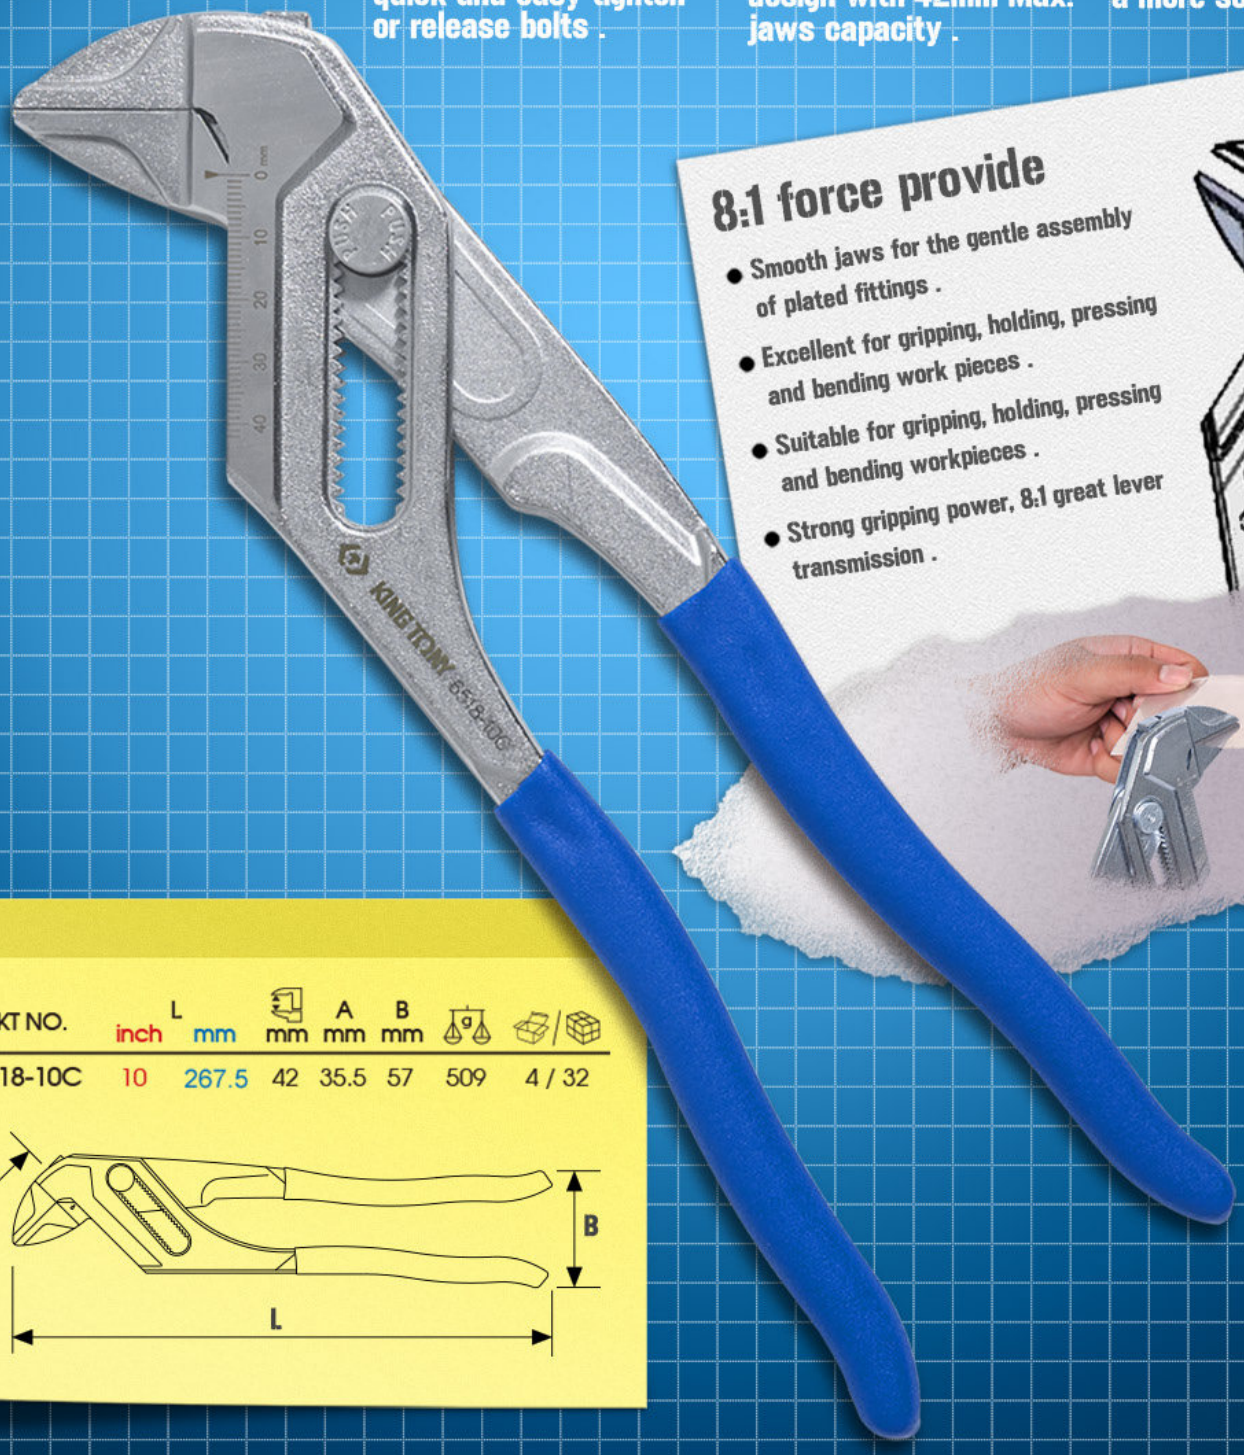

8:1 force provide

- Smooth jaws for the gentle assembly of plated fittings .
- Excellent for gripping, holding, pressing and bending work pieces .
- Suitable for gripping, holding, pressing and bending workpieces .
- Strong gripping power, 8:1 great lever transmission .





KT NO.	L inch	L mm	mm	A mm	B mm	g	pcs/box
6518-10C	10	267.5	42	35.5	57	509	4 / 32

Circlip Pliers

- Grip material - PVC

66HS | 66HB | 66SS | 66SB

- Design of hidden spring
- Straight and angled pattern
- High strength of tip
- DIN 5254, DIN 5256





KT NO.	Tips	Overall length inch	Overall length mm	Ø-tips	Capacity Ø mm	g	
66HS-07		7	188	1.8	19~60	176	8 / 48
66HB-07		7	175	1.8	19~60	176	8 / 48
66SS-07		7	188	1.8	19~60	195	8 / 48
66SB-07		7	175	1.8	19~60	195	8 / 48

67HS | 67HB | 68HS | 68HB


- For internal retaining rings
- Straight and angled pattern
- DIN 5254, DIN 5256




67SS | 67SB | 68SS | 68SB

- For external retaining rings
- Straight and angled pattern
- DIN 5254, DIN 5256



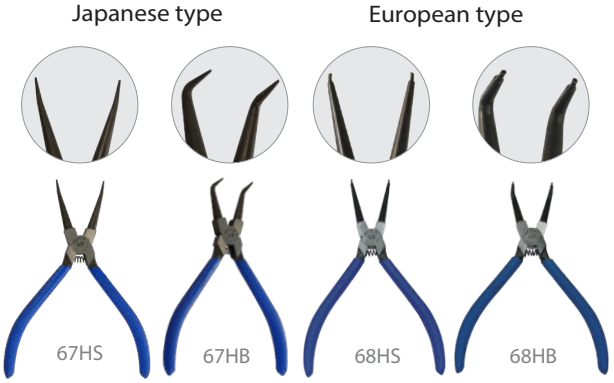

KT NO.	Tips	Overall length inch	Overall length mm	Ø tips	Capacity Ø mm	g	
67HS-07		7	180	1.8	19~60	129	12 / 144
67HB-07		7	180	1.8	19~60	131	12 / 144
68HS-05		5	125	1.3	12~28	83	10 / 80
68HS-07		7	180	1.8	19~60	134	12 / 144
68HS-10		10	250	2.3	40~100	322	8 / 64
68HB-05		5	125	1.3	12~28	94	10 / 80
68HB-07		6-3/4	170	1.8	19~60	131	12 / 144
68HB-10		9-1/2	241	2.3	40~100	317	6 / 48

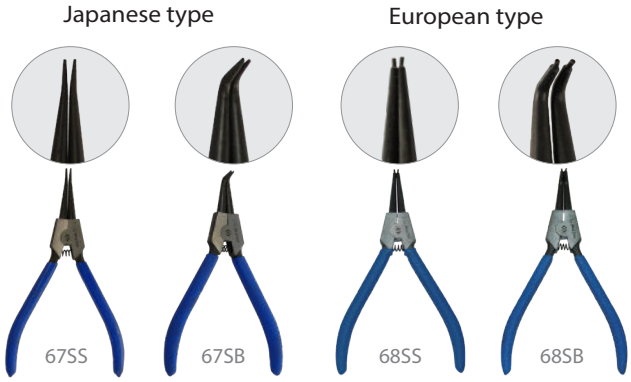

KT NO.	Tips	Overall length inch	Overall length mm	Ø tips	Capacity Ø mm	g	
67SS-07		7	180	1.8	19~60	151	12 / 144
67SB-07		7	180	1.8	19~60	150	12 / 144
68SS-05		5	125	1.3	12~28	97	10 / 80
68SS-07		7	180	1.8	19~60	154	12 / 144
68SS-10		10	250	2.3	40~100	323	8 / 64
68SB-05		5	125	1.3	12~28	96	10 / 80
68SB-07		6-3/4	170	1.8	19~60	152	12 / 144
68SB-10		9-1/2	241	2.3	40~100	316	6 / 48


Circlip Pliers

- Grip material - PVC

65SS

- Design of hidden spring
- DIN 5254 & DIN 5256






External type




KT NO.	Overall length inch	Overall length mm	Capacity Ø mm	g	
65SS-07	7	188	19~60	195	8 / 48

68HB-07L

- For removing or installing the intimal retaining rings
- 90 angel and extra long tip design for narrow space

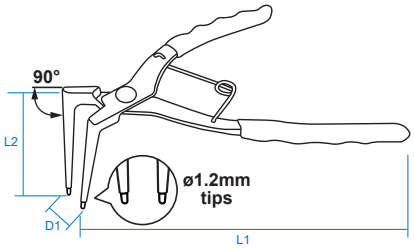



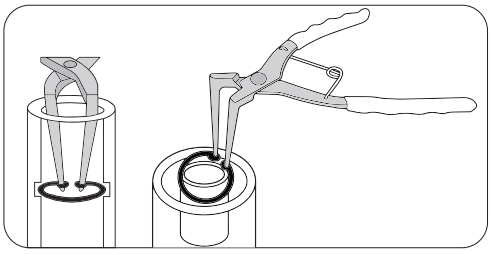

KT NO.	L1 inch	L1 mm	L2 (mm)	D1 Capacity Ømm	Ø tips	g	
68HB-07L	7	180	64	12~28	1.2	222	12 / 48

Pliers Set



► Nylon pouch bag



► Color box

KT NO.	PC.	Contents				Package	Kg	
42104GP	4	6511-10	6111-06	6211-06	6311-08	Nylon	1.17	1 / 18
42104GP01	4	6516-10C				Nylon	1.17	1 / 18
42124GP	4	6511-10C	6111-08	6311-08	6232-08	Nylon	1.48	1 / 18
42124GP01	4	6516-10C				Nylon	1.48	1 / 18
42124GP04	4	6111-08	6311-08	6232-08	6517-10C	Nylon	1.48	1 / 18
42213GP01	3	6111-08	6311-08	6232-08		Color box	1.05	1 / 20

Circlip Pliers Set


KT NO.	PC.	Contents	Kg	
42114GP	4	68HS-07, 68SS-07, 68HB-07, 68SB-07	062	1 / 32
42154GP	4	66HS-07, 66SB-07, 66HB-07, 66SS-07	0.84	1 / 32
42116GP	6	68HS-07, 68HB-07, 68HS-10, 68SS-07, 68SB-07, 68SS-10	1.33	1 / 18



► Nylon pouch bag

- Finishing - option 1 : chrome plated (R) / option 2 : nickel plated (N)

Locking Pliers

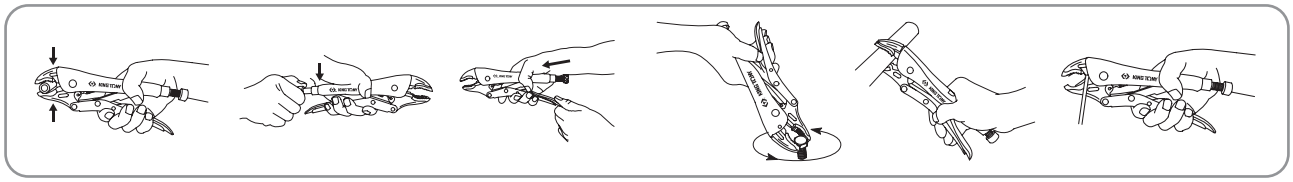

6011

2X GRIPPING POWER

- Locking pliers curved jaw straight tip with wire cutter
- With adjusting screw and release lever
- 2X more grinpping power hold object tighter
- ASME B107.500-2010

MATERIAL - Jaw : Spring alloy steel
Handle : Chrome molybdenum alloy steel


6011R


6011

KT NO.	Overall length inch	Overall length mm	Jaw capacity mm	g	
6011-05R	5-1/2	142	29	173	6 / 48
6011-07R	7	185	38	352	8 / 32
6011-07	7	185	38	351	8 / 32
6011-10R	10	254	48	542	8 / 32
6011-10	10	254	48	506	8 / 32

6012

- V jaw with wire cutter
- With adjusting screw and release lever
- ASME B107.500-2010

MATERIAL - Jaw : Chrome molybdenum alloy steel
Handle : Chrome molybdenum alloy steel



KT NO.	Overall length inch	Overall length mm	Jaw capacity mm	g	
6012-07	7	175	33	357	8 / 32
6012-10	10	254	45	541	8 / 32

6013-10

3X GRIPPING POWER

- Large curved jaw
- 3X more grinpping power hold object tighter
- Turn hexagon screw adjust pressure
- Quick trigger release lever
- ASME B107.500-2010

MATERIAL - Jaw : Chrome molybdenum alloy steel
Handle : Chrome molybdenum alloy steel



KT NO.	Overall length inch	Overall length mm	Jaw capacity mm	g	
6013-10	10	254	50	550	8 / 32

6031

- Locking pliers straight jaw
- With adjusting screw and release lever
- ASME B107.500-2010

MATERIAL - Jaw : Spring alloy steel
Handle : Chrome molybdenum alloy steel



KT NO.	Overall length inch	Overall length mm	Jaw capacity mm	g	
6031-07	7	185	33	371	8 / 32
6031-10	10	254	45	535	8 / 32

Long Nose Pliers

6315

- Locking pliers straight long nose with wire cutter
- ASME B107.500-2010

MATERIAL - Jaw : Spring alloy steel
Handle : Chrome molybdenum alloy steel

KT NO.	Overall length inch	Overall length mm	Jaw capacity mm	g	
6315-06	6	166	51	186	8 / 80
6315-09	9	221	70	393	6 / 36



Locking Pliers Set

KT NO.	PC.	Contents		Kg	
42503PR	3	6011-10	6031-07	1.24	1 / 20
42504PR	4	6011-05, 6013-10	6315-06	1.43	1 / 15



► Nylon pouch bag

Lock Sheet Metal Clamp

6605

- Locking pliers sheet metal bending and forming
- With adjusting screw and release lever
- Makes bending, forming, and crimping sheet metal easier

MATERIAL - Chrome molybdenum alloy steel




KT NO.	Overall length inch	Overall length mm	Jaw capacity mm	g	
6605-08	8	206	13	475	1 / 18

Locking Welding Clamp

6665

- Locking pliers U jaw for odd shape welding
- U-shaped jaws allow enhanced visibility and more working space
- Holds work in proper alignment
- For use in welding or holding awkward shapes in place

MATERIAL - Chrome molybdenum alloy steel





KT NO.	Overall length inch	Overall length mm	Clamping range (W) mm	g	
6665-09	9	230	0-41	622	1 / 18

Locking Chain Clamp

6655

- Locking pliers chain grip for round shape
- Chain can hold around any shape or size
- Convenient for awkward shaped pieces
- With adjusting screw and release lever

MATERIAL - Handle : Chrome molybdenum alloy steel

KT NO.	Overall length inch	Overall length mm	Capacity mm	g	
6655-09	9	225	Ø 60~140	733	1 / 18



C-clamp Grip Pliers

6615

- Locking pliers wide open C jaw with regular tips

MATERIAL -
Jaw : Chrome vanadium alloy steel
Handle : Chrome molybdenum alloy steel



KT NO.	Overall length inch	Overall length mm	Capacity mm	g	
6615-06	6-3/4	170	50	247	6 / 72
6615-11	11	280	100	790	1 / 20
6615-18	18	456	200	1136	1 / 10

6625

- Locking pliers wide open C jaw with swivel pads

MATERIAL -
Jaw : Chrome vanadium alloy steel
Handle : Chrome molybdenum alloy steel




KT NO.	Overall length inch	Overall length mm	Capacity mm	g	
6625-06	7	175	54	274	6 / 72
6625-11	11	280	96	840	1 / 20
6625-18	18-1/2	457	200	1220	1 / 10

Wire Twisting Pliers

6121

- Simple pull action twisting wires into a tight uniform fastener
- Material : Chrome vanadium alloy steel
- Twist wire up to 0.04 inch

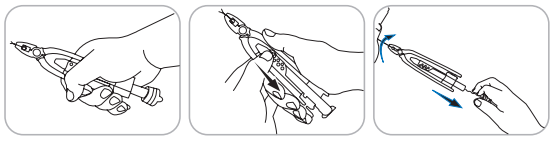

- Grip wire and pull down the bar
- Pull the lock
- Pull the knob





KT NO.	Twist wire mm	L	g	
6121-06X	Ø1.0	215	250	12 / 48
6121-09X	Ø1.5	262	380	12 / 48


CHROME VANADIUM

PIPE TOOLS





3-35mm
1/8"-1-3/8" O.D.
TUBE CUTTER FOR BRASS PIPE Ø 22mm
KING TONY

Tube Cutter for Steel

7918-A0

- For steel pipes
- Strong cast housing
- Extra-long shank provides for quick & easy adjustment
- Possible for large pipe sizes
- Perfectly balanced

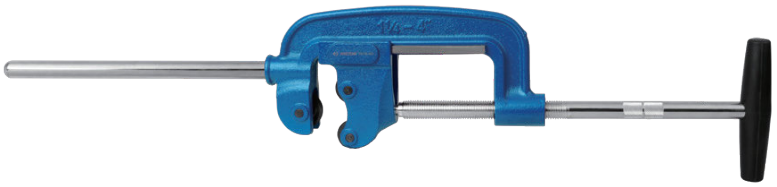

KT NO.	inch	mm	max. (mm)	Overall length inch	Overall length mm	g	
7918-A0	1-11/32~3-9/16	43~114	3	28-1/8	900	5020	1 / 4
7918-A011	Spare cutting blade					66	1 / 200

Ratchet Tubing Cutter for Stainless Steel


7912-21


7912-22

- Cuts without having to rotate tool completely around tubing
- Ratchet mechanism allows for tight area operation
- Cuts through some of the toughest surfaces: stainless steel, wall conduit, copper and aluminum
- Exclusive one hand operation, limited risks of hand-fatigue and injuries




- Comes with spare blade.
- Provided with foldable reamer.

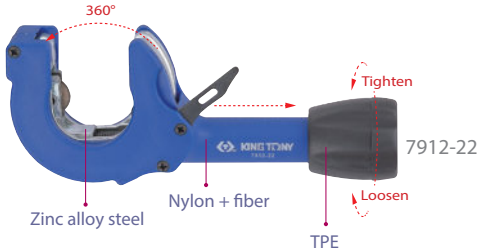



- Use Phillips screwdriver to take out the back-up blade located in the handle base.




- Deploy foldable reamer provided to smoothen sharp edges. (only 7912-22)


KT NO.	Capacity ø mm	Max. cutting thickness (mm) Stainless	Max. cutting thickness (mm) Other	Remark	g	
7912-21	8-28	2	3.0	spare blade	389	1 / 40
7912-22	12-35	2	3.0	spare blade / reamer	452	1 / 40
7912-0111	Spare cutting blade				5	25 / 250


7912-23

- Apply to cut car's exhaust pipe.









- Use Phillips screwdriver to take out the back-up blade located in the handle base.

KT NO.	Capacity ø mm	Max. cutting thickness (mm) Stainless	Max. cutting thickness (mm) Other	g	
7912-23	28-67	2	3.0	1122.6	1 / 10
7912-2311	Spare cutting blade			5	25 / 250

Tube Cutter for Copper

7914A-35

- For copper, brass, aluminum pipes
- Ergonomic handle design for comfortable operation
- Includes one piece spare cutting wheel
- With four guide rollers
- Full-stop feed system prevents wheels and rollers from coming into contact
- Quick adjustment and easy to change the cutting wheel









KT NO.	inch	mm	max. (mm)	Overall length inch	Overall length mm	g	
7914A-35	1/8~1-3/8	3~35	1.2	5-1/2	140	333	10 / 60
7914A-0111			Spare cutting blade			13	25 / 250

7914C-70

- For copper, brass, aluminum pipes
- Ergonomic handle design for comfortable operation
- Includes one piece spare cutting wheel & retractable deburring tool
- With four guide rollers
- Full-stop feed system prevents wheels and rollers from coming into contact
- Quick adjustment and easy to change the cutting wheel





KT NO.	inch	mm	max. (mm)	Overall length inch	Overall length mm	g	
7914C-70	1/4~2-3/4	6~70	1.2	8-3/4	222	802	4 / 24
7914A-0111			Spare cutting blade			13	25 / 250
7914C-7021			Spare deburring tool			17	1 / 300

7915-30




KT NO.	inch	mm	max. (mm)	Overall length inch	Overall length mm	g	
7915-30	1/8~1-1/8	3~30	1.2	5-1/2	140	231	1 / 20
7915-3011		Spare cutting blade				10	25 / 250

Tube Cutter for Copper

7916M

- For copper pipes
- Easy to use in restricted space
- Self-alignment for adjustment





- Ideal for hard to reach places



KT NO.	mm	max. (mm)	Overall length mm	g	
7916-12M	12	1.2	52	176	10 / 100
7916-15M	15	1.2	56	207	10 / 100
7916-21M	21	1.2	68	248	10 / 60
7916-0111	Spare cutting blade			11	25 / 250

Mini Tube Cutter for Copper

- Full-stop feed system prevents wheels and rollers from coming into contact
- Ergonomic handle design for comfortable operation
- Quick adjustment and easy to change the cutting wheel
- For copper, brass, aluminum pipes
- Specifically design for using in restricted place
- With two guide rollers

7915A-19



7915A-28



KT NO.	inch	mm	max. (mm)	Overall length inch	Overall length mm	g	
7915A-19	1/8~3/4	3~19	1.2	2-1/2	62	152	10 / 100
7915A-28	1/8~1-1/8	3~28	1.2	2-3/4	70	205	10 / 100
7914A-0111	Spare cutting blade					13	25 / 250

Tube Cutter for PVC Soft Plastic Pipe

7913B-35

- For PVC, PP, PE, PEX, PB
- For soft plastic pipe
- Aluminum body
- One-hand operation
- Burr-free cutting
- Reversible blade





KT NO.	inch	mm	Overall length inch	Overall length mm	g	
7913B-35	1/8~1-3/8	3~35	8-1/4	211	215	20 / 60
7913B-3511	Spare cutting blade				36	1 / 100

Ratchet Tubing Cutter for PVC Pipe

7913

- For PVC, PP, PE, PEX, PB pipes
- Ratchet design for quick cutting





KT NO.	inch	mm	Overall length inch	Overall length mm	g	
7913-42	1/2~1-5/8	6~42	8	201	360	10 / 50
7913-4211	Spare cutting blade				60	10 / 200

2-in-1 Ratchet Tubing Cutter for PVC Pipe

7913A-63

- Easy one-hand operation
- Cut into thick pipe and thin pipe
- Easily apply for max. 63 O.D.
- Comfortable TPR handle
- For unitary material tube: PE, PP, PVDF, PB, PVC or similar tube
- Advanced tool steel blade and aluminum body
- Ratchet design for quick cutting




KT NO.	inch	mm	Overall length inch	Overall length mm	g	
7913A-63	1/4~2-1/2	6~63	11-1/2	293	802	6 / 24
7913A-6311	Spare cutting blade				190	1 / 100

S Type Pipe Wrench

6521

- For nuts, bolts, flat material
- A non-detachable adjusting nut with round thread ensures a wide adjustment
- For working in confined space
- DIN 5234



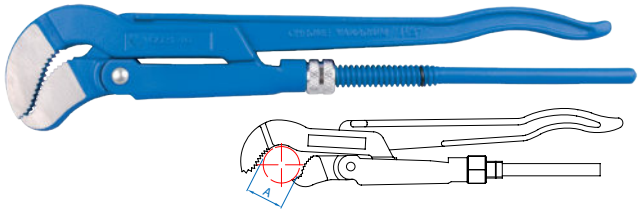


KT NO.	A mm	Size inch	Overall length inch	Overall length mm	g	
6521-13	40	1	13	330	791	1 / 20
6521-16	55	1-1/2	16-1/2	420	1450	1 / 12
6521-21	67	2	21	535	2404	1 / 6
6521-26	103	3	25-5/8	652	5030	1 / 2

Pipe Wrench

6531

- Professional stillson type
- High quality steel






KT NO.	A inch	A mm	Overall length inch	Overall length mm	g	
6531-10	1-3/16	34	10	231	600	1 / 24
6531-12	1-9/16	42	12	271	780	1 / 24
6531-14	1-7/8	48	14	315	1050	1 / 12
6531-18	2-3/8	60	18	407	1720	1 / 12
6531-24	2-15/16	76	24	539	3150	1 / 6
6531-36	4	102	36	825	6280	1 / 2
6531-48	5-1/2	140	48	1034	9750	1 / 2

Pipe Wrench

6532

- Extra heavy straight type
- Forged parts tempered
- Teeth offset against direction of rotation and induction-hardened

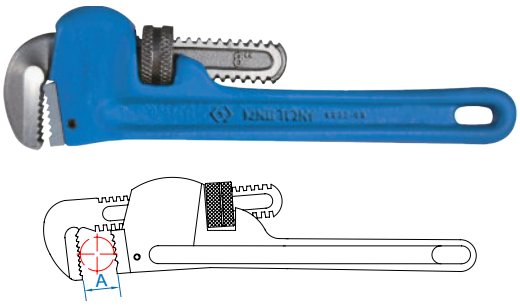


KT NO.	A mm	Overall length inch	Overall length mm	g	
6532-08	27	8	180	380	1 / 40
6532-10	30	10	245	700	1 / 20
6532-12	40	12	275	1050	1 / 20
6532-14	50	14	315	1340	1 / 12
6532-18	60	18	395	1960	1 / 12
6532-24	75	24	525	3640	1/ 6
6532-36	85	36	765	6300	1 / 2
6532-48	110	48	1025	9100	1 / 2

Aluminum Pipe Wrench

6533L

- 25% lighter than heavy-duty models, easy to use
- Straight pipe wrench is suitable for all types of pipe work
- Drop-forged jaw is heat-treated to resist distortion
- Easy-spin adjusting nut, quick to adjust size

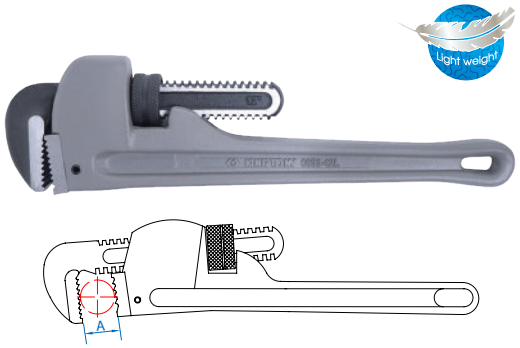


KT NO.	A mm	Overall length inch	Overall length mm	g	
6533-10L	30	10	254	530	6 / 24
6533-12L	40	12	300	790	6 / 18
6533-14L	50	14	356	940	6 / 12
6533-18L	60	18	455	1480	3 / 6
6533-24L	75	24	600	2470	2 / 4
6533-36L	85	36	910	4670	1 / 2
6533-48L	110	48	1200	7960	1 / 2




Flaring Tool Set

7CA0107M

- For producing precision flares on copper, brass, aluminium pipes up to 1 mm wall thickness
- Suitable for pipes in refrigeration, air conditioning







7 PC.

Contents	Kg 1.07	1 / 18
7CA22BP10M		4.75, 5, 6, 8, 10 mm
7CA22BP01		
Adapters for expander		4.75, 5, 6, 8, 10 mm

7CA0110S

- For producing precision flares on copper, brass, aluminium pipes up to 1 mm wall thickness
- Suitable for pipes in refrigeration, air conditioning






10 PC.

Contents	Kg 1.68	1 / 12
7915-30		3-30 mm 1/8~1-1/8"
7CA22P20S		3/16", 1/4", 5/16", 3/8", 7/16",1/2", 5/8"
7CA22P01		
Adapter for expander		3/16", 1/4", 5/16", 3/8", 7/16", 1/2", 5/8"

Type of the flares

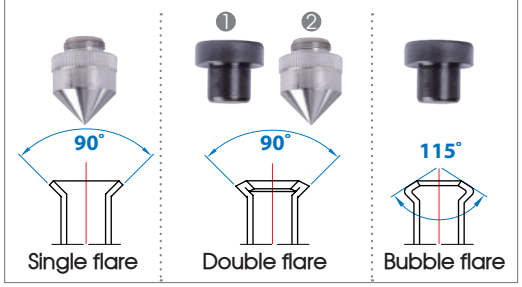



Ratchet Pipe Threader Set

7CA0606S

- Use to thread pipe for attach fitting and connector
- Thread sizes:
  4pcs interchangeable dies 1/2", 3/4", 1" and 1-1/4"
- Ratchet threader assembly with extension handle



7CA0606S1



7 PC.

KT NO.	Thread Plug Gauge	Capacity	Contents			
						7.1 kg / 1 / 2
7CA0606S	BSPT	1/2"	7CA61-A01		7CA61-A011	
		3/4"	7CA61-A02		7CA61-A021	
		1"	7CA61-A03		7CA61-A031	
		1-1/4"	7CA61-A04		7CA61-A041	
7CA0606S1	NPT	1/2"	7CA61-B01		7CA61-B011	
		3/4"	7CA61-B02		7CA61-B021	
		1"	7CA61-B03		7CA61-B031	
		1-1/4"	7CA61-B04		7CA61-B041	



7CA61P01

7CA61P02




7CA61P03

180° Tube Bender

7CA11M

7CA11S

- Suitable for use in refrigeration and air-conditioning, oil supply, heating installations, floor heating
- Able to accurately bend soft copper pipes, brass pipes, aluminum pipes, and thin-walled iron pipes (walls less than 0.6 mm) up to 180°
- Bending with the bending radius display and measurement scale





7CA11-12S
7CA11-16S



7CA11-15M / 7CA11-16M
7CA11-20S / 7CA11-24S


KT NO.	mm	max. (mm)	R(radius) inch	R(radius) mm	Overall length inch	Overall length mm	g	
7CA11-15M	15	1.2	2-1/4	57	30	758	2832	1 / 8
7CA11-16M	16	1.2	2-1/4	57	30	758	2832	1 / 8

KT NO.	inch	max. (inch)	R(radius) inch	R(radius) mm	Overall length inch	Overall length mm	g	
7CA11-12S	3/8	0.035	15/16	24	13	334	964	1 / 20
7CA11-16S	1/2	0.049	1-1/2	38	20	493	1833	1 / 12
7CA11-20S	5/8	0.049	2-1/4	57	30	758	2832	1 / 6
7CA11-24S	3/4	0.049	3	76	30	758	3500	1 / 6

90° Tube Bender

7CA15-10M

- 4 in 1 design, easy and quick to change the bend size
- Bend 5mm, 6mm, 8mm and 10mm outside diameter brass, copper or aluminum tubing
- Unique design allows bending in tight spaces
- Comfort grip handles reduce hand fatigue and slippage








KT NO.	inch	max. (mm)	Overall length inch	Overall length mm	g	
7CA15-10M	3/16, 1/4, 5/16, 3/8	0.9	10-7/8	275	958	6 / 24


Stepped Ratchet Radiator Key Set

7HA03

- Suitable for installation and removal of most radiator valves and tank connectors
- Key has fittings from small to large, stepped along the length of the key, for different internal hexagon and internal lug valve sizes
- Stepped hexagon key with 3/8", 7/16", 1/2", 3/4", 1"
- 1/2"DR. ratchet makes installations quickly and easily
- 4724-11G can be used as general ratchet, DIN 3122, 11° gear action degree (32 teeth)

Contents	Kg 0.74		1 / 24
	4724-11G		
	7HA11		
	4724-01		

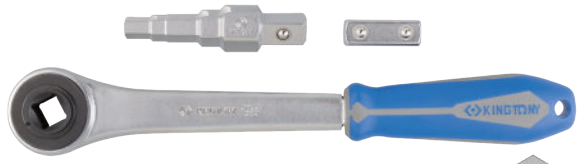

4724DK



Hexagon A/F





4-way Control Cabinet Key



7HA21

- For all standard cabinets and shut-off systems
- For control cabinets and shut-off systems in the supply of gas, water and electricity
- For technical installations in buildings, e. g. air conditioning and ventilation systems, shut-off valves, mains switch-boards, etc.



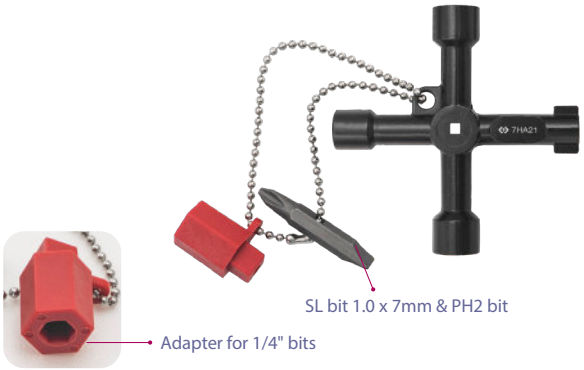

KT NO.	mm	mm	mm	No.	mm	g	
7HA21	6, 8	9	3-5	PH2	1.0 x 7	89	20 / 200

SCREWDRIVERS & L-WRENCHES & BITS



21557
KING TONY

Screwdriver

- Shank material - SNCM - V alloy steel
- Grip material - PP + TPR
- Finishing - chrome plated with black tip

1421

- Phillips head, round shank
- DIN ISO 8764

KT NO.	No.	mm	inch	mm	g	
14210023	PH0	60	2-3/8	3.2	35	12 / 144
14210132	PH1	80	3-1/8	4.5	57	12 / 96
14210104	PH1	100	4	4.5	59	12 / 96
14210214	PH2	38	1-1/2	6.5	45	12 / 144
14210204	PH2	100	4	6.0	84	12 / 96
14210206	PH2	150	6	6.0	94	12 / 144
14210306	PH3	150	6	8.0	142	12 / 144



KT NO.	No.	mm	inch	mm	g	
14210112	PH1	300	12	4.5	85	12 / 96
14210212	PH2	300	12	6.0	129	12 / 96
14210116	PH1	400	16	4.5	97	12 / 96
14210216	PH2	400	16	6.0	151	12 / 96



1421xx12
1421xx16

1422

- Slotted head, round shank
- DIN ISO 2380

KT NO.	mm	inch	mm	mm	inch	mm	g	
14220303	3	1/8	0.5	75	3	3.2	38	12 / 144
14220404	4	5/32	0.8	100	4	4.0	56	12 / 96
14220503	5	3/16	0.8	75	3	5.0	59	12 / 96
14220504	5	3/16	0.8	100	4	5.0	63	12 / 96
14225503	5.5	7/32	1.0	75	3	5.0	71	12 / 96
14225504	5.5	7/32	1.0	100	4	5.0	75	12 / 96
14225505	5.5	7/32	1.0	125	5	5.0	79	12 / 144
14225506	5.5	7/32	1.0	150	6	5.0	83	12 / 144
14226514	6.5	1/4	1.2	38	1-1/2	6.5	46	12 / 144
14226504	6.5	1/4	1.2	100	4	6.0	83	12 / 96
14226506	6.5	1/4	1.2	150	6	6.0	95	12 / 144
14220806	8	5/16	1.2	150	6	8.0	141	12 / 144
14220807	8	5/16	1.2	175	7	8.0	153	12 / 144
14220808	8	5/16	1.2	200	8	8.0	163	12 / 144
14221008	10	3/8	1.6	200	8	10.0	214	12 / 72



KT NO.	mm	inch	mm	mm	inch	mm	g	
14220512	5	3/16	0.8	300	12	5.0	94	12 / 96
14220516	5	3/16	0.8	400	16	5.0	109	12 / 96
14226512	6.5	1/4	1.2	300	12	6.0	129	12 / 96
14226516	6.5	1/4	1.2	400	16	6.0	150	12 / 96



1422xx12
1422xx16

Screwdriver

KT No. & D1



- Shank material - SNCM - V alloy steel
- Grip material - PP + TPR
- Finishing - chrome plated with black tip

1423

- For torx head screw, round shank

14232010, 14232510, 14233010 at the dashboard, car body, engine compart ment as well as in industry.



KT NO.	Size	mm	inch	mm	g	
14230602	T6	48	2	3.2	35	12 / 144
14230702	T7	48	2	3.2	35	12 / 144
14230803	T8	75	3	3.2	37	12 / 144
14230903	T9	75	3	3.2	37	12 / 144
14231003	T10	75	3	3.2	37	12 / 144
14231503	T15	75	3	4.0	54	12 / 144
14231510	T15	250	10	5.0	86	12 / 96
14232004	T20	100	4	5.0	63	12 / 144
14232010	T20	250	10	5.0	87	12 / 96
14232504	T25	100	4	6.0	84	12 / 144
14232510	T25	250	10	6.0	118	12 / 96
14232704	T27	100	4	6.0	84	12 / 144
14233005	T30	125	5	6.0	91	12 / 144
14233010	T30	250	10	6.0	119	12 / 96
14234006	T40	150	6	8.0	143	12 / 144

1424

- Square head



KT NO.	Size	mm	inch	mm	g	
14240206	RB2	150	6	6.0	94	12 / 144

1427

- For torx head screw, round shank
- Tamper-resistant type




KT NO.	Size	mm	inch	mm	g	
14270803	T8H	75	3	3.2	36	12 / 144
14270903	T9H	75	3	3.2	36	12 / 144
14271003	T10H	75	3	3.2	36	12 / 144
14271503	T15H	75	3	4.0	54	12 / 144
14272004	T20H	100	4	5.0	63	12 / 144
14272504	T25H	100	4	6.0	84	12 / 144
14272704	T27H	100	4	6.0	84	12 / 144
14273005	T30H	125	5	6.0	89	12 / 144
14274006	T40H	150	6	8.0	142	12 / 144

1428

- Pozidriv head, round shank
- DIN ISO 8764



KT NO.	No.	mm	inch	mm	g	
14280023	PZ0	60	2-3/8	3.2	37	12 / 96
14280132	PZ1	80	3-1/8	4.5	57	12 / 96
14280104	PZ1	100	4	4.5	59	12 / 96
14280204	PZ2	100	4	6.0	83	12 / 96
14280306	PZ3	150	6	8.0	142	12 / 144

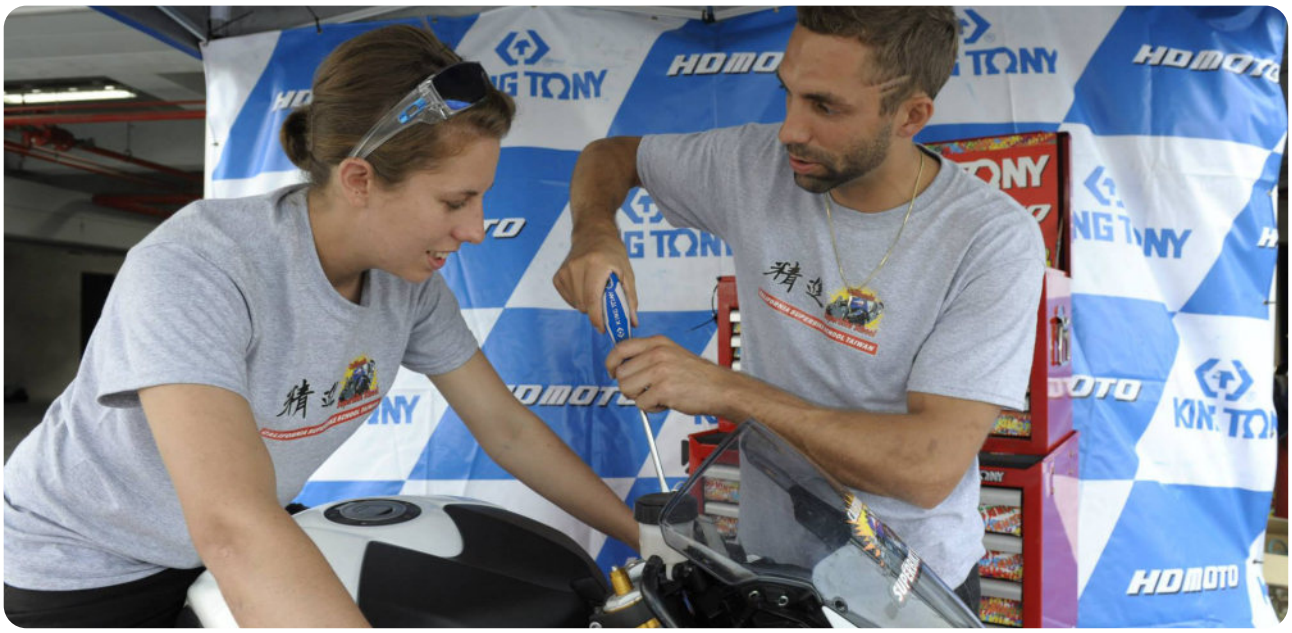

Screwdriver Set

- Shank material - SNCM - V alloy steel
- Grip material - PP + TPR
- Finishing - chrome plated with black tip



KT NO.	PC.	Contents	Kg	
31107MR	7	1421 PH0 x 60, PH1 x 80, PH1 x 100, PH2 x 38, PH2 x 100, PH2 x 150, PH3 x 150	0.70	1 / 20
30118MR	8	1422 3 x 75, 5 x 75, 5 x 100, 8 x 150, 8 x 200, 6.5 x 100, 6.5 x 150, 6.5 x 38	0.90	1 / 20
30115MR	5	1421 PH1 x 80, PH2 x 100 1422 4 x 100, 5.5 x 125, 6.5 x 150	0.54	1 / 20
31116MR	6	1421 PH0 x 60, PH1 x 80, PH2 x 100 1422 3 x 75, 5.5 x 100, 6.5 x 150	0.56	1 / 20
31216MR	6	1421 PH1 x 80, PH2 x 100 1422 5 x 75, 5 x 100, 6.5 x 100, 6.5 x 150	0.65	1 / 20
30117MR	7	1421 PH1 x 80, PH2 x 100 1422 3 x 75, 4 x 100, 5.5 x 125, 6.5 x 150, 8 x 175	0.77	1 / 20
33108MR	8	1421 PH0 x 60, PH1 x 100, PH2 x 100, PH2 x 38 1422 3 x 75, 5.5 x 100, 6.5 x 38, 6.5 x 100	1.30	1 / 10
30127MR	7	1428 PZ1 x 80, PZ2 x 100, PZ3 x 150 1422 4 x 100, 5.5 x 125, 6.5 x 150, 8 x 175	0.82	1 / 20
30315PR	5	1423 T15 x 75, T20 x 100, T25 x 100, T27 x 100, T30 x 125	0.37	1 / 20
30316PR	6	1423 T10 x 75, T15 x 75, T20 x 100, T25 x 100, T30 x 125, T40 x 150	0.48	1 / 20
30317PR	7	1423 T10 x 75, T15 x 75, T20 x 100, T25 x 100, T27 x 100, T30 x 125, T40 x 150	0.78	1 / 20
30319PR	9	1423 T8 x 75, T9 x 75, T10 x 75, T15 x 75, T20 x 100, T25 x 100, T27 x 100, T30 x 125, T40 x 150	0.88	1 / 20
30307PR	7	1427 T10H x 75, T15H x 75, T20H x 100, T25H x 100, T27H x 100, T30H x 125, T40H x 150	0.78	1 / 20
30309PR	9	1427 T8H x 75, T9H x 75, T10H x 75, T15H x 75, T20H x 100, T25H x 100, T27H x 100, T30H x 125, T40H x 150	0.88	1 / 20

Screwdriver & Set

KT No. & D1




- Shank material - S2 alloy steel
- Grip material - PP + TPR
- Finishing - Magnet chrome plated with black tip

14A1

- Phillips head, round shank
- DIN ISO 8764

KT NO.	No.	mm	inch	mm	g	
14A10132	PH1	80	3-1/8	5.0	60	12 / 96
14A10214	PH2	38	1-1/2	6.0	45	12 / 144
14A10204	PH2	100	4	6.0	88	12 / 96
14A10306	PH3	150	6	8.0	144	12 / 144



14A2

- Slotted head, round shank
- DIN ISO 2380


KT NO.	mm	inch	mm	mm	inch	mm	g	
14A20303	3	1/8	0.6	75	3	3.0	37	12 / 144
14A20404	4	5/32	0.8	100	4	4.0	56	12 / 96
14A25504	5.5	5/32	1.0	100	4	5.5	82	12 / 96
14A25505	5.5	7/32	1.0	125	5	5.5	86	12 / 144
14A26514	6.5	1/4	1.2	38	1-1/2	6.5	47	12 / 144
14A26506	6.5	1/4	1.2	150	6	6.5	105	12 / 144
14A20808	8	5/16	1.6	200	8	8.0	166	12 / 144



14A8

- Pozidriv head, round shank
- DIN ISO 8764

KT NO.	No.	mm	inch	mm	g	
14A80132	PZ1	80	3-1/8	5.0	60	12 / 96
14A80204	PZ2	100	4	6.0	89	12 / 96





KT NO.	PC.		Contents	Kg	
30106AMRB	6	14A1	PH1 x 80, PH2 x 100	0.56	1 / 12
		14A2	3 x 75, 4 x 100, 5.5 x 125, 6.5 x 150		
30116AMRB	6	14A8	PZ1 x 80, PZ2 x 100	0.56	1 / 12
		14A2	3 x 75, 4 x 100, 5.5 x 125, 6.5 x 150		
30107AMRB	7	14A1	PH1 x 80, PH2 x 100, PH3 x 150	0.82	1 / 12
		14A2	3 x 75, 4 x 100, 5.5 x 125, 6.5 x 150		


Screwdriver & Set

- Shank material - Chrome vanadium alloy steel
- Grip material - PP
- Finishing - chrome plated

1411

- Phillips head, round shank
- DIN ISO 8764

KT NO.	No.	mm	inch	mm	g	
14110003	PH0	75	3	3.0	28	12 / 240
14110104	PH1	100	4	5.0	41	12 / 240
14110214	PH2	38	1-1/2	6.5	30	12 / 144
14110204	PH2	100	4	6.0	68	12 / 96
14110204-E*	PH2	100	4	6.0	86	12 / 96
14110205-E*	PH2	125	5	6.0	92	12 / 144
14110206	PH2	150	6	6.0	80	12 / 144
14110206-E*	PH2	150	6	6.0	96	12 / 144
14110208-E*	PH2	200	8	6.0	108	12 / 144
14110306	PH3	150	6	8.0	123	12 / 144
14110308	PH3	200	8	8.0	146	12 / 144

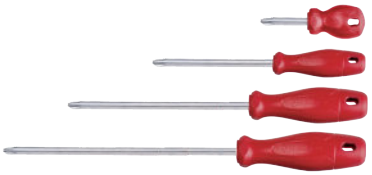


* Enlarged handle

1412

- Slotted head, round shank
- DIN ISO 2380

KT NO.	mm	inch	mm	mm	inch	mm	g	
14120303	3.0	1/8	0.5	75	3	3.0	27	12 / 240
14120404	4.0	5/32	0.8	100	4	4.0	33	12 / 240
14125504	5.5	7/32	0.8	100	4	5.0	40	12 / 240
14126514	6.5	1/4	1.2	38	1-1/2	6.5	30	12 / 144
14126504	6.5	1/4	1.2	100	4	6.0	71	12 / 96
14126504-E*	6.5	1/4	1.2	100	4	6.0	86	12 / 96
14126506	6.5	1/4	1.2	150	6	6.0	79	12 / 144
14126506-E*	6.5	1/4	1.2	150	6	6.0	105	12 / 144
14120806	8.0	5/16	1.2	150	6	8.0	126	12 / 144
14120808	8.0	5/16	1.2	200	8	8.0	142	12 / 144

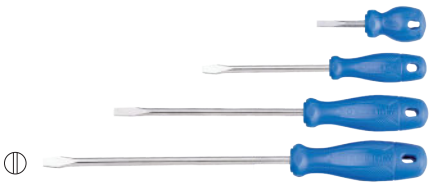

* Enlarged handle

2411

- Two-way screwdriver hex shank

KT NO.	No.	mm	mm	mm	inch	g	
24110204	PH2	7	1.2	100	4	89	20 / 240
24110214	PH2	7	1.2	38	1-1/2	42	20 /240




24110204



24110214

KT NO.	PC.	Contents	Kg	
35105MR	5	1411 PH1 x 100, PH2 x 100 1412 4 x 100, 5.5 x 100, 6.5 x 150	0.54	1 / 20
35116MR01	6	1411 PH1 x 100, PH2 x 100, PH3 x 150 1412 4 x 100, 5.5 x 100, 6.5 x 150	0.65	1 / 20
35107MR	7	1411 PH1 x 100, PH2 x 100, PH3 x 150 1412 4 x 100, 5.5 x 100, 6.5 x 150, 8 x 150	0.72	1 / 20



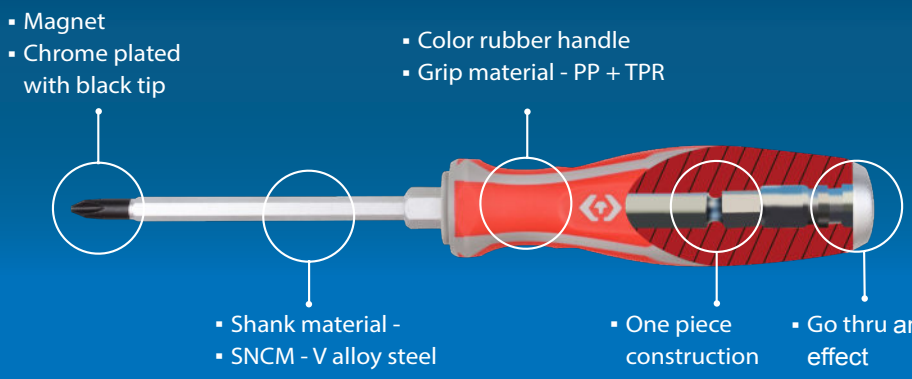

Go Thru Screwdriver & Set

KT No. & D1

- Shank material - SNCM - V alloy steel
- Grip material - PP + TPR
- Finishing - chrome plated with black tips

1461

▪ Phillips head, hex-shank
▪ DIN ISO 8764

KT NO.	No.	mm	inch	mm	mm	g	
14610103	PH1	75	3	5.0	10	121	12 / 96
14610204	PH2	100	4	6.0	10	135	12 / 96
14610206	PH2	150	6	6.0	10	148	12 / 144
14610306	PH3	150	6	8.0	13	219	12 / 96



1462

▪ Slotted head, hex-shank
▪ DIN ISO 2380

KT NO.	mm	inch	mm	mm	inch	mm	mm	g	
14625504	5.5	7/32	1.0	100	4	5.0	10	125	12 / 96
14626504	6.5	1/4	1.2	100	4	6.0	10	134	12 / 96
14626506	6.5	1/4	1.2	150	6	6.0	10	147	12 / 144
14620806	8.0	5/16	1.2	150	6	8.0	13	217	12 / 144
14620807	8.0	5/16	1.2	175	7	8.0	13	228	12 / 144
14621008	10.0	3/8	1.6	200	8	10.0	16	310	12 / 72
14621012	10.0	3/8	1.6	300	12	10.0	16	391	10 / 40
14621210	12.0	15/32	2.0	250	10	10.0	16	347	10 / 40



30206MR

Contents	Kg 1.20	1 / 20
1461	PH1 x 75, PH2 x 100, PH3 x 150	
1462	5.5 x 100, 6.5 x 150, 8.0 x 175	




6 PC.

35208MR

Blow case size (mm) :
430 x 300 x 50 (1.29 cuft)

Contents	Kg 2.16	1 / 4
1461	PH1 x 75, PH2 x 100, PH3 x 150	
1462	6.5 x 100, 8.0 x 175, 10 x 300	
1421	PH2 x 38	
1422	6.5 x 38	

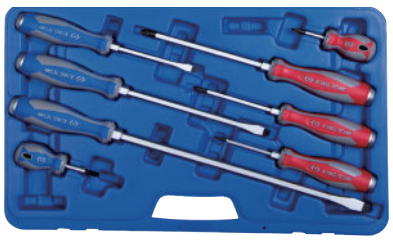

8 PC.

Go Thru Screwdriver & Set

- Shank material - S2 alloy steel
- Grip material - PP + TPR
- Finishing - Magnet chrome plated with black tip

14B1

- Phillips head, hex-shank
- DIN ISO 8764

KT NO.	No.	mm	inch	mm	g	
14B10103	PH1	75	3	5.0	130	12 / 96
14B10204	PH2	100	4	6.0	134	12 / 96
14B10206	PH2	150	6	6.0	145	12 / 144
14B10306	PH3	150	6	8.0	241	12 / 96



14B2

- Slotted head, hex-shank
- DIN ISO 2380

KT NO.	mm	inch	mm	mm	inch	mm	g	
14B25504	5.5	7/32	1.0	100	4	5.5	139	12 / 96
14B26506	6.5	1/4	1.2	150	6	6.5	164	12 / 144
14B20807	8.0	5/16	1.6	175	7	8.0	252	12 / 96



30206AMRB

Contents — 1.20 kg — 1 / 12

14B1	PH1 x 75, PH2 x 100, PH3 x 150
14B2	5.5 x 100, 6.5 x 150, 8.0 x 175



6 PC.

Go Thru Screwdriver

- Shank material - Chrome vanadium alloy steel
- Grip material - PP
- Finishing - chrome plated

1481

- Phillips head, hex-shank
- DIN ISO 8764

KT NO.	No.	mm	inch	mm	g	
14810103	PH1	75	3	5.0	55	12 / 240
14810204	PH2	100	4	6.0	93	12 / 144
14810204-E*	PH2	100	4	6.0	112	12 / 96
14810205	PH2	125	5	6.0	99	12 / 144
14810205-E*	PH2	125	5	6.0	118	12 / 144
14810306	PH3	150	6	8.0	175	12 / 144
14810412	PH4	300	12	10.0	328	10 / 40

* Enlarged handle



Go Thru Screwdriver & Set

KT No. & D1

- Shank material - Chrome vanadium alloy steel
- Grip material - PP
- Finishing - chrome plated

1482

- Slotted head, hex-shank
- DIN ISO 2380

KT NO.	mm	inch	mm	mm	inch	mm	g	
14825503	5.5	7/32	0.8	75	3	5.0	54	12 / 240
14826504	6.5	1/4	1.2	100	4	6.0	93	12 / 144
14826504-E*	6.5	1/4	1.2	100	4	6.0	112	12 / 96
14826505-E*	6.5	1/4	1.2	125	5	6.0	116	12 / 144
14826506	6.5	1/4	1.2	150	6	6.0	103	12 / 144
14820806	8.0	5/16	1.2	150	6	8.0	174	12 / 144
14821012	10.0	12/32	1.6	300	12	10.0	326	10 / 40

* Enlarged handle



36206MR

Contents — 0.97 Kg — 1 / 20

1481	PH1 x 75, PH2 x 100, PH3 x 150
1482	5.5 x 75, 6.5 x 150, 8.0 x 150




6 PC.

35114MR

- Standard & insulated & go thru screwdriver set

35114MR01

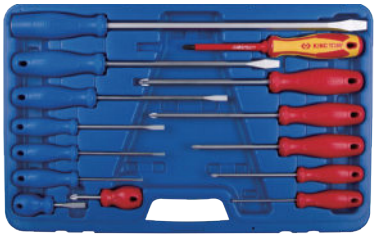

14 PC.

KT NO.			Contents
35114MR	1472	6.5 x 150	1411: PH0 x 75, PH1 x 100, PH2 x 100, PH2 x 150, PH2 x 38, PH3 x 150 1412: 3 x 75, 4 x 100, 5.5 x 100, 6.5 x 150, 6.5 x 38, 8 x 200 1482: 10 x 300
35114MR01	1478	PZ2 x 100	

Kg 2.40 — 1 / 4

Screwdriver Set

31416MR

- Standard screwdriver set

KT NO.	Contents		Each Q'ty
31416MR	⊕ 1421	PH0 x 60, PH1 x 80, PH1 x 100, PH2 x 38, PH2 x 100, PH2 x 150, PH3 x 150	6
	⊖ 1422	3.0 x 75, 4.0 x 100, 5.5 x 75, 5.5 x 100, 5.5 x 125, 6.5 x 38, 6.5 x 100, 6.5 x 150, 8.0 x 150	



96 PC.

Screwdriver shelf size (mm) : 600 x 240 x 210

KT NO.	Kg	CUFT
87105	3.30	1.97
31416MR-D	6.20	0.71

31516MR

- Standard & go thru screwdriver set

KT NO.	Contents		Each Q'ty
31516MR	1427	T8H x 75, T9H x 75, T10H x 75, T15H x 75, T20H x 100, T25H x 100, T27H x 100, T30H x 125, T40H x 150	6
	⊕ 1461	PH1 x 75, PH2 x 100, PH3 x 150	
	⊖ 1462	5.5 x 100, 6.5 x 100, 6.5 x 150, 8.0 x 175	



96 PC.

Screwdriver shelf size (mm) : 600 x 240 x 210

KT NO.	Kg	CUFT
87105	3.30	1.97
31516MR-D	10.10	0.71

31519MR

- Standard Screwdriver set

KT NO.	Contents		Each Q'ty
31519MR	⊕ 1411	PH0 x 75, PH1 x 100, PH2 x 100, PH2 x 100E*, PH2 x 150, PH2 x 150E*, PH2 x 38, PH3 x 150, PH3 x 200	6
	⊖ 1412	3.0 x 75, 4.0 x 100, 5.5 x 100, 6.5 x 100, 6.5 x 150, 6.5 x 100E*, 6.5 x 38, 8 x 150, 8 x 200, 6.5 x 150E*	

* Enlarged handle



114 PC.

Screwdriver shelf size (mm) : 650 x 250 x 210

KT NO.	Kg	CUFT
87111	3.50	1.97
31519MR-D	10.34	0.71

Screwdriver Set

31427MR

- Standard screwdriver set

KT NO.	Contents	
31427MR	1421	PH0 x 60, PH1 x 80 x2, PH1 x 100 x2, PH2 x 38 x2, PH2 x 100 x2, PH2 x 150 x2, PH3 x 150 x2
	1422	3.0 x 75 x3, 4.0 x 100 x2, 5.5 x 100 x2, 5.5 x 125 x2, 5.5 x 150 x2, 6.5 x 38 x2, 6.5 x 100 x2, 6.5 x 150 x2
	1423	T10 x 75, T15 x 75, T20 x 100, T25 x 100, T30 x 125
	1427	T10H x 75, T15H x 75, T20H x 100, T25H x 100, T30H x 125



40 PC.

Screwdriver shelf size (mm) : 325 x 205 x 270

KT NO.	Kg	CUFT
87104	1.40	0.30
31427MR-D	2.66	0.27

Screwdriver Display

87104

- Overall size -W 325 x D 205 x H 270 mm
- Weight - 1.4 Kg / Cuft - 0.3



Magnetizer / Demagnetizer

79B1-01

- Quickly magnetize / demagnetize screwdriver tips or screw bits
- Magnetize your screwdrivers to allow them to grab small screws
- Demagnetize your screwdrivers to safely work on sensitive electronics



• Magnetizer



• Demagnetizer

KT NO.	Size (mm)	g	
79B1-01	52 x 50 x 30	88.6	20 / 80



Interchangeable Handle

91232

KT NO.	mm	inch	mm	inch	g	
91232	6.35	1/4	135	5-1/4	84	12 / 144




Power Bit

1317

- Bits for screwdriver handle 91232
- Material - SNCM - V alloy steel

KT NO.	Size	mm	inch	g	
1317012PN	PH1 PH2	175	7	45	40 / 400
1317012ZN	PZ2 PZ1	175	7	45	40 / 400
1317046SN	4.0 6.0	175	7	43	40 / 400
1317057SN	5.0 7.0	175	7	43	40 / 400
1317115TN	T10 T15	175	7	42	40 / 400
1317225TN	T20 T25	175	7	45	40 / 400
1317340TN	T30 T40	175	7	45	40 / 400
1317401PN	4.0 PH1	175	7	43	40 / 400
131744BHN	B4 H4	175	7	45	40 / 400
1317501ZN	5.0 PZ1	175	7	43	40 / 400
131755BHN	B5 H5	175	7	45	40 / 400
1317602PN	6.0 PH2	175	7	43	40 / 400
131766BHN	B6 H6	175	7	46	40 / 400
1317702ZN	7.0 PZ2	175	7	44	40 / 400

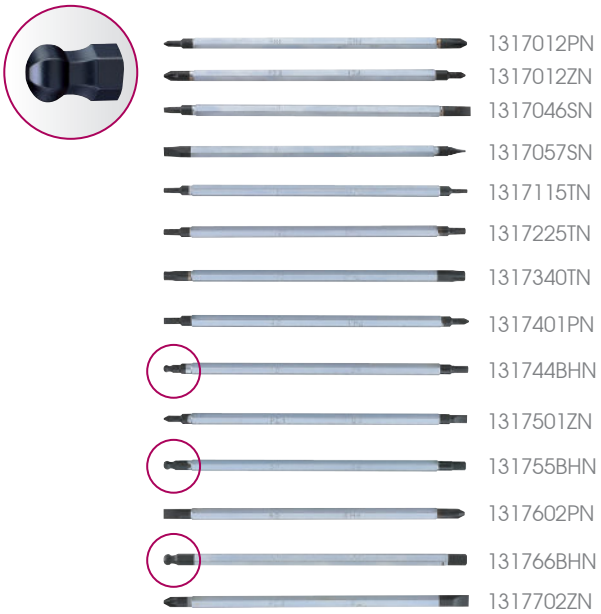

Screwdriver Set

- Shank material - SNCM - V alloy steel
- Grip material - PP + TPR
- Shank finishing - chrome plated

32518MR

- Two-way screwdriver set

Contents				0.70	1 / 24
1317012PN	PH1		PH2		
1317012ZN	PZ2		PZ1		
1317046SN	4.0		6.0		
1317057SN	5.0		7.0		
1317115TN	T10		T15		
1317225TN	T20		T25		
1317340TN	T30		T40		
131744BHN	B4		H4		
131755BHN	B5		H5		
131766BHN	B6		H6		
91232					



11 PC.

Blow case size (mm) : 233 x 120 x 43 (0.04cuft)

Screwdriver Set

32518MR01

- Two-way screwdriver set



11 PC.

Blow case size (mm) : 233 x 120 x 43 (0.04cuft)

Contents					0.76	1 / 20
1317115TN	T10			T15		
1317225TN	T20			T25		
1317340TN	T30			T40		
1317401PN	4.0			PH1		
131744BHN	B4			H4		
1317501ZN	5.0			PZ1		
131755BHN	B5			H5		
1317602PN	6.0			PH2		
131766BHN	B6			H6		
1317702ZN	7.0			PZ2		
91232						

32518MR02

- Two-way screwdriver set



11 PC.

Blow case size (mm) : 233 x 120 x 43 (0.04cuft)

Contents					0.70	1 / 24
1317115TN	T10			T15		
1317225TN	T20			T25		
1317340TN	T30			T40		
1317401PN	4.0			PH1		
131744BHN	B4			H4		
1317012PN	PH1			PH2		
131755BHN	B5			H5		
1317602PN	6.0			PH2		
131766BHN	B6			H6		
1317057SN	5.0			7.0		
91232						

Nut Spinner

- Shank material - chrome vanadium alloy steel
- Grip material - PP + TPR
- Finishing - chrome plated

1450



KT NO.	mm	mm	mm	mm	g	
1450-04	4.0	4.5	125	225	74	12 / 144
1450-45	4.5	4.5	125	225	75	12 / 144
1450-05	5.0	5.0	125	225	75	12 / 144
1450-55	5.5	5.0	125	225	82	12 / 144
1450-06	6.0	6.0	125	225	81	12 / 144
1450-07	7.0	6.0	125	235	103	12 / 144
1450-08	8.0	7.0	125	235	108	12 / 144
1450-09	9.0	7.0	125	235	110	12 / 144
1450-10	10.0	8.0	125	235	114	12 / 144
1450-11	11.0	9.0	125	245	165	12 / 144
1450-12	12.0	10.0	125	245	169	12 / 144
1450-13	13.0	10.0	125	245	172	10 / 120

5450



KT NO.	inch	mm	mm	mm	g	
5450-08	1/4	12.0	125	223	81	12 / 144
5450-10	5/16	8.2	125	223	109	12 / 144

Flexible Nut Spinner

1453

- For the hose clamps on radiator hoses

KT NO.	mm	mm	mm	mm	g	
1453-05	5	14.3	190	300	132	12 / 144
1453-06	6	14.1	190	300	132	12 / 144
1453-07	7	14.5	190	300	137	12 / 144
1453-08	8	13.2	190	300	133	12 / 144
1453-10	10	12.7	190	300	135	12 / 144



Bit

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted
- Total length : 25 mm



Item No.xxxxxxx.B

1025P

- DIN ISO 2351-2



KT NO.	No.	g	
102500P (102500P.B)	PH0	5	20 / 300 (50 / 1000)
102501P (102501P.B)	PH1	5	
102502P (102502P.B)	PH2	6	
102503P (102503P.B)	PH3	6	
102504P (102504P.B)	PH4	6	

102512P

- Reduced for dry-wall
- DIN ISO 2351-2



KT NO.	No.	g	
102512P (102512P.B)	PH2	6	20 / 300 (50 / 1000)

1025S

- DIN ISO 2351-1



KT NO.	Tip width (mm)	Tip thickness (mm)	g	
102503S1 (102503S1.B)	3.0	0.5	5	20 / 300 (50 / 1000)
102535S1 (102535S1.B)	3.5	0.6	5	
102504S1 (102504S1.B)	4.0	0.5	5	
102504S2 (102504S2.B)	4.0	0.8	5	
102545S1 (102545S1.B)	4.5	0.6	5	
102505S1 (102505S1.B)	5.0	0.8	5	
102555S1 (102555S1.B)	5.5	0.8	5	
102555S2 (102555S2.B)	5.5	1.0	5	
102506S1 (102506S1.B)	6.0	1.0	5	
102565S1 (102565S1.B)	6.5	1.2	6	
102507S1 (102507S1.B)	7.0	1.2	6	
102508S1 (102508S1.B)	8.0	1.2	6	
102508S2 (102508S2.B)	8.0	1.6	6	

1025H 5025H

- DIN ISO 2351-3



KT NO.	mm	g	
102515H (102515H.B)	H1.5	4	20 / 300 (50 / 1000)
102502H (102502H.B)	H2	5	
102525H (102525H.B)	H2.5	5	
102503H (102503H.B)	H3	5	
102504H (102504H.B)	H4	6	
102505H (102505H.B)	H5	6	
102506H (102506H.B)	H6	6	
102507H (102507H.B)	H7	8	
102508H (102508H.B)	H8	9	
102510H (102510H.B)	H10	12	

KT NO.	inch	g	
502503H (502503H.B)	3/64	4	20 / 300 (50 / 1000)
502504H (502504H.B)	1/16	4	
502505H (502505H.B)	5/64	5	
502506H (502506H.B)	3/32	5	
502507H (502507H.B)	7/64	5	
502508H (502508H.B)	1/8	5	
502509H (502509H.B)	9/64	5	
502510H (502510H.B)	5/32	5	

1/4" Hex size shank driver



order unit :one box

1025T

- For torx head screw



KT NO.	Size	g	
102506T (102506T.B)	T6	5	20 / 300 (50 / 1000)
102507T (102507T.B)	T7	5	
102508T (102508T.B)	T8	5	
102509T (102509T.B)	T9	5	
102510T (102510T.B)	T10	5	
102515T (102515T.B)	T15	5	
102520T (102520T.B)	T20	5	
102525T (102525T.B)	T25	5	
102527T (102527T.B)	T27	5	
102530T (102530T.B)	T30	5	
102535T (102535T.B)	T35	6	
102540T (102540T.B)	T40	6	
102545T (102545T.B)	T45	7	
102550T (102550T.B)	T50	8	

1025U

- For torx head screw
- Tamper-resistant type



KT NO.	Size	g	
102507U (102507U.B)	T7H	4	20 / 300 (50 / 1000)
102508U (102508U.B)	T8H	5	
102509U (102509U.B)	T9H	5	
102510U (102510U.B)	T10H	5	
102515U (102515U.B)	T15H	5	
102520U (102520U.B)	T20H	5	
102525U (102525U.B)	T25H	5	
102527U (102527U.B)	T27H	5	
102530U (102530U.B)	T30H	6	
102540U (102540U.B)	T40H	6	

1025M

- DIN 65254



KT NO.	size	g	
102504M	M4	5	20 / 300
102505M	M5	5	
102506M	M6	6	
102508M	M8	7	
102510M	M10	10	

1025V

- For inside 5-star screw
- Tamper-resistant type



KT NO.	Size	g	
102508V	IPR 8	5	20 / 300
102509V	IPR 9	5	
102510V	IPR 10	5	
102515V	IPR 15	5	
102520V	IPR 20	5	
102525V	IPR 25	5	
102527V	IPR 27	5	
102530V	IPR 30	5	
102540V	IPR 40	6	

Bit

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted

1/4" Hex size shank driver



order unit : one blister card



Item No.xxxxxxx.B

5/16" Hex size shank driver



order unit : one box

1025Z

- Pozidriv type
- DIN ISO 2351-2



KT NO.	No.	g	pcs / box
102501Z (102501Z.B)	PZ1	5	20 / 300 (50 / 1000)
102502Z (102502Z.B)	PZ2	6	
102503Z (102503Z.B)	PZ3	6	

1025R



KT NO.	Size	g	pcs / box
102500R (102500R.B)	RB0	5	20 / 300 (50 / 1000)
102501R (102501R.B)	RB1	5	
102502R (102502R.B)	RB2	6	
102503R (102503R.B)	RB3	6	

1360Z



KT NO.	No.	Overall length (mm)	g	pcs / box
1360023Z	PZ2 / PZ3	60	14	10 / 150

1360Z



KT NO.	No.	Tip width (mm)	Tip thickness (mm)	Overall length (mm)	g	pcs / box
1360451Z	PZ1	4.5	0.6	60	13	10 / 150
1360552Z	PZ2	5.5	1.0	60	14	10 / 150

1360P



KT NO.	No.	Overall length (mm)	g	pcs / box
1360012P	PH1 / PH2	60	13	10 / 150
1360022P	PH2 / PH2	60	14	
1360023P	PH2 / PH3	60	14	

1360P



KT NO.	No.	Tip width (mm)	Tip thickness (mm)	Overall length (mm)	g	pcs / box
1360552P	PH2	5.5	0.8	60	14	
1360703P	PH3	7.0	1.2	60	14	

1800P

- 36 / 80 / 125mmL
- DIN ISO 2251-2



KT NO.	No.	Overall length (mm)	g	pcs / box
183601P	PH1	36	12	20 / 200
183602P	PH2	36	12	20 / 200
183603P	PH3	36	12	20 / 200
183604P	PH4	36	12	20 / 200
188002P	PH2	80	31	10 / 100
188003P	PH3	80	31	10 / 100
188004P	PH4	80	31	10 / 100
181202P	PH2	125	50	10 / 100
181203P	PH3	125	50	10 / 100

1800S

- 36 / 80mmL
- DIN ISO 2351-1



KT NO.	Tip width (mm)	Tip thickness (mm)	Overall length (mm)	g	pcs / box
183608S	8	1.2	36	12	20 / 300
183609S	9	1.6	36	13	20 / 300
183610S	10	1.6	36	15	20 / 240
183611S	11	2.0	36	16	20 / 240
183612S	12	2.0	36	18	12 / 120
183614S	14	2.5	36	21	12 / 120
188008S	8	1.2	80	32	10 / 150
188010S	10	1.6	80	33	10 / 120
188012S	12	2.0	80	34	6 / 60

1800H

- 32 / 36 mmL



KT NO.	mm	Overall length (mm)	g	pcs / box
183203H	H3	32	9	20 / 300
183204H	H4	32	10	20 / 300
183205H	H5	32	10	20 / 300
183206H	H6	32	11	20 / 300
183207H	H7	32	12	20 / 300
183208H	H8	32	13	20 / 300
183210H	H10	32	17	20 / 240
183212H	H12	32	22	12 / 120
183604H	H4	36	11	20 / 300
183605H	H5	36	12	20 / 300
183606H	H6	36	13	20 / 300
183607H	H7	36	14	20 / 300
183608H	H8	36	15	20 / 300
183610H	H10	36	19	20 / 240
183612H	H12	36	25	12 / 120
183614H	H14	36	31	12 / 120

Bit

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted

5/16" Hex size shank driver



order unit : one box

1800T

- For torx internal screws
  32 / 36 / 70 mmL



KT NO.	Size	Overall length (mm)	g	
183215T	T15	32	10	20 / 300
183220T	T20	32	10	20 / 300
183225T	T25	32	10	20 / 300
183227T	T27	32	11	20 / 300
183230T	T30	32	11	20 / 300
183240T	T40	32	11	20 / 300
183245T	T45	32	11	20 / 300
183250T	T50	32	11	20 / 300
183620T	T20	36	11	20 / 300
183625T	T25	36	11	20 / 300
183627T	T27	36	11	20 / 300
183630T	T30	36	12	20 / 300
183635T	T35	36	12	20 / 300
183640T	T40	36	13	20 / 300
183645T	T45	36	13	20 / 300
183650T	T50	36	14	20 / 300
183655T	T55	36	19	20 / 240
183660T	T60	36	22	20 / 120
187015T	T15	70	22	10 / 150
187020T	T20	70	22	10 / 150
187025T	T25	70	22	10 / 150
187027T	T27	70	22	10 / 150
187030T	T30	70	22	10 / 150
187040T	T40	70	22	10 / 150
187045T	T45	70	22	10 / 150
187050T	T50	70	22	10 / 150

1836Z

- 36 mmL



KT NO.	No.	Overall length (mm)	g	
183602Z	PZ2	36	12	20 / 300
183603Z	PZ3	36	12	20 / 300
183604Z	PZ4	36	13	20 / 300

10mm Hex size shank driver



order unit : one blister card

1600H

- 36 / 80mmL





KT NO.	mm	Overall length (mm)	g	
163604H	H4	36	17	12 / 144
163605H	H5	36	19	12 / 144
163606H	H6	36	19	12 / 144
163607H	H7	36	20	12 / 144
163608H	H8	36	21	12 / 144
163609H	H9	36	23	12 / 144
163610H	H10	36	24	12 / 144
163612H	H12	36	31	12 / 120
168004H	H4	80	47	6 / 72
168005H	H5	80	48	6 / 72
168006H	H6	80	49	6 / 72
168007H	H7	80	50	6 / 72
168008H	H8	80	51	6 / 72
168009H	H9	80	52	6 / 72
168010H	H10	80	54	6 / 72
168012H	H12	80	73	6 / 60

1600T

- For torx head screw
- 36 / 80mmL





KT NO.	Size	Overall length (mm)	g	
163610T	T10	36	17	12 / 144
163615T	T15	36	17	12 / 144
163620T	T20	36	18	12 / 144
163625T	T25	36	18	12 / 144
163627T	T27	36	18	12 / 144
163630T	T30	36	18	12 / 144
163640T	T40	36	20	12 / 144
163645T	T45	36	21	12 / 144
163650T	T50	36	23	12 / 144
163655T	T55	36	28	12 / 144
163660T	T60	36	33	12 / 120
168010T	T10	80	46	6 / 72
168015T	T15	80	47	6 / 72
168020T	T20	80	47	6 / 72
168025T	T25	80	47	6 / 72
168027T	T27	80	47	6 / 72
168030T	T30	80	47	6 / 72
168040T	T40	80	48	6 / 72
168045T	T45	80	49	6 / 72
168050T	T50	80	50	6 / 72
168055T	T55	80	52	6 / 72
168060T	T60	80	70	6 / 60

Bit

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted


10mm Hex size shank driver



order unit : one blister card

1600E


- For torx Plus head screw
- 36 / 80mmL



KT NO.	Size	Overall length (mm)	g	
163610E	IP10	36	15	12 / 144
163615E	IP15	36	16	12 / 144
163620E	IP20	36	16	12 / 144
163625E	IP25	36	16	12 / 144
163627E	IP27	36	17	12 / 144
163630E	IP30	36	17	12 / 144
163640E	IP40	36	18	12 / 144
163645E	IP45	36	20	12 / 144
163650E	IP50	36	21	12 / 144
163655E	IP55	36	25	12 / 144
163660E	IP60	36	31	12 / 120
168010E	IP10	80	45	6 / 72
168015E	IP15	80	45	6 / 72
168020E	IP20	80	45	6 / 72
168025E	IP25	80	46	6 / 72
168027E	IP27	80	46	6 / 72
168030E	IP30	80	47	6 / 72
168040E	IP40	80	48	6 / 72
168045E	IP45	80	49	6 / 72
168050E	IP50	80	50	6 / 72
168055E	IP55	80	60	6 / 72
168060E	IP60	80	79	6 / 60

1600U


- For torx head screw
- Tamper-resistant type
- 36 / 80mmL



KT NO.	Size	Overall length (mm)	g	
163610U	T10H	36	17	12 / 144
163615U	T15H	36	17	12 / 144
163620U	T20H	36	18	12 / 144
163625U	T25H	36	18	12 / 144
163627U	T27H	36	18	12 / 144
163630U	T30H	36	18	12 / 144
163640U	T40H	36	20	12 / 144
163645U	T45H	36	21	12 / 144
163650U	T50H	36	23	12 / 144
163655U	T55H	36	28	12 / 144
163660U	T60H	36	33	12 / 120
168010U	T10H	80	46	6 / 72
168015U	T15H	80	47	6 / 72
168020U	T20H	80	47	6 / 72
168025U	T25H	80	47	6 / 72
168027U	T27H	80	47	6 / 72
168030U	T30H	80	47	6 / 72
168040U	T40H	80	48	6 / 72
168045U	T45H	80	49	6 / 72
168050U	T50H	80	50	6 / 72
168055U	T55H	80	52	6 / 72
168060U	T60H	80	70	6 / 60

1600M

- 36 / 80mmL



KT NO.	Size	Overall length (mm)	g	
163605M	M5	36	18	12 / 144
163606M	M6	36	19	12 / 144
163608M	M8	36	20	12 / 144
163609M	M9	36	21	12 / 144
163610M	M10	36	22	12 / 144
163612M	M12	36	28	12 / 120
163614M	M14	36	30	12 / 120
168005M	M5	80	47	6 / 72
168006M	M6	80	48	6 / 72
168008M	M8	80	49	6 / 72
168009M	M9	80	51	6 / 72
168010M	M10	80	52	6 / 72
168012M	M12	80	70	6 / 60
168014M	M14	80	71	6 / 60



Bit Set

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted

1011MQ

Metal case size (mm) : 198 x 105 x 37 (0.027 cuft)



11 PC.

Contents — 0.82 kg — 1 / 20

1636M	M5, M6, M8, M10, M12	
1680M	M5, M6, M8, M10, M12	
414810M		

1015MQ

Metal case size (mm) : 198 x 105 x 37 (0.027 cuft)



15 PC.

Contents — 0.96 kg — 1 / 20

1636H	H4, H5, H6, H7, H8, H10, H12	
1680H	H4, H5, H6, H7, H8, H10, H12	
414810M		

1015PQ

Metal case size (mm) : 198 x 105 x 37 (0.027 cuft)



15 PC.

Contents — 0.90 kg — 1 / 20

1636T	T20,T25, T30, T40, T45, T50, T55	
1680T	T20,T25, T30, T40, T45, T50, T55	
414810M		

1023EQ

Metal case size (mm) : 244 x 118 x 37 (0.038 cuft)



23 PC.

Contents — 1.60 kg — 1 / 18

1636E	10IP, 15IP, 20IP, 25IP, 27IP, 30IP, 40IP, 45IP, 50IP, 55IP, 60IP	
1680E	10IP, 15IP, 20IP, 25IP, 27IP, 30IP, 40IP, 45IP, 50IP, 55IP, 60IP	
414810M		

1040CQ

Metal case size (mm) : 320 x 153 x 31 (0.054 cuft)



40 PC.

Contents — 2.0 kg — 1 /10

1630M	M5, M6, M8, M10, M12	
1630H	H4, H5, H6, H7, H8, H10, H12	
1630T	T20, T25, T30, T40, T45, T50, T55	
1675M	M5, M6, M8, M10, M12	
1675H	H4, H5, H6, H7, H8, H10, H12	
1675T	T20, T25, T30, T40, T45, T50, T55	
314810M, 414810M		

1042CQ

Metal case size (mm) : 205 x 80 x 42 (0.024 cuft)



42 PC.

Contents — 0.52 kg — 1 / 20

1025H	H1.5, H2, H2.5, H3, H4, H5, H6, H7, H8, H10	
1025T	T6	
1025U	T7H, T8H, T9H , T10H, T15H, T20H, T25H, T27H, T30H, T40H	
1025S	3 x 0.5, 3.5 x 0.6, 4 x 0.5, 4.5 x 0.6, 5 x 0.8, 5.5 x 0.8, 6 x 1.0, 6.5 x 1.2, 7 x 1.2, 8 x 1.2	
1025P	PH0, PH1, PH2, PH3	
1025Z	PZ1, PZ2, PZ3	
1025R	RB0, RB1, RB2, RB3	

1043CQ

Metal case size (mm) : 290 x 130 x 41 (0.056 cuft)



43 PC.

Contents — 2.50 kg — 1 / 10

1636H	H4, H5, H6, H7, H8, H10, H12	
1636M	M5, M6, M8, M10, M12	
1636T	T20, T25, T27, T30, T40, T45, T50,T55, T60	
1680H	H4, H5, H6, H7, H8, H10, H12	
1680M	M5, M6, M8, M10, M12	
1680T	T20, T25, T27, T30, T40, T45, T50, T55, T60	
414710M		

Bit Set

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted

1044CQ

Metal case size (mm) : 296 x 130 x 41 (0.056 cuft)



44 PC.

Contents — 2.5 kg — 1 /10

1636H	H4, H5, H6, H7, H8, H10, H12
1636M	M5, M6, M8, M10, M12
1636T	T20, T25, T27, T30, T40, T45, T50, T55, T60
1680H	H4, H5, H6, H7, H8, H10, H12
1680M	M5, M6, M8, M10, M12
1680T	T20, T25, T27, T30, T40, T45, T50, T55, T60
314810M, 414810M	

5169PR

Metal case size (mm) : 445 x 187 x 50 (0.147 cuft)



69 PC.

Contents — 4.15 kg — 1 /4

3375M	E4, E5, E6, E7, E8, E10, E11, E12, E14, E16, E18
1147R	T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H, T50H
1636H	H4, H5, H6, H7, H8, H10, H12
1636M	M5, M6, M8, M10, M12
1636T	T10, T15, T20, T25, T27, T30, T40, T45, T50, T55, T60
1680H	H4, H5, H6, H7, H8, H10, H12
1680M	M5, M6, M8, M10, M12
1680T	T10, T15, T20, T25, T27, T30, T40, T45, T50, T55, T60
314810M	3792	3779-08G

Ratchet Screwdriver & Set

2166DF

- Two position L-handle design for greater torque
- PC+TPR Handle



KT NO.	Gear	Overall Length (mm)	kg	
2166DF	46 teeth	167	0.28	6 / 72

32809MR

- 9-in-1 ratchet screwdriver set
- Reversible ratchet with 1/4" bit holder



9 PC.

Contents — 0.32 kg — 6 / 72

1025S	4.0, 5.0
1025P	PH1, PH2, PH3
1025Z	PZ1, PZ2
750-60	
2166DF	

2555MR 1/4"

- Ratchet screwdriver set
- Blow case size (mm) : 260 x 160 x 64 (0.094 cuft)



55 PC.

Contents — 1.00 kg — 1 / 10


1025S	3.0, 4.0, 4.5, 5.0, 5.5, 6.0, 6.5, 8.0
1025P	PH0, PH1, PH2, PH3
1025Z	PZ0, PZ1, PZ2, PZ3
1025T	T10, T15, T20, T25, T27, T30, T40
1025H	H2, H2.5, H3, H4, H5, H6, H8
1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H
1025R	RB1, RB2
7702-25	
750-60	
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
2166DF	

Palm Ratchet Screwdriver & Set



2746 1/4"

- 48 teeth
- With an internal soft structure, it allows the operator to spin fasteners on and off in hard-to-reach areas
- Stubby grip fitting the palm, good to use in a confined space

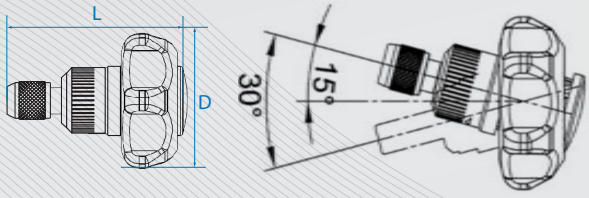

KT NO.	D (mm)	L (mm)	g	
2746	60	72	95	1 / 48







1048MR 1/4"

49 PC.

Contents

0.53 kg | 1 / 12

1025S	3.0 x 0.5, 4.0 x 0.5, 5.0 x 0.8, 6.0 x 1.0
1025P	PH1 x 2, PH2 x 2 ø6mm, PH3, PH2 ø4.7mm
1025T	T10, T15, T20 x 2, T25, T27, T30, T40
1025H	H3, H4, H5, H6
1025U	T10H, T15H, T20H x 2, T25H, T27H, T30H, T40H
1025Z	PZ2 x 2
7150T	T15, T20, T25,
7150P	PH2 x 2
7150Z	PZ2
7150S	4.0 x 0.8, 6.0 x 1.0
7150H	H3, H4, H5, H6, H7, H8
750-75	1/4"
753-63	1/4"


2746





Plastic case size (mm) : 150 x 102 x 46 (0.025 cuft)

Ratchet Screwdriver & Set




32808MR 1/4"

8 PC.


- 8-in-1 ratchet screwdriver set
- Reversible ratchet screwdriver with max torque 45 Nm
- 45 teeth
- Magnetic nut setter 1/4" and bit holder
- Extended blades max. 135mmL
- Extended drive gets into hard-to-reach space easily



▪ Ergonomic grip




▪ Extended magnetic bit holder



▪ Forward, reverse and neutral



▪ 6 bit storage compartment cap

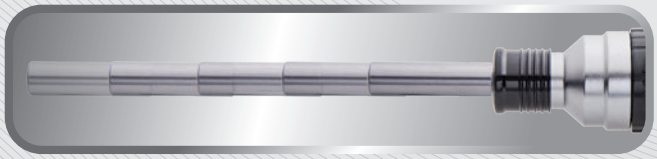

▪ Telescopic ratchet screwdriver

Contents — 0.27 kg — 1 /48

	1025P	PH1, PH2
	1025Z	PZ2
	1025S	4.0 x 0.5, 5.5 x 0.8, 6.5 x 1.2
	2155-06	
	2155DF	

32526MRN


16 PC.



Contents — 0.7 kg — 1 / 30

PH1	PH2	1317012PN
4.0	6.0	1317046SN
5.0	7.0	1317057SN
T10	T15	1317115TN
T20	T25	1317225TN
B4	H4	131744BHN
B5	H5	131755BHN
B6	H6	131766BHN
		2155DF

Contents

	1025S	4.0, 5.5, 6.5
	1025P	PH1, PH2
	1025Z	PZ2
	2155-06	



32540MR

Contents			0.58	1 / 12
	1025S	3.0, 4.0, 5.0, 6.0		
	1025P	PH1, PH2 x 2, PH3		
	1025Z	PZ1, PZ2 x 2, PZ3		
	1025T	T10, T15, T20, T25, T27, T30, T40		
	1025H	H3, H4, H5, H6		
	1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H		
	7702-25			
	753-63			
	1025P	PH1, PH2		
	1025Z	PZ2		
	1025S	4.0 x 0.5, 5.5 x 0.8, 6.5 x 1.2		
	2155-06			
	2155DF			

- Suitable for fixing, repairing and installation work, and can also be used with power tools, with ratchet driver included to complete the work without power tools



40 PC.



2539MRV04

- Suitable for fixing, repair and installation work

39 PC.




Contents			1.25	1 / 16
	2335M	5, 6, 7, 8, 9, 10, 11, 12, 13, 14		
	1025S	4.0 x 0.5, 5.5 x 0.8, 6.5 x 1.2		
	1025P	PH1, PH2		
	1025Z	PZ2		
	1025H	H1.5, H2, H2.5, H3, H4, H5, H6		
	1025U	T7H, T8H, T9H, T10H, T15H, T20H, T25H, T27H, T30H, T40H		
	7702-25			
	2155-06			
	2155DF			
1317012PN	PH1		PH2	
1317046SN	4.0		6.0	
1317057SN	5.0		7.0	

Atom Series

Asymmetrical line design

PAT.

26 PC.

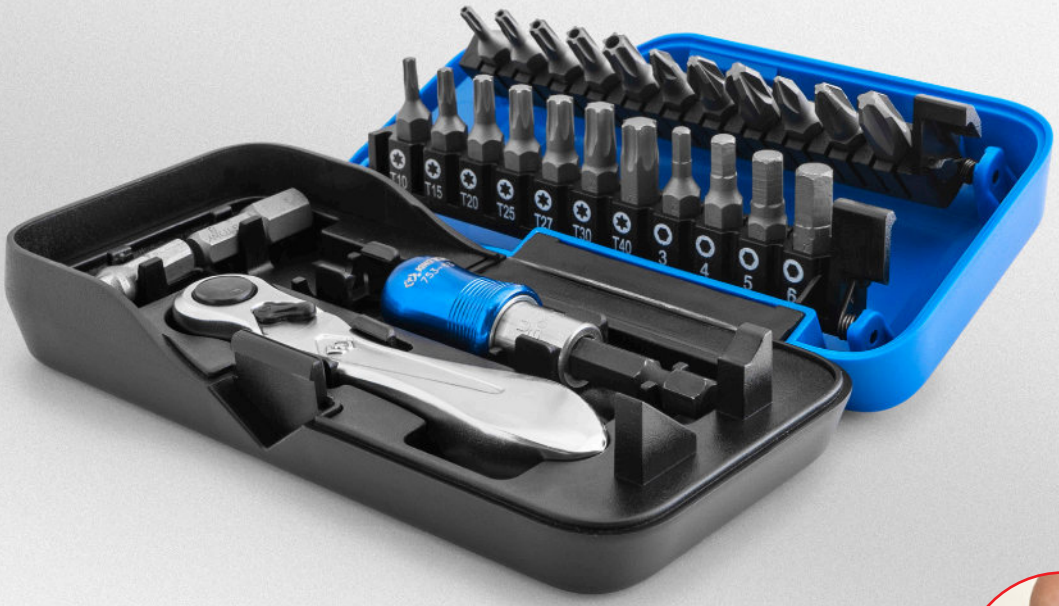


1026CQ-AM

Plastic case size (mm) :
140 x 65 x 36








▪ Easy to pick up



▪ Automatic raising bit rack



▪ Suitable in pocket

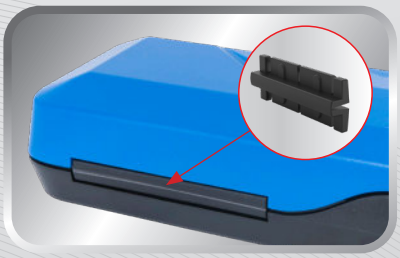

▪ Built-in rotation axis design

Contents

0.39 kg | 1 / 40

⊕	1025P	PH1, PH2, PH3
✳	1025Z	PZ1, PZ2, PZ3
✿	1025U	T10H, T15H, T20H, T25H, T30H
⬣	1025H	H3, H4, H5, H6, H8
✶	1025T	T10, T15, T20, T25, T27, T30, T40
■	7702-25	
○	753-63	
	276B-35	



Bit Set

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted

1032CQ

Plastic case size (mm) :
120 x 70 x 42 (0.012 cuft)



32 PC.

Contents		0.30	1 / 20
1025S	3.0, 4.0, 5.0, 6.0		
1025P	PH1, PH2 x 2, PH3		
1025Z	PZ1, PZ2 x 2, PZ3		
1025T	T10, T15, T20, T25, T27, T30, T40		
1025H	H3, H4, H5, H6		
1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H		
7702-25			
753-63			

1032CQ01

Plastic case size (mm) :
120 x 70 x 42 (0.012 cuft)



33 PC.

Contents		0.30	1 / 20
1025S	3.0, 4.0, 5.0, 6.0		
1025P	PH1, PH2 x 2, PH3		
1025Z	PZ1, PZ2 x 2, PZ3		
1025T	T10, T15, T20, T25, T27, T30, T40		
1025H	H3, H4, H5, H6		
1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H		
1025R	RB2		
7702-25			
753-63			

Bit Set

KT NO.	PC.	Contents		g	
102502P-S1	25	1025P	PH2 x 25 PC.	161	12 / 72
102502Z-S1	25	1025Z	PZ2 x 25 PC.	161	12 / 72
102510T-S1	25	1025T	T10 x 25 PC.	136	12 / 72
102515T-S1	25	1025T	T15 x 25 PC.	140	12 / 72
102520T-S1	25	1025T	T20 x 25 PC.	142	12 / 72
102525T-S1	25	1025T	T25 x 25 PC.	144	12 / 72
102530T-S1	25	1025T	T30 x 25 PC.	146	12 / 72



Power Driving

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, phosphate sunk
- Magnetic **1/4"** Hex size shank driver



order unit : one blister card

7100P

- Short neck (9.5 mm) type
- DIN ISO 2351-2



KT NO.	No.	Overall length (mm)	g	
715000P	PH0	50	8	
715001P	PH1	50	9	
715002P	PH2	50	11	
715003P	PH3	50	11	
715004P	PH4	50	14	10 / 150
716502P	PH2	65	15	
717001P	PH1	70	16	
717002P	PH2	70	17	
717003P	PH3	70	17	
719001P	PH1	90	18	
719002P	PH2	90	20	
719003P	PH3	90	20	
711002P	PH2	100	24	10 / 120
711501P	PH1	150	23	
711502P	PH2	150	33	
711503P	PH3	150	33	

7100H

- DIN ISO 2351-3



KT NO.	mm / inch	Overall length (mm)	g	
715002H	H2	50	6	
715025H	H2.5	50	6	
715003H	H3	50	6	
715004H	H4	50	9	
715005H	H5	50	10	
715006H	H6	50	11	
715007H	H7	50	13	
715008H	H8	50	17	
715012SH	3/16	50	20	10 / 150
715014SH	7/32	50	22	
717002H	H2	70	8	
717025H	H2.5	70	8	
717003H	H3	70	9	
717004H	H4	70	13	
717005H	H5	70	15	
717006H	H6	70	18	
717007H	H7	70	21	
717008H	H8	70	25	
711102H	H2	110	11	
711125H	H2.5	110	11	
711103H	H3	110	14	
711104H	H4	110	18	
711105H	H5	110	24	10 / 120
711106H	H6	110	29	
711107H	H7	110	34	
711108H	H8	110	42	
711110H	H10	110	62	8 / 80
711502H	H2	150	16	
711503H	H3	150	18	
711504H	H4	150	25	
711505H	H5	150	34	10 / 120
711506H	H6	150	40	
711507H	H7	150	47	
711508H	H8	150	59	

7150S

- DIN ISO 2351-1



KT NO.	Tip width (mm)	Tip thickness (mm)	Overall length (mm)	g	
715003S1	3.0	0.5	50	6	
715035S1	3.5	0.5	50	6	
715004S2	4.0	0.5	50	7	
715004S1	4.0	0.8	50	7	
715045S1	4.5	0.6	50	7	10 / 150
715005S1	5.0	0.8	50	8	
715055S1	5.5	0.8	50	8	
715006S1	6.0	1.0	50	8	
715065S1	6.5	1.2	50	9	

7100T

- For torx head screw



KT NO.	Size	Overall length (mm)	g	
715006T	T6	50	5	
715007T	T7	50	5	
715008T	T8	50	5	
715009T	T9	50	5	
715010T	T10	50	6	
715015T	T15	50	6	
715020T	T20	50	7	
715025T	T25	50	8	
715027T	T27	50	9	
715030T	T30	50	9	
715040T	T40	50	10	
715050T	T50	50	15	10 / 150
717006T	T6	70	7	
717007T	T7	70	7	
717008T	T8	70	7	
717009T	T9	70	7	
717010T	T10	70	8	
717015T	T15	70	8	
717020T	T20	70	10	
717025T	T25	70	11	
717027T	T27	70	14	
717030T	T30	70	14	
717040T	T40	70	15	
711110T	T10	110	14	
711115T	T15	110	14	
711120T	T20	110	18	
711125T	T25	110	19	
711127T	T27	110	24	
711130T	T30	110	24	
711140T	T40	110	28	
711506T	T6	150	16	
711507T	T7	150	16	10 / 120
711508T	T8	150	16	
711509T	T9	150	16	
711510T	T10	150	17	
711515T	T15	150	18	
711520T	T20	150	24	
711525T	T25	150	24	
711527T	T27	150	32	
711530T	T30	150	33	
711540T	T40	150	39	

Power Driving

7100Z

- DIN ISO 2351-2



KT NO.	No.	Overall length (mm)	g	
715001Z	PZ1	50	9	
715002Z	PZ2	50	11	
715003Z	PZ3	50	12	10 / 150
717001Z	PZ1	70	11	
717002Z	PZ2	70	15	
717003Z	PZ3	70	15	
719001Z	PZ1	90	13	
719002Z	PZ2	90	19	10 / 120
719003Z	PZ3	90	19	

7100U

- For torx head screw
- Tamper-resistant type



KT NO.	Size	Overall length (mm)	g	
715009U	T9H	50	5	
715010U	T10H	50	7	
715015U	T15H	50	7	
715020U	T20H	50	7	
715025U	T25H	50	8	
715027U	T27H	50	9	
715030U	T30H	50	9	
715040U	T40H	50	11	10 / 150
717010U	T10H	70	8	
717015U	T15H	70	8	
717020U	T20H	70	10	
717025U	T25H	70	11	
717027U	T27H	70	13	
717030U	T30H	70	13	
717040U	T40H	70	15	
711110U	T10H	110	14	
711115U	T15H	110	14	
711120U	T20H	110	18	
711125U	T25H	110	19	10 / 120
711127U	T27H	110	24	
711130U	T30H	110	24	
711140U	T40H	110	28	

7100R



KT NO.	Size	Overall length (mm)	g	
715000R	RB0	50	7	
715001R	RB1	50	8	
715002R	RB2	50	8	
715003R	RB3	50	8	10 / 150
717000R	RB0	70	9	
717001R	RB1	70	11	
717002R	RB2	70	13	
717003R	RB3	70	13	

2128PR

- torx head tamper-resistant & L-type holder set



8 PC.

Contents

Kg 0.17 | 10 / 60

7170U	T10H, T15H, T20H, T25H, T27H, T30H, T40H
158902ERA	

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, phosphate sunk
- Magnetic

1/4" Hex size shank driver



order unit : one blister card

2138PR

- Hexagon head power bits & L-type holder set



8 PC.

Contents

Kg 0.24 | 10 / 60

7150H	H2, H3, H4, H5, H6, H7, H8
158902ERA	

7400P

- Short head type



KT NO.	No.	Overall length (mm)	g	
745002P	PH2	50	11	10 / 150
747501P	PH1	75	16	10 / 150
747502P	PH2	75	15	10 / 150
747503P	PH3	75	16	10 / 150
741002P	PH2	100	23	10 / 120
741502P	PH2	150	37	10 / 100
742002P	PH2	200	50	10 / 100
743002P	PH2	300	70	10 / 40
743003P	PH3	300	77	10 / 40

7300P

- Long head type



KT NO.	No.	Overall length (mm)	g	
734501P	PH1	45	9	
734502P	PH2	45	9	
734503P	PH3	45	10	10 / 150
736501P	PH1	65	14	
736502P	PH2	65	14	
736503P	PH3	65	14	
731101P	PH1	110	26	
731102P	PH2	110	26	
731103P	PH3	110	26	10 / 120
731502P	PH2	150	32	
731503P	PH3	150	33	



5mm Hex size shank driver order unit : one box

Insert Size: The suggested size is according to the depth of bit holder which a bit is inserted.

7200P

- Long head typed



KT NO.	No.	Overall length (mm)	g	
726502P	PH2	65	8	
727502P	PH2	75	10	10 / 100
721102P	PH2	110	14	

Power Driving

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, phosphate sunk
- Magnetic
- 2 PC. bits set

1/4" Hex size shank driver

order unit : one blister card



7100P-S1

- Short neck (9.5 mm) type
- DIN ISO 2351-2



KT NO.	No.	Overall length (mm)	g	set
715000P-S1	PH0	50	16	
715001P-S1	PH1	50	18	
715002P-S1	PH2	50	22	
715003P-S1	PH3	50	22	
715004P-S1	PH4	50	28	
716502P-S1	PH2	65	30	
717001P-S1	PH1	70	32	
717002P-S1	PH2	70	34	
717003P-S1	PH3	70	34	1 / 20
719001P-S1	PH1	90	36	
719002P-S1	PH2	90	40	
719003P-S1	PH3	90	40	
711002P-S1	PH2	100	48	
711501P-S1	PH1	150	46	
711502P-S1	PH2	150	66	
711503P-S1	PH3	150	66	

7100H-S1

- DIN ISO 2351-3



KT NO.	mm / inch	Overall length (mm)	g	set
715002H-S1	H2	50	12	
715025H-S1	H2.5	50	12	
715003H-S1	H3	50	12	
715004H-S1	H4	50	18	
715005H-S1	H5	50	20	
715006H-S1	H6	50	22	
715007H-S1	H7	50	26	
715008H-S1	H8	50	34	
715012SH-S1	3/16	50	20	
715014SH-S1	7/32	50	22	
717005H-S1	H5	70	30	1 / 20
717006H-S1	H6	70	36	
711102H-S1	H2	110	22	
711125H-S1	H2.5	110	22	
711103H-S1	H3	110	28	
711104H-S1	H4	110	36	
711105H-S1	H5	110	48	
711106H-S1	H6	110	58	
711107H-S1	H7	110	68	
711505H-S1	H5	150	68	
711507H-S1	H7	150	94	
711512SH-S1	3/16	150	68	

7150S-S1

- DIN ISO 2351-1



KT NO.	Tip width (mm)	Tip thickness (mm)	Overall length (mm)	g	set
715003S1-S1	3.0	0.5	50	12	
715035S1-S1	3.5	0.5	50	12	
715004S2-S1	4.0	0.5	50	14	
715004S1-S1	4.0	0.8	50	14	
715045S1-S1	4.5	0.6	50	14	1 / 20
715005S1-S1	5.0	0.8	50	16	
715055S1-S1	5.5	0.8	50	16	
715006S1-S1	6.0	1.0	50	16	
715065S1-S1	6.5	1.2	50	18	

7100T-S1

- For torx head screw



KT NO.	Size	Overall length (mm)	g	set
715006T-S1	T6	50	10	
715007T-S1	T7	50	10	
715008T-S1	T8	50	10	
715009T-S1	T9	50	10	
715010T-S1	T10	50	12	
715015T-S1	T15	50	12	
715020T-S1	T20	50	14	
715025T-S1	T25	50	16	
715027T-S1	T27	50	18	
715030T-S1	T30	50	18	
715040T-S1	T40	50	20	
715050T-S1	T50	50	30	
717006T-S1	T6	70	14	
717007T-S1	T7	70	14	
717008T-S1	T8	70	14	
717009T-S1	T9	70	14	
717010T-S1	T10	70	14	
717015T-S1	T15	70	16	
717020T-S1	T20	70	16	
717025T-S1	T25	70	20	
717027T-S1	T27	70	22	1 / 20
717030T-S1	T30	70	28	
717040T-S1	T40	70	28	
711110T-S1	T10	110	30	
711115T-S1	T15	110	28	
711120T-S1	T20	110	28	
711125T-S1	T25	110	36	
711127T-S1	T27	110	38	
711130T-S1	T30	110	48	
711140T-S1	T40	110	48	
711506T-S1	T6	150	56	
711507T-S1	T7	150	32	
711508T-S1	T8	150	32	
711509T-S1	T9	150	32	
711510T-S1	T10	150	34	
711515T-S1	T15	150	36	
711520T-S1	T20	150	48	
711525T-S1	T25	150	48	
711527T-S1	T27	150	64	
711530T-S1	T30	150	66	
711540T-S1	T40	150	78	

Power Driving

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, phosphate sunk
- Magnetic
- 2 PC. bits set

1/4" Hex size shank driver
order unit : one blister card



7100Z-S1

- DIN ISO 2351-2



KT NO.	No.	Overall length (mm)	g	set
715001Z-S1	PZ1	50	18	1 / 20
715002Z-S1	PZ2	50	22	
715003Z-S1	PZ3	50	24	
717001Z-S1	PZ1	70	22	
717002Z-S1	PZ2	70	30	
717003Z-S1	PZ3	70	30	
719001Z-S1	PZ1	90	26	
719002Z-S1	PZ2	90	38	
719003Z-S1	PZ3	90	38	

7100U-S1

- For torx head screw
- Tamper-resistant type



KT NO.	Size	Overall length (mm)	g	set
715009U-S1	T9H	50	10	1 / 20
715010U-S1	T10H	50	14	
715015U-S1	T15H	50	14	
715020U-S1	T20H	50	14	
715025U-S1	T25H	50	16	
715027U-S1	T27H	50	18	
715030U-S1	T30H	50	18	
715040U-S1	T40H	50	22	
717010U-S1	T10H	70	16	
717015U-S1	T15H	70	16	
717020U-S1	T20H	70	20	
717025U-S1	T25H	70	22	
717027U-S1	T27H	70	26	
717030U-S1	T30H	70	26	
717040U-S1	T40H	70	30	
711110U-S1	T10H	110	28	
711115U-S1	T15H	110	28	
711120U-S1	T20H	110	36	
711125U-S1	T25H	110	38	
711127U-S1	T27H	110	48	
711130U-S1	T30H	110	48	
711140U-S1	T40H	110	56	

7100R-S1



KT NO.	Size	Overall length (mm)	g	set
715000R-S1	RB0	50	14	1 / 20
715001R-S1	RB1	50	16	
715002R-S1	RB2	50	16	
715003R-S1	RB3	50	16	
717000R-S1	RB0	70	18	
717001R-S1	RB1	70	22	
717002R-S1	RB2	70	26	
717003R-S1	RB3	70	26	

7400P-S1

- Short head type



KT NO.	No.	Overall length (mm)	g	set
745002P-S1	PH2	50	22	1 / 20
747501P-S1	PH1	75	32	
747502P-S1	PH2	75	30	
747503P-S1	PH3	75	32	
741002P-S1	PH2	100	46	
741502P-S1	PH2	150	74	

7300P-S1

- Long head type



KT NO.	No.	Overall length (mm)	g	set
734501P-S1	PH1	45	18	1 / 20
734502P-S1	PH2	45	18	
734503P-S1	PH3	45	20	
736501P-S1	PH1	65	28	
736502P-S1	PH2	65	28	
736503P-S1	PH3	65	28	
731101P-S1	PH1	110	52	
731102P-S1	PH2	110	52	
731103P-S1	PH3	110	52	
731502P-S1	PH2	150	64	
731503P-S1	PH3	150	66	

Insert Size: The suggested size is according to the depth of bit holder which a bit is inserted.

5mm Hex size shank driver order unit : one box



7200P-S1

- Long head typed



KT NO.	No.	Overall length (mm)	g	set
726502P-S1	PH2	65	16	1 / 20
727502P-S1	PH2	75	20	
721102P-S1	PH2	110	28	

Power Driving

- Silicon chrome vanadium alloy steel (S2)
- Nickel plated
- Magnetic

1/4" Hex size shank driver



order unit : one box

1300P

- Long head type



KT NO.	No.	Overall length (mm)	g	
134501P	PH1	45	8	10 / 300
134502P	PH2	45	9	10 / 300
134503P	PH3	45	9	10 / 300
136501P	PH1	65	14	10 / 200
136502P	PH2	65	14	10 / 200
136503P	PH3	65	14	10 / 200
131101P	PH1	110	26	10 / 150
131102P	PH2	110	26	10 / 150
131103P	PH3	110	26	10 / 150
131501P	PH1	150	36	10 / 100
131502P	PH2	150	36	10 / 100
131503P	PH3	150	37	10 / 100

1500P

- Short head type



KT NO.	No.	Overall length (mm)	g	
155001P	PH1	50	10	10 / 300
155002P	PH2	50	10	10 / 300
155003P	PH3	50	10	10 / 300
157501P	PH1	75	16	10 / 200
157502P	PH2	75	16	10 / 200
157503P	PH3	75	17	10 / 200
151001P	PH1	100	23	10 / 150
151002P	PH2	100	23	10 / 150
151003P	PH3	100	23	10 / 150
151501P	PH1	150	36	10 / 100
151502P	PH2	150	37	10 / 100
151503P	PH3	150	37	10 / 100

7300P

- Long head type



KT NO.	No.	Tip width (mm)	Tip thickness (mm)	Overall length (mm)	g	
734551P	PH1	5.0	0.8	45	8	10 / 300
734552P	PH2	5.0	0.8	45	8	10 / 300
736552P	PH2	5.0	0.8	65	13	10 / 200
731152P	PH2	5.0	0.8	110	25	10 / 150
731552P	PH2	5.0	0.8	150	36	10 / 100

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, phosphate sunk
- Magnetic

1/4" Hex size shank driver



order unit : one box

13A6502P

- Long head type
- For ironwork screws



KT NO.	No.	Overall length (mm)	g	
13A6502P	PH2	65	8	10 / 100

13B6502P

- Long head type
- For woodwork screws



KT NO.	No.	Overall length (mm)	g	
13B6502P	PH2	65	8	10 / 100

- Chrome vanadium & stainless alloy steel
- Anti-rust oiled , sand-blasted
- Magnetic

1/4" Hex size shank driver



750

- Magnetic bit holder
- 750-50A : with spring clip
- DIN 7427

750-50A



KT NO.	inch	Overall length (mm)	g	
750-60	1/4	60	20	6 / 84
750-50A	1/4	50	22	6 / 84

KT NO.	inch	Overall length (mm)	g	
750-75	1/4	75	30	1 / 20
750-100	1/4	100	37	1 / 20
750-150	1/4	150	50	1 / 20

751

- Magnetic bit holder
- With spring clip
- DIN 7427



KT NO.	inch	Overall length (mm)	g	
751-60	1/4	60	24	6 / 84
751-75	1/4	75	36	6 / 84

Power Driving

- Chrome vanadium & stainless alloy steel
- Anti-rust oiled , sand-blasted
- Magnetic

1/4" Hex size shank driver

752

- Magnetic bit holder
- With quick-release sleeve
- DIN 7427



KT NO.	inch	Overall length (mm)	g	
752-60	1/4	63	33	6 / 72
752-75	1/4	75	32	1 / 12
752-100	1/4	100	38	1 / 12
752-150	1/4	150	52	1 / 12
752-300	1/4	300	92	1 / 12

754

- Universal joint bit holder
- 20 degree pivot mode allows for limited space accessibility
- Can be used in straight or pivot mode





KT NO.	inch	Overall Length (mm)	g	
754-90	1/4	90	52	1 / 12

753

- 753-63
  -Magnetic bit holder
  -With quick-release sleeve
  -For 1025 bit
  -DIN 7427



KT NO.	inch	Overall length (mm)	g	
753-63	1/4	63	33	6 / 72

755

- Quick release flexible bit holder
- Flexible shaft driver
- The flex shaft accepts any standard hex fitting
- Quick release fits double end power bits and 50mm power bits



KT NO.	inch	Overall length (mm)	g	
755-300	1/4	300	293	1 / 12
755-400	1/4	400	385	1 / 8


Angle Driver

- The body is zin alloy steel
- The arm is chrome vanadium alloy steel
- The chuck is aluminum alloy steel
- Magnetic

1/4" Hex size shank driver

759

- Heavy duty right angle bit holder
- This heavy duty 90 degree offset driver with 24 position gripped stabilizer arm is designed for use with power drivers 18-24 Volts
- Its head is shorter than 2.5" which is suitable to use in limited space
- Locking magnetic chuck accepts any 1/4" hex drive accessory such as twist drills, spade drills, step drills, grinding stones, buffer pads, nut drivers and screwdriver bits
- Durable all metal housing and steel gears with ball bearing construction
- Gripped stabilizer arm with 1 screwdriver bit storage
- It's amazing capacity for up to 500 inch lbs with 2000 RPM

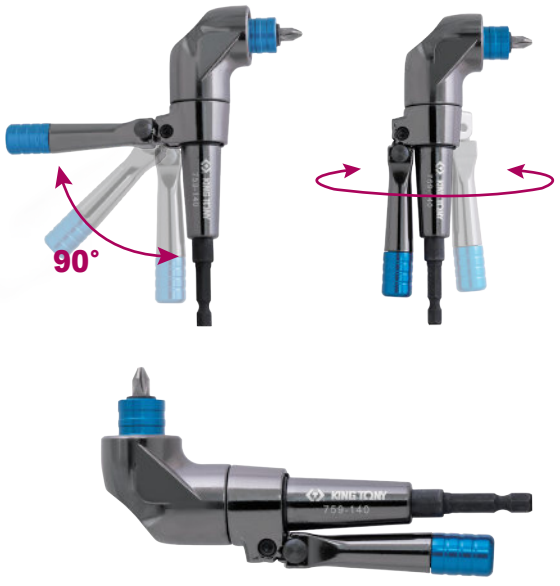

KT NO.	inch	Overall length (mm)	g	
759-140	1/4	140	305	12 / 48

Power Driving

- Chrome vanadium alloy steel
- Anti-rust oiled , sand-blasted


1/4" Hex size shank driver



75A1

- Threaded rod socket
- Fastest tool available to tighten or loosen threaded rods
- Automatic locking cams
- Will not damage the threads when used properly







KT NO.	Size mm	Size inch	D mm	L mm	Capacity Ø mm	g	
75A105M	5	3/16	22	66	4.6~5.0	60	10 / 72
75A106M	6	1/4	24	66	5.6~6.35	75	10 / 80
75A108M	8	5/16	24	66	7.6~8.0	74	10 / 80
75A110M	10	3/8	28	66	9.0~10.0	99	10 / 107
75A112M	12	1/2	28	66	11.4~12.7	98	10 / 103
75A114M	14	9/16	32	66	13.2~14.3	126	10 / 127
75A116M	16	5/8	32	66	15.2~16.0	125	10 / 125

760M

760S

- Nut setter
- Non magnetic type
- DIN 3126





KT NO.	mm	ℓ mm	Overall length (mm)	g	
7605512M	12	7.0	55	55	6 / 72
7606512M	12	6.8	65	50	6 / 72
7607510M	10	6.0	75	38	6 / 72


KT NO.	mm	ℓ mm	Overall length (mm)	g	
7601012M	12	7.5	100	61	1 / 25
7601013M	13	7.0	100	70	1 / 25

KT NO.	inch	ℓ mm	Overall length (mm)	g	
7606508S	1/4	4.8	65	20	6 / 84
7606510S	5/16	6.6	65	30	6 / 84
7606512S	3/8	6.8	65	36	6 / 72

761M

761S

- Nut setter
- Magnetic type
- DIN 3126





KT NO.	mm	ℓ mm	Overall length (mm)	g	
7616505M	5	2.3	65	27	6 / 84
7616506M	6	2.6	65	26	6 / 84
7616507M	7	2.9	65	25	6 / 84
7616508M	8	3.5	65	30	6 / 84
7616510M	10	4.5	65	37	6 / 72
7616512M	12	5.6	65	52	6 / 72
7616513M	13	6.0	65	54	6 / 72
7616514M	14	6.5	65	52	6 / 20

KT NO.	mm	ℓ mm	Overall length (mm)	g	
7611006M	6	2.6	100	38	1 / 25
7611008M	8	3.5	100	48	1 / 25
7611010M	10	4.5	100	54	1 / 25
7611012M	12	5.6	100	68	1 / 25
7611013M	13	6.0	100	71	1 / 25
7611014M	14	6.5	100	77	1 / 25
7611506M	6	2.6	150	58	1 / 25
7611507M	7	2.9	150	65	1 / 25
7611508M	8	3.5	150	67	1 / 25
7611510M	10	4.5	150	68	1 / 25
7611512M	12	5.6	150	103	1 / 25
7611513M	13	6.0	150	110	1 / 25
7611514M	14	6.5	150	115	1 / 25
7612006M	6	2.6	200	78	1 / 20
7612008M	8	3.5	200	93	1 / 20
7612010M	10	4.5	200	89	1 / 20
7612012M	12	5.6	200	128	1 / 20
7612014M	14	6.5	200	128	1 / 20

KT NO.	inch	ℓ mm	Overall length (mm)	g	
7614208S	1/4	2.7	42	15	6 / 84
7614210S	5/16	3.7	42	17	6 / 84
7614512S	3/8	4.7	45	22	6 / 84
7616508S	1/4	4.8	65	30	6 / 84
7616510S	5/16	6.6	65	31	6 / 84
7616512S	3/8	6.8	65	37	6 / 72
7616514S	7/16	6.8	65	39	6 / 72

Power Driving


- Chrome vanadium alloy steel
- Anti-rust oiled , sand-blasted

1/4" & 3/8" & 1/2"
Hex size shank driver



76B


- Deep well nut setter
- Deep hole for bolt & nut
- Press-fitted high-durability shank
- Use for tightening step clamp in construction

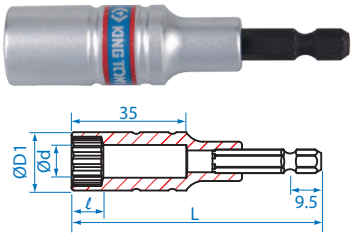

KT NO.	mm	D1 mm	ℓ mm	d mm	L mm	g	
76B808M	8	13	6	6	80	41	15 / 300
76B809M	9	13	6	7	80	40	15 / 300
76B812M	12	17	8	9	80	57	12 / 240
76B813M	13	18	9	10	80	62	12 / 240
76B814M	14	20	9	12	80	70	12 / 240
76B815M	15	21	10	12	80	77	12 / 240
76B816M	16	22	10	14	80	76	12 / 240
76B819M	19	26	13	15	80	112	10 / 120
76B821M	21	28	13	19	80	113	10 / 120

76C

- 110mm length easy to reach at confined spaces
- Extra depth dimension 63mm perfectly go through various bolts
- Press-fit structure with durability socket suitable for 18V power tools
- Ideal for construction assembling, scaffolding and roof work

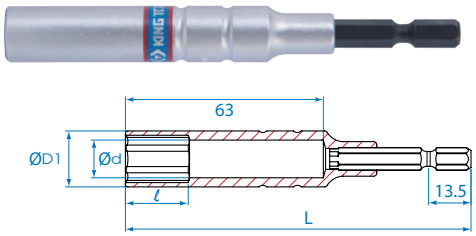

KT NO.	mm	D1 mm	ℓ mm	d mm	L mm	g	
76C1108M	8	14.0	12	7	110	71	12 / 216
76C1109M	9	14.0	14	8	110	64	12 / 216
76C1110M	10	15.0	15	9	110	67	12 / 216
76C1111M	11	17.0	17	10	110	84	10 / 180
76C1112M	12	17.0	18	11	110	74	10 / 180
76C1113M	13	18.0	20	12	110	79	10 / 180
76C1114M	14	20.0	21	13	110	99	10 / 180
76C1117M	17	24.0	26	16	110	139	10 / 180
76C1119M	19	26.0	29	18	110	158	10 / 180
76C1121M	21	28.0	30	20	110	161	8 / 144
76C1123M	23	29.8	30	22	110	200	8 / 96
76C1124M	24	32.0	30	23	110	216	8 / 96

Impact Construction Socket Set

1010CMR

Plastic case size (mm) :
257 x200 x 52 (0.095 cuft)




10 PC.

Contents	Kg 1.66	1 / 8
76C	8, 10, 12, 13, 14, 17, 19, 21, 23, 24	

770


- Socket adapter
- Ball retainer type
- DIN 7428



KT NO.	Size	Overall length (mm)	g	
7702-25	1/4"	25	6	20 / 200
7702-50	1/4"	50	13	10 / 100
7702-75	1/4"	75	23	10 / 100
7703-50	3/8"	50	23	6 / 84
7704-50	1/2"	50	24	6 / 72

774


- Bit adapter
- Wobble function provides up to 15° accessibility

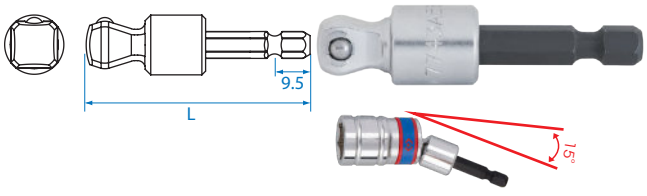

KT NO.	Size	L mm	g	
7743-56	3/8"	56	30	6 / 72
7744-60	1/2"	60	42	6 / 72



Power Bit Pocket Case

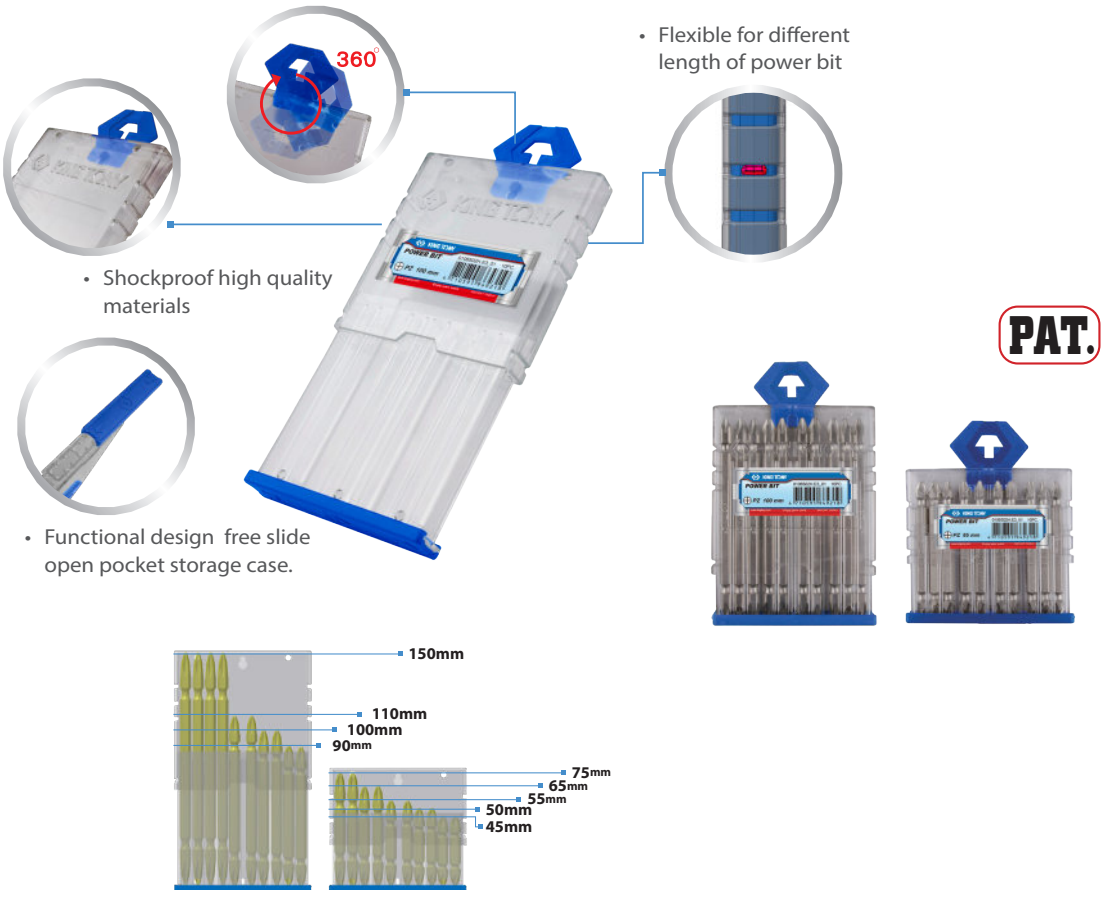

Spot Weld Drill Bit

7E511

- Material : HSS M35
- Special drill bit for removal of spot welds effectively
- Two cutting edge

KT NO.	Diameter mm	Length mm	g	
7E51180-60	8	60	32	100 / 600
7E51180-80	8	80	35	100 / 600



Titanium Coated HSS Drill Bit Set

11101SQ 1/4"

- Titanium coated HSS drill set with standard 1/4" hex shank that will fit cordless screwdrivers, hand drills and impact drivers etc. or use in standard drill chuck
- Suitable for use with steel, wood, plastic etc
- Titanium nitride drill bits run cooler, drill smoother and last longer than standard bits
- High speed steel
- 120 deg. tips
- 1/4" hex shank for fast changes

Ø mm	Overall length mm
1.5	62
2	69
2.5	77
3	82
3.2	85
3.5	90
4	95
4.5	100
4.8	105
5	106



10 PC.

Power Driving Set

1035MR — 1/4"

Plastic case size (mm) : 150 x 103 x 46 (0.025 cuft)

Contents		0.62 kg / 1 / 32
1025S		3.0 x 0.5, 4.0 x 0.5, 5.0 x 0.8, 6.0 x 1.0
1025P		PH1 x 2, PH2 x 2 ø6mm, PH2 ø4.7mm, PH3
1025T		T15, T20 x 2, T25 x 2, T30 x 2, T40
1025H		H3, H4, H5, H6
1025Z		PZ2 x 2
7E111		2.5, 3.0, 3.5, 4.0, 5.0
754-90		1/4"
7400P		PH2
761M x 65L		8, 10, 13
752-60		1/4"



35 PC.

1036MR — 1/4"

Plastic case size (mm) : 150 x 103 x 46 (0.025 cuft)

Contents		0.59 kg / 1 / 32
1025S		3.0 x 0.5, 4.0 x 0.5, 5.0 x 0.8, 6.0 x 1.0
1025P		PH1 x 2, PH2 x 2 ø6mm, PH2 ø4.7mm, PH3
1025T		T15, T20 x 2, T25 x 2, T30 x 2, T40
1025H		H3, H4, H5, H6
1025Z		PZ2 x 2
7150T		T20, T25, T30
7150Z		PZ2 x 2
7150S		5.5 x 0.8
7450P		PH2 x 2
761M x 65L		8, 10, 13
753-63		1/4"



36 PC.

1044MR — 1/4"

Plastic case size (mm) : 150 x 103 x 46 (0.025 cuft)

Contents		0.63 kg / 1 / 32
1025S		3.0 x 0.5, 4.0 x 0.5, 5.0 x 0.8, 6.0 x 1.0
1025P		PH1 x 2, PH2 x 2 ø6mm, PH2 ø4.7mm, PH3
1025T		T10, T15, T20 x 2, T25, T27, T30, T40
1025H		H3, H4, H5, H6
1025U		T10H, T15H, T20H x 2, T25H, T27H, T30H, T40H
1025Z		PZ2 x 2
7170T		T15, T20, T25,
7170P		PH2 x 2
7170Z		PZ2
7150S		4.0 x 0.8, 6.0 x 1.0
761M x 65L		6, 8, 10
753-63		1/4"



44 PC.

Power Driving Set

1045MR 1/4"

Plastic case size (mm) : 150 x 103 x 46 (0.025 cuft)

Contents		0.64 / 1 / 32
1025S		4.0 x 0.5, 5.5 x 0.8, 6.5 x 1.2
1025P		PH2 x 2 ø4.7mm
1025T		T10, T15, T20, T25, T27, T30, T35, T40
1025H		H2, H3, H4, H5, H6
1025U		T10H, T15H, T20H x 2, T25H, T27H, T30H, T40H
1025Z		PZ1, PZ2, PZ3
1025R		RB1, RB2, RB3
1550P		PH1, PH2 x 2, PH3
7150P		PH2
7E111		3, 4, 5
761M x 65L		8, 10, 13
750-50A		1/4"
7702-50		1/4" DR.



45 PC.

1049CQ 1/4"

Plastic case size (mm) : 150 x 103 x 46 (0.025 cuft)

Contents		0.51 / 1 / 32
1025P		PH1 x 2, PH2 x 2 ø6mm, PH2 x 2 ø4.7mm, PH3 x 2
1025S		4.0 x 0.5 x 2, 5.5 x 0.8 x 2, 6.5 x 1.2 x 2
1025H		H2, H2.5, H3, H4, H5, H6, H7, H8
1025Z		PZ1 x 2, PZ2 x 2, PZ3 x 2
1025U		T9H, T10H, T15H, T20H, T25H, T27H, T30H, T40H
1025T		T9, T10, T15, T20, T25, T27, T30,T40
1025R		RB1, RB2,
2141		1/4" DR. x 1/4"H
750-50A		1/4"
7702-25		1/4" DR.



49 PC.


Power Driving Set



1045MR01-EB

Contents		0.97	1 / 12
	1025S	4.0 x 0.5, 5.5 x 0.8, 6.5 x 1.2	
	1025P	PH2 x 2 ø4.7mm	
	1025T	T10, T15, T20, T25, T27, T30, T35, T40	
	1025H	H2, H3, H4, H5, H6	
	1025U	T10H, T15H, T20H x 2, T25H, T27H, T30H, T40H	
	1025Z	PZ1, PZ2, PZ3	
	1025R	RB1, RB2, RB3	
	1550P	PH1, PH2 x 2, PH3	
	7150P	PH2	
	7E111	3, 4, 5	
	761M x 65L	8, 10, 13	
	750-50A	1/4"	
	7702-50	1/4"	
	759-140		

45 PC.







2547MR-EB

Contents		1.0	1 / 12
	2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	
	2375M	E4, E5, E6, E7, E8, E10	
	2031	PH1, PH2, PH3	
	2032	3.5, 4, 5.5, 6.5, 8	
	2033	T8, T9, T10, T15, T20, T25, T27, T30, T40	
	2035	H3, H4, H5, H6, H8	
	2038	PZ1, PZ2	
	2813	1/4"F x 3/8"M	
	7702-50	1/4" DR.	
	7703-50	3/8" DR.	
	7704-50	1/2" DR.	

47 PC.








Power Driving Set

1041CQ-EB



Contents		2.1	1 / 12
1636M	M5, M6, M8, M9, M10, M12, M14		
1636U	T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H, T50H, T55H, T60H		
1636H	H5, H6, H8, H10		
1680M	M5, M6, M8, M9, M10, M12, M14		
1680U	T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H, T50H, T55H, T60H		
414810M			







41 PC.



Hex Key & Set

KT No. & D1



- Material - SNCM - V alloy steel
- Finishing - chrome plated

1145MR

- Standard arm type
- Allen head
- DIN ISO 2936



KT NO.	mm	mm	mm	g	
114515MR	H1.5	16	47	1	20 / 400
114502MR	H2	18	52	1	20 / 400
114525MR	H2.5	21	59	3	20 / 400
114503MR	H3	24	66	5	20 / 400
114504MR	H4	30	74	10	20 / 400
114505MR	H5	33	85	18	20 / 400
114555MR	H5.5	36	91	23	10 / 200
114506MR	H6	38	97	29	10 / 200
114507MR	H7	41	102	43	10 / 200
114508MR	H8	44	108	58	10 / 200
114510MR	H10	50	122	101	10 / 200

1145SR



KT NO.	inch	mm	mm	g	
114502SR	1/16	18	49	1	20 / 400
114525SR	5/64	20	52	1.5	20 / 400
114503SR	3/32	21	56	3	20 / 400
114504SR	1/8	25	63	5	20 / 400
114505SR	5/32	28	70	9	20 / 400
114506SR	3/16	31	77	15	20 / 400
114508SR	1/4	37	91	31	10 / 200
114510SR	5/16	42	106	55	10 / 200
114512SR	3/8	47	120	93	10 / 120
114516SR	1/2	54	146	195	10 / 120
114518SR	9/16	59	160	267	6 / 72
114520SR	5/8	64	175	362	6 / 72
114524SR	3/4	73	203	599	6 / 24

1125MR

- Extra long arm type
- Allen head
- DIN ISO 2936

KT NO.	mm	mm	mm	g	
112515MR	H1.5	16	92	1	20 / 400
112502MR	H2	18	102	3	20 / 400
112525MR	H2.5	21	115	5	20 / 400
112503MR	H3	23	129	9	20 / 480
112504MR	H4	29	144	17	20 / 300
112505MR	H5	33	165	31	20 / 300
112506MR	H6	38	186	51	20 / 400
112507MR	H7	41	197	74	20 / 240
112508MR	H8	44	208	100	10 / 100
112510MR	H10	50	234	176	10 / 100
112512MR	H12	57	262	286	8 / 48
112514MR	H14	70	294	445	8 / 48
112517MR	H17	80	337	770	4 / 32
112519MR	H19	89	380	863	4 / 16
112522MR	H22	102	422	1590	2 / 16

1125SR



KT NO.	inch	mm	mm	g	
112502SR	1/16	16	92	2	20 / 400
112525SR	5/64	18	102	3	20 / 400
112503SR	3/32	21	115	5	20 / 400
112504SR	1/8	23	129	9	20 / 400
112505SR	5/32	29	144	17	20 / 300
112506SR	3/16	33	165	28	20 / 300
112508SR	1/4	38	186	57	10 / 100
112510SR	5/16	44	208	100	10 / 100
112512SR	3/8	50	234	160	10 / 100
112516SR	1/2	57	262	319	8 / 48
112518SR	9/16	70	294	459	8 / 48








KT NO.	PC.	Spec.		Contents	Kg	
20218MR	8	Knife type		H2, H2.5, H3, H4, H5, H6, H8, H10	0.29	12 / 72
20219MR	9	Standard arm	1145MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	0.33	6 / 48
20219SR	9		1145SR	1/16, 5/64, 3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8	0.33	6 / 48
20208MR	8	Extra long arm	1125MR	H2, H2.5, H3, H4, H5, H6, H8, H10	0.43	8 / 48
20209MR	9		1125MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	0.49	8 / 48
20209SR02	9		1125SR	1/16, 5/64, 3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8	0.47	8 / 48

Hex Key Set

20208MR01 | 20208SR01



8 PC.

KT NO.	Spec.	Contents	1.25 kg / 1 / 20
20208MR01	Extra long arm	1125MR	H3, H4, H5, H6, H8, H10, H12, H14
20208SR01		1125SR	1/8, 5/32, 3/16, 1/4, 5/16, 3/8, 1/2, 9/16

20210MR

Metal case size (mm) :
372 x 153 x 40 (0.08 cuft)




10 PC.

Spec.	Contents	3.03 kg / 1 / 6
Extra long arm	1125MR	H3, H4, H5, H6, H7, H8, H10, H12, H14, H17


L- wrench Set With Display Stnad

2020H0MR

- 5mm durable acrylic sheets to increase structural strength
- Transparent design for demonstrating product feature
- Great capacity, suitable for multi-size
- Size : 220 x 260 x 270mm



KT NO. 87125

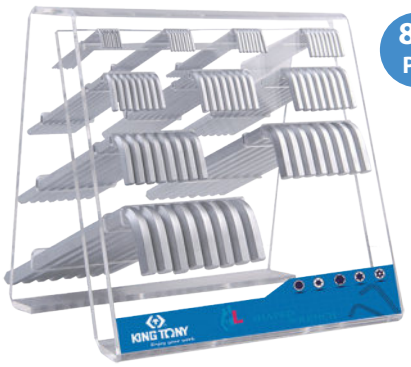

80 PC.

Spec.	Contents	7.68 kg / 1 / 4	Each Q'ty
Extra long arm	1125MR	H2, H2.5, H3, H4, H5, H6, H7, H8, H10, H12	8

Spline L- wrench & Set

1146MR

- Standard arm type
- For spline head screw



KT NO.	Size	mm	mm	g	
114605MR	M5	29	83	15	20 / 320
114606MR	M6	33	90	24	20 / 320
114608MR	M8	39	98	47	10 / 300
114610MR	M10	44	111	82	10 / 200
114612MR	M12	53	126	127	10 / 180

1126MR

- Extra long arm type



KT NO.	Size	mm	mm	g	
112605MR	M5	33	165	29	20 / 300
112606MR	M6	38	186	47	20 / 300
112608MR	M8	44	208	91	10 / 100
112610MR	M10	50	234	160	10 / 100
112612MR	M12	53	264	239	10 / 80

20505PR01 | 20515PR01

5 PC.



KT NO.	Spec.	Contents		kg	
20505PR01	Standard arm type	1146MR	M5, M6, M8, M10, M12	0.33	6 / 54
20515PR01	Extra long arm type	1126MR	M5, M6, M8, M10, M12	0.63	4 / 32

Ball Hex Key & Set

KT No. & D1


- Material - SNCM - V alloy steel
- Finishing - chrome plated

1130MR

- Long arm with ball point type
- DIN ISO 2936

KT NO.	mm	mm	mm	g	
113015MR	H1.5	16	64	1	20 / 400
113002MR	H2	18	77	2	20 / 400
113025MR	H2.5	21	88	4	20 / 400
113003MR	H3	23	93	7	20 / 400
113004MR	H4	29	104	14	20 / 400
113005MR	H5	33	120	25	20 / 300
113006MR	H6	38	141	41	10 / 160
113008MR	H8	44	158	84	10 / 150
113010MR	H10	50	180	145	10 / 150

1130SR



KT NO.	inch	mm	mm	g	
113002SR	1/16	18	80.0	2	20 / 400
113025SR	5/64	19	85.0	2	20 / 400
113003SR	3/32	21	90.0	4	20 / 400
113004SR	1/8	24	101.0	8	20 / 400
113005SR	5/32	27	111.0	14	20 / 400
113006SR	3/16	30	121.0	24	20 / 300
113007SR	7/32	34	131.0	31	10 / 150
113008SR	1/4	36	142.0	44	10 / 150
113010SR	5/16	42	162.5	78	10 / 150
113012SR	3/8	46	183.0	138	10 / 150

1120MR

- Extra long arm with ball point type
- DIN ISO 2936



KT NO.	mm	mm	mm	g	
112015MR	H1.5	16	92	1	20 / 400
112002MR	H2	18	102	3	20 / 400
112025MR	H2.5	21	115	5	20 / 400
112003MR	H3	23	129	9	20 / 480
112004MR	H4	29	144	17	20 / 300
112005MR	H5	33	165	31	20 / 300
112006MR	H6	38	186	51	20 / 400
112007MR	H7	41	197	73	20 / 400
112008MR	H8	44	208	99	10 / 100
112010MR	H10	50	234	174	10 / 100




20107MR01 20109MR 20119MR01

KT NO.	PC.	Spec.		Contents	Kg	
20107MR01	7	Long arm / ball	1130MR	H2.5, H3, H4, H5, H6, H8, H10	0.37	10 / 60
20107SR	7		1130SR	3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8	0.36	10 / 60
20108MR	8	Extra long arm / ball	1120MR	H2, H2.5, H3, H4, H5, H6, H8, H10	0.43	8 / 48
20109MR	9		1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	0.49	8 / 48
20119MR01	9		1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H7, H8	0.36	6 / 48
20110MR	9	Long arm / ball	1130MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	0.39	6 / 60
20129SR	9		1130SR	1/16, 5/64, 3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8	0.39	6 / 60

9 PC. Color Coded Extra Long Arm Ball End Hex Key Set

20109MW

- Color coded according to size makes it easy to distinguish and allows for faster work
- This professional ball hex key is made of S2 material
- The unique design at the bottom of the ball head has an inclination angle of 25 degrees that allows for easy operation in narrow spaces
- The rack can be opened, and the wrenches are easy to take out
- Easy to identify with the internal engravings





color	mm	L mm
	H1.5	92
	H2	102
	H2.5	115
	H3	129
	H4	144
	H5	165
	H6	186
	H8	208
	H10	234




KT NO.	PC.	Spec.	Contents	Kg	
20109MW	9	Extra long arm / ball	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	0.45	6 / 36

20109MW-S



Paper display stand size(mm) :
238 x 95 x 303 (0.24 CUFT)

Contents		Kg	
 20109MW	x 8 Sets	3.57	1 / 4



Star L- wrench

KT No. & D1

- Material - SNCM - V alloy steel
- Finishing - chrome plated

1143R


- Standard arm type
- For torx head screw



KT NO.	Size	mm	mm	g	
114310R	T10	19	49	3	20 / 400
114315R	T15	20	57	5	20 / 400
114320R	T20	23	62	7	20 / 400
114325R	T25	25	70	10	20 / 400
114327R	T27	29	77	14	20 / 400
114330R	T30	35	86	23	10 / 200
114340R	T40	42	97	37	10 / 200
114345R	T45	47	110	54	10 / 200
114350R	T50	50	124	76	10 / 200

1147R

- Standard arm type
- Tamper-resistant type
- For torx head screw



KT NO.	Size	mm	mm	g	
114710R	T10H	18	50	3	20 / 400
114715R	T15H	20	56	5	20 / 400
114720R	T20H	24	62	7	20 / 400
114725R	T25H	26	68	10	20 / 400
114727R	T27H	30	76	14	20 / 400
114730R	T30H	36	86	23	10 / 200
114740R	T40H	41	97	36	10 / 200
114745R	T45H	46	107	54	10 / 200
114750R	T50H	52	122	75	10 / 200

1123R


- Extra long arm type
- For torx head screw



KT NO.	Size	mm	mm	g	
112310R	T10	18	92	6	20 / 400
112315R	T15	20	103	9	20 / 400
112320R	T20	22	115	12	20 / 400
112325R	T25	25	130	18	20 / 300
112327R	T27	29	146	25	20 / 300
112330R	T30	35	165	40	20 / 300
112340R	T40	40	182	61	10 / 100
112345R	T45	45	202	89	10 / 100
112350R	T50	49	225	126	10 / 100

1127R

- Extra long arm type
- Tamper-resistant type
- For torx head screw

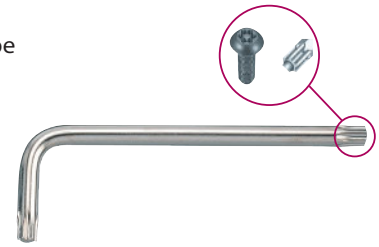

KT NO.	Size	mm	mm	g	
112710R	T10H	18	92	5	20 / 400
112715R	T15H	20	103	8	20 / 400
112720R	T20H	22	115	12	20 / 400
112725R	T25H	25	130	17	20 / 300
112727R	T27H	29	146	25	20 / 300
112730R	T30H	35	165	40	20 / 300
112740R	T40H	40	182	60	10 / 100
112745R	T45H	45	202	89	10 / 100
112750R	T50H	49	225	126	10 / 100



▪ 1123R



▪ 1147R

Extension Pipe


- Material - Extension pipe: iron
  L-wrench: SNCM - V alloy steel
- Finishing - chrome plated

20002UB

128 g | 6/ 36

Contents	Overall length (mm)	AØ mm	BØ mm
S : 5 x 6mm	110	11	10
L : 8 x 10mm	150	16	14



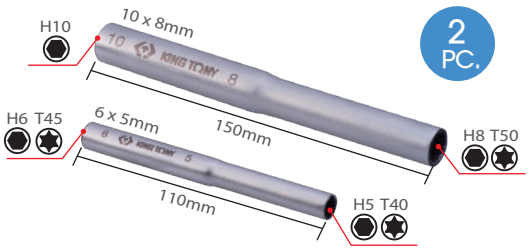

L- wrench & Extension Pipe Set



Caution :
Please be careful not to overtighten.
Do not use any other L-wrench that is incompatible with the pipe size.



KT NO.	PC.	Spec.	Contents			
20109MRU	11	Extra long arm / ball	1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	0.62	11 / 66
			20002UB	5 x 6, 8 x 10		
20319PRU	11	Extra long arm	1123R	T10, T15, T20, T25, T27, T30, T40, T45, T50	0.67	11 / 66
			20002UB	5(T40) x 6(T45), 8(T50) x 10		

Star L-wrench Set


knife type



Standard arm



Extra long arm

KT NO.	PC.	Spec		Contents		
20307PR	7	Standard arm	1143R	T10, T15, T20, T25, T27, T30, T40	0.13	15 / 120
20407PR	7	Standard arm / Tamper-resistant	1147R	T10H, T15H, T20H, T25H, T27H, T30H, T40H	0.13	15 / 120
20308PR	8	Knife type		T9, T10, T15, T20, T25, T27, T30, T40	0.20	12 / 72
20318PR	8			T9H, T10H, T15H, T20H, T25H, T27H, T30H, T40H	0.20	12 / 72
20309PR	9	Standard arm	1143MR	T10, T15, T20, T25, T27, T30, T40, T45, T50	0.30	6 / 48
20319PR	9	Extra long arm	1123R	T10, T15, T20, T25, T27, T30, T40, T45, T50	0.45	8 / 48
20409PR	9	Standard arm / Tamper-resistant	1147R	T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H,T50H	0.34	6 / 48
20419PR	9	Extra long arm / Tamper-resistant	1127R	T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H,T50H	0.47	8 / 48

Stubby L- wrench Set

- The "SPECIAL SHORT ARM" L1 length is designed to be 1/3 as short as other wrenches to allow easy work in cramped places
- The "SPECIAL SHORT ARM" is made with a 90 degree bend for high workability in small spaces without risk of pinched fingers



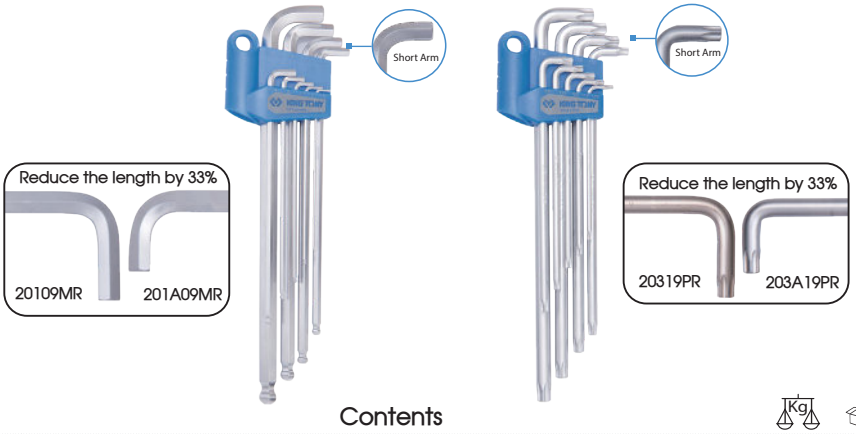


KT NO.	PC.	Spec.	Contents		
201A09MR	9	Extra long arm / ball	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	0.45	10 / 60
203A19PR	9	Extra long arm	T10, T15, T20, T25, T27, T30 T40, T45, T50	0.45	10 / 60

Ball Hex Key & Set

201B09MR

- Set of ball head offset key wrench, extra long arm









KT NO.	PC.	Spec.	Contents		
201B09MR	9	Extra long arm / ball	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	0.45	8 / 48

Ball End Star L-wrench Set

204B29PR

- Set of ball head offset key wrench, long modle, for torx internal screw



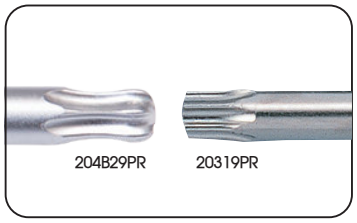





KT NO.	PC.	Spec.	Contents		
204B29PR	9	Standard arm / ball	T10, T15, T20, T25, T27, T30, T40, T45, T50	0.37	6 / 48



Bicycle Repair Tool

20A16MR

- 16-in-1 bicycle repair tool set

Contents	300 g	10 / 60
H2, H2.5, H3, H4, H5, H6		
8, 9, 10 mm		
PH2		
5.0		
Spoke Wrench: 14GE	Extension bar 1/4" DR.	
Wrench: 8 / 10 / 15 mm		



20A17MR

- 20-in-1 bicycle repair tool set

Contents	305 g	10 / 60
H2, H2.5, H3, H4, H5, H6		
9, 10, 12, 13, 15		
PH2		
5.0		
Socket : 8mm		
Spoke Wrench: 14GE / 15GE / 0.136"		
Chain Wrench x 1	Tire Lever x 2	



Aluminum Folding Hex Key Wrench Set

20317MR

- 7-in-1 aluminum folding hex key wrench set

Spec	Contents	90 g	10 / 200
knife type	H1.5, H2, H2.5, H3, H4, H5, H6		



L- type Wrench


KT No. & D1

- Material - SNCM - V alloy steel
- Finishing - chrome plated with black tip

1160MR

- Hexagon with ball point head


KT NO.	mm	mm	mm	g	
116002MR	H2	95	145	14	10 / 200
116025MR	H2.5	95	145	17	10 / 200
116003MR	H3	95	145	20	10 / 200
116004MR	H4	95	145	29	10 / 200
116005MR	H5	150	215	66	10 / 200
116006MR	H6	150	215	84	10 / 200
116007MR	H7	150	215	105	10 / 200
116008MR	H8	200	280	188	10 / 80
116010MR	H10	200	280	265	10 / 80

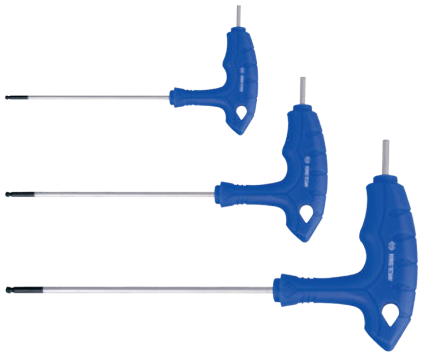

1165MR

- For hexagon head screw


KT NO.	mm	mm	mm	g	
116502MR	H2	95	145	14	10 / 200
116525MR	H2.5	95	145	17	10 / 200
116503MR	H3	95	145	20	10 / 200
116504MR	H4	95	145	29	10 / 200
116505MR	H5	150	215	66	10 / 200
116506MR	H6	150	215	84	10 / 200
116507MR	H7	150	215	107	10 / 200
116508MR	H8	200	280	190	10 / 80
116510MR	H10	200	280	289	10 / 80

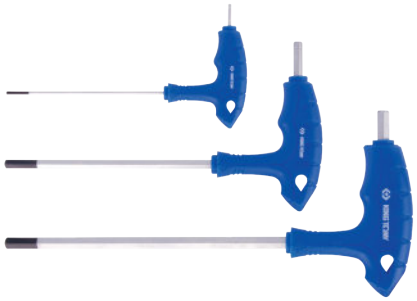

1163TR

- For torx internal screw
- Tamper-resistant type


KT NO.	Size	mm	mm	g	
116310TR	T10	95	145	22	10 / 200
116315TR	T15	95	145	23	10 / 200
116320TR	T20	95	145	31	10 / 200
116325TR	T25	95	145	31	10 / 200
116327TR	T27	150	215	78	10 / 200
116330TR	T30	150	215	78	10 / 200
116340TR	T40	150	215	97	10 / 200
116345TR	T45	200	280	176	10 / 80
116350TR	T50	200	280	209	10 / 80

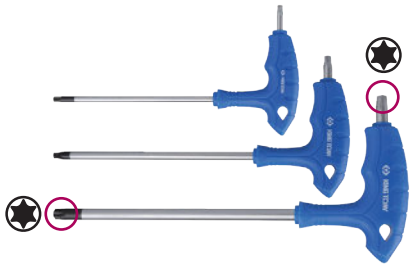

1163R

- For torx internal screw
- Tamper-resistant type

KT NO.	Size	mm	mm	g	
116310R	T10H	95	145	22	10 / 200
116350R	T50H	200	280	209	10 / 80

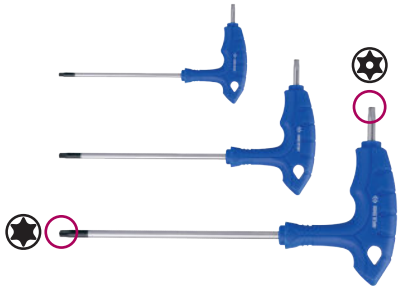

L- type Wrench Set



► Tray



► Shelf

KT NO.	PC.	Spec	Contents	Package	Kg	
22106MR	6	Ball & hex two way type	1160MR H3, H4, H5, H6, H7, H8	Tray	0.68	1 / 20
22108MR	8	Ball & hex two way type	1160MR H2, H2.5, H3, H4, H5, H6, H8, H10	Tray	0.97	1 / 10
22208MR	8	Hex head	1165MR H2, H2.5, H3, H4, H5, H6, H8, H10	Tray	0.97	1 / 10
22306TR	6	torx head	1163TR T10, T15, T20, T25, T30, T40	Tray	0.46	1 / 20
22309TR	9	torx head	1163TR T10, T15, T20, T25, T27, T30, T40, T45, T50	Tray	1.00	1 / 10
22118MR	8	Ball & hex two way type	1160MR H2, H2.5, H3, H4, H5, H6, H8, H10	Shelf	1.10	1 / 12
22218MR	8	Hex head	1165MR H2, H2.5, H3, H4, H5, H6, H8, H10	Shelf	1.10	1 / 12
22319TR	9	torx head	1163TR T10, T15, T20, T25, T27, T30, T40, T45, T50	Shelf	1.12	1 / 12

T - type Wrench

- Material - SNCM - V alloy steel
- Finishing - chrome plated with black tip

1150MR

▪ Hexagon with ball point head



KT NO.	mm	mm	mm	mm	g	
115002MR	H2	100	137	90	28	10 / 200
115025MR	H2.5	100	137	90	30	10 / 200
115003MR	H3	100	137	90	32	10 / 200
115004MR	H4	100	137	90	38	10 / 200
115005MR	H5	150	188	100	65	10 / 200
115006MR	H6	150	188	100	79	10 / 200
115008MR	H8	200	240	120	159	10 / 120
115010MR	H10	200	240	120	217	10 / 120

1155MR

▪ Hexagon head

1155SR



KT NO.	mm / inch	mm	mm	mm	g	
115502MR	H2	100	137	90	28	10 / 200
115525MR	H2.5	100	137	90	30	10 / 200
115503MR	H3	100	137	90	32	10 / 200
115504MR	H4	100	137	90	38	10 / 200
115505MR	H5	150	188	100	65	10 / 200
115506MR	H6	150	188	100	79	10 / 200
115508MR	H8	200	240	120	159	10 / 120
115510MR	H10	200	240	120	217	10 / 120
115525SR	5/64	100	137	90	19	10 / 200
115503SR	3/32	100	137	90	21	10 / 200
115504SR	1/8	100	137	90	25	10 / 200
115505SR	5/32	100	137	90	30	10 / 200
115506SR	3/16	150	188	100	56	10 / 200
115508SR	1/4	150	188	100	78	10 / 200
115510SR	5/16	200	240	120	158	10 / 120
115512SR	3/8	200	240	120	202	10 / 120

T - type Wrench & Set



KT No. & D1

- Material - SNCM - V alloy steel
- Finishing - chrome plated with black tip

1153R

- For torx head screw



KT NO.	Size	mm	mm	mm	g	
115310R	T10	100	137	90	40	10 / 200
115315R	T15	100	137	90	40	10 / 200
115320R	T20	100	137	90	40	10 / 200
115325R	T25	100	137	90	40	10 / 200
115327R	T27	150	188	100	73	10 / 200
115330R	T30	150	188	100	74	10 / 200
115340R	T40	150	188	100	88	10 / 200
115345R	T45	200	240	120	173	10 / 120
115350R	T50	200	240	120	173	10 / 120

11A3R

- For torx head screw



KT NO.	Size	mm	mm	mm	g	
11A310R	T10	200	237	90	53	12 / 192
11A315R	T15	200	237	90	53	12 / 192
11A320R	T20	200	237	90	53	12 / 192
11A325R	T25	200	237	90	53	12 / 192
11A327R	T27	200	238	100	86	10 / 160
11A330R	T30	200	238	100	86	10 / 160
11A340R	T40	200	238	100	105	10 / 160



KT NO.	PC.	Spec		Contents	Kg	
21108MR	8	Ball hex type	1150MR	H2, H2.5, H3, H4, H5, H6, H8, H10	1.10	1 / 12
21208MR	8	Hexagon type	1155MR	H2, H2.5, H3, H4, H5, H6, H8, H10	1.10	1 / 12
21208SR	8		1155SR	5/64, 3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8	1.10	1 / 12
21309PR	9	torx head type	1153R	T10, T15, T20, T25, T27, T30, T40, T45, T50	1.20	1 / 12

23208MR

- Perfect for when you need more leverage than a standard hex, or space is limited and you can't get a good swing on a standard wrench
- Spring and ball detent to secure the Sliding T
- It turns fasteners quickly and continuously with free spinning collar

8 PC.



• Speed & Efficiency



• Locking Stopper



• Extension



KT NO.	PC.	Spec		Contents	Kg	
23208MR	8	Hexagon type	1195AM	H2, H2.5, H3, H4, H5, H6, H8, H10	1.64	1 / 6


T - handle Wrench


- Material - Chrome vanadium steel
- Finishing - chrome plated

1195M

- 6 Points
- For hexagon head screw
- The handle pin can be removed for another wrench
- The 10mm size is with chrome plated end





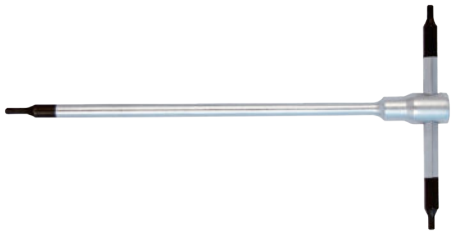

KT NO.	mm	mm	mm	g	
119502M	H2	64	127	22	10 / 200
119525M	H2.5	64	127	22	10 / 200
119503M	H3	64	127	22	10 / 200
119504M	H4	90	181	64	10 / 200
119505M	H5	90	182	65	10 / 200
119506M	H6	105	210	135	6 / 48
119508M	H8	124	250	224	4 / 32
119510M	H10	145	300	386	5 / 50

Wing Handle torx Screwdriver & Set

1153A



KT NO.	Size	mm	mm	mm	g	
1153A05R	T5	45	84	35	7	20 / 200
1153A06R	T6	45	84	35	7	20 / 200
1153A07R	T7	45	84	35	7	20 / 200
1153A08R	T8	45	84	35	7	20 / 200
1153A09R	T9	45	84	35	10	20 / 200
1153A10R	T10	45	84	35	10	20 / 200
1153A15R	T15	45	84	35	10	20 / 200
1153A20R	T20	45	84	35	10	20 / 200

23308PR

8 PC.



Contents

0.26 kg | 1 / 20



1153A

T5, T6, T7, T8, T9, T10, T15, T20

Flag Handle torx Screwdriver & Set

1163A



KT NO.	Size	mm	mm	mm	g	
1163A05R	T5	45	84	31	6	20 / 200
1163A06R	T6	45	84	31	6	20 / 200
1163A07R	T7	45	84	31	6	20 / 200
1163A08R	T8	45	84	31	6	20 / 200
1163A09R	T9	45	84	31	9	20 / 200
1163A10R	T10	45	84	31	9	20 / 200
1163A15R	T15	45	84	31	9	20 / 200
1163A20R	T20	45	84	31	9	20 / 200

24308PR

8 PC.




Contents

0.27 kg | 1 / 20



1163A

T5, T6, T7, T8, T9, T10, T15, T20






VDE INSULATED TOOLS

Ps. VDE insulated ratchet and VDE insulated socket and accessory series must be used with KING TONY VDE insulated tools.

They cannot be used with hand tools or other brands of VDE insulated tools.

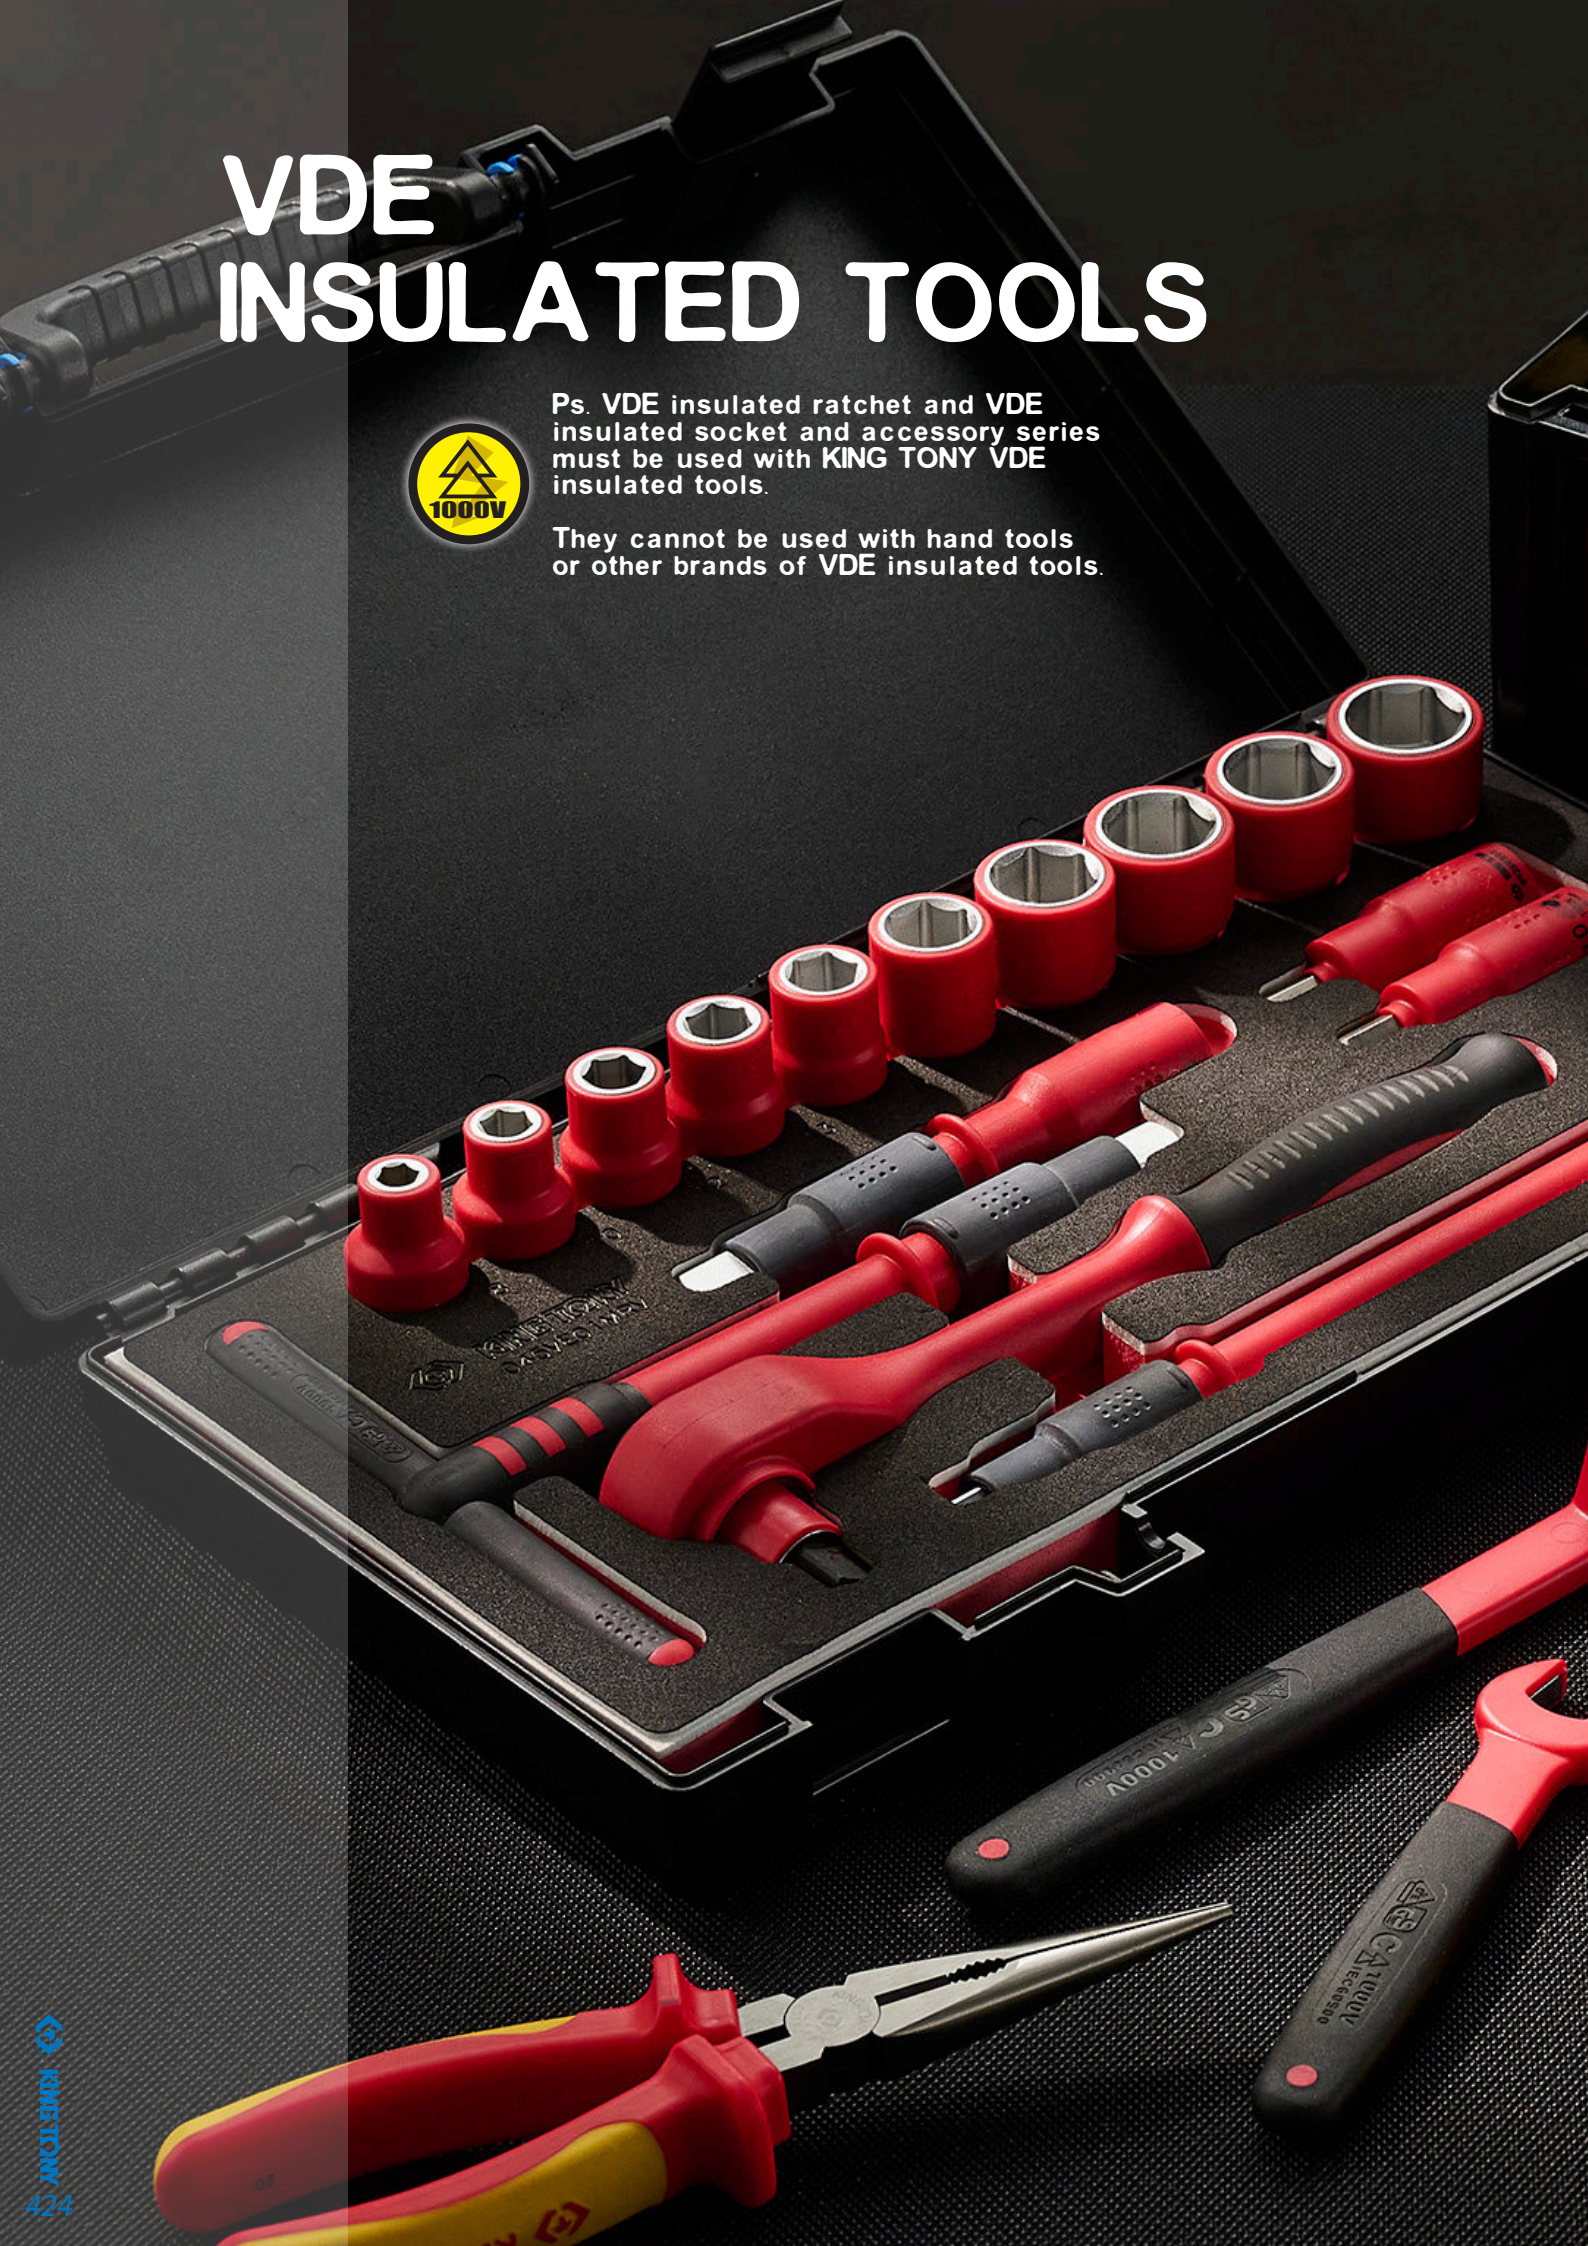


GENUINE HICKORY
KING TONY
KING TONY
KING TONY
KING TONY
KING TONY

Standard Socket

2335VE — 1/4"

- IEC 60900:2012



KT NO.	mm	L mm	g	
2335VE05M	5	41	14	5 / 45
2335VE06M	6	41	15	5 / 45
2335VE07M	7	41	15	5 / 45
2335VE08M	8	41	15	5 / 45
2335VE09M	9	41	16	5 / 45
2335VE10M	10	41	18	5 / 45
2335VE11M	11	41	21	5 / 45
2335VE12M	12	41	23	5 / 45
2335VE13M	13	41	23	5 / 45
2335VE14M	14	41	26	5 / 45

Bit Socket

2035VE — 1/4"

- IEC 60900:2012



KT NO.	mm	L mm	g	
2035VE03	H3	54	18	5 / 45
2035VE04	H4	54	18	5 / 45
2035VE05	H5	54	19	5 / 45
2035VE06	H6	54	20	5 / 45

Ratchet

2771VE — 1/4"

- IEC 60900:2012



KT NO.	Overall length mm	g	
2771VE-55	150	140	2 / 32

Accessory

2221VE — 1/4"

IEC 60900:2012



KT NO.	Overall length mm	g	
2221VE-04	100	47	4 / 36
2221VE-06	150	68	4 / 48

2178VE — 1/4"

- IEC 60900:2012



KT NO.	mm	g	
2178VE-05	125	82	4 / 40

Insulated Tool Set

25VE01MRV — 1/4"

- IEC 60900:2012

Handy case size (mm) :
294 x 231 x 66 (1.835cuft)

Contents		1.30 kg	1 / 10
2335VE	5, 6, 7, 8, 9, 10, 11, 12, 13, 14		
2035VE	H3, H4, H5, H6		
2221VE	4, 6		
2771VE-55	2178VE-05		



18 PC.

Standard Socket

3335VE — 3/8"

- IEC 60900:2012



KT NO.	mm	L mm	g	
3335VE06M	6	44.5	25	5 / 45
3335VE07M	7	44.5	26	5 / 45
3335VE08M	8	44.5	27	5 / 45
3335VE09M	9	44.5	27	5 / 45
3335VE10M	10	44.5	28	5 / 45
3335VE11M	11	44.5	29	5 / 45
3335VE12M	12	44.5	29	5 / 45
3335VE13M	13	44.5	32	5 / 45
3335VE14M	14	44.5	35	5 / 45
3335VE15M	15	46	40	5 / 45
3335VE16M	16	46	42	5 / 45
3335VE17M	17	46	47	5 / 45
3335VE18M	18	46	48	5 / 60
3335VE19M	19	46	51	5 / 60
3335VE20M	20	46	55	5 / 60
3335VE21M	21	46	59	5 / 60
3335VE22M	22	46	63	5 / 60
3335VE24M	24	46	66	5 / 60

Deep Socket

3235VE — 3/8"

- IEC 60900:2012



KT NO.	mm	L mm	g	
3235VE08M	8	79	52	5 / 50
3235VE10M	10	79	60	5 / 50
3235VE12M	12	79	68	5 / 50
3235VE14M	14	79	76	5 / 50

Bit Socket

3025VE — 3/8"

- IEC 60900:2012



KT NO.	mm	Overall length mm	g	
3025VE04	H4	65	37	5 / 50
3025VE05	H5	65	38	5 / 50
3025VE06	H6	65	39	5 / 50
3025VE08	H8	65	42	5 / 50
3025VE10	H10	65	51	5 / 50

Ratchet

3771VE — 3/8"

- IEC 60900:2012



KT NO.	Overall length mm	g	
3771VE-08	200	300	2 / 20

Accessory

3221VE — 3/8"

- IEC 60900:2012



KT NO.	Overall length mm	g	
3221VE-06	150	150	4 / 48
3221VE-10	250	250	4 / 24

3178VE — 3/8"

- IEC 60900:2012



KT NO.	mm	g	
3178VE-08	200	240	2 / 12

Insulated Tool Set

35VE01MRV — 3/8"

- IEC 60900:2012

Handy case size (mm) :
389 x 229 x 66 (1.49cuft)

Contents — 2.16 kg | 1 / 6

3335VE	10, 11, 12, 13, 14, 17, 19	
3025VE	5, 6, 8,	
3221VE	6, 10,	
3771VE-08	3178VE-08	



14 PC.

VDE INSULATED TOOL

Standard Socket

4335VE 1/2"

- IEC 60900:2012



KT NO.	mm	L mm	g	
4335VE08M	8	55	54	5 / 40
4335VE10M	10	55	55	5 / 40
4335VE11M	11	55	57	5 / 40
4335VE12M	12	55	58	5 / 40
4335VE13M	13	55	59	5 / 40
4335VE14M	14	55	62	5 / 40
4335VE15M	15	55	60	5 / 40
4335VE16M	16	55	60	5 / 40
4335VE17M	17	55	70	5 / 50
4335VE18M	18	55	77	5 / 50
4335VE19M	19	55	72	5 / 50
4335VE20M	20	55	80	5 / 50
4335VE21M	21	55	73	5 / 50
4335VE22M	22	55	87	5 / 50
4335VE24M	24	55	96	5 / 50
4335VE27M	27	59	125	5 / 50
4335VE30M	30	59	146	5 / 50
4335VE32M	32	59	170	5 / 50

Bit Socket

4025VE 1/2"

- IEC 60900:2012



KT NO.	mm	Overall length mm	g	
4025VE04	H4	75	78	5 / 50
4025VE05	H5	75	78	5 / 50
4025VE06	H6	75	79	5 / 50
4025VE08	H8	75	80	5 / 50
4025VE10	H10	75	89	5 / 50

4035VE 1/2"

- IEC 60900:2012



KT NO.	mm	Overall length mm	g	
4035VE04	H4	120	99	5 / 50
4035VE05	H5	120	99	5 / 50
4035VE06	H6	120	100	5 / 50
4035VE08	H8	120	102	5 / 50
4035VE10	H10	120	121	5 / 50

Ratchet

4771VE 1/2"

- IEC 60900:2012



KT NO.	Overall length mm	g	
4771VE-10	250	570	2 / 20

Accessory

4251VE 1/2"

- IEC 60900:2012



KT NO.	Overall length mm	g	
4251VE-05	125	210	4 / 40
4251VE-10	250	410	4 / 40

4178VE 1/2"

- IEC 60900:2012



KT NO.	mm	g	
4178VE-08	200	330	2 / 12

Insulated Tool Set

45VE01MRV 1/2"

- IEC 60900:2012

Handy case size (mm) :
389 x 229 x 66 (1.49cuft)

Contents	Kg 3.22	1 / 6
4335VE	8, 10, 12, 13, 14, 17, 19, 21, 22, 24	
4025VE	H8, H10	
4251VE	5, 10	
4771VE-10	4178VE-08	



16 PC.

Open End Wrench & Set

10F0VE

- IEC 60900:2012

KT NO.	Size mm	L mm	g	
10F0VE-07	7	88	20	5 / 50
10F0VE-08	8	104	26	5 / 50
10F0VE-09	9	104	26	5 / 50
10F0VE-10	10	114	40	5 / 50
10F0VE-11	11	124	60	5 / 50
10F0VE-12	12	124	60	5 / 50
10F0VE-13	13	154	90	5 / 50
10F0VE-14	14	154	90	5 / 50
10F0VE-15	15	171	127	5 / 50
10F0VE-16	16	170	125	5 / 50
10F0VE-17	17	170	125	5 / 50



KT NO.	Size mm	L mm	g	
10F0VE-18	18	180	150	5 / 50
10F0VE-19	19	180	150	5 / 50
10F0VE-20	20	202	215	5 / 50
10F0VE-21	21	202	215	5 / 50
10F0VE-22	22	202	215	5 / 50
10F0VE-23	23	238	323	5 / 40
10F0VE-24	24	237	318	5 / 40





►MRN : Tetoron pouch bag

KT NO.	PC.		Contents	Package	Kg	
12FVE08MRN	8	 10F0VE	10, 11, 12, 13, 14, 17, 18, 19	Tetoron	0.91	1 / 10
12FVE10MRN	10		10, 11, 12, 13, 14, 16, 17, 18, 19, 22	Tetoron	1.28	1 / 10

75° Offset Ring Wrench

10G0VE

- IEC 60900:2012

KT NO.	Size mm	L mm	g	
10G0VE-07	7	149	62	5 / 50
10G0VE-08	8	164	70	5 / 50
10G0VE-09	9	164	70	5 / 50
10G0VE-10	10	174	80	5 / 50
10G0VE-11	11	184	90	5 / 50
10G0VE-12	12	184	90	5 / 50
10G0VE-13	13	205	140	5 / 40
10G0VE-14	14	205	140	5 / 40
10G0VE-15	15	218	164	5 / 40



KT NO.	Size mm	L mm	g	
10G0VE-16	16	221	185	5 / 40
10G0VE-17	17	221	185	5 / 40
10G0VE-18	18	237	235	5 / 50
10G0VE-19	19	237	235	5 / 50
10G0VE-21	21	257	295	5 / 40
10G0VE-22	22	257	295	5 / 40
10G0VE-24	24	287	390	5 / 40

Adjustable Wrench

3611VE

- IEC 60900:2012


KT NO.	mm	L mm	g	
3611VE-06	24	164	167	4 / 32
3611VE-08	28	212	273	4 / 32
3611VE-10	32	260	497	4 / 32
3611VE-12	38	310	679	4 / 24



- Grip material-TPR
- Chrome vanadium steel
- Polished head
- IEC DIN EN 60900

Combination Pliers


6116



KT NO.	L inch	L mm	ø mm 4.0	3.0	2.0	1.6	g	
6116-07A	7-1/2	185	4.0	3.0	2.0	1.6	290	10 / 60
6116-08A	8	200	4.0	3.0	2.0	1.6	386	10 / 60

Cable Cutting Pliers


6146

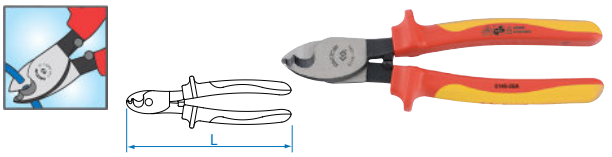

KT NO.	L inch	L mm	ø mm	g	
6146-08A	8-1/4	214	14	360	10 / 60

Diagonal Cutting Pliers


6216



KT NO.	L inch	L mm	ø mm 4.0	2.8	2.0	1.6	g	
6216-06A	6-1/2	167	4.0	2.8	2.0	1.6	230	10 / 60

Heavy Duty Diagonal Cutting Pliers


6236



KT NO.	L inch	L mm	ø mm 5.0	3.5	2.4	2.0	g	
6236-07A	7-1/2	190	5.0	3.5	2.4	2.0	280	10 / 60

Long Nose Pliers


6318

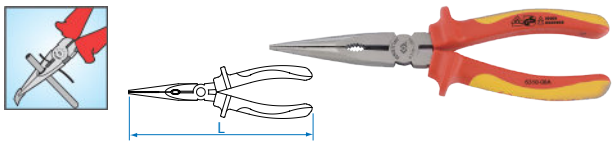

KT NO.	L inch	L mm	ø mm 4.0	2.8	2.0	1.6	g	
6318-08A	8-1/4	210	4.0	2.8	2.0	1.6	230	10 / 60

Bent Nose Pliers

6336

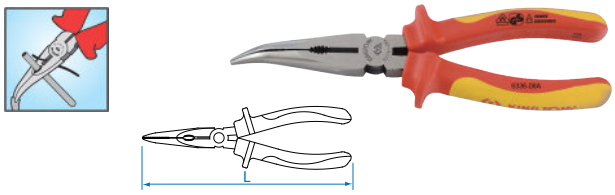


KT NO.	L inch	L mm	ø mm 4.0	3.0	2.0	1.6	g	
6336-08A	8	200	4.0	3.0	2.0	1.6	250	10 / 60

Groove Joint Pliers

6516

- Box joint

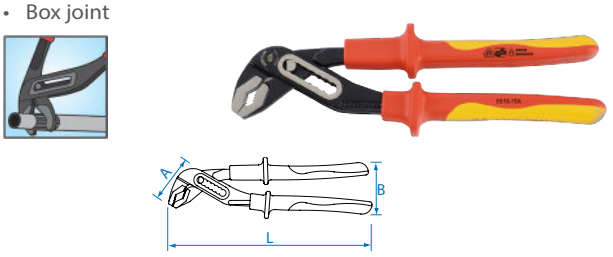


KT NO.	A mm	B mm	L inch	L mm	mm	g	
6516-10A	55	63	10	250	36	420	10 / 50

Stripping Pliers

6716

- With spring

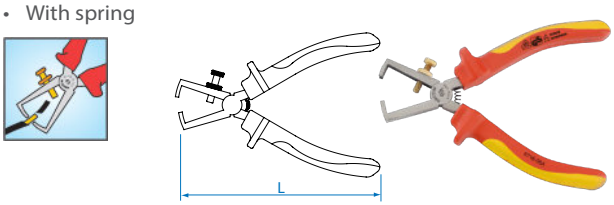

KT NO.	L inch	L mm	ø mm	Wire stripper mm²	g	
6716-06A	6-1/4	160	5	10	205	10 / 60

Insulated Pliers Set

40603GP

3 PC.



Contents — 0.89 kg — 1 / 20



6116-07A | 6318-08A | 6216-06A

Insulated Screwdriver

KT No. & D1



- Shank material - SNCM - V alloy steel
- Grip material - PP + TPR
- Finishing - chrome plated with black tip

1471

- Phillips head, round shank
- IEC 60900:2012

KT NO.	No.	mm	inch	mm	g	
14710003	PH0	75	3	3.0	37	12 / 144
14710104	PH1	100	4	4.5	54	12 / 216
14710204	PH2	100	4	6.0	77	12 / 144
14710306	PH3	150	6	8.0	135	12 / 144



147E

- Terminal Block Screwdriver
- Phillips / Slotted hand, round shank
- IEC 60900:2012



KT NO.	No.	mm	inch	mm	g	
147E0104	SL/PH1	100	4	4.5	61	12 / 216
147E0204	SL/PH2	100	4	6.0	85	12 / 144



1472

- Slotted head, round shank
- IEC 60900:2012

KT NO.	mm	inch	mm	mm	inch	mm	g	
14722503	2.5	-	0.4	75	3	2.5	35	12 / 144
14720303	3	1/8	0.5	75	3	3.0	38	12 / 144
14720404	4	3/16	0.8	100	4	4.0	44	12 / 96
14723504	3.5	1/8	0.6	100	4	3.5	54	12 / 144
14725505	5.5	7/32	1	125	5	5.5	72	12 / 144
14726506	6.5	1/4	1.2	150	6	6.5	87	12 / 144
14720807	8	5/16	1.2	175	7	8.0	143	12 / 144



1474

- Square head, round shank
- IEC 60900:2012

KT NO.	Size	mm	inch	mm	g	
14740105	RB1	125	5	5.5	72	12 / 144
14740206	RB2	150	6	6.5	87	12 / 144



1478

- Pozidriv head, round shank
- IEC 60900:2012

KT NO.	Size	mm	inch	mm	g	
14780003	PZ0	75	3	3.0	37	12 / 144
14780104	PZ1	100	4	4.5	54	12 / 96
14780204	PZ2	100	4	6.0	77	12 / 144
14780306	PZ3	150	6	8.0	135	12 / 144



Insulated Screwdriver Set

- Shank material - SNCM - V alloy steel
- Grip material - PP + TPR
- Finishing - chrome plated with black tip



0.86 | 1 / 20

KT NO.	PC.	Contents	
30606MR	6	1471	PH0 x 75, PH2 x 100, PH3 x 150
		1472	3 x 75, 4 x 100, 6.5 x 150
30607MR	7	1472	4 x 100, 5.5 x 125, 6.5 x 150, 8.0 x 175
		1478	PZ1 x 100, PZ2 x 100, PZ3 x 150
30607MR02	7	1471	PH1 x 100, PH2 x 100
		1472	4 x 100, 5.5 x 125, 6.5 x 150
		1474	1 x 125, 2 x 150
30617MR	7	1471	PH1 x 100, PH2 x 100, PH3 x 150
		1472	4 x 100, 5.5 x 125, 6.5 x 150, 8.0 x 175



0.50 | 1 / 30

KT NO.	PC.	Contents	
30605MR	5	1472	4 x 100, 5.5 x 125, 6.5 x 150
		1478	PZ1 x 100, PZ2 x 100
30615MR	5	1471	PH1 x 100, PH2 x 100
		1472	4 x 100, 5.5 x 125, 6.5 x 150

Tool Box Set

37 PC.

9052-001MRV

Plastic case size (mm) :
456 x 372 x 155 (0.93 cuft)



Pouch 1 — 6 PC.



Pouch 2 — 21 PC.




EVA foam(9-90110GPV) — 10 PC.



Pouch 1

Contents



6CB21 6716-06A 6216-06A 6336-08A



6318-08A 6146-08A

Pouch 2

Contents

1471	PH0 x 75, PH1 x 100, PH2 x 100
1472	3 x 75, 4 x 100, 5.5 x 125, 6.5 X 150
1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10
20002UB	5 x 6mm, 8 x 10mm



6CB02 3611VE-08 79095-05M

EVA foam(9-90110GPV)

Contents

Kg 8.69 CUFT 1.16



6511-10 3611-10R 76223-08 76210-10



7821-50 67B3-55 9CJ1120 6AG11-20



6311-08 67A1-07

VDE INSULATED TOOL

IC SPECIALIZED TOOLS & MEASURING TOOLS






KINGTONY
6024
7935-08
SELECT
OFF
D-H
KINGTONY
9DM1361
AUTO RANGE
10A
COM
hFE
NPN
PNP
LED


Precision Pliers

6207-05

Diagonal cutting nippers

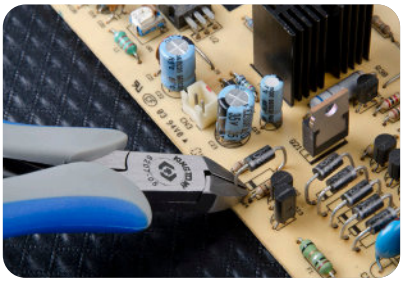




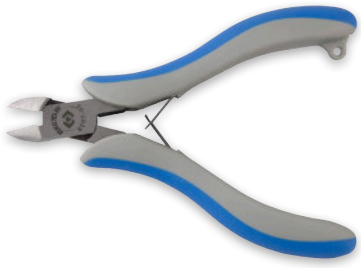



KT NO.	Overall length inch	Overall length mm	Cutting capacities ⊙ ø mm	Cutting capacities ◉ ø mm	A mm	B mm	C mm	g	
6207-05	4-3/4	118	2.0	1.6	10.8	11.5	7.1	88	6 / 120

6927-05

For plastic

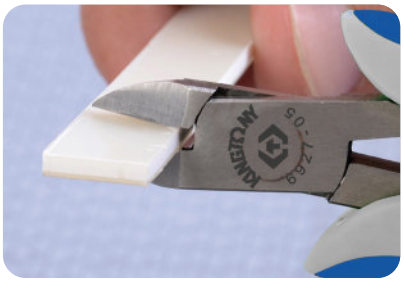




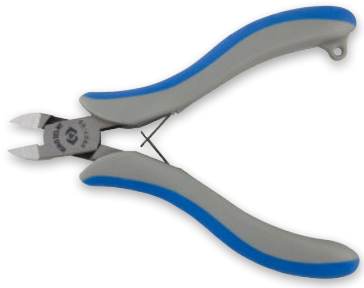



KT NO.	Overall length inch	Overall length mm	A mm	B mm	C mm	g	
6927-05	4-3/4	118	10.3	11.5	7.1	71	6 / 120

6217-05

Diagonal cutting nippers












KT NO.	Overall length inch	Overall length mm	Cutting capacities ⊙ ø mm	Cutting capacities ◉ ø mm	α	A mm	B mm	C mm	D mm	g	
6217-05	4-3/4	118	2.0	1.0	35°	11.8	17	12.7	17.7	76	6 / 120

6247-05

Diagonal cutting nippers

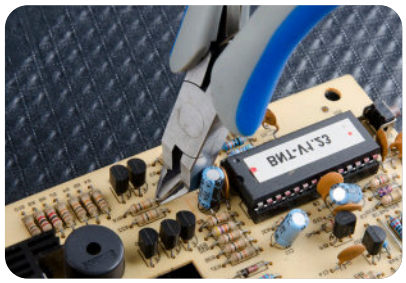



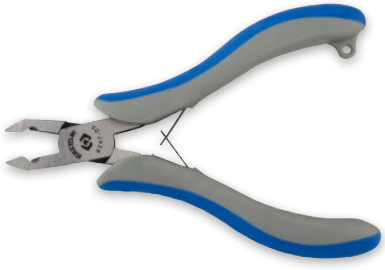

KT NO.	Overall length inch	Overall length mm	Cutting capacities ⊙ ø mm	Cutting capacities ◉ ø mm	α	A mm	B mm	C mm	D mm	g	
6247-05	5	125	1.0	0.5	45°	11.4	19.4	7.5	55	73	6 / 120

Precision Pliers

6271C


Diagonal cutting nippers

- The cutting edge hardness at least 73° HRC up





- The cutting edge is made from tungsten steel for an extremely long service life.







KT NO.	Overall length inch	Overall length mm	●	A mm	B mm	C mm	g	
6271-05C	5	125	0.6	13.2	15	7.1	77	6 / 120
6271-65C	6-1/2	160	0.6	19.2	26	10.7	151	6 / 120

6317-06

Long nose pliers

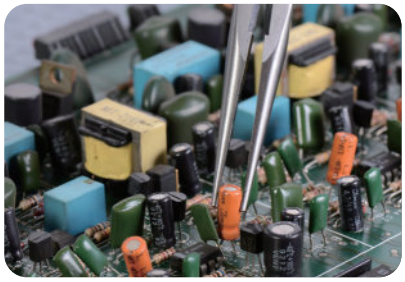








KT NO.	Overall length inch	Overall length mm	Cutting capacities ø mm	Cutting capacities ø mm	A mm	B mm	C mm	D mm	E mm	g	
6317-06	6	157	2.0	1.6	11.6	50	7.5	2	2	84	6 / 120

6377-55

Half-round nose pliers

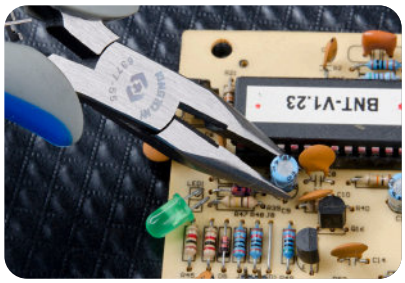



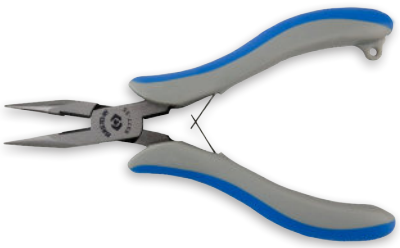



KT NO.	Overall length inch	Overall length mm	Cutting capacities ø mm	Cutting capacities ø mm	A mm	B mm	C mm	D mm	E mm	g	
6377-55	5-1/2	138	2.0	1.6	11.3	30	7.5	1.5	1.5	97	6 / 120


6337-06

Bent nose pilers







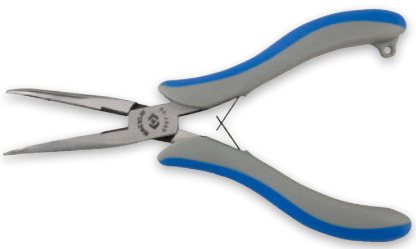



KT NO.	Overall length inch	Overall length mm	Cutting capacities ø mm	Cutting capacities ø mm	α	A mm	B mm	C mm	D mm	E mm	F mm	g	
6337-06	6	154	2.0	1.6	40°	11.3	50	7.5	2	2.5	14	84	6 / 120


Precision Pliers

6347-05

Round-nose pliers

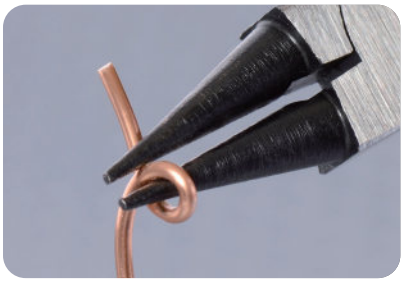




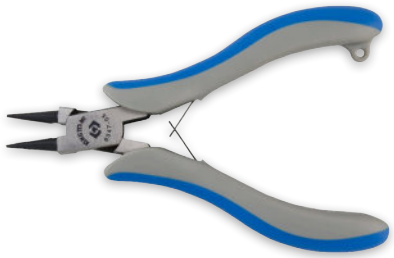



KT NO.	Overall length inch	Overall length mm	A mm	B mm	C mm	D mm	E mm	g	
6347-05	5	128	11.4	24.9	7.5	1	2.14	74	6 / 120

63A7-05

Round-nose pliers

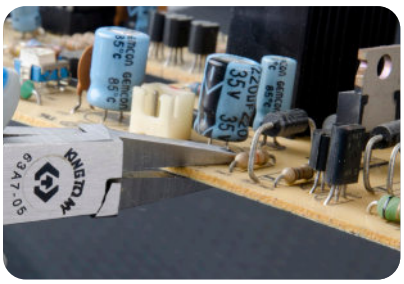




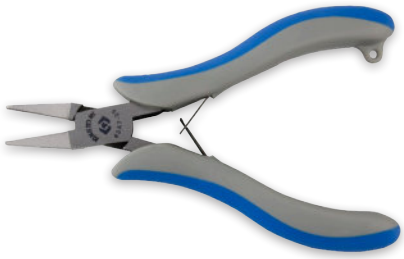



KT NO.	Overall length inch	Overall length mm	A mm	B mm	C mm	D mm	E mm	g	
63A7-05	5	128	11.5	24.7	7.5	3.3	1.8	75	6 / 120

63B7-05

Round-nose pliers

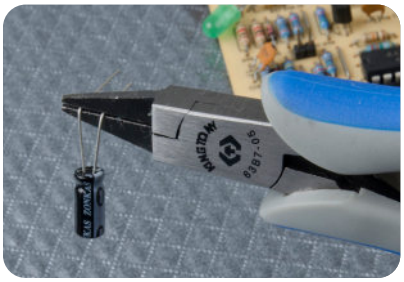



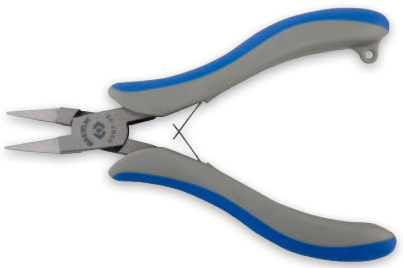

KT NO.	Overall length inch	Overall length mm	A mm	B mm	C mm	D mm	E mm	g	
63B7-05	5	128	11.5	24.7	7.5	1.3	1.8	74	6 / 120

Precision Screwdriver

- Shank material - SNCM - V alloy steel
- Grip material - PP
- Finishing - chrome plated with black tip

1431

- Phillips head, round shank
- DIN ISO 8764

KT NO.	No.	Ø mm	mm	g	
14313015	PH000	1.5	40	7	10 / 320
14312015	PH00	2.0	40	7	10 / 320
14311015	PH0	3.0	40	13	10 / 100
14311115	PH1	4.0	40	16	10 / 100
14313003	PH000	1.5	75	8	10 / 320
14312003	PH00	2.0	75	8	10 / 320
14311003	PH0	3.0	75	14	10 / 100
14311103	PH1	4.0	75	18	10 / 100



1432

- Slotted head, round shank
- Metric size
- DIN 5263

KT NO.	mm	mm	mm	Ø mm	g	
14320615	0.6	0.15	40	3.0	9	10 / 320
14320815	0.8	0.19	40	3.0	9	10 / 320
14321015	1.0	0.20	40	3.0	9	10 / 320
14321515	1.5	0.23	40	3.0	10	10 / 320
14321815	1.8	0.30	40	3.0	10	10 / 320
14322015	2.0	0.40	40	2.0	11	10 / 100
14322515	2.5	0.40	40	2.5	12	10 / 100
14323015	3.0	0.50	40	3.0	13	10 / 100
14323515	3.5	0.60	40	3.5	14	10 / 100
14324015	4.0	0.80	40	4.0	16	10 / 100
14321003	1.0	0.20	75	3.0	11	10 / 320
14321503	1.5	0.23	75	3.0	11	10 / 320
14321803	1.8	0.30	75	3.0	11	10 / 320
14322003	2.0	0.40	75	2.0	11	10 / 100
14322503	2.5	0.40	75	2.5	13	10 / 100
14323003	3.0	0.50	75	3.0	15	10 / 100
14323503	3.5	0.60	75	3.5	16	10 / 100
14324003	4.0	0.80	75	4.0	18	10 / 100



1433

- For torx head, round shank

KT NO.	Size	Ø mm	mm	g	
14330415	T4	3	40	10	10 / 320
14330515	T5	3	40	10	10 / 320
14330615	T6	3	40	10	10 / 100
14330715	T7	3	40	10	10 / 100
14330815	T8	3	40	10	10 / 320
14330902	T9	4	50	16	10 / 100
14331002	T10	4	50	16	10 / 100
14331502	T15	4	50	16	10 / 100
14332002	T20	4	50	16	10 / 100
14330403	T4	3	75	11	10 / 320
14330503	T5	3	75	11	10 / 320
14330603	T6	3	75	11	10 / 320
14330703	T7	3	75	11	10 / 320
14330803	T8	3	75	11	10 / 320
14330903	T9	4	75	18	10 / 100
14331003	T10	4	75	18	10 / 100
14331503	T15	4	75	18	10 / 100
14332003	T20	4	75	18	10 / 100



Precision Screwdriver & Set

91230

- Screwdriver handle for interchangeable blades 2431, 2433
- Handle material - polypropylene (PP)



KT NO.	mm		
91230	100	12	10 / 100

2431

- Combination type
- Phillips / Slotted head, hexagonal shank
- Blade material - SNCM - V alloy steel
- Finishing - chrome plated with black tip




KT NO.	No.	mm	mm	mm	mm		
24312020	PH00	2.0	0.30	4	120	11	20 / 200
24311030	PH0	3.0	0.50	4	120	11	20 / 200
24311140	PH1	4.0	0.60	4	120	11	20 / 200

2433

- Combination type
- Torx head, hexagonal shank
- Blade material - SNCM - V alloy steel
- Finishing - chrome plated with black tip



KT NO.	Size	mm	mm		
24330610	T6 x T10	4	120	11	20 / 200
24330715	T7 x T15	4	120	11	20 / 200
24330820	T8 x T20	4	120	11	20 / 200
24330915	T9 x T15	4	120	11	20 / 200

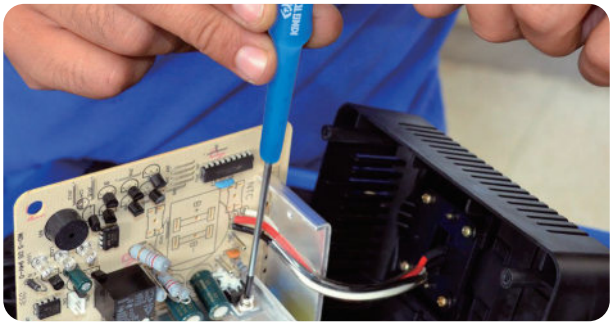

KT NO.	PC.	Contents		
32218MR	8	1432 — 1.0 x 75, 1.5 x 75, 1.8 x 75, 2.0 x 75, 2.5 x 75, 3.0 x 75, 3.5 x 75, 4.0 x 75	0.32	1 / 30
32209MR	9	1432 — 0.8 x 40, 1.0 x 40, 1.5 x 40, 1.8 x 40, 2.0 x 40, 2.5 x 40, 3.0 x 40, 3.5 x 40, 4.0 x 40	0.26	1 / 30
32108MR	8	1431 — PH000 x 40, PH00 x 40,PH0 x 40, PH1 x 40 1432 — 1.5 x 40, 2.0 x 40, 2.5 x 40, 3.0 x 40	0.29	1 / 30
32118MR	8	1431 — PH000 x 75, PH.00 x 75, PH0 x 75, PH1 x 75 1432 — 1.5 x 75, 2.0 x 75, 2.5 x 75, 3.0 x 75	0.36	1 / 30
32309PR	9	1433 — T4 x 40, T5 x 40, T6 x 40, T7 x 40, T8 x 40, T9 x 50, T10 x 50, T15 x 50, T20 x 50	0.26	1 / 30
32607MR	8	91230 2431 — PH00 x 2.0, PH0 x 3.0, PH1 x 4.0 2433 — T6 x T10, T7 x T15, T8 x T20, T9 x T15	0.22	1 / 30



Precision Screwdriver Set

31419MR

- Precision screwdriver set

KT NO.	Contents		Each Q'ty
31419MR	1431	PH000 x 40, PH00 x 40, PH0 x 40, PH1 x 40	6
	1432	0.6 x 40, 0.8 x 40, 1.0 x 40, 1.5 x 40, 1.8 x 40, 2.0 x 40, 2.5 x 40, 3.0 x 40, 3.5 x 40, 4.0 x 40	
	1433	T4 x 40, T5 x 40, T6 x 40, T7 x 40, T8 x 40	



114 PC.

Screwdriver shelf size (mm) : 383 x 136 x 130

Packing NO.	Spec.	kg	CUFT
31419MR-A	87107	0.86	0.47
31419MR-D	114 PC. content	1.17	0.14


Soldering Iron

6BC141A

- 220V~240V, 20W / 40W
- For electrical and stained glass work
- Lightweight handle
- Replaceable tip

KT NO.	Voltage V	Rating W	g	box
6BC141A	220-240	20 / 40	204	25 / 50
6BC141-1		Soldering iron tip		

KT NO.	Rattlm W	ø mm	Overall length	g	box
6BC141-1	20/40	6	81	17	10 / 100

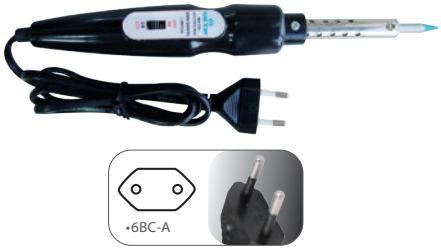

•6BC-A

6BC141-1

6BC23 30W

6BC26 60W

- 110V~240V, 30W, 40W, 60W, 100W
- For electrical and stained glass work

KT NO.	Voltage V	Rating W	g	box
6BC23A	220-240	30	160	54
6BC23B	220-240	30	125	54
6BC23F	110-120	30	125	54
6BC24A	220-240	40	125	54
6BC24B	220-240	40	125	54
6BC24C	220-240	40	196	32
6BC24F	110-120	40	125	54
6BC26A	220-240	60	166	54
6BC26B	220-240	60	166	54
6BC26C	220-240	60	216	32
6BC26F	110-120	60	166	54
6BC210A	220-240	100	210	20
6BC210B	220-240	100	210	20
6BC210C	220-240	100	330	20
6BC210D	220-240	100	288	20
6BC210F	110-120	100	210	20

6BC24 40W

6BC210 100W

- Lightweight handle
- Replaceable tip
- No CE certification



6BC210




6BC23 / 6BC24 / 6BC26



• 6BC-A



• 6BC-B



• 6BC-C



• 6BC-D



• 6BC-F

Soldering Iron Tip (Conical Type)

6BC23-1

- Copper-based iron tips are manufactured using patented process which produces a uniform iron and chrome plating thickness

KT NO.	Rating W	Ø mm	g	pcs/box
6BC23-1	30 / 40	4	13	100 / 4200
6BC26-1	60	6	16	100 / 1600
6BC26-3	60	6	16	100 / 1600

6BC26-1

6BC26-3

- All tips are pre-tinned



Gas Soldering Iron Set

6BC3007




- Gas soldering iron set with four tips, reflector and desolder wire
- Power range: 30W-150W
- Soldering temperature: 400°C~450°C (750°F~840°F)
- Torch temperature: 1300°C (2400°F)
- Fuel capacity: 20ml
- Tank fuel for 90 minutes operation
- Ready to use 45 seconds after ignition



8 PC.

KT NO.	Contents	0.45 kg	20 pcs/box
6BC372		Gas saldering iron 257mm	
6BC372-1	+ 	Conical	
6BC372-2		2.5mm round	
6BC372-3		3.5mm chisel	
6BC372-4		4.5mm angle	
6BC372-5		Reflector	
6BF21-17		Desolder wire / Sn 99.3%, Cu 0.7%	
		Foam	






Desolder Wire

6BF11-17

- 40% lead and 60% tin




KT NO.	Size mm	g	pcs/box
6BF11-17	1.0	17	20 / 480

Desoldering Pump

6BD11

- One-hand operation
- ABS Body, teflon nozzle



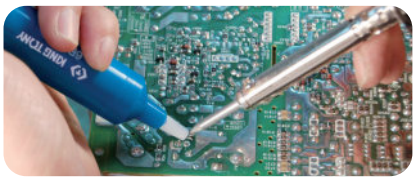


KT NO.	Overall length mm	g	pcs/box
6BD11	195	42	8 / 32


6BD22

- Anti-static solder desoldering pump
- Teflon suction head
- Aluminum body






• Turn down the body

• Clean

• Turn up the body

KT NO.	Overall length mm	g	pcs/box
6BD22	197	85	50 / 100

Soldering Aid

6BE11-07

- Brush / Scraper :
  For removing flux residue and surplus solder

6BE12-07



- Scraper / Curved Probe :
  For component and lead extraction

6BE16-07

- Pointed / Slotted Probe :
  Fits wire up to 22AWG
  For wrapping and unwrapping etc

KT NO.	Overall length mm	g	
6BE11-07	175	15	1 / 200
6BE12-07	175	15	1 / 200
6BE16-07	180	15	1 / 200





Straight Fine Point Tweezers

6AF11-125

- Stainless steel with straight fine point
- Used for soldering integrated circuit chip, installing or replacing components
- It's suitable for doing precise repairing work



KT NO.	Overall length mm	g	
6AF11-125	124	16	50 / 800

Reverse Action Tweezers

6AF21-165

- Stainless steel with tapered tips and flat points
- For holding small parts when soldering or spraying



KT NO.	Overall length mm	g	
6AF21-165	172	29	30 / 480

Mini Soldering Iron Stand

6BC100

- Lightweight and high temperature bakelite resistance
- Mini size, easy to take
- Used for holding solder iron

12 g 12 / 240




Soldering Iron Stand with Sponge

6BC200

- Suitable for most pencil type soldering irons
- Convenient for easy storage
- Sponge for tip cleaning
- Double spiral spring construction prevents the hot soldering iron from accidentally burning the surface of other objects when it is inserted into the stand

187 g 4 / 24





Punch Down Tool

6AH

- For setting wire into terminal blocks or cut off wire end after terminated
- Blade : 66 & 110/88 & Krone type

KT NO.	Type	Overall length inch	mm	g	
6AH11	110/88	6-3/4	170	140	20 / 80
6AH12	KRONE	6-3/4	170	140	20 / 80
6AH13	66	6-3/4	170	140	20 / 80
6AH14	66 &110/88	6-3/4	170	140	20 / 80

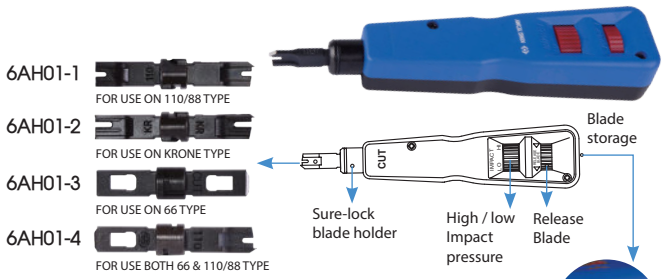

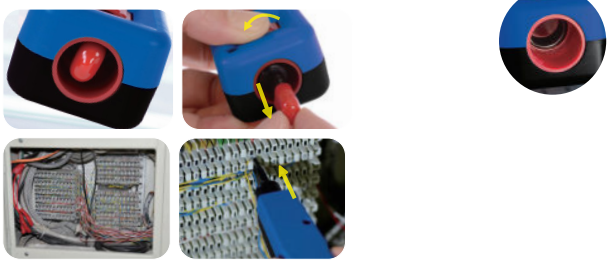

PVC Electrical Insulation Tape

6AG11-20



KT NO.	Width mm	g	
6AG11-20	18	52	1 / 250

Electronic Tool Set

- To repair electronic equipment....etc.

90217PQ

6BC23B
Soldering iron 220V/30W

90217PQ01

6BC23A
Soldering iron 220V/30W

90217PQ03

6BC23F
Soldering iron 110V/30W



17 PC.

Contents — 1.26 — 1 / 8

1412	3 x 75, 5.5 x 100, 6.5 x 100
1411	PH0 x 75, PH1 x 100, PH2 x 100
6207-05	
6377-55	
6741-06	
3611-06R	
6BC23	
6BC100	
6BF11-17	
6BD11	
6AF11-125	
6CB02	
7976-65	

Electrician Tool Box Set

97121PQ

- For electrician equipment

21 PC.



87407
Overall size :
445 x 240 x 206 mm

Contents — 4.9 — 1 — CUFT 0.79

1471	VDE PH0 x 75, PH1 x 100, PH2 x 100, PH3 x 150
1472	VDE 3 x 75, 4 x 100, 5.5 x 125, 6.5 x 150, 8 x 175
6116-07A	VDE 7-1/2"
6146-08A	VDE 8-1/4"
6216-06A	VDE 6-1/2"
6318-08A	VDE 8-1/4"
6516-10A	VDE 10"
6716-06A	VDE 6-1/4"
6214-45	4-1/2"
6334-05	5"
6721-10	
6751-44	
6AB12-55	
7932-04	

Electrician Tool Bag Set

91333MQ

- For electrician equipment

Contents		6.02	1
⊕	1421	PH1 x 80, PH2 x 100	
⊖	1422	5 x 75, 5 x 100, 6.5 x 100, 6.5 x 150	
⊕	1471	VDE PH2 x 100	
⊖	1472	VDE 6.5 x 150	
	6116-07A	VDE 7-1/2"	
	6216-06A	VDE 6-1/2"	
	6318-08A	VDE 8-1/4"	
	6716-06A	VDE 6-1/4"	
	20109MR	1.5, 2, 2.5, 3, 4, 5, 6, 8, 10	
	20129SR	1/16, 3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8, 5/64	
	3611-08R	200mm	
	79093-05C	5M/16FT 19mm	
	7971-07	165mm	

33 PC.



87711C
Overall size :
510 x 255 x 345 mm / 39 inner pockets

91038MY01

- For electronic & electrician equipment…etc

Contents		3.13	1
⊕	1421	PH0 x 60, PH1 x 80, PH2 x 100	
⊖	1422	3 x 75, 5 x 75, 6.5 x 100	
	6207-05	6377-55	6AB12-55
	6BF11-17	6BD11	6313-06
	7976-65	6AF11-125	6732-09
	6BC24A 220V / 40W	87137	6BC200 6AG11-20
	6BE11-07	6BE12-07	6BE16-07
	9DM1361	1036ZQ	ST20219MY1
	87721B		

38 PC.



87721B
Overall size : 360 x 200 x 260 mm

Lit when in DC mode measurement

Lit when in AC mode measurement

Negative polarity indicator-lit when the polarity is negative

AUTO Auto range indicator

Lit when in continuity check

Lit when in diode check

D-H Date hold indication

Lit when the battery is low

MΩ KΩ Ω

Unit for resistance measurement

mV V Unit for voltage measurement

1.8.8.8 Numeral date display

hFE Lit when in transistor hFE check

μA mA A

Unit for current measurement

LCD DISPLAY

SELECT KEY

DATA HOLD KEY



INPUT TERMINAL 10A USEAGE ONLY

- The Max. protective fuse for μA、μA、mA、mA is 0.5A/250V
- The Max.protective fuse for 10A、10A is 15A/250V

POWER & FUNCTION SWITCH

AC voltage measurement

DC voltage measurement

AC/DC current measurement in micro-amperes

AC/DC current measurement in milli-amperes

10A AC/DC current measurement in 10 amperes

NPN Transistor in NPN hFE measurement

LED LED test

AC or DC measurement

OFF Turn off the power

PNP Transistor in PNP hFE measurement

Ω


Resistance measurement / Diode test / Continuity check

Digital Multimeter

9DM1361

- Date hold, auto range, auto power off selection, auto power off cancelation
- Unit & function indication, Maximum reading value 1999 digits. Negative polarity indicator (no indication is given for positive polarity)
- Low power consumption
- Fuse with : 500mA / 600V & 10A / 600V
- AAA battery x 2 PC. included
- CE approval IEC61010-1 (2010), CAT.II 600V, CAT.III 300V



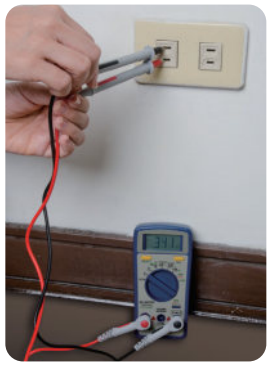

Specification	
DC Voltages (0.1mV ~ 1V)	200mV / 2V / 20V / 200V / 600V
AC Voltages (0.001V ~ 1V)	2V / 20V / 200V / 600V
DC Ampere (0.1uA ~ 0.01A)	200uA / 2000uA / 20mA / 2A / 10A
AC Ampere (0.1uA ~ 0.01A)	200uA / 2000uA / 20mA / 2A / 10A
Resistance (0.1Ω ~ 0.01MΩ)	200Ω / 2kΩ / 20kΩ / 200kΩ / 2MΩ / 20MΩ
Continuity check	Yes
Diode test	Yes
hFE(NPN, PNP)	Yes
LED check	Yes
Low battery indicator	Yes
LCD Display	3 1/2 digits 2000 counts
Sampling rate	3 times / sec

KT NO.	Size (mm) L x W x H	g	
9DM1361	138 x 70 x 32	85	10 / 60

Digital Multimeter

9DM1381

- Pocket size with flip cover design
- Approx. 4300 counts LCD display
- Auto range, auto power off selection
- Low power consumption
- LR44 battery x 2 PC. included
- CE approval EN61010-1, CAT.II 600V, CAT.III 300V
- Attachable test leads, easy operation





Specification	
DC Voltages (0.1mV ~ 1V)	400mV / 4V / 40V / 400V / 600V
AC Voltages (0.001V ~ 1V)	4V / 40V / 400V / 600V
Resistance (0.1Ω ~ 0.01MΩ)	400Ω / 4kΩ / 40kΩ / 400kΩ / 4MΩ / 40MΩ
Continuity check	Yes
Diode test	Yes
Overload indicator	OL
Low battery indicator	Yes
Sampling rate	Approx. 2 times / sec


KT NO.	Size (mm) L x W x H	g	
9DM1381	117 x 76 x 18	121	20 / 80

Digital Clamp Meter

9DM2351

- Max clamp size : Ø 30mm
- Unit & function indication, maximum reading value 1999 digits
- Negative polarity indicator (no indication is given for positive polarity)
- Auto power off selection approx. 15 minutes
- Low power consumption
- AAA battery x 2 PC. included
- CE approval IEC 61010-1, IEC 61010-2-032
  CAT.III 600V Pollution Degree 2
- Attachable test leads, easy operation





Specification	
AC Ampere (0.1A - 1A)	200A / 600A
AC Voltages (0.001V - 1V)	2V / 20V / 200V / 600V
DC Voltages (0.1mV - 1V)	200mV / 2V / 20V / 200V / 600V
Resistance (0.1Ω - 0.01MΩ)	200Ω / 2kΩ / 20kΩ / 200kΩ / 2MΩ / 20MΩ
Continuity check	Yes
Diode test	Yes
Low battery indicator	Yes
LCD Display	3 1/2 digits 1999 counts
Sampling rate	3 times / Sec.
Overload indicator	OL





KT NO.	Size (mm) L x W x H	g	
9DM2351	189 x 71 x 37	354	5 / 40

AC Non-contact Voltage Tester

6CB31


- Voltage ranges : 80 to 1000V AC.(50~60Hz)
- Application :
  AC voltage in outlets, lighting, circuit breakers, wires and cables etc..
- Adjustable sensitivity voltage detection
- Visible LED light voltage indicator in tip
  (Green light is high gear, red light is low gear)
- AAA battery x 2 PC. included
- Standard category :
  EN 61000-6-3 / EN 61000-6-1 CAT III



KT NO.	Overall size (mm) L x W x H	g	
6CB31	160 x 20 x 24	72	10 / 100

Measurement level

The input voltage should not exceed the maximum value.

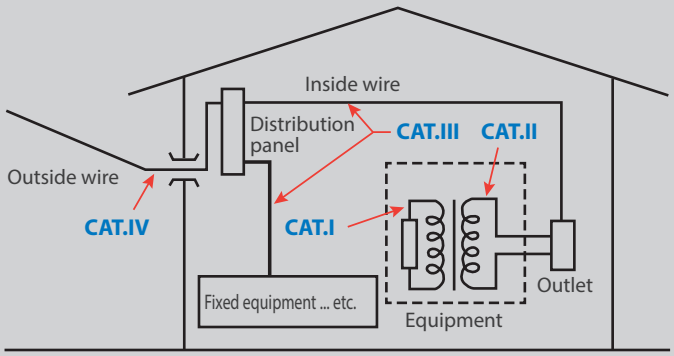

Measurement level	Description	Example
CAT.I	Measurement directly connected to the power supply circuit board	The secondary of the transformer measured
CAT.II	Measurement board directly connected to the low voltage devices	Equipment, portable devices
CAT.III	Equipment within the building	Distribution panels, circuit breakers
CAT.IV	Sources of all low voltage installations	Overhead lines, cable facilities

9 in 1 Multifunctional Wire Stripper

6CB41

- Non-contact voltage detection 80 - 1000V, 3 minutes auto power off
- Application: AC voltage in outlets, lighting, circuit breakers, wires and cables etc
- Illumination: COB LED
- Magnetic pads which can be useful for holding small components like nuts and bolts
- Screwdriver No. PH2 x1
- Battery: 3V (AAA 1.5V x2) Included
- Standard category: CAT IV 1000,
  EN 61010-1 : 2010/A1 : 2019, EN 62471 : 2008,
  EN 61326-1 : 2013, EN 61326-2-2 : 2013


• Magnetic



• Lock



• Cut



• Stripper(romex cable type NM-B)



• Stripper


• Stripper



• Volt tester


• Measurement


• Screwdriver (Use 65mm-70mm)



KT NO.	Wire stripper	Stripping romex cable	Stripping round cable Ø mm	Wire cutter Ø mm	g	
6CB41	mm^2-0.5, 0.8, 1.3, 2.0, 3.3, 5.0, 8.0 AWG-20, 18, 16, 14, 12, 10, 8	12~2	8~10	7	220	1 / 50

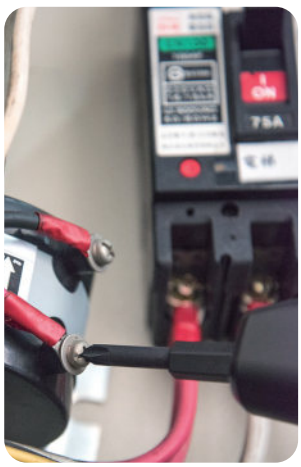





Infrared Thermometer

9DN12

- Not necessary to contact with the object
- IR point can be displayed clearly
- °C and °F interchangeable functions
- Selection of different materials
- Dark screen backlight test board functions
- 15 seconds automatically turn off the screen
- 9V battery x 1 PC. (included)

Technical data	
Temperature range	-30~550°C (-22~1022°F)
Operating temperature	0~50°C
Resolution	0.1°C / 0.1°F
Accuracy	±2.5% OR 3°C
Emissivity	Selectable (0.85 / 0.90 / 0.95)
Distance to spot ratio	12 :1
Auto power off	15 seconds
Laser pointer	Class 2 Laser < 1 mW

KT NO.	Overall Size (mm) L x W x H	g	
9DN12	193 x 47 x 126	313	5 / 20







Testing Screwdriver

6CB02

- Testing range : 100~250V
- CE approval
- Don't use the testing screwdriver as screwdriver
- Neon indicator



KT NO.	mm	mm	mm	mm	Testing range	g	
6CB02	3	0.6	65.5	140	100~250V	15	12 / 288


Digital Voltage Tester

6CB21

- Self-Diagnostic test
- Built-in LED flashlight
- LCD Display
- Protection IP64
- AAA 1.5V x 2 PC.
- Standard category :
  EN 61243-3 / IEC 61243-3
  EN 61010-1 / IEC 61010-1
  CAT.III 690V / CAT.IV 600V

KT NO.	Overall Size (mm) L x W x H	g	
6CB21	255 x 66 x 30	250	5 / 20

Specification	
DC Voltage Test	12, 24, 50, 120, 230, 400, 690V
Polarity indication	Yes
AC Voltage Test	12, 24, 50, 120, 230, 400, 690V
Phase rotation test	Yes
High voltage indication	≧ 50V
Frequency range	0-70Hz
Continuity test	0~550KΩ
Operation condition	-10~55°C










KING TONY
9DM1361
AUTO RANGE
SELECT
OFF
10A
COM
CAT II 600V
CAT III 300V
hFE
NPN
PNP
LED
KING TONY
6CB41
NCV: 80~1000V AC CAT IV 1000V
KING TONY
9DM2352
AC/DC
CLAMP METER
COM
OFF
HOLD
SEL/REL
CAT III 600V
MAX 600A
KING TONY
Distance ratio
12:1
-30~550°C

WIRE & CABLE TOOLS



Electrician Scissors

6AB13-06

- High cutting performance by low cutting force



- 38mm² wire



Ergonomic design, handles made of high compressive strength and non-slip nylon fiber + TPV
Special handle design, also suitable for the left-hander

Blades made of AUS-8, serrated on the edge can prevent objects from slip away, soft cable, up to dia 38mm², insulation materials, electrical tape cable tie

KT NO.	Overall length inch	Overall length mm	Cutting length mm	Cutting capacity AWG	Cutting capacity mm²	g	
6AB13-06	6	150	26	2	38	114	12 / 72

6AB21-65

- Curved mouth cable cutter
- Safety blade locking system





KT NO.	Overall length inch	Overall length mm	Cutting length mm	Cutting capacity mm²	g	
6AB21-65	6-1/2	158	22	10	156	12 / 72

Multi-purpose Scissors

6AB12-55

- Stainless steel with serrated edges
- Grip material - PP + TPR



KT NO.	Overall length mm	(mm)	Cutting capacities (mm²) Electric cable	Cardboard	Rubber	Leather	Rolled steel	Copper (soft)	Aluminum	g	
6AB12-55	145	55	10	10	10	10	0.5	0.5	0.5	94	12 / 72

6AB31-75

- Even mouth cable cutter
- Safety blade locking system



KT NO.	Overall length inch	Overall length mm	Cutting capacity mm	AWG	mm²	Cutting capacity (mm²) Leather	Copper(soft)	Aluminum	g	
6AB31-75	7-1/2	185	52	16-12	1.5-4.0	2.0	0.5	0.5	160	12 / 72

- Cut cable , cardboard , rubber , leather , rolled steel , copper (soft) , aluminum , carpet , branch and so on.

5 in 1 Multi-functional Electrician Scissors

6AB14-06

- Professional scissors with special steel frame for high resistance and durability
- High hardness blades and anti-slip serrated edge for making precise cuts
- Light and strong handles are made from impact-resistant plastic material
- Ergonomically-designed handles are suitable for a comfortable grip
- PP+TPR handle material
- The blade is made of 4034 stainless steel


• Crimping terminal of cable


• Scraping




• Welding cable 100mm²


• Wire stripper 1.5-4mm²



KT NO.	Overall length inch	Overall length mm	Cutting length mm	Cutting capacity AWG	Cutting capacity mm²	Wire stripper AWG	Wire stripper mm²	Pin terminal insulated/ Non-insulated terminal crimping AWG	Pin terminal insulated/ Non-insulated terminal crimping mm²	g	
6AB14-06	6-3/8	161	24	1/0	50	14, 12	1.5, 2.5	14	2.5	193	12 / 48

6AB14-65


- Professional scissors with special steel frame for high resistance and durability
- High hardness blades and anti-slip serrated edge for making precise cuts
- Light and strong handles are made from impact-resistant plastic material
- Ergonomically-designed handles are suitable for a comfortable grip
- PP+TPR handle material
- The blade is made of 4034 stainless steel


• Wire stripper 1.5-4mm²


• Crimping terminal of cable


• Crimping terminal of cable


• Welding cable 80mm²


• Scraping





KT NO.	Overall length inch	Overall length mm	Cutting length mm	Cutting capacity AWG	Cutting capacity mm²	Wire stripper AWG	Wire stripper mm²	Pin terminal insulated/ Non-insulated terminal crimping AWG	Pin terminal insulated/ Non-insulated terminal crimping mm²	g	
6AB14-65	6-3/4	170	21	3/0	80	16, 14, 12	1.5, 2.5, 4	14	2.5	228	12 / 48

Multi-purpose Scissors

6AB33-95

- Ergonomically-designed handles are comfortable and durable during usage
- For cutting soft materials such as tin sheets, plastics, CD, cards and papers...etc
- The stainless steel blade and the curve-blade design makes it steady and saves strength while cutting
- The big angle design between blades and the handles of the scissors makes it so your hand never touches any object while operating
- Designed to conveniently adjust blades
- The blade is made of 420J2 stainless steel material
- PP+TPR handle material



• Large angle of blades



• Small angle of blades



• Big angle design between blades and the handles of the scissors





• Iron wire cutter

KT NO.	Overall length inch	Overall length mm	Cutting length mm	Wire cutting Aluminum / Copper mm	Cutting capacities (mm^2) Cardboard / Carpet / Copper / Aluminium (soft)				g	
6AB33-95	9-3/4	246	73	2.5	10	5	0.5	0.6	312	6 / 48

Retractable Safety Cutter

7946-07

- Multifunctional safety cutters with trapezium blades 60x18 mm premium quality robust and resistant
- Upper slider for blade extraction with automatic retraction
- Container with 2 replacement blades integrated in the handle
- Integrated device for cutting nylon threads and films
- Structure in zinc alloy, anti-slip ergonomic grip handle in TPR Soft-Grip
- High quality blades in carbon steel SK5 extremely sharp and long duration






• Auto return butto



• Auto lock button



• 2 blades in storage



• Blade replace button



7945-07P01
(62mm, 10 PC.)

KT NO.	L mm	g	
7946-07	180	200	12 / 72

7946-07-S

Paper display stand size(mm) :
243 x 199 x 217 (0.37 CUFT)

KT NO.	Contents	Kg	
7946-07-S	 7946-07 x 12 PC.	2.75	1 / 4






12 PC.

Cable Cutting Pliers

6141C

- Polished head
- For cutting copper and aluminum cables, single and multiple wire





KT NO.	Overall length inch	Overall length mm	Cutting capacity DIN(mm²)	Cutting capacity AWG	Ø mm	g	
6141-06C	6	160	22	4	9.2	169	6 / 120
6141-08C	8-3/8	212	38	2	11.5	282	6 / 60

Cable Cutter

6AD

- Cable cutter for cutting copper and aluminum cable





- Can be use with : 67B3-55 439 / 6AC51 444

KT NO.	Overall length mm	Cutting capacity DIN(mm²)	Cutting capacity AWG(MCM)	kg	
6AD17-150	435	150	300	1.34	1 / 20
6AD23-400	595	400	800	1.84	1 / 10

Ratcheting Cable Cutter

6AD10-325

- Cut soft copper, aluminum and multiple conductor cable to 325mm² (600MCM)
- Cuts hard drawn copper to 200mm² (400MCM)





KT NO.	Overall length mm	Cutting capacity mm²	Cutting capacity AWG(MCM)	g	
6AD10-325	255	325	600	613.2	10 / 30
6AD10-3P01	Spare cutting blade			58	1 / 100

6AD16-500

- Cut soft copper, aluminum and multiple conductor cable to 500mm² (1000MCM)





KT NO.	Overall length mm	Cutting capacity mm²	Cutting capacity AWG(MCM)	kg	
6AD16-500	400	500	1000	1.60	1 / 10

Electrician Knife

7932-04

- Electrician knife with wire stripper
- 1 blade with half-moon notch for stripping and vee for cutting



KT NO.	Blade length mm	Closed length mm	Overall length mm	g	pcs/box
7932-04	85	110	196	75	10 / 180





7933-45

- Straight blade electrician knife



KT NO.	Blade length mm	Closed length mm	Overall length mm	g	pcs/box
7933-45	85	120	205	111	10 / 180


Cable Stripping Knife

7935-08

- Blades are made from high tensile steel, allowing for excellent strength and performance
- Light and strong handles are made from impact-resistant plastic material
- Ergonomically-designed handles are suitable for comfortable and durable usage
- The Cable Stripping Knife has a protection sheath
- The protection sheath can also be used for assisting stripping wires
- The V-shaped groove can be used to position wires, and can prevent sliding while you peel wires
- Nylon handle
- The blade is made of 4034 stainless steel

KT NO.	L mm	g	pcs/box
7935-08	204	109	12 / 72





• Cable stripping




• Scraping



• Protection set locked



• Protection set unlocked




Folding Clasp Knife

7941-08

- Suitable for mechanics, outdoor and camping etc
- Blade fixator folded out
- Light and handy to use
- Stainless Blade with blacking coating
- With belt clip

KT NO.	L mm	g	pcs/box
7941-08	210	166	8 / 48









Utility Cutter

7971-07

- Automatically reloading snap-off blades
- Ergonomic soft ABS TPR handle
- Stainless steel blade guide
- Blade lock knob
- 4-blade cartridge(18mm)

KT NO.	L mm	g	
7971-07	165	180	6 / 72



• 3 blades in storage







7971-07P02
(18mm, 10 PC.)

7978-07

- 3-blade cartridge with automatically reloading function
- Material : SK4 (HRC ≧ 62)
- 0.5mm thickness and 18mm width

KT NO.	L mm	g	
7978-07	175	131	12 / 144



• Quickly remove blade & automatically reload function



• 3 blades in storage

7978-07P02
(18mm, 10 PC.)

7978-07-S

Paper display stand size(mm) :
172 x 1360 x 222mm (2.75CUFT)



12 PC.

KT NO.	Contents		kg	
7978-07-S	 7978-07	x 12 PC.	1.58	1 / 12

7977-07

- Heavy duty 18mm wide cutting knife with snap off blades
- Exceptional cutting performance with SK4 blade (HRC ≧ 65)
- Provides sharper and more stable cutting with a high hardness cutting edge

KT NO.	L mm	N.W	G.W	CUFT	g	
7977-07	180	20	22	2.13	117	12 / 144
7977-07P02	-	10	12	1.06	9	200 / 2400



7977-07P02
(18mm, 10 PC.)



7977-07-S

Paper display stand size(mm) :
265 x 162 x 245 (0.37CUFT)



12 PC.

KT NO.	Contents		kg	
7977-07-S	 7977-07	x 12 PC.	2.23	4

Multi-purpose Wire Stripper


6751-44

- Wire stripper
- Wire cutter
- Cable stripper






Preparation blade

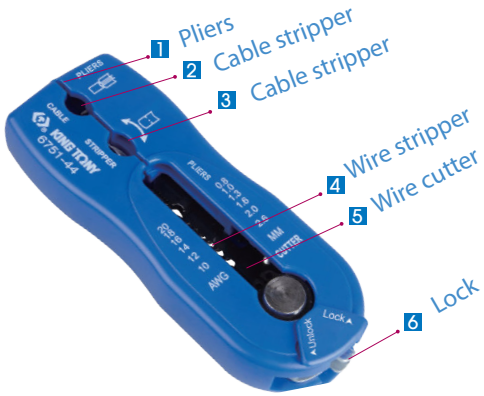


KT NO.	Wire stripper Ø mm	Wire stripper AWG	Cable stripper Ø mm	Wire cutter Ø mm		
6751-44	0.8-2.6	20-10	6-10	6	116	10 / 120

Wire Stripper

6762-08



• Insulated terminal crimping



• Wire stripper



• Wire cutter



KT NO.	Wire stripper mm²	Wire stripper AWG	Wire cutter Ø mm	Insulated terminal crimping mm²	Insulated terminal crimping AWG		
6762-08	0.2-6	24-10	6	0.5-6	22-10	271	15 / 60

67A1-07








KT NO.	Wire stripper mm²	Wire stripper AWG	Wire cutter Ø mm		
67A1-07	0.05-3.5	30-12	5	209	12 / 60

Wire Stripper Pliers

6761-07

- Aluminum body design for light weight
- Special design of strip length setting function for quickly operate
- SK5 knife








KT NO.	Wire stripper mm²	Overall length mm		
6761-07	0.9, 1.25, 2, 3.5, 5.5	178	271	10 / 60


Cable Stripper

6755-05

- UTP/STP, flat cable stripper & cutter
- Material : ABS





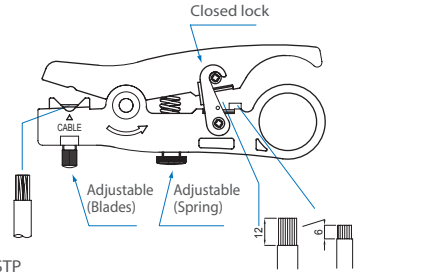

UTP/STP
Cable stripper
(Ø 2.6 ~ Ø 8.0)

Flat cable
stripper / cutter
RJ-45 (12 mm)
RJ-11/12 (6 mm)

UTP/STP cable stripper	(Ø 2.6 ~ Ø 8.0)
Flat cable stripper / cutter	RJ-45 (12 mm), RJ-11/12 (6 mm)

KT NO.	Overall length inch	mm	g	
6755-05	5	127	72	20 / 120

Coax. Cable Stripper

6756-05


- 2-Blades model
- Material : ABS





Stripper dimension "d"	6.4 mm 
Stripper distance 2-Blades model	RG-174/58/59/62/6 3C/4C/5C (Ø 2.6 ~ Ø 8.0)






KT NO.	Overall length inch	mm	g	
6756-05	5	127	68	20 / 120

Fiber Optic Stripper

67B1-06

- Three in one model performs all common fiber stripping functions
- Safety locking system for easy and steady stripping
- Ergonomic handle for comfort grip



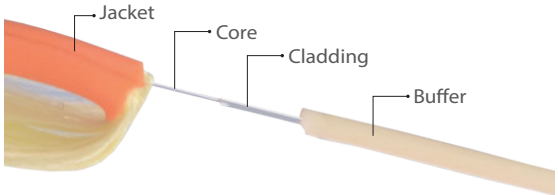




- To strip the 2.0-3.0 mm fiber jacketing



- 600-900 micron buffer layer stripping



- Strips the 250 micron cable down to the glass fiber without scratching or nicking glass fiber


KT NO.	Overall length inch	mm	Stripping range ◆mm	◆µm	◆µm	g	
67B1-06	6	150	2.0-3.0	600-900	250	130	10 / 100

Multi-stripper

67B2-05

KT NO.	Overall length inch	mm	g	
67B2-05	4-3/4	120	69	15 / 90

Stripping capacity
• Round cables between : 8-13mm
• Wire cable : 0.5 1.0 1.5 2.5 4.0 6.0mm^2
• AWG : 20 18 16 14 12 10
• Coax.cable : RG-6 / RG-59

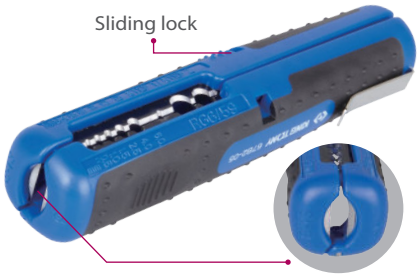

Cable Stripper


67B3-55

- Fast and safe stripping of round cable sheaths made of PVC or rubber from 6-45mm dia
- Adjustable knurled nut for max 6mm sheath

KT NO.	Cable stripper mm^2	Overall length inch	mm	g	
67B3-55	6-45	5-1/2	140	170	10 / 100



• Can be use with : 6AC51 444 / 6AD 434



• Adjustable cutting depth




• Push cover




• Simple rotating the tool body









• Remove the cable sheaths without damage of the inner conductors

■ Crimp die profiles

Symbol	
 	Phone plugs 6 pin
 	Modular plugs 8 pin
 	Insulated terminal connectors
 	Non-Insulated terminal connectors
 	Pin terminal, Insulated & Non-Insulated ferrules
 	Non-Insulated terminal, Lug connectors

Symbol	
 	CATV "F", BNC , COAX , and fiber optics connectors
	
	
	

Modular Crimping Tool

67F1-08

- For cutting / stripping / crimping
- 2 types of plugs in 1 tool
- Grip material - PP+TPR




• 6P



• 8P



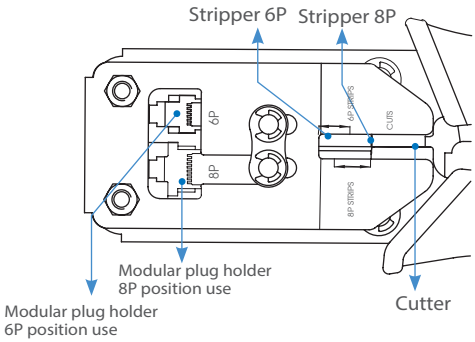

KT NO.	Overall length inch	Overall length mm	g	pc / box
67F1-08	8	203	370	10 / 40

Interchangeable Ratchet Crimping Tool Set

42107GX

- Quick interchangeable ratchet function & easy to use
- Crimping jaws with heat treatment
- Blow case size (mm) : 282 x 176 x 52 (0.09 cuft)

1.16 kg | 1 / 10



7 PC.

Item No.	Replacement die set	Terminal size	Description	
6781P0A		AWG 12-10 / 16-14 / 22-18 / 0.5-1.0 / 1.5-2.5 / 4-6 mm²	Insulated Terminal	
6781P0B		AWG 1.5 / 2.5 / 8 / 10 mm²	Non-Insulated Terminal	
6781P0C		AWG 0.5-1 / 1.5 / 2.5 / 4-6 mm²	Open Barrel Terminal	
6781P0D		AWG 0.5 / 0.75 / 1 / 1.5 / 2.5 / 4 mm²	Insulated Core-end Terminal	
6781P0F		AWG 6 / 8 / 10 / 16 mm²	Insulated Huge Core-end Terminal	
6781P0H		AWG 0.5 / 2.5 / 8-6 / 8-10 / 14 / 22 mm²	Open Barrel & D-Sub, V.35 Connectors	
6781-85			Ratchet	

Ratchet Crimping Tool Set

67G0005

- Blow case size (mm) : 240 x 70 x 50 (0.07 cuft)

1 kg | 1 / 16



5 PC.



Item No.	Replacement die set	Terminal size	Description	
67GN-09	67GNP01	AWG 12 / 14 / 16 / 18 / 20 / 22 0.5 / 0.75 / 1.0 / 1.5 / 2.5 / 4.0 mm²	PIN TERMINAL INSULATED OR NON-INSULATED FERRULES	
67GJP01		AWG 6 / 8 / 10 6 / 10 / 16 mm²	PIN TERMINAL INSULATED OR NON-INSULATED FERRULES	
67GKP01		AWG 12-10 / 16-14 / 22-18 0.5-1.0 / 1.5-2.5 / 4-6 mm²	INTER-LOCKING & NON-INSULATED	
67GLP01		AWG 12-10 / 8 / 16-14 / 20-18 1.5 / 2.5 / 6 / 10 mm²	NON-INSULATED TERMINAL	
67GHP01		AWG 12-10 / 16-14 / 22-18 0.5-1.0 / 1.5-2.5 / 4-6 mm²	FOR INSULATED TERMINAL	


Ratchet Crimping Tool

67G

- For crimping RG type cable
- CATV "F" connectors
- Interchangeable die



KT NO.	Overall length inch	Overall length mm	g	
67G	8.7	222	480	1 / 30

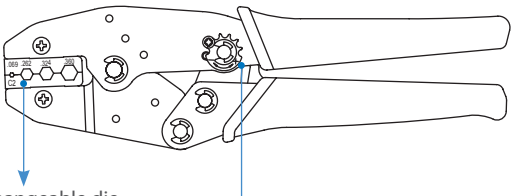





Item No.	Replacement die set	Terminal size	Description	
67G1-09	67G1P01	.068" .262" .324" .360" (1.72 6.65 8.23 9.14 mm)	CATV "F" Connectors RG59, 6	
67GB-09	67GBP01	.075" .100" .128" .429" (1.9 2.54 3.25 10.9 mm)	RG8, 9, 11, 174, 316 BELDEN 9913	
67GN-09	67GNP01	AWG 12 / 14 / 16 / 18 / 20 / 22 0.5 / 0.75 / 1.0 / 1.5 / 2.5 / 4.0 mm^2	PIN TERMINAL INSULATED OR NON-INSULATED FERRULES	
67GJ-09	67GJP01	AWG 6 / 8 / 10 6 / 10 / 16 mm^2	PIN TERMINAL INSULATED OR NON-INSULATED FERRULES	
67GK-09	67GKP01	AWG 12-10 / 16-14 / 22-18 0.5-1.0 / 1.5-2.5 / 4-6 mm^2	INTER-LOCKING & NON-INSULATED	
67GL-09	67GLP01	AWG 12-10 / 8 / 16-14 / 20-18 1.5 / 2.5 / 6 / 10 mm^2	NON-INSULATED TERMINAL	
67GH-09	67GHP01	AWG 12-10 / 16-14 / 22-18 0.5-1.0 / 1.5-2.5 / 4-6 mm^2	FOR INSULATED TERMINAL	
67GG-09	Unchangeable	AWG 12-10 / 16-14 / 22-18 0.5-1.0 / 1.5-2.5 / 4-6 mm^2	FOR INSULATED TERMINAL	









Crimping Tools

6721-10


- Wire cutter
- Crimps insulated terminals
- Bolt cutter
- Crimps non-insulated terminals (Open barrel)
- Wire stripper




FUNCTION:




• Wire cutter




• Open barrel terminal crimping




• Non-Insulated terminal Crimping



• Bolt-cutter



• Insulated terminal Crimping




• Wire stripper


KT NO.	Wire cutter Ø mm²	Insulated terminal crimping	Bolt-cutter	Non insulated termind crimp	Open barrel terminal crimping	Wire stripper mm²	g	
6721-10	6	0.5~6	M2.6~5	0.5~6	1.5~6	0.75~6.0	294	50 / 50

6732-09


- Wire cutter
- Crimps insulated terminals
- Bolt cutter
- Crimps non-insulated terminals (Ring)
- Wire stripper

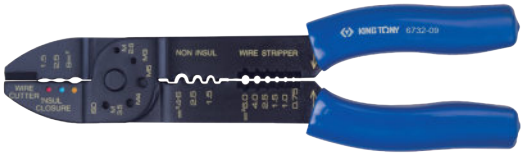


FUNCTION:




• Wire cutter




• Bolt-cutter



• Insulated terminal Crimping



• Wire stripper




• Non-insulated ring terminal crimping

KT NO.	Wire cutter Ø mm²	Insulated terminal crimping	Bolt-cutter	Non-insulated ring terminal crimping	Wire stripper mm²	g	
6732-09	6	1.5~6	M2.6~5	1.5~6	0.75~6.0	261	24 / 72


6741-06

- Wire cutter
- Wire stripper


FUNCTION:



• Wire cutter



• Wire stripper



• Peel the electric wire's shell



KT NO.	Wire cutter Ø mm²	Wire stripper mm²	g	
6741-06	6	0.5~5.5	103	10 / 100

Heavy Duty Crimping Tool

6AC51-26

- For cable lugs from 10mm^2-150mm^2 with non-ratchet screw adjustment






KT NO.	Overall length mm	kg	
6AC51-26	665	3.9	1 / 5

Crimping capacity

AWG	8	6	4	2	1/0	2/0	3/0	4/0	300MCM
JIS(mm^2)	8	14	22	38	60	70	80	100	150
DIN(mm^2)	10	16	25	35	50	70	95	120	150

6AC52-12

- Ratchet designed. For non-insulated terminals







KT NO.	Overall length inch	Overall length mm	g	
6AC52-12	12	300	520	6 / 24

Item No. \ AWG	16	14	10	8	6
JIS mm^2	1.25	2	5.5	8	14
DIN mm^2	1.5	2.5	6	10	16
6AC52-12	•	•	•	•	•





HAMMERS & STRIKING TOOLS





KING TONY 7821-30
GENUINE HICKORY
WARNING
This tool can be made to chip if struck against brittle material such as hardened surfaces. Repeated hard blows may cause tool to break or other debris to fly which could cause bodily injury.

Hammer

Convert :
1g = 0.035 oz / 1g = 0.0022 lb

7811

- American style
- Forged and hardened steel
- Wood and metal wedge
- GGG-H86C

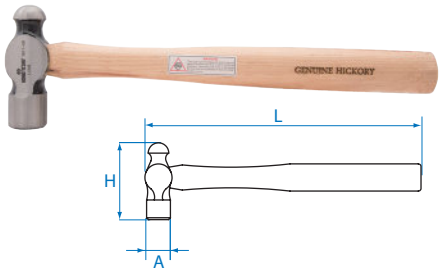


KT NO.	H.W g	A mm	H mm	L mm	g	
7811-08	245	25	80	300	391	6 / 60
7811-12	370	29	93	300	480	6 / 48
7811-16	485	32.5	103	353	651	6 / 36
7811-24	765	35.5	122	405	983	6 / 24
7811-32	925	40.5	125	405	1170	6 / 24
7811-40	1125	42.2	133	405	1344	6 / 12

7821

7821:

- German style
- Forged and hardened steel
- Wood and metal wedge
- DIN 1041

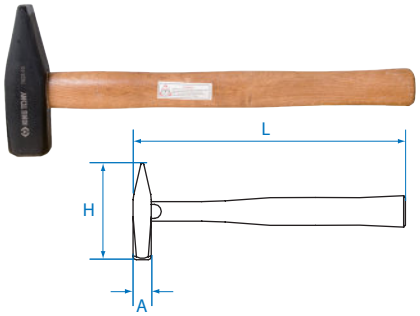

7823


7823:

- Engineer's hammer
- DIN1041

KT NO.	H.W g	A mm	H mm	L mm	g	
7821-30	371	23	103	300	395	12 / 48
7821-50	500	27	120.5	320	615	6 / 36
7821-80	800	33	130	350	990	6 / 24
7823-10	1000	36	135	360	1121	9 / 18
7823-15	1500	42	145	380	1666	6 / 12
7823-20	2000	47	155	400	2197	6 / 12

7822


- Riveting hammer
- NF E71-016

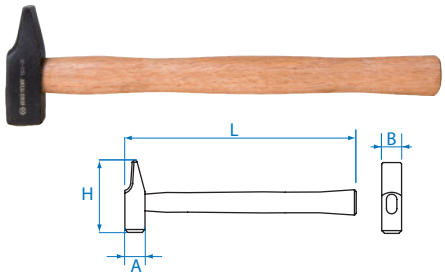

KT NO.	H.W g	A mm	B mm	H mm	L mm	g	
7822-30	400	30	26	95	300	463	10 / 40
7822-40	800	40	35	115	320	977	8 / 16
7822-45	1250	45	40	124	355	1267	8 / 16
7822-50	1600	50	44	135	382	1856	6 / 12

7833


- Lump hammer
- DIN 6475

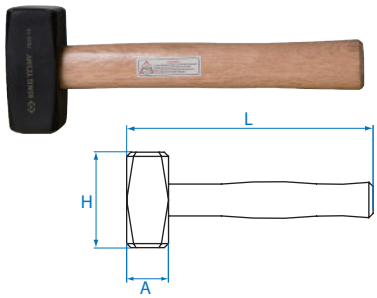

KT NO.	H.W g	A mm	H mm	L mm	g	
7833-10	1000	40	95	260	1066	7 / 14
7833-12	1250	43	100	260	1425	6 / 12
7833-15	1500	45	110	280	1642	6 / 12
7833-20	2000	50	120	300	2142	4 / 8

7834


- Sledge hammer
- Fiberglass handle

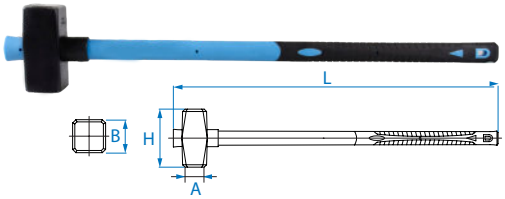

KT NO.	H.W g	A mm	B mm	H mm	L mm	g	
7834-50	5000	68	70	158	908	5850	1 / 2

7852


- Rubber hammer
- Fiberglass handle

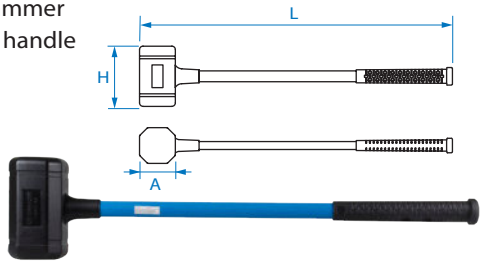

KT NO.	H.W g	A mm	H mm	L mm	g	
7852-23	1650	69.5	142	500	2062	4 / 8
7852-55	4500	104	198	910	5500	2 / 4

7861

- Fiberglass claw hammer

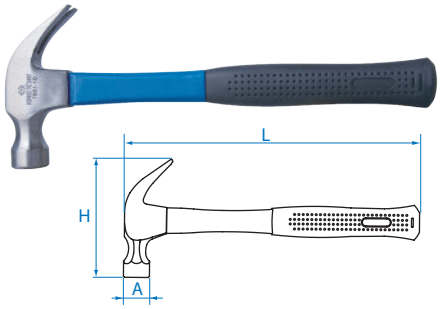


KT NO.	H.W g	A mm	H mm	L mm	g	
7861-08	225	24.8	106	275	374	10 / 40
7861-16	450	30.0	133	335	740	4 / 24
7861-20	565	31.0	144	340	830	4 / 24
7861-24	680	32.0	147	380	920	10 / 20

Hammer

CAUTION Please wear proper safety gear while working.

7848


- Rubber hammer
- Feature : used to lay basalt floors, tires and other materials which are vulnerable

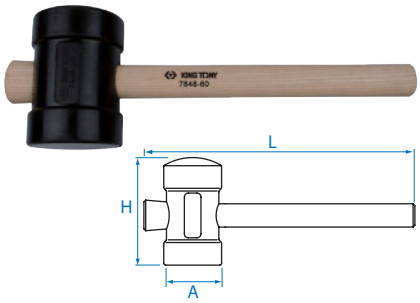

KT NO.	H.W g	A mm	H mm	L mm	g	
7848-60	523	64	119	330	628	6 / 12
7848-80	821	79	119	350	979	5 / 10

7851


- Dead blow hammer

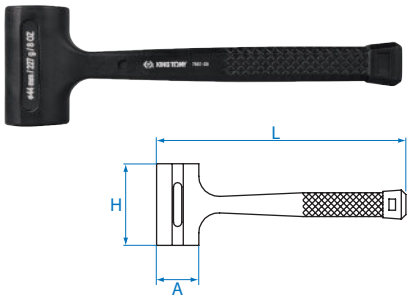

KT NO.	H.W g	A mm	H mm	L mm	g	
7851-08	227	44	81	272	572	6 / 24
7851-16	454	45	100	304	804	6 / 24
7851-24	680	49	100	322	942	6 / 24
7851-32	907	55	100	342	1059	6 / 24
7851-40	1134	58	110	342	1168	6 / 24
7851-48	1361	61	123	355	1321	6 / 12
7851-64	1814	68	136	368	1976	6 / 12

7842

- Soft face hammer
- Replaceable polyurethane face
- Helps minimize marring and surface damage

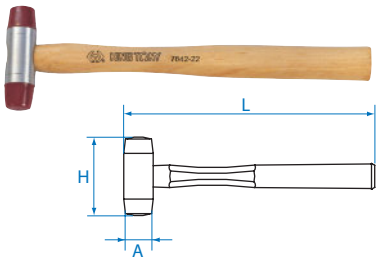


KT NO.	A mm	H mm	L mm	g	
7842-22	22	75	255	110	10 / 40
7842-28	28	85	295	165	10 / 40
7842-35	38	100	325	305	8 / 32
7842-45	45	112	335	420	8 / 32
7842-60	60	135	380	895	6 / 12

915

- Spare faces for item 7842





KT NO.	A mm	g	
91522H/S	22	11	10 / 160
91528H/S	28	22	10 / 100
91535H/S	38	38	6 / 120
91545H/S	45	70	6 / 36
91560H/S	60	137	6 / 24

Hammer Hook

91431

- Overall Size - W40 x D210 x H240 mm
- Weight - 411.6 g / Cuft - 0.072






Chisel & Punch

- Material - chrome vanadium alloy steel
- Finishing - phosphate sunk

761 Center punch



KT NO.	Ø mm	L mm	g	
76103-04	3	100	33	12 / 336
76104-05	4	120	58	12 / 336
76105-06	5	150	129	12 / 144

763 Starter punch



KT NO.	Ø mm	L mm	g	
76301-05	1	120	57	12 / 336
76302-05	2	120	55	12 / 336
76303-05	3	120	57	12 / 336
76304-05	4	120	58	12 / 336
76305-05	5	120	59	12 / 336
76306-05	6	120	61	12 / 336
76307-05	7	120	101	12 / 240
76308-05	8	120	110	12 / 240
76309-06	9	150	141	12 / 144
76310-06	10	150	144	12 / 144

Chisel & Punch Set

CAUTION Please wear proper safety gear while working.


- Material - chrome vanadium alloy steel
- Finishing - phosphate sunk

765 Cape chisel



KT NO.	A mm	L mm	g	
76505-05	5	130	66	12 / 240

762 Flat chisel



KT NO.	A mm	L mm	g	
76210-10	10	250	135	12 / 144
76213-04	13	100	52	12 / 336
76213-06	13	150	82	12 / 144
76215-05	15	125	67	12 / 336
76217-06	17	150	140	12 / 144
76220-07	20	175	169	12 / 144
76223-08	23	200	295	12 / 72
76224-10	24	250	376	4 / 40
76226-12	26	300	649	4 / 32

764 Pin punch



KT NO.	Ø mm	L mm	g	
76402-45	2	115	31	10 / 640
76403-05	3	125	33	10 / 640
76403-06	3	150	39	10 / 250
76404-06	4	150	60	10 / 250
76405-65	5	165	68	10 / 280
76406-07	6	180	125	10 / 150
76408-08	8	200	162	10 / 120
76410-85	10	215	222	12 / 120
76412-09	12	230	349	10 / 80
76414-10	14	250	502	6 / 48

1005APR

5 PC.



Contents	Kg 0.32	8 / 48
76104-05	Ø 4 x 120	
76215-05	15 x 125	
76303-05	Ø 3 x 120	
76404-06	Ø 4 x 150	
76505-05	5 x 130	

1006APR

6 PC.



Contents	Kg 0.51	5 / 30
764	Ø 2 x 115, Ø 3 x 125 Ø 4 x 150, Ø 5 x 165 Ø 6 x 180, Ø 8 x 200	

Flat Chisel & Punch Set

1090PR1

- Flat chisel & punch set

KT NO.		Contents	Each Q'ty	Kg	Cuft
1090PR1	761	Ø 4 x 120, Ø 5 x 150	6	13.50	0.34'
	762	17 x 150, 20 x 175, 23 x 200, 24 x 250 mm			
	763	4 x 120, 8 x 120 mm			
	764	Ø 3 x 40, Ø 4 x 50, Ø 5 x 50, Ø 6 x 50, Ø 10 x 65			
	767	150 , 200 mm			
8711B		600 x 240 x 60 mm	1	6.20	0.9'
8711B-1		600 x 232 x 230 mm	1	2.00	1.7'



90 PC.

Shelf size (mm) : 600 x 240 x 290

Punch Set

- Material - chrome vanadium alloy steel
- Finishing - phosphate sunk



► Pouch material : Tetoron



► Pouch material : Nylon



► Pouch material : Tetoron

KT NO.	PC.		Contents	Package	Kg	
1006PR	6	764	Ø 2 x 30, Ø 3 x 40, Ø 4 x 50, Ø 5 x 50, Ø 6 x 50, Ø 8 x 50	Nylon	0.57	1 / 20
1006PRN	6			Tetoron		
1016PR	6	761	Ø4 x 120, Ø5 x 150	Nylon	0.84	1 / 20
		762	20 x 175, 23 x 200			
		764	Ø3 x 125, Ø5 x 165			
1009PR	9	764	Ø 2 x 30, Ø 3 x 40, Ø 4 x 50, Ø 5 x 50, Ø 6 x 50, Ø 8 x 50, Ø10 x 65, Ø12 x 70, Ø14 x 75	Nylon	1.70	1 / 12
1009PRN	9			Tetoron		
1010PR	10	761	Ø 3 x 100, Ø 4 x 120, Ø 5 x 150	Nylon	0.88	1 / 24
		763	Ø 3 x 120, Ø 6 x 120, Ø 8 x 120			
		764	Ø 3 x 40, Ø 4 x 50, Ø 5 x 50, Ø 6 x 50			
1025PRN	5	762	13 x 100, 15 x 125, 17 x 150, 20 x 175, 23 x 200	Tetoron	0.79	1 / 20

Sheathed Chisel & Pin Punch

- Material – chrome molybdenum alloy steel
- Finishing - phosphate sunk
- Safe and comfortable grip

761-G Sheathed center punch



KT NO.	Ø mm	L mm	g	
76125-74G	2.5	185	111	12 / 144
76104-74G	4	185	113	12 / 144
76106-74G	6	185	175	12 / 144
76108-74G	8	185	168	12 / 120
76110-74G	10	185	117	12 / 120

762-G Sheathed flat chisel



KT NO.	A mm	L mm	g	
76218-75G	18	190	181	10 / 100
76219-75G	19	190	180	10 / 100
76220-84G	20	210	268	8 / 80
76222-84G	22	210	269	8 / 80

763-G Sheathed starter punch



KT NO.	Ø mm	L mm	g	
76302-74G	2	185	111	12 / 144
76303-74G	3	185	111	12 / 144
76304-74G	4	185	112	12 / 144
76305-74G	5	185	115	12 / 144
76306-74G	6	185	118	12 / 144
76308-74G	8	185	166	12 / 120

764-G Sheathed pin punch



KT NO.	Ø mm	L mm	g	
76402-55G	2	140	50	12 / 384
76403-06G	3	150	53	12 / 384
76404-07G	4	180	96	12 / 144
76405-08G	5	200	110	12 / 144
76406-84G	6	210	163	12 / 120
76407-84G	7	220	163	12 / 120
76408-88G	8	220	174	12 / 96
76409-88G	9	230	183	12 / 96
76410-09G	10	250	246	10 / 80
76412-10G	12	290	347	8 / 64
76414-11G	14	350	443	6 / 48
76416-12G	16	310	594	6 / 36
76410-14G	10	350	358	10 / 60
76412-14G	12	350	476	6 / 36
76414-14G	14	350	521	6 / 36
76416-14G	16	350	670	5 / 30

Sheathed Pin Punch Set



► Pouch material : Tetoron

KT NO.	PC.		Contents	Kg	
1014GPN	4	764-G	Ø 10 x 350, Ø 12 x 350, Ø 14 x 350, Ø 16 x 350	2.13	1 / 8
1006GPN	6		Ø 2 x 140, Ø 3 x 150, Ø 4 x 180, Ø 5 x 200, Ø 6 x 210, Ø 8 x 220	0.80	1 / 8
1009GPN	9		Ø 2 x 140, Ø 3 x 150, Ø 4 x 180, Ø 5 x 200, Ø 6 x 210, Ø 8 x 220, Ø 10 x 230, Ø 12 x 250, Ø 14 x 290	1.82	1 / 12

Automatic Center Punch

768

- Material : handle - brass, tip - S2
- Spring-loaded trigger design for useing without a hammer


KT NO.	Ø mm	L mm	g	
76804-05	1.3	130	75.0	30 / 120
76807-06	1.7	155	142	30 / 120



Flat Chisel & Set

767

- Ribbed type

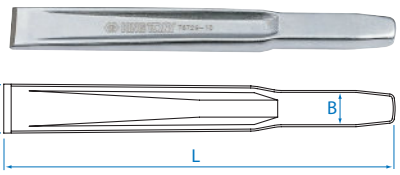

KT NO.	A mm	B mm	L mm	g	
76717-05	17	12.6	125	88	12 / 240
76721-06	20	16.0	150	147	12 / 144
76724-08	25	19.0	200	264	12 / 72
76729-10	29	22.3	250	454	8 / 48

11104PR10



4 PC.

Contents — Kg 1.0 — 1 / 20

76717-05	17 x 125
76721-06	20 x 150
76724-08	25 x 200
76729-10	29 x 250

11104PR



4 PC.

Contents — Kg 1.37 — 1 / 10


76717-05	17 x 125
76721-06	20 x 150
76724-08	25 x 200
76729-10	29 x 250



87108

87108

- Acrylic display stand



KT NO.	H mm	L mm	g	
87108	140	160	410	12

Marking Punch

CAUTION Please wear proper safety gear while working.

11409SQ

- Chrome vanadium alloy steel
- Hardened and tempered control HRC60 for safe use
- Invert number 6 to be number 9 (For 11409SQ)
- The letter A~Z with extra "&" (ampersand) included (For 11427SQ)



• The position hole help to fix the marking punch



11409SQ

11427SQ



11427SQ

KT NO.	Font size mm	Font size inch	Contents	Shank mm²	L mm	Kg	
11409SQ02	2.0	5/64"	9 PCS 0~9	6.35	61	0.18	1 / 120
11409SQ03	3.0	1/8"		6.35	61	0.18	1 / 120
11409SQ04	4.0	5/32"		6.35	59	0.18	1 / 120
11409SQ05	5.0	3/16"		8	61	0.28	1 / 80
11409SQ06	6.0	1/4"		9.53	61	0.43	1 / 60
11409SQ08	8.0	5/16"		12.7	71	0.78	1 / 30
11427SQ02	2.0	5/64"	27 PCS A~Z, &	6.35	61	0.52	1 / 50
11427SQ03	3.0	1/8"		6.35	61	0.52	1 / 50
11427SQ04	4.0	5/32"		6.35	59	0.52	1 / 50
11427SQ05	5.0	3/16"		8	61	0.82	1 / 30
11427SQ06	6.0	1/4"		9.53	61	1.25	1 / 20
11427SQ08	8.0	5/16"		12.7	71	2.33	1 / 10

Heavy Duty Marking Punch

11509SQ

- Chrome vanadium alloy steel
- Hardened and tempered control HRC60 for safe use
- Hardness reduced at striking end HRC40 to have longer life time
- Invert number 6 to be number 9 (For 11509SQ)
- The letter A~Z with extra "&" (ampersand)included (For 11527SQ)



11509SQ05

11527SQ



11527SQ05

KT NO.	Font size mm	Font size inch	Contents	Shank mm²	L mm	Kg	
11509SQ05	5.0	3/16"	9 PCS 0~9	11	61	0.56	1 / 30
11527SQ05	5.0	3/16"	27 PCS A~Z, &	11	61	1.70	1 / 10



WORKSHOP TOOLS





KING TONY 9TBA600
KING TONY
9TD406-19M
9TD406-17M
HIGH THRUST
KING TONY 7CA82-30

Gear Puller & Set

- Material - chrome vanadium alloy steel
- Finishing - chrome plated & phosphate sunk

7962

- Two-Jaw gear puller






KT NO.	Capacity (tons)	HEX (mm)	Jaw (leg)	Spread (A)mm	Reach (B)mm	Kg	
7962-03	2	14	2	40~75	60	0.44	1 / 40
7962-04	4	17	2	50~100	95	0.78	1 / 20
7962-06	6	19	2	70~150	150	1.65	1 / 10
7962-08	10	23	2	95~200	235	3.50	1 / 5
7962-12	15	32	2	140~300	280	7.00	1 / 2

7963

- Three-Jaw gear puller







KT NO.	Capacity (tons)	HEX (mm)	Jaw (leg)	Spread (A)mm	Reach (B)mm	Kg	
7963-03	3	14	3	40~75	60	0.55	1 / 40
7963-04	6	17	3	50~100	95	1.06	1 / 20
7963-06	9	19	3	70~150	150	2.25	1 / 10
7963-08	15	23	3	95~200	235	4.50	1 / 5
7963-12	22	32	3	140~300	280	11.00	1 / 2

7962B

- Two-Jaw gear puller
- Adjustable sliding arm for efficiency and safety
- Reversible jaws for internal & external options gear, axle, bearing, etc…

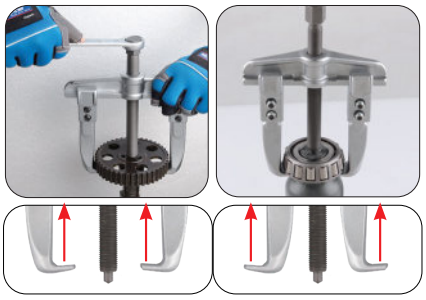

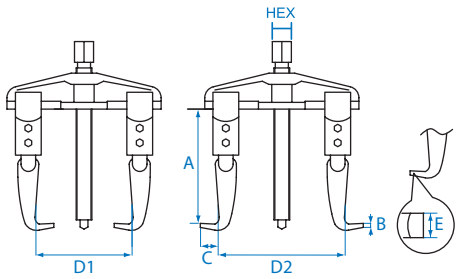



KT NO.	Capacity (tons)	Hex (mm)	Jaw (leg)	Reach A(mm)	B (mm)	C (mm)	Spread D1 (mm)	Spread D2(mm)	E (mm)	Kg	
7962B-35	3.0	17	2	100	3.8	14.5	90	60~125	21	1.05	1/12
7962B-05	5.0	17	2	100	3.8	14.5	130	60~160	21	1.15	1/12
7962B-06	5.0	22	2	150	4.6	23.0	150	85~200	30	2.98	1/6
7962B-08	7.5	22	2	150	4.6	23.0	190	105~230	30	3.41	1/6
7962B-10	7.5	27	2	210	7.0	30.0	240	130~300	35	7.11	1/3

7962B1PR

- Two-Jaw gear puller
- Adjustable sliding arm for efficiency and safety
- Reversible jaws for internal & external options gear, axle, bearing, etc…



5 PC.

Contents — Kg 18.20 — 1



7962B 3.5", 5", 6", 8", 10"



87155

Micro Bearing Puller

7965-02

- Applications include: alternators, generators, domestic appliances, power tools and pumps







- Adjust the jaws by turning the screw

KT NO.	Capacity (Tons)	Spread A(mm)	Reach B(mm)	g	
7965-02	2T	19-45	73	905	1 / 12

Two Sets Pressure Screw Bearing Separator Puller Set

9BA21

- 2 Sets bearing separator & bolts
- Contents:

(1) Bearing Seperator
9BA21P02
Capacity 30mm ~ 50mm
Bolt 3/8" x 24UNF x L125mm

(2) Bearing Seperator
9BA21P01
Capacity 50mm ~ 75mm
Bolt 1/2" x 20UNF x L 135mm

(3) 4 PC. Main rod
9BA21P04
Hex bar 14mm 3/8" x L 102mm x 2 pcs

9BA21P06
Hex bar 17mm 1/2" x L 127mm x 2 pcs

(4) 4 PC. Extension rod
9BA21P05
Hex bar 14mm 3/8" x L 102mm x 2 pcs

9BA21P07
Hex bar 17mm 1/2" x L 127mm x 2 pcs

(5) 1 PC. Beam
9BA21P03
Central Bolt
9BA21P011

(6) 9BA21P011
Hex 18mm x 9/16" x L175mm

5.25 | 1 / 2



Pressure Screw Bearing Separator Puller Set

9BA22

- Includes bearing separator & bolts
- Contents:

(1) Bearing Seperator
9BA22P01
Capacity 75mm ~ 105mm
Bolt 5/8" x 18UNF x L 165mm

(2) 2 PC. Main rod
9BA22P02
Hex bar 19mm x M12 & 1/2" x L 255mm

(3) 2 PC. Extension rod
9BA22P04
Hex bar 19mm x M12 x L 255mm

(4) 1 PC. Beam

(5) 1 PC. Central bolt
9BA22P011
Hex 21mm x M18 x L292 mm

(6) 1 PC. Nut

8.95 | 1 / 2




Hydraulic Puller Set


9BA01

- Includes forged steel bearing separator and gear puller
- Operate up to 10 tons hydraulic pulling power
- Special separator design of the strong back puller allows the puller to be used even in the tightest spaces
- Suitable for industry, automotive and a gricultural machine



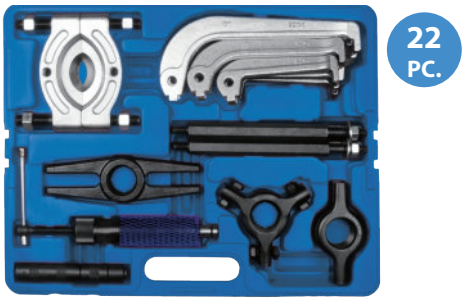

9BA22P011- Set Separator Capacity 75mm ~ 105mm
9BA22P03- 1 PC. Beam
9BA01P01- 1 PC. 10T Hydraulic Ram
9BA01P032- 1 PC. Tripe Head
9BA01P031- 1 PC. Twin Head
9BA01P033- 1 PC. Ram Part
9BA01P012- 1 PC. Centre Adapter
9BA01P013- 1 PC. 1"x 2" Extension Rod
9BA01P014- 1 PC. 1"x 4" Extension Rod
9BA22P02- 2 PC. Main Rod Hex bar 19mm x M12 & 1/2" xL255mm
9BA22P04- 2 PC. Extension Rod Hex bar 19mm x M12 x L255mm
9BA01P051- 3 PC. 4" Leg
9BA01P052- 3 PC. 6" Leg
9BA01P053- 3 PC. 8" Leg



Size	Spread A (mm)	Reach B(mm)	Spread C(mm)	Reach D(mm)
4"	240	120	250	120
6"	190	170	310	170
8"	180	220	200	220




17.00 | 1 / 1

Hydraulic Mechanical Pullers

9BA

- Quick and safe removal particularly large and tight gears, bearings, etc…
- Two and three jaws type, use for different space

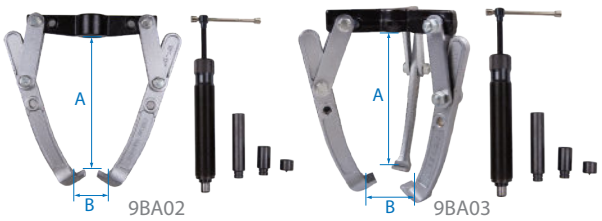

KT NO.	Capacity (Tons)	Jaws (leg)	Reach A(mm)	Spread B(mm)	kg	
9BA02	15T	2	320	500	11.30	1 / 1
9BA03	15T	3	320	500	16.50	1 / 1

Universal Bearing Puller Set

9BA31

- Easy and fast removing ball bearing by using the puller
- Select proper tips by ball diameter

CONTENTS :

- 1 PC. Puller yoke M6 x1.0 and center screw Hex 12mm x160mmL
- 1 PC. Top Nut
- 2 PC. Extension rod x L 105mm Ball ended threaded adapter
- 2 PC. 5.5mm / 2 PC. 6.0mm / 2 PC. 8.0mm

1.33 kg / 1 / 12



9BA32 1/2"

- Easy and fast removing ball bearing by using the puller
- Select proper tips by ball diameter

CONTENTS :

- 1 PC. Puller yoke 3/8-16UNC and center screw Hex 14mm x175mmL
- 1 PC. Top Nut
- 2 PC. Extension rod x L 100mm Ball ended threaded adapter
- 2 PC. 11.0mm / 2 PC. 12.5mm / 2 PC. 15.0mm


2.00 kg / 1 / 12



9BA33

- Easy and fast removing ball bearing by using the puller
- Select proper tips by ball diameter


CONTENTS :



- 1 PC. Puller yoke M14 x2.0 and center screw Hex 21mm x280mmL
- 1 PC. Top Nut
- 2 PC. Extension rod x L 170mm Ball ended threaded adapter :
- 2 PC. 15.0mm / 2 PC. 17.4mm
- 2 PC. 20.0mm / 2 PC. 25.2mm
- 2 PC. 30.0mm / 2 PC. 36.4mm

8.00 kg / 1 / 3



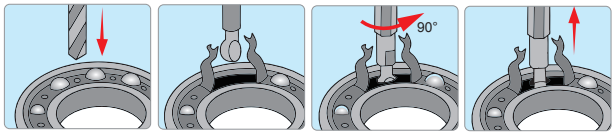

Slide Hammer Gear Puller Set

796401MR

Slide Hammer Puller Set

- For jobs involving pull and grip gears, bearings, outer races, grease retainers, oil seals, etc.
- 2.6 lbs(1.2 kgs) slide hammer
- 400 mm length T-handle puller
- 3-in-1 hammer puller, to handle inside pull such as bearing cups and outer races, as well as regular outside pull jobs


4.50 kg / 1/4



CONTENTS:

- 1 PC. 400 mm T handle shaft
- 1 PC. 2.6 lbs / 1.2 kgs hammer
- 1 PC. Adjustable nut
- 1SET Internal gear puller for Ø15-30mm(A)
- 1SET Internal gear puller for Ø30-80mm(B)
- 1SET External gear puller for Ø15-80mm(C)

Items		D (mm)	Capacity
Internal gear puller		6	Ø 15-30mm
Internal gear puller		10.5	Ø 30-80mm
External gear puller		10.5	Ø 15-80mm







Riveter & Set

21-20-101

- Stainless steel riveter nozzles
- Drop-forged aluminum body



Ø 2.4~4.8mm

KT NO.	L inch	L mm	Capacity inch	Capacity mm	g	
21-20-101	10-1/4	260	3 / 32 1 / 8 5 / 32 3 / 16	Ø 2.4 Ø 3.2 Ø 4.0 Ø 4.8	588	12 / 24

21-20-07MR

Blow case size (mm) :
276 x 160 x 46(0.122 cuft)



121 PC.

Contents	Kg 1.06	1 / 16	Each Q'ty
4 x 8 mm	4 x 10 mm		20
4 x 8 mm	4 x 10 mm		
4.8 x 8 mm	4.8 x 10 mm		
21-20-101			1

21-20-102

- 4 changeable sizes
- Stainless steel riveter
- The driver can be used in 90° and 180°








KT NO.	L inch	L mm	Capacity inch	Capacity mm	g	
21-20-102	11	278	3 / 32 1 / 8 5 / 32 3 / 16	Ø 2.4 Ø 3.2 Ø 4.0 Ø 4.8	778	6 / 24

Riveter

79711

- Stainless steel riveter nozzles
- Drop-forged aluminum body
- Heavy duty riveter for stainless or aluminum rivets

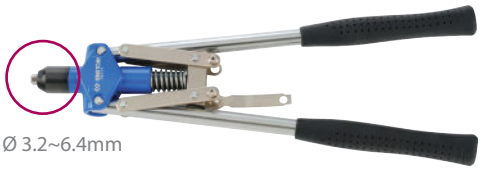

Ø 3.2~6.4mm

KT NO.	L inch	L mm	Capacity inch	Capacity mm	g	
79711	18	460	1 / 8 5 / 32 3 / 16 1 / 4	Ø 3.2 Ø 4.0 Ø 4.8 Ø 6.4	1480	1 / 12


Expander Riveter

79721

- Expander framework design to press riveter
- 4 PC. Interchangeable nozzles
- Heavy duty riveter for stainless or aluminum rivets



L / min



L / max

KT NO.	L mm(min)	L mm(max)	Capacity inch	Capacity mm	kg	
79721	315	870	1 / 8 5 / 32 3 / 16 1 / 4	Ø 3.2 Ø 4.0 Ø 4.8 Ø 6.4	2.00	1 / 10

Blind Nut Riveter

21-30-09MR

- Designed for fastening object to thin metal
- 4 PC. interchangeable mandrels (M4, M5, M6, M8)
- 80 PC. iron nut rivet



85 PC.


KT NO.	L inch	L mm	Capacity	kg	
21-30-09MR	10-1/2	265	M4 x 0.7 M5 x 0.8 M6 x 1.0 M8 x 1.25	1.32	1 / 12

Nut Riveter

79731

- Stainless steel nut riveter nozzles
- Drop-forged aluminum body
- Heavy duty riveter for stainless or aluminum rivet nuts


KT NO.	L inch	L mm	Capacity	kg	
79731	18	472	M5 M6 M8 M10	1.86	1 / 12

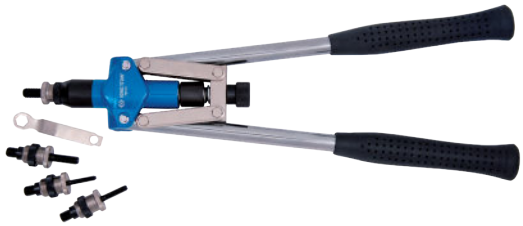

Measuring Tape

- Auto-Lock measuring tape
- Two retrieval buttons
- Nylon coating 3-rivet blade
- Ergonomic & shockproof ABS+TPE case
- Specially red marked each 10cm scale
- EU Class II accuracy standard approval

79093

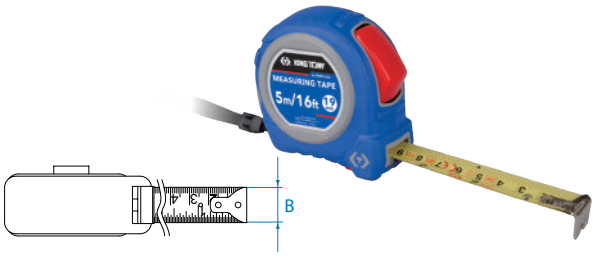

KT NO.	L M / FT	B mm	g	
79093-02M	2M	16	110	16 / 64
79093-03M	3M	16	137	16 / 64
79093-05M	5M	19	210	14 / 56
79093-05M1	5M	25	260	12 / 48
79093-08M	8M	25	420	12 / 48
79093-03C	3M/10FT	16	137	16 / 64
79093-05C	5M/16FT	19	210	14 / 56
79093-08C	8M/26FT	25	420	12 / 48

79094

- Magnetic hook




KT NO.	L M / FT	B mm	g	
79094-02M	2M	16	110	16 / 64
79094-03M	3M	16	137	16 / 64
79094-05M	5M	19	210	14 / 56
79094-08M	8M	25	420	12 / 48
79094-03C	3M/10FT	16	137	16 / 64
79094-05C	5M/16FT	19	210	15 / 60
79094-05C1	5M/16FT	25	260	12 / 48
79094-08C	8M/26FT	25	420	12 / 48

79095-05M

79094-05M 16%

- Magnetic hook





KT NO.	L M / FT	B mm	g	
79095-05M	5M	19	158	12 / 144

79095-05M-S

12 PC.



Contents			kg	
	79095-05M	x 12 PC.	1.90	1 / 10

Paper Display Stand

87118


- Capacity : 12 PC.
- For all measuring tape (79093 / 79094 <02M,03M,05M>series)
- Paper display stand size(mm) : 309 x 237 x 189 (0.489 CUFT)



Full Color Laser Distance 60M

7DM1160

- Colorful LCD display for easily reading
- Functions : Single measure, continuous measure, area, volume, height, stake-out
- Six flexible ways for height measurement
- Universal 8 length units with auto-converting
- 360° inclination sensor for determining the horizontal and vertical distance
- 2 selectable measurement reference points : Front and rear
- Automatic orientation display
- CE Approval IEC 60825-1: 2014, EN 61326-1: 2013

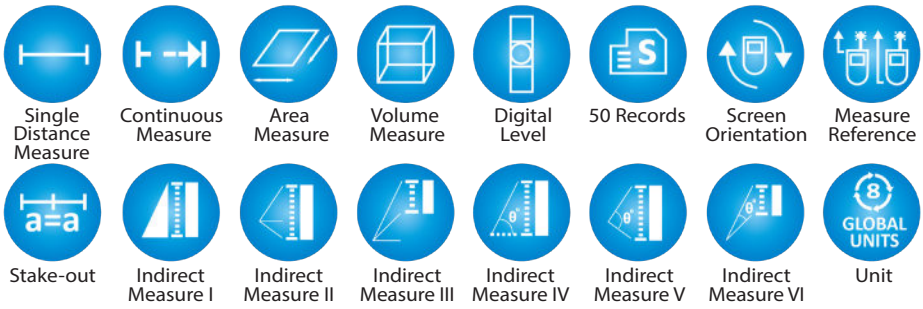

Technical data	
Display	Color LCD
Measuring Range	0.05 m ~ 60 m
Resolution	0.001 m
Accuracy	±1.5 mm
Laser Type	650 nm, Class II, < 1 mw
Unit(Selectable)	m, ft, in, 0'0"1/32, 1/32in, 1/16in, 1/8in, 10/33
Battery Life	Up to 6,000 measures
Operation Temperature	-5° C ~ 40° C
Storage Temperature	-20° C ~ 60° C
Memory	50 set
IP code	54
Automatic Power-Off	Laser-120 seconds Device-180 seconds
Battery	AAA x 2 PC. Included

KT NO.	Size (mm) L x W x H	g	
7DM1160	105 x 48 x 21	200	1 / 40





- Color LCD

Overview for device :


- A - LCD
- B - Single Measure
- C - Addition
- D - Subtraction
- E - Clear / Power
- F - Functions Included Single Measure, Continuous Measure, Area, Volume, Six Indirectly Height Measurements, Stake-out, Level, Unit and Setting
- G - Reference
- H - Receiving Lens
- I - Laser Emitted Window

Measuring

79062

- Adjustable square measuring with angle spirit level 305mm
- Sliding combination of square, spirit level, height gauge and steel rule
- 90° and 45° level allow try-square and metre-square work
- Metal scriber pin in the end
- Metric and imperial marking at both sides
- Precision cast zinc alloy and stainless blade
- For woodwork






KT NO.	L mm	L Inch	g	
79062-12	305	12	312	12 / 72

Stainless Ruler

79063

- Stainless steel deeply etched for easy reading
- Dual scale : metric & imperial marking (mm/inch)

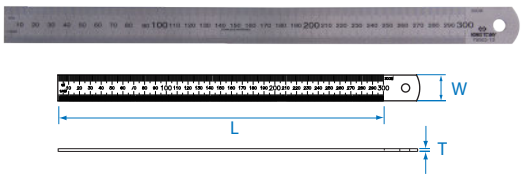


KT NO.	L mm	L inch	W mm	T mm	g	
79063-06	150	6	13	0.6	12	10 / 500
79063-12	300	12	30	0.8	65	10 / 300
79063-20	500	20	30	0.8	105	10 / 250
79063-40	1000	40	30	0.8	360	10 / 100

Calipers

77131


- Vernier calipers parallax free
- Parallax free bevel scales for easy and accurate measurement
- 4 way measurement capability for outside, inside, depth and step measurement
- The caliperis made of hardened stainless steel

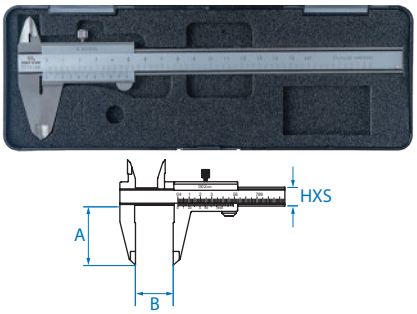

KT NO.	A mm	B max mm	Vernier mm	H x S mm	g	
77131-06	40	150	0.02	16 x 3	320	1 / 50
77131-08	50	200	0.02	20 x 4	450	1 / 50

77141

- Digital calipers
- Digital display slide calipers with thumb roller
- Large clear LCD on/off, metric/imperial, zero switches
- Hold function allows quick and efficient inspection record
- Made of hardened stainless steel

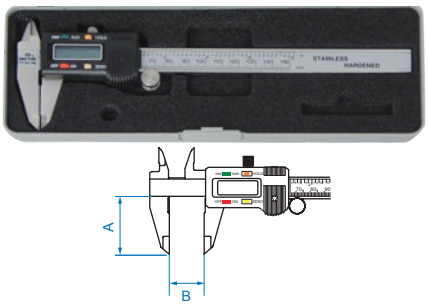

KT NO.	A mm	B max mm	B max inch	Resolution mm	Resolution inch	g	
77141-06	40	150	6	0.01	0.001	320	1 / 20
77141-08	50	200	8	0.01	0.001	485	1 / 50

Metric Feeler Gauge

- Material: blade made of spring steel

77340-20

- 20 blades metric feeler gauge

CONTENTS :

- 0.05, 0.10, 0.15, 0.20, 0.25, 0.30, 0.35, 0.40, 0.45, 0.50, 0.55, 0.60, 0.65, 0.70, 0.75, 0.80, 0.85, 0.90, 0.95, 1.00 mm



KT NO.	Number of blades	Width x Length of blades (mm)	g	
77340-20	20	10 x 100	105	50 / 200

77335-25

- 25 blades metric feeler gauge

CONTENTS :

- 0.04, 0.05, 0.06, 0.07, 0.08, 0.09, 0.10, 0.15, 0.20, 0.25, 0.30, 0.35, 0.40, 0.45, 0.50, 0.55, 0.60, 0.65, 0.70, 0.75, 0.80, 0.85, 0.90, 0.95, 1.00 mm



KT NO.	Number of blades	Width x Length of blades (mm)	g	
77335-25	25	13 x 85	105	50 / 200

77328-26

- 26 blades inch feeler gauge

CONTENTS :


- 0.0015", 0.002", 0.0025", 0.003",
- 0.004", 0.005", 0.006", 0.007",
- 0.008", 0.009", 0.010", 0.011",
- 0.012", 0.013", 0.014", 0.015", 0.016", 0.017", 0.018", 0.019", 0.020", 0.021", 0.022", 0.023", 0.024", 0.025"
- 0.038, 0.051, 0.063, 0.076, 0.102, 0.127, 0.152, 0.178, 0.203, 0.229, 0.254, 0.279, 0.305, 0.330, 0.356, 0.381, 0.406, 0.432, 0.457, 0.483, 0.508, 0.533, 0.559, 0.584, 0.610, 0.635 mm



KT NO.	Number of blades	Width x Length of blades (mm)	g	
77328-26	26	12.7 x 76	91	14 / 168

Roller Chain Detacher

3214

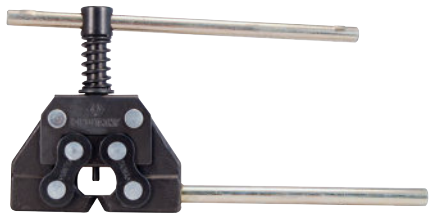

KT NO.	For chain size ANSI NO.	g	
3214-35	35~50	310	1 / 60
3214-60	60~100	691	1 / 20

Revolving Punch Pliers

74A00

- To punch holes into leather, textiles and soft material
- Revolving steel head has unique waste collection facility









KT NO.	Punch size mm^2	Overall length mm	g	
74A00	2, 2.5, 3, 3.5, 4, 4.5	230	366	10 / 60

Retractable Tool Lanyard

79A21-30

79A22-30

- Retractable tool lanyard
- 3 kgs maximum tool weight
- Nylon tether with steel spring inside to absorb the shock of a dropped tool
- Increases safety and productivity
- Ergonomically designed length



79A21-30




79A22-30





KT NO.	Capacity mm	Hook	g	
79A21-30	800~1300	2 lock snaps	106	12 / 144
79A22-30	800~1300	fixed loop	89	12 / 144

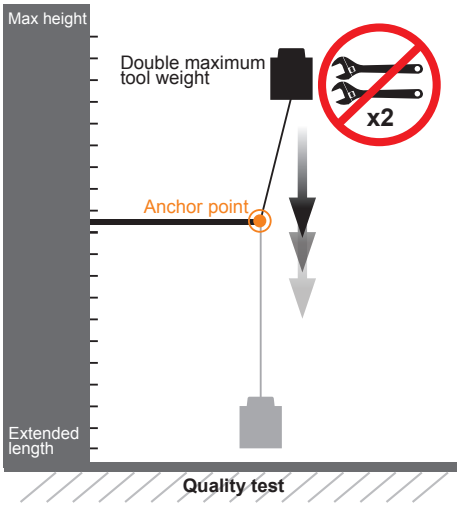

- The retractable tool lanyards are developed according to KING TONY standard. The steel lanyards are tested by double maximum weight and dropped from height. Product quality is approved.

Round Magnetic Tool Holder

CAUTION Please wear proper safety gear while working.

9TE11

- Stainless steel tray resists corrosion
- Can be used horizontally, vertically, and upside down
- Convenient for collecting small parts and tools





KT NO.	Size mm	g	
9TE11	Ø 150	433	1 / 30

PU Working Gloves

CAUTION WARNING: KEEP AWAY FROM FIRE

9TH31-XL

9TH31-2L

- Strap design for easy adjustments
- Comfortable and breathable fabric material



KT NO.	Size	Width mm	Overall Length mm	g	
9TH31-XL	XL	107	235	70	100
9TH31-2L	2L	112	240	70	100

Anti-vibration Protective Gloves

9TH21XL

- Protection from repetitive impact and vibration of pneumatic tools
- Magnet in back of glove for storing metal parts and fasteners

110 g 100





KT NO.	Size	Width mm	Overall Length mm	g	
9TH21XL	XL	112	235	110	100

Lightweight PU Work Gloves

9TH41

- PU leather offers high dexterity, sensitivity, excellent grip and good comfort
- Mesh fabric provides good breathability
- Elastic band cuff with label velcro provides firm fitting
- EN388 2121X

Non-slip Ventilation Sensitivity

EN 388 2121X



KT NO.	Size	Width mm	Overall Length mm	g	
9TH41-L	L	105	230	67	120
9TH41-XL	XL	110	240	72	120

Vibration Resistant Work Gloves

9TH42

- Goat leather palm provides high dexterity and comfort with EVA padding for anti-vibration
- Touch screen capable fingertips
- Mesh fabric provides good breathability
- Neoprene cuff with velcro adjustment ensures firm fitting
- EN388 2111X

Abrasion Resistance Shock Absorption Touch Screen Ventilation

EN 388 2111X



KT NO.	Size	Width mm	Overall Length mm	g	
9TH42-XL	XL	115	250	98	120
9TH42-XXL	XXL	120	260	102	120

Silicone Non-slip Work Gloves

9TH43

- Durable palm with anti-slip silicone for excellent grip. EVA padding for anti-vibration
- Reflective piping ensure safe work in dark
- Elastic band cuff with label velcro provides firm fitting
- EN388 2111X

Abrasion Resistance Shock Absorption Non-slip Ventilation

EN 388 2111X



KT NO.	Size	Width mm	Overall Length mm	g	
9TH43-XL	XL	115	247	102	120
9TH43-XXL	XXL	120	257	108	120

Cold Protection Work Gloves

9TH44

- Nubuck leather palm is breathable, foam insert for extra comfort and anti-vibration
- Reflective piping ensure safe work in the dark
- Neoprene cuff with velcro adjustment ensures firm fitting
- Thinsulate insulation lining offers extra warmth
- EN388 2111X



KT NO.	Size	Width mm	Overall Length mm	g	
9TH44-XL	XL	120	250	105	120
9TH44-XXL	XXL	125	260	113	120

Magnetic Work Gloves

9TH45

- Durable palm with magnetic index finger
- Powerful magnetic on back for storing metal parts & fasteners
- Elastic band cuff with label velcro to ensure firm fitting
- EN388 3111X



KT NO.	Size	Width mm	Overall Length mm	g	
9TH45-XL	XL	120	250	92	120
9TH45-XXL	XXL	125	260	98	120

Silicone Trowel & Scraper

7AA105

- Suitable for removing old caulking and replacing new caulking
- The trowel head with chamfer which is easy for smooth sealing lines
- The stainless tip prevent the surface from being damaged





KT NO.	Size	Overall length mm	g	
7AA105	3R, 6R, 10R, 13R, 17R	204	100	24 / 48

- Includes Five different nozzle pad head

High Thrust Caulking Gun

7CA81-30H

- Cartridge caulk gun
- For 10oz / 300ml cartridges
- 26:1 high thrust ratio provide 450 kgf push force
- Apply extremely thicker materials and adhesives
- Smooth action provide cleaner sealant





- Adjustable screw tightening increases product lifespan



KT NO.	Overall length mm	g	
7CA81-30H	357	814	1 / 10

High Thrust Aluminum Tube Caulking Gun

7CA82-30

- Suitable for 310ml cartridges or bulk
- Professional caulk gun with 18:1 high thrust ratio
- Includes nozzle and pad
- 350kgs maximum thrust power, perfect for applying thicker materials, adhesives
- Application: glass, windowsill, bathroom, etc.




KT NO.	Overall length mm	g	
7CA82-30	352	965	1 / 10

Butane Torch

6BB11


- Adjustable flame length with a maximum temperature of 1300°C /2450°F and will operate on a single fill for 60~90 minutes
- Quick and easy to refill gas only 5 seconds
- A ceramic partition in the nozzle, fast heat dissipation and high safety
- Aluminium body, lightweight and portable
- Built in child proof safety lock system
- Applications include soldering, brazing, heat shrink tubing, frozen locks, fusing rope ends, camping, etc…
- Suitable for workshops, factories and daily professional use
- Anti-flare gas flow tube
- Piezo ignition for instant flame



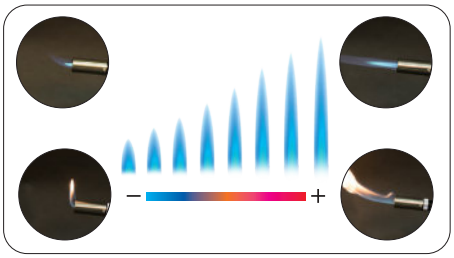



- Refilling gas



- Turn the air flow control switch to change the fire type



- Push the safety latch up



- Turn the gas flow control switch counter-clockwise



- Press the ignition button

KT NO.	Gas Capacity (ml)	Operation Time (min)	Gas Type	flame Temp °C/°F	Dimension L x W x H (mm)	g	
6BB11	34	60~90	Butane	1300 / 2450	122 x 70 x 168	400	12 / 24


Cordless Butane Gas Glue Gun

6BJ21


- Self-regulating temperature system, avoiding the glue keeping coming out to stuck the nozzle or drip everywhere
- Fast-heating in 2 to 3 Minutes
- Quick and easy to refill gas only 3s, keeps running for approximately 1.5 hours
- Front top heater design for safety usage
- Portable and cordless for convenient application
- Passed the 250 hour continuous work durability test
- Included 2 PC. 11mm glue stick
- Suitable for wood workings, household repairs, artficial flowers, models, art and decorations etc…
- Optional glue stick 6BJ901, pack by 10 PC.
- Ergonomic comfort grip



6BJ21



6BJ901



- Refilling gas



- Turn the gas switch on



- Press the ignition button and wait 2-3 min (Make sure the indicator on)



- Automatic temperature control turns off at 180° and turns on under 160°

KT NO.	Gas Capacity (ml)	Operation Time (min)	Glue size (mm)	Gas Type	Operating Temp °C	Dimension(mm) L x W x H	g	
6BJ21	6.8	90	11	Butane	160-180	175 x 36 x 155	241	1 / 10
6BJ901	-	-	11	-	-	Ø11 x 150mm	140	10

360° Cast Steel BenchVise & Display Rack


9TZ11

- Cast steel body and slide ideal for heavy duty applications
- Ductile cast iron screw pitched acme thread ensures long life and positives action
- Serrated jaws design provides good grip
- 360° swivel base allows operator to approach any direction



• Applicable for round shape objects



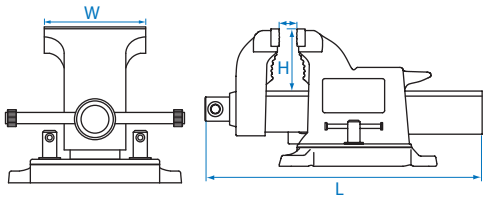

KT NO.	W mm	W inch	W mm	H mm	L mm	Kg	
9TZ11-04	146	4"	104	57	310	7.50	1
9TZ11-05	166	5"	130	67	365	11.00	1
9TZ11-06	200	6"	155	76	422	14.50	1
9TZ11-08	225	8"	200	89	492	18.00	1
9TZ11-10	250	10"	250	102	572	25.60	1
9TZ11-12	300	12"	305	127	655	33.00	1

Steel Wire Brush Set

9CZ201-S



20 PC.

Contents		Kg	
9CZ201	x 20 PC.	2.70	1 / 8


Broken Screw Extractor Set

11205SQ

- A quick and easy way to remove broken screw, pipe, bolt and stud

100 g | 25 / 100

5 PC.






KT NO.	Capacity mm	Capacity inch	L mm
2127-06M	M3~M6	1/8~1/4	51.5
2127-08M	M6~M8	1/4~5/16	58.0
2127-11M	M8~M11	5/16~7/16	66.0
2127-14M	M11~M14	7/16~9/16	73.5
2127-18M	M14~M18	9/16~3/4	81.0

11208SQ

- Quick and easy to remove broken screw, pipe, bolt and stud

829 g | 6 / 24

8 PC.





KT NO.	Capacity mm	Capacity inch	L mm
2127A-06M	M3~M6	1/8~1/4	51.5
2127A-08M	M6~M8	1/4~5/16	58.0
2127A-11M	M8~M11	5/16~7/16	66.0
2127A-14M	M11~M14	7/16~9/16	73.5
2127A-18M	M14~M18	9/16~3/4	81.0
2127A-24M	M18~M24	3/4~1	91.0
2127A-33M	M24~M33	1~1-3/8	106.0
2127A-50M	M33~M50	1-3/8~2	112.0

Broken Screw Extractor and Drill-Bit Set

11310SQ

- Material : Drill-Bit(HSS), screw extractor(GCr15)

Metal case size (mm) :
149 x 115 x 24 (0.014 cuft)

10 PC.



Contents			Kg 0.4	1 / 40
	ø2.5, ø3, ø4.5, ø6, ø8			
	#1	M3 - M6 1/8" - 1/4"		
	#2	M6 - M8 1/4" - 5/16"		
	#3	M8 - M11 5/16" - 7/16"		
	#4	M11 - M14 7/16" - 9/16"		
	#5	M14 - M18 9/16" - 3/4"		

Speed Out Broken Screw Extractor Set

11406SQ


- For stripped, broken, stuck or damaged screw removal
- Size includes: #0, #1, #2, #2, #3, #4
- High hardness HSS material makes drilling easier and faster
- The screw extractor set is tested with quality, efficiency, durability and stability


82 g 12 / 96

6 PC.




Specifications	Drill Size Ø H1	Suitable for Screw Diameter
HSS #0	2.5	2-3mm
HSS #1	3.0	3-5mm
HSS #2	3.5	4-8mm
HSS #2	3.5	4-8mm
HSS #3	4.0	5-10mm
HSS #4	6.0	6-12mm



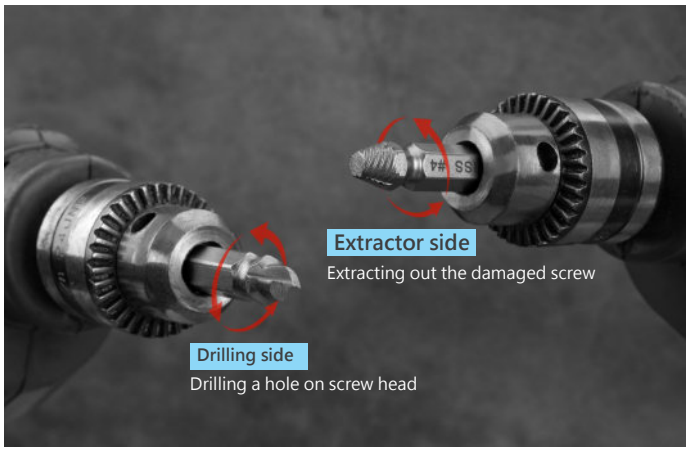

3 steps:

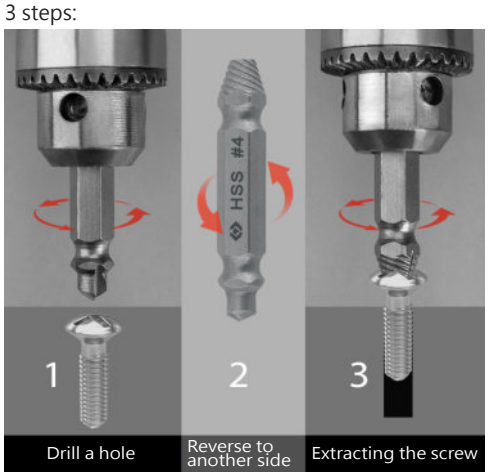

Broken Screw Extractor & Drill Set

11225SQ


- Easy to remove 5~14 mm broken screws
- 15 PC. HSS drill bit & center guide
- 10 PC. extractor pin & nut


0.79 kg 1 / 20

25 PC.



Blow case size (mm) :
260 x 175 x 60 (0.096CUFT)







- Use the guide to drill a pilot hole in the center of broken screw



- Put on extractor nut turning out broken screw with wrench

Nut Splitter Set

9TD062

- For removing stubborn nuts or over tightened bolts without damaging the bolt thread
- Suitable for nuts to a tensile class 6
- Do not overtighten to prevent damage to the threads under the nut

0.61 | 12 / 36

KT NO.	Capacity inch	Capacity mm	Hex (mm)
9TD602	1/2"~5/8"	12~16	14
9TD603	5/8"~7/8"	16~22	19



2 PC.

9TD064

Blow case size (mm) :
260 x 175 x 60 (0.096CUFT)

1.89 | 1 / 12

KT NO.	Capacity inch	Capacity mm	Hex (mm)
9TD601	5/16"~1/2"	9~12	12
9TD602	1/2"~5/8"	12~16	14
9TD603	5/8"~7/8"	16~22	19
9TD604	7/8"~1-1/8"	22~27	21






4 PC.

1/2" DR. Damaged Nuts Remover Socket & Set

CAUTION Can't be used with pneumatic wrench

9TD403 1/2"

- Made of top quality SNCM alloy steel, provide good wear resistance and durability
- Ideal for the removal of rounded, damaged or corroded nuts, bolts, oil drain plugs, marine nuts and bolts, exhaust manifold nuts, pipe nozzele, and studs
- No need for pounding, chisels or torches





KT NO.	D1 mm	D2 mm	ℓ mm	L mm	g	
9TD403-10M	16.0	22	8	50	76	10 / 180
9TD403-12M	18.0	22	11	50	78	10 / 180
9TD403-13M	20.0	22	11	50	85	10 / 180
9TD403-14M	21.0	22	11	50	88	10 / 180
9TD403-17M	24.5	25	15	50	113	10 / 180
9TD403-19M	27.0	27	15	50	124	8 / 80
9TD403-21M	29.4	27	16	50	139	8 / 80
9TD403-22M	30.5	27	17	50	140	8 / 80
9TD403-23M	31.8	27	17	50	119	8 / 80
9TD403-24M	33.0	27	17	50	143	8 / 80
9TD403-27M	36.0	27	18	50	145	8 / 80

9TD 1/2"




9TD034MR 4 PC.



9TD035MR 5 PC.




9TD036MR 6 PC.










KT NO.	Contents				
9TD034MR	9TD403	21, 22, 23 27	8740705	0.58	4/36
9TD035MR		12, 13, 14, 17, 19		0.52	
9TD036MR		10, 12, 13 14, 17, 19	8740706	0.60	


Roller Stud Extractor Socket & Set

9TD401 1/2"

- For tightening or loosening studs









KT NO.	mm	D1 mm	D2 mm	L mm	g	
9TD401-06M	6	24.5	21	60	131	10 / 180
9TD401-08M	8	24.5	21	60	128	10 / 180
9TD401-10M	10	27.5	21	69.5	180	12 / 120
9TD401-12M	12	27.5	21	69.5	179	12 / 120

9TD014MR 1/2"

- 4 stud drivers for sizes M6, M8, M10 and M12

Kg 0.83 / 1 / 30

Blow case size (mm) :
210 x 111 x 49 (0.04CUFT)





4 PC.


Stud Remover Tool

9TD404-0619M

- Stud range: 6-19mm (1/4" - 3/4")
- Allows for easy removal of studs .Turn extractor with a ratchet, wrench or socket to engage the cam and stud, then pull out stud

Kg 0.64 / 1 / 24



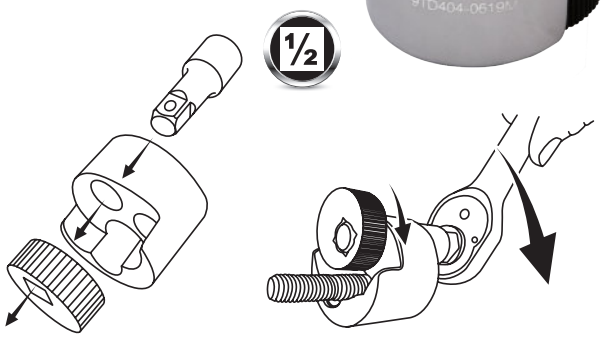

Long Twist sockets set

- For removing damaged wheel nuts and locking nuts. Especially useful on deep seated wheel nuts on modern alloys
- Twisting socket design is easily to remove stripped lug nut
- Straight kick out bar 12x160mmL
- Length:146mm

9TD164MR



4 PC.

Contents	Kg 1.36	/ 1 / 8
9TD406	17, 19, 21	
7641206P		

9TD165MR



5 PC.





•Grip and remove damange bolt



•Kick out grip bolt by punch ground or hammer

Contents	Kg 1.70	/ 1 / 8
9TD406	17, 19, 21, 22	
7641206P		

Aviation Tin Snips

74010~74060

- Special drop forged CRMO with induction hardened edges 62HRC
- Blades with serrated edges fast cuts in sheet metal, aluminum, and much more
- Cut 1.2mm cold-rolled steel (18GA) low carbon steel
- Non-slip color code grips for superior control
- 74040 Notching bulldog style with higher cutting ability
- 74060 Extra-long compound action style compare to tin snips

- Special laborsaving design
- High tensile strength
- High torsional strength spring
- Solid and comfortable handle with non-slip design
- Hang-up hole for convenient storage
- Safety auto latch (D.PAT.)



74010



74020



74030



74040



74060

KT NO.	Overall length mm	Cutting length mm	Color of handle	Cutting capacities (mm) Copper (soft)	Cold-rolled steel (soft)	Hard steel HRC 30 (Hard)	Stainless steel304	g	
74010	248	35	Red	1.50	1.20	0.80	0.70	375	6 / 48
74020	248	35	Green	1.50	1.20	0.80	0.70	375	6 / 48
74030	250	38	Yellow	1.50	1.20	0.80	0.70	380	6 / 48
74040	230	25	Yellow	2.00	1.60	1.20	1.20	370	6 / 36
74060	290	75	Orange	1.10	0.94	0.70	0.53	450	6 / 36

Figure Tin Snips

74250~74270

- Special drop forged CRMO with induction hardened edges 63HRC
- Blades with serrated edges fast cuts in sheet metal, aluminum, and much more
- Cut 1.5mm cold-rolled steel (16GA) low carbon steel
- Non-slip color code grips for superior control

- Special laborsaving design
- High tensile strength provided
- High torsional strength spring designed
- Solid and comfortable handle with non-slip design
- Hang-up hole for convenient storage
- Safety auto latch (D.PAT.)



74250



74260



74270

KT NO.	Overall length mm	Cutting length mm	Color of handle	Cutting capacities (mm) Copper (soft)	Cold-rolled steel (soft)	Hard steel HRC 30 (Hard)	Stainless steel304	g	
74250	260	35	Orange	1.80	1.50	1.00	0.90	480	6 / 36
74260	260	35	Blue	1.80	1.50	1.00	0.90	480	6 / 36
74270	260	35	Yellow	1.80	1.50	1.00	0.90	480	6 / 36

Straight Pattern Snips

74410~74416

- Drop forged of finest quality steel induction hardened edges 60HRC
- Cuts straight flat face guides tool along straight line
- Blades individually hand edged for maximum cutting efficiency
- Cushion handle for comfort and better grip



74410 ~ 74416

KT NO.	Overall length mm	Cutting length mm	Cutting capacities (mm) Copper (soft)	Cold-rolled Steel (soft)	Hard steel HRC 30 (Hard)	Stainless steel304	g	
74410	254	51	0.94	0.78	0.60	0.45	480	6 / 36
74412	305	70	1.15	0.91	0.70	0.63	650	6 / 24
74414	356	76	1.41	1.20	1.00	0.70	780	6 / 24
74416	415	63	2.00	1.60	1.20	1.00	1700	3 / 12

Curved Tin Snips

74512

- Drop forged of finest quality steel induction hardened edges 60HRC
- Double curved, hollow ground blades reduce friction for easier cutting
- British Gilbow type
- Cushion handle for comfort and better grip

74514



74512 / 74514

KT NO.	Overall length mm	Cutting length mm	Cutting capacities (mm) Copper (soft)	Cold-rolled steel (soft)	Hard steel HRC 30 (Hard)	Stainless steel304	g	
74512	305	60	1.15	0.91	0.70	0.63	670	6 / 24
74514	356	65	1.40	1.20	1.00	0.70	920	6 / 24

Duckbill Pattern Snips

74613

- Drop forged of finest quality steel induction hardened edges 60HRC
- Cuts moderately tight curves left, right or straight in light stock
- Blades individually hand edged for maximum cutting efficiency
- Cushion handle for comfort and better grip



KT NO.	Overall length mm	Cutting length mm	Cutting capacities (mm) Copper (soft)	Cold-rolled steel (soft)	Hard steel HRC 30 (Hard)	Stainless steel304	g	
74613	330	72	1.20	0.84	0.61	0.61	720	6 / 24

Saw

7911-12

- Sliding metal bow
- Lightweight, resistant to oxidization and oil
- Two blade positions 45° and 90° including flush cut
- Ergonomic handle with hand stop
- Handle material : Zinc frame, soft grip TPR handle



KT NO.	Adjustable blade length (mm)	Overall length mm	g	
7911-12	300	400	637	6 / 36

Saw

7921-12

- Sliding metal bow
- Handle material : ABS+TPR
- Lightweight & anti-slippery
- Four blade positions 45°, 90°, 135°, 180° including flush cut
- Spare blades can be stored



KT NO.	Adjustable blade length (mm)	Overall length mm	g	
7921-12	300	510	555	12 / 24

File

7510G

- Flat file



KT NO.	Size mm		L mm	mm	mm	g	
75101-08G	8	Bastard cut	200	4.8	20.0	188	2 / 40
75101-10G	10		250	5.7	23.6	292	2 / 40
75102-08G	8	Second cut	200	4.8	20.0	190	2 / 40
75102-10G	10		250	5.7	23.6	293	2 / 40

7520G

- Half round file



KT NO.	Size mm		L mm	mm	mm	g	
75201-08G	8	Bastard cut	200	6.7	19.9	190	2 / 40
75201-10G	10		250	7.0	23.5	292	2 / 40
75202-08G	8	Second cut	200	6.7	19.9	184	2 / 40
75202-10G	10		250	7.0	23.5	291	2 / 40

7530G

- Round file



KT NO.	Size mm		L mm	mm	g	
75302-08G	8	Second cut	200	7.2	127	2 / 40
75302-10G	10		250	9.2	172	2 / 40

7540G

- Triangle file



KT NO.	Size mm		L mm	mm	g	
75402-08G	8	Second cut	200	13.0	175	2 / 40
75402-10G	10		250	14.9	284	2 / 40

7550G

- Square file



KT NO.	Size mm		L mm	mm	g	
75501-08G	8	Bastard cut	200	7.5	130	2 / 40
75501-10G	10		250	9.5	210	2 / 40
75502-08G	8	Second cut	200	7.5	128	2 / 40
75502-10G	10		250	9.5	205	2 / 40

File Set

1005GQ

1015GQ

- Bastard cut
- Designed for steel, cast iron, brass, and hard plastics
- Pouch material : Nylon

5 PC.



1005GQ / 1015GQ

KT NO.	Contents	L inch	kg		
1005GQ (for 8")	75102-08G, 75202-08G, 75302-08G, 75402-08G, 75502-08G	8"	0.9	1 / 20	
1015GQ (for 10")	75102-10G, 75202-10G, 75302-10G, 75402-10G, 75502-10G	10"	1.4	1 / 8	

Needle File Set

- Pouch material : PVC

1036ZQ

- Perfect for filing off sharp edges, reshaping cuts or reaming drilled holes
- #60 grit diamond coating surface



6 PC.


Contents			L mm	g	
75135-06	75435-06				
75235-06	75535-06		160	95	10 / 120
75335-06	75035-06				

Tapered Reamer

7E61001

- For deburring and sizing the diameter of holes 1/8" to 3/8"
- Suitable for metal, wood or plastic

g 70 | 24 / 96

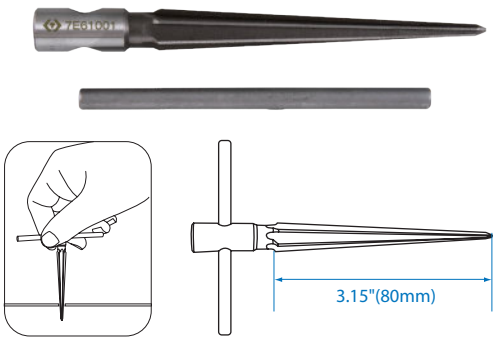

Threaded Coil-Insert Repair Set

11311MQ

- Thread tap for most common metric size : M5, M6, M8 and M10
- Used for repairing and restoring damaged threads
- Suitable for machine, engine and other automotive repair applications



119 PC.

Metal case size (mm) : 350 x 216 x 40


Contents	Kg 2.78	1 / 5
Screw-Coil:		
M5x0.8x1.5D(L:7.5mm)		25 PC.
M6x1.0x1.5D(L:9mm)		25 PC.
M8x1.25x1.5D(L:12mm)		25 PC.
M10x1.5x1.5D(L:15mm)		25 PC.
Tap:		
M5x0.8		1 PC.
M6x1.0		1 PC.
M8x1.25		1 PC.
M10x1.5		1 PC.
Tang Puncher:		
M5x0.8		1 PC.
M6x1.0		1 PC.
M8x1.25		1 PC.
M10x1.5		1 PC.
Drill:		
5.2mm		1 PC.
6.3mm		1 PC.
8.3mm		1 PC.
10.4mm		1 PC.
Main Tool:		
M5x0.8		1 PC.
M6x1.0		1 PC.
M8x1.25		1 PC.
M10x1.5		1 PC.
3571-08	3/8"drive sliding T-handle	
3764-55G	3/8"drive mini reversible ratchet	
39123010M	3/8" tap holder	


Tap Holder

3912M

- Used with reversible ratchet and T-handle
- Chuck mechanism hold compatible tap drills
- Used for metal working screw thread









KT NO.	Drive	S(mm) min.	S(mm) max.	D1 mm	D2 mm	L mm	g	
39123010M	3/8"	2.0	6.0	23.0	34	53.0	221	4 / 64
39123012M	3/8"	4.0	9.0	23.0	34	53.0	223	4 / 64
new 39124012M	1/2"	6.0	12.0	25.3	38	52.4	265	4 / 64
new 39124016M	1/2"	12.0	17.0	34.0	48.3	52.3	280	1 / 48

Drill-Bit Set

11325SQ

- Material : HSS

Metal case size (mm) :
197 x 115 x 58 (0.046 cuft)

25 PC.



Contents		Kg 1.23	1 / 20
Drill - Bit		1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10, 10.5, 11, 11.5, 12, 12.5, 13	

Tap and Drill-Bit Set

11328SQ

- Material : Drill-Bit(HSS), Tap(GCr15)

Metal case size (mm) :
195 x 115 x 57 (0.045 cuft)

28 PC.



Contents		Kg 1.05	1 / 20
Drill - Bit		2.5, 3.3, 4.2, 5, 6.8, 8.5, 10.2	
Tap		M3x3, M4x3, M5x3, M6x3, M8x3, M10x3, M12x3	

Tap & Die Set

12916MQ1

- Material : SK5 alloy steel
- 1 PC.Tap wrench(M3-M12, 1/8"~1/2")
- 1 PC. Die stock 25mm(1")
- Tap : M3~M12
- Die : M3~M12



16 PC.


Contents		0.78	1 / 20
12939MQ-A	M3x0.5, M4x0.7, M5x0.8, M6x1.0, M8x1.25, M10x1.5, M12x1.75	12939MQ-A01	25mm (1")
12939MQ-A		12939MQ-A02	M3~M12 (1/8"~1/2")

12939MQ1

- Material : SK5 alloy steel
- 1 PC. Tap wrench(M3-M12, 1/8"~1/2")
- 1 PC. "T" Type tap wrench(M3-M6, 1/8"~1/4")
- 1 PC. Die stock 25mm(1")
- 1 PC. Screw driver
- 12939MQ1-
  1 PC. Screw pitch gauge (0.5-28)
  Tap : M3~M12 / Die: M3~M12
- 12939SQ1-
  1 PC. Screw pitch gauge(12-40)
  Tap : 1/8"~1/2" / Die : 1/8"~1/2"



12939SQ1

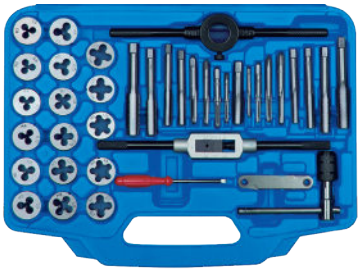

39 PC.

KT NO.		Contents	1.4	1 / 10
12939MQ1	12939MQ-A	**12939MQ-A06** / M3x0.5, **12939MQ-A07** / M3x0.6, **12939MQ-A08** / M4x0.7, **12939MQ-A09** / M4x0.75, **12939MQ-A10** / M5x0.8, **12939MQ-A11** / M5x0.9, **12939MQ-A12** / M6x0.75, **12939MQ-A13** / M6x1.0, **12939MQ-A14** / M7x0.75, **12939MQ-A15** / M7x1.0, **12939MQ-A16** / M8x1.0, **12939MQ-A17** / M8x1.25, **12939MQ-A18** / M10x1.25, **12939MQ-A19** / M10x1.5, **12939MQ-A20** / M12x1.5, **12939MQ-A21** / M12x1.75, **12939MQ-A22** / 1/8NPT27	12939MQ-A01	25mm (1")
	12939MQ-A	**12939MQ-A23** / M3x0.5, **12939MQ-A24** / M3x0.6, **12939MQ-A25** / M4x0.7, **12939MQ-A26** / M4x0.75, **12939MQ-A27** / M5x0.8, **12939MQ-A28** / M5x0.9, **12939MQ-A29** / M6x0.75, **12939MQ-A30** / M6x1.0, **12939MQ-A31** / M7x0.75, **12939MQ-A32** / M7x1.0, **12939MQ-A33** / M8x1.0, **12939MQ-A34** / M8x1.25, **12939MQ-A35** / M10x1.25, **12939MQ-A36** / M10x1.5, **12939MQ-A37** / M12x1.5, **12939MQ-A38** / M12x1.75, **12939MQ-A39** / 1/8NPT27	12939MQ-A02	M3~M12 (1/8"~1/2")
	12939MQ-A03	0.5, 0.6, 0.7, 0.75, 0.8, 0.9, 1.0, 1.25, 1.5, 1.75, 27, 28	12939MQ-A04	M3~M6 (1/8"~1/4")
12939SQ1	12939SQ-A	4NS36, 6NC32, 8NC32, 10NC24, 10NF32, 12NC24, 1/4NC20, 1/4NF28, 5/16NC18, 5/16NF24, 3/8NC16, 3/8NF24, 7/16NC14, 7/16NF20, 1/2NC13, 1/2NF20, 1/8NPT27	12939MQ-A05	
	12939SQ-A			
	12939SQ-A03	12, 13, 14, 16, 18, 20, 24, 27, 28, 32, 36, 40		


12 KING
12mm

LIGHTING





KING TONY
9TA48
KING TONY
9TA48
KING TONY
9TA71W
KING TONY
9TA26B
KING TONY
9AT53




Wireless Charging Slim Lamp

9TA267W

- 10W COB + 1W SMD (Top)
- White light color, kelvin : 6500K
- Material : Nylon+PC+TPE
- 360° Adjustable base
  +180° hiding hook + Strong magnetic base
- Rechargeable battery : 3.7V - 4500mAh Li-ion battery
- Accessory :Type-C USB charging cable
- Four leds battery indicator
- Charging time : 4 hours by charger and 6~8 hours by wireless charging base
- Can be charged with wireless charging pad 9TA92W (not included)

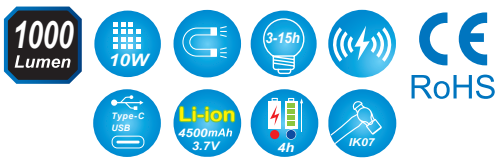

Switch mode	Lumen	Operating hours
Top light	100 lm	15h
One light	500+500 lm	12~6h
Two light	250~500 lm	3h




• One light source



• Both side can be lit at the same time



• 180° hiding hook



• Top light



• 360° swivel head in vertical



• Wireless charging design



Front Back

KT NO.	L mm	g	
9TA267W	400	335	1 / 20


Contents

Wireless Charging Slim Lamp	x 1 PC.
Type-C USB cable	x 1 PC.

Wireless charging Dual-Light Pocket Lamp

9TA44W

- 8W COB LED + 3W SMD
- White light color, kelvin : 6500K
- Dual light and spot mode, flood mode
- IP65 waterproof and dustproof, IK07 vandalproof
- 180° flexible handle + super strong magnet on the handle
- Rechargeable battery : 3.7V - 2600mAh Li-ion battery
- Accessory : Type-C USB fast charging cable
- 3 LED battery status indicators
- Charging time : 4 hours by USB cable, 6-7 hours by wireless charging base(The charging time depends on the changing power of the wireless charging base)
- Can be charged with wireless charging pad 9TA92W(not included)

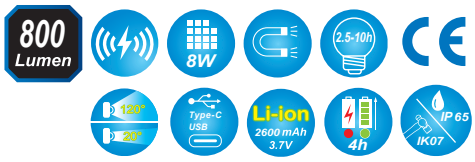

Switch mode	Lumen	Operating hours
Spot light	250 lm	4.5h
Flood light low	160 lm	10h
Flood light mid	400 lm	4.5h
Flood light high	800 lm	2.5h



• LED battery status indicators



• 180° flexible direction



• Super strong magnet on the handle



• Easy to carry



• Wireless charging design

KT NO.	L mm	g	
9TA44W	97 x 83 x 39	218	1 / 24

Contents

Dual - light pocket lamp		x 1 PC.
Type-C USB cable		x 1 PC.



10W Wireless Charging Flashlight

9TA71W

- Chips: High quality 10w LED, 6500K
- Switch mode:
  Spot Light mode (Eco-Low-Mid-High)
  Strobe mode: press and hold the switch for two seconds
- Battery: rechargeable high quality 3.7V 2600mAh Li-ion
- Charging time: 4 hours by charger and 6~8 hours by wireless charging base
  (The specific charging time depends on the power of the charging base)
- IP68 waterproof and IK07 vandalproof
- Features:
  Wireless charging function
  Super strong magnets on the light
  Three LED battery indicators show the charging and working
- Working temperature: -10°C to +40°C
- Accessory: type-C fast charging cable
- Can be charged with wireless charging pad 9TA92W

Switch mode	Lumen	Operating hours
Spot light eco	5 lm	200h
Spot light low	30 lm	25h
Spot light mid	400 lm	4h
Spot light high	1000 lm	2h




• Main switch


• Type-C USB charger port


• Wireless charging


• Hanging hole



• Press and hold the switch for two seconds


• Super strong magnets on the light

KT NO.	L mm	g	
9TA71W	160	215	1 / 24


Contents


Flashlight		x 1 PC.
Type-C USB cable		x 1 PC.


Wireless Charging Pad

9TA92W

- Output power: 5W
- IP20 waterproof and IK07 vandalproof
- Features:
  Built-in screw holes for wall mounting
  Super strong magnets in the front and back
  LED battery indicator shows the charging and working
- Working temperature:-10°C to +40°C
- Accessory: Type-C charging cable and 5V1A USB adapter
- Can be used by wireless charging light
  9TA267W/9TA44W/9TA71W

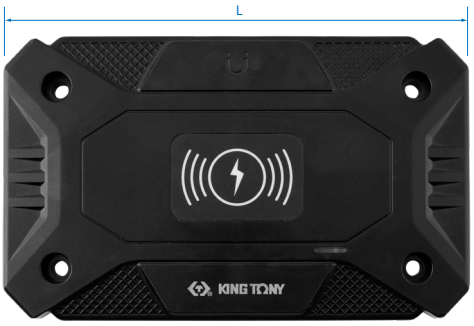



• Built-in screw holes for wall mounting


• LED battery indicator shows the charging and working

KT NO.	Applicable area	L mm	g	
9TA92WA	Europe	164	335	1 / 12
9TA92WB	America & Asia		335	1 / 12
9TA92WD	Australia & New Zealand		335	1 / 12

Contents

5W output charger base		x 1 PC.
Type-C USB cable		x 1 PC.
5V1A USB charger		x 1 PC.




7W+4W Inspection Light

9TA242

- Chips:
  High quality 7W COB LED,6500K
  High quality 4W SMD LED,6500K
- Switch mode: Top Torch-Main Light(Low-Mid-High)-Off
- Battery: rechargeable high quality 3.7V 2600mAh Li-ion
- Charging time: 4hr by charger
- IP65 waterproof and IK07 vandalproof
- Features:
  180° swivel base+Two 360° functional hooks
  Two super strong magnets on the back and one on the base
  Three LED battery indicators show the charging and working
- Working temperature: -10°C to + 40°C
- Accessory:Type-C USB Charging cable and 5V 1A USB charger


Switch mode	Lumen	Operating hours
Top light	200 lm	5h
Main light low	150 lm	8h
Main light mid	350 lm	4h
Main light high	700 lm	2h



- Two super strong magnets on the back and one on the base
- Two 360° functional hooks



- Type-C USB charger port







KT NO.		Applicable area	L mm	g	
9TA242A		Europe	260	516	1 / 12
9TA242B		America & Asia	260	516	1 / 12
9TA242D		Australia & New Zealand	260	516	1 / 12

Contents

Inspection lamp	x 1 PC.
Type-C USB cable	x 1 PC.
USB charger	x 1 PC.

6W COB +1W SMD Slim Inspection Lamp

9TA261


- 6W COB + 1W SMD (Top)
- White light color, kelvin : 6500K
- IP54 waterproof and dustproof, IK07 vandalproof
- Materials : ABS plastic + rubber housing + PC lens + aluminium slim housing
- 120° Angle rotation & magnetic base
- Rechargeable battery : 3.7V - 2600mAh Li-ion
- Switch modes : Top light – Worklight low-Worklight high-Off
- Accessory : Type-C USB Charging cable and 5V 1A USB charger
- Charging time : 4 hours



Switch mode	Lumen	Operating hours
Top light	120 lm	8h
Main light low	250 lm	6h
Main light high	600 lm	3h





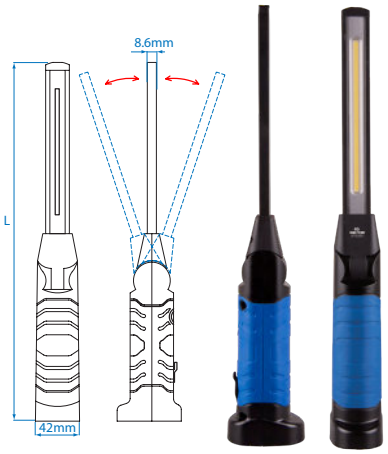

KT NO.	Applicable area	L mm	g	
9TA261A	Europe	340	300	1 / 12
9TA261B	America & Asia	340	300	1 / 12
9TA261D	Australia & New Zealand	340	300	1 / 12

Contents

COB LED lamp	x 1 PC.
USB charger	x 1 PC.
Type-C USB cable	x 1 PC.

Aluminum Folding Slim Lamp


9TA268


- White light color, kelvin : 6500K
- Material : PA + Rubber + Aluminum housing
- 180°swivel head in vertical + Strong magnetic base
- Rechargeable battery : 3.7V - 2600mAh Li-ion battery
- Accessory :Type-C USB Charging cable and 5V 1A USB charger
- Three leds battery indicator / Charging time : 4 hours



Switch mode	Lumen	Operating hours
Top light	120 lm	8h
Main light low	150 lm	8h
Main light high	800 lm	2.5h
Minor light low	120 lm	9h
Minor light high	400 lm	4h





- Super strong magnets on the bottom
- Top light
- Three leds battery indicator
- 180°swivel head in vertical

KT NO.	Applicable area	L mm	g	
9TA268A	Europe	200	193	1 / 40
9TA268B	America & Asia	200	193	1 / 40
9TA268D	Australia & New Zealand	200	193	1 / 40

Contents

Pro Aluminium Rechargeable Slimlight	x 1 PC.
Type-C USB cable	x 1 PC.
Charger	x 1 PC.


Flexible LED Slim Light

9TA251

- 5W COB + 3W SMD (Top)
- White light color, kelvin : 6000K~6500K
- IP54 waterproof and dustproof, IK07 vandalproof
- Material : PA + TPE housing
- Flexible Gooseneck + 90° hiding hook + Strong magnetic base
- Rechargeable battery : 3.7V - 2600mAh Li-ion battery
- Accessory : Type-C USB Charging cable and 5V 1A USB charger
- Three leds battery indicator
- Charging time : 4 hours



Switch mode	Lumen	Operating hours
Top light	120 lm	9h
Main light Min ~ Max	50~500 lm	16~2h



- Top SMD



- USB charger port + battery indicator



- Strong magnetic + 90° Hook



- Stepless Dimmer Switch



KT NO.	Applicable area	L mm	g	
9TA251A	Europe	475	322	1 / 12
9TA251B	America & Asia	475	322	1 / 12
9TA251D	Australia & New Zealand	475	322	1 / 12

Contents		
Flexible slim lamp		x 1 PC.
USB charger		x 1 PC.
Type-C USB cable		x 1 PC.




10W COB LED Adjustable Lamp


9TA33

- White color, kelvin : 6500K
- Two steps adjustable light
- Material : ABS + PC
- IP20 waterproof and dustproof, IK07 vandalproof
- 170° magnetic swivel base + 360° body swivel knot + two 360° functional hooks
- Rechargeable battery : 7.4V - 2600mAh Li-ion
- Accessory : Type-C USB Charging cable and 5V 1A USB charger
- Charging time : 4.5 hours


Switch mode	Lumen	Operating hours
Low light	400 lm	5.5h
High light	1000 lm	2.2h



• 170° swivel base



• Two steps adjustable light



• Magnetic swivel base



• body swivel knot

KT NO.	Applicable area	L mm	g	
9TA33A	Europe	500	487	1 / 12
9TA33B	America & Asia	500	487	1 / 12
9TA33D	Australia & New Zealand	500	487	1 / 12



Contents

10W COB LED adjustable lamp		x 1 PC.
USB charger		x 1 PC.
Type-C USB cable		x 1 PC.

LED Rechargeable Underhood Light


9TA34

- 20W SMD
- White color, 50x Super bright SMD LED, 6500K
- Material : Aluminum body + PA
- IP20 waterproof and dustproof, IK07 vandalproof
- Features :
  Durable housing,Hooks with Rubber, and lens
  3 leds battery level indicator
- Battery: 3.6V4800mAh Li-ion battery with Type-C USB socket
- Accessory: Type-C USB Charging cable and 5V 2A USB charger
- Charging time : 4 hours

Switch mode	Lumen	Operating hours
Low light	500 lm	6.5h
Mid light	1000 lm	4h
High light	2000 lm	2h





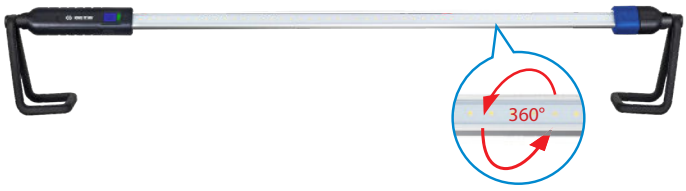




KT NO.	Applicable area	L mm	g	
9TA34A	Europe	1170	1666	1 / 6
9TA34B	America & Asia	1170	1666	1 / 6
9TA34D	Australia & New Zealand	1170	1666	1 / 6
9TA34P01	3.6V4800mAh		70	1 / 1

Contents


360° Rotational Bar		x 1 PC.
5V/2A charger		x 1 PC.
Type-C USB		x 1 PC.
4800mAh Battery	21700	x 1 PC.

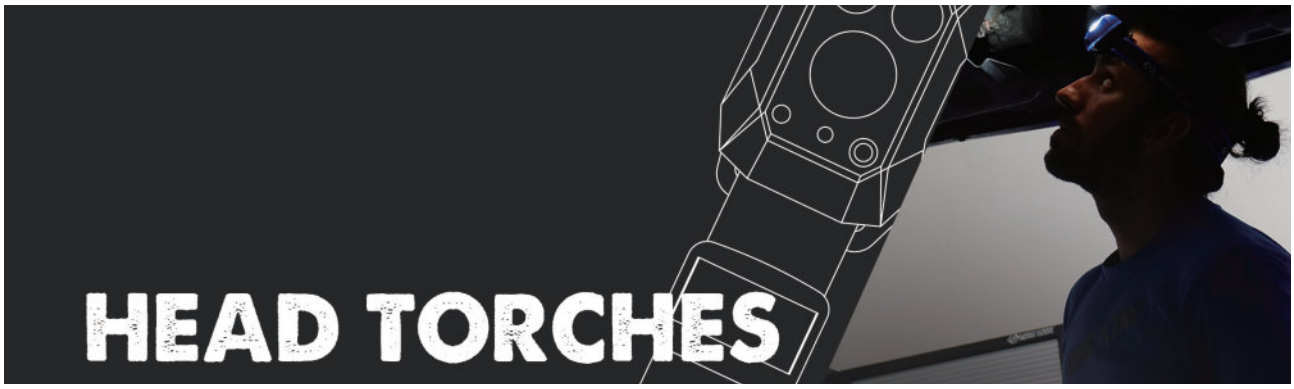

Lightweight Rechargeable Neck Light

9TA54

- White light color, kelvin : 6500K
- IP54 waterproof and dustproof, IK07 vandalproof
- Features:
  The Neck light is lightweight, adjustable and comfortable around your neck
  The 2 light head can be adjusted independently up to 120° for a wider Lighting
  Circuit protection prevents battery from over-charging or over-discharging
- Rechargeable battery : Rechargeable high quality 3.7V 700mAh Li-ion
- 3 colors LED battery level indicator show the battery level
  Red Blinking: Low battery power warning
  Green Blinking: charging
  Green: Fully charged
- Charging time : 2.5 hours
- Temperature: -10°C to +40

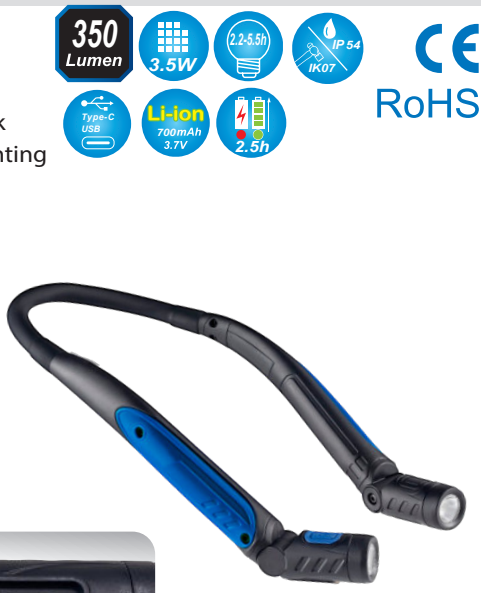

Switch mode	Lumen	Operating hours
Low light	180 lm	5.5h
High light	350 lm	2.2h



• Lightweight, adjustable, comfortable



• 3 Colors LED indicator



• 120° Adjustable light head



• Type - C USB port

KT NO.	L mm	g	
9TA54	230 x 130 x 45	140	1 / 12


Contents

Lightweight Rechargeable Neck Light	x 1 PC.
Type-C USB cable	x 1 PC.

Rechargeable LED Beanie Hat

9TA56

- Made of 100% acrylic, help you resist the cold wind, keep your head and ear warm
- Elastic material, fits for most of head circumference
- 3.7V 250mAh rechargeable Li-Polymer battery
- 4 built-in LED bulbs with 3 adjustable brightness level
- With reflective strip to make you easily be noticed in the dark
- Suitable for all kinds of outdoor activities
- Charging time : 2 hours



• Simply pop it out and chargeit

Switch mode	Lumen	Operating hours
Low light	30 lm	6h
Mid light	60 lm	4h
High light	170 lm	2h



• Socket



• Laptop



• Car Charger



• Power Bank





• reflective strip

3W COB LED Inductive Head Lamp

9TA52

- White light color, kelvin : 6500K
- IP65 waterproof and dustproof
- Materials : High impact ABS + TPE housing + PC lens & non-skid grip belt
- Feature : 10cm Smart motion sensor
- Rechargeable battery : 3.7V - 1500mAh Li-po
- LED battery charging indicator
- Charging time : 2.5 hours
- Accessory : Type-C USB Charging cable and 5V 1A USB charger

Switch mode	Lumen	Operating hours
Low light	100 lm	5.5h
High light	280 lm	2h



• Two step adjustable light




• 60° Adjustable lighting



• Inductive indicator ON



• Inductive light switch





KT NO.	Applicable area	L mm	g	1 / 40
9TA52A	Europe	65	110	1 / 40
9TA52B	America & Asia	65	110	1 / 40
9TA52D	Australia & New Zealand	65	110	1 / 40

Contents		
COB LED lamp		x 1 PC.
Headband		x 1 PC.
USB charger		x 1 PC.
Type-C USB cable		x 1 PC.

Twin-Beam Multifunctional Head Lamp

9TA53

- White light color, kelvin: 6500K
- Dual light mode, spot mode, flood mode
- IP65 waterproof and IK07 dustproof
- Materials : High impact ABS + PC housing + PC lens & non-skid grip belt
- Feature : 10 cm Smart motion sensor + 60° adjustment
- Battery : AAA alkaline battery (included)

Switch mode	Lumen	Operating hours
Spot light	20~400 lm	60~5h
Flood light	20~200 lm	60~4h
Red LED	0.5~20lm	70~10h
SOS light	strobe	



• Inductive light switch



• 60° Adjustable lighting



KT NO.	L mm	g	1 / 12
9TA53	68.8	89	1 / 12



• Strobe for signaling



Contents		
COB LED lamp		x 1 PC.
Headband		x 1 PC.
AAA alkaline battery	AAA	x 3 PC.



1.5W COB +1 LED Lamp

9TA28

- 1.5W COB + 1W LED
- 180° magnetic swivel base + 270° magnetic swivel clip
- Rechargeable battery : 3.7V - 800mAh Li-ion
- Accessory : Type-C USB Charging cable
- Overcharge/Discharge protection
- Materials : ABS+PC
- Charging time : 2 hours
- White light color, kelvin : 7200K




Switch mode	Lumen	Operating hours
Top light	80 lm	3.5h
Main light	145 lm	2h



• magnetic base



• USB charger port



• Top light with 1 LED



• 180° swivel clip



KT NO.	L mm	g	
9TA28	180	160	12 / 48

Contents

1.5W COB + 1 LED rechargeable work lamp	x 1 PC.
Type-C USB cable	x 1 PC.

Rechargeable LED Pen Light

9TA281

- 1.5W -7 SMD + 1W SMD (Top)
- White light color, kelvin : 6500K
- IP20 waterproof and dustproof, IK07 vandalproof
- Material : ABS housing + Rubberized painting + PC lens
- Strong magnet on the clip
- Rechargeable battery : 3.7V 750mAh Li-ion
- Led charging indicator : Red -Charging, Green –Fulled
- Charging time : 2 hours
- Accessory : Type-C USB Charging cable



Switch mode	Lumen	Operating hours
Top light	80 lm	4h
Main light	120 lm	2.5h









KT NO.	L mm	g	
9TA281	170	58	1 / 48

Contents

LED pen light	x 1 PC.
Type-C USB cable	x 1 PC.



LED Pocket Torch

79815

- 3W High performance LED adjustable focus pocket torch
- Strobe warning lights for maximize visibility
- Aluminum alloy body, safety lanyard included
- Operates using 3 x AAA batteries (not included)



Switch mode	Lumen	Operating hours
Main light	120 lm	6.5h



KT NO.	L x Ø mm	g	
79815	128 x 28	95	1 / 100

LED Pen Light

79831

- Pen light with 6 PC. SMD(surface-mount devices) LED
- ABS body 360 degree rotation
- PE lampshade : avoid nebulization
- Operates using 3 x AAA batteries (not included)



Switch mode	Lumen	Operating hours
Main light	135 lm	5.5h




KT NO.	L x W x H mm	g	
79831	165 x 25 x 30	58	10 / 120


LED Telescopic Torch

79833

- 3 LEDs, white light color
- Magnetic torch with 360° flexible head
- Extends up from 170mm to 560mm
- 4 x LR44 batteries included



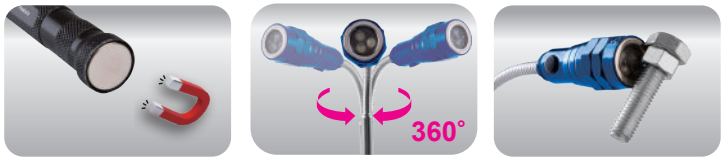

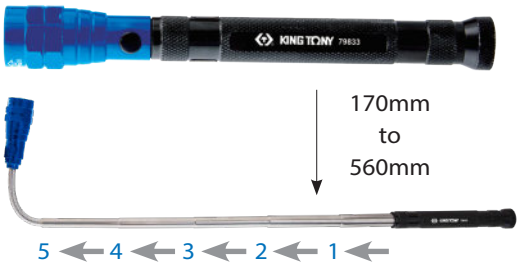

KT NO.	L x Ø mm	g	
79833	170 x 22	100	10 / 120



30W Wired COB LED Site Light


9TA42

- 30W COB LED floodlight with portable handle
- White light color, kelvin : 6000~7000K
- Pass IP54 test
- Slim profile with lockable adjustment and 180° swivel base
- Option to wall mount or tripod stand at work sites
- Accessory : AC adapter cable 1.8M

Switch mode	Lumen
Main light	3000 lm



• Swivel base

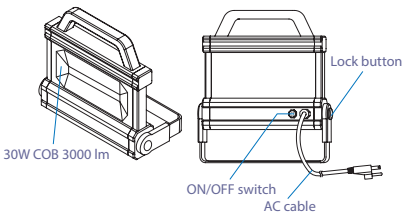



KT NO.	Applicable area	L x H x W mm	g	
9TA42A	Europe	238 x 270 x 46	1239	1 / 6
9TA42B	America & Asia	238 x 270 x 46	1239	1 / 6
9TA42D	Australia & New Zealand	238 x 270 x 46	1239	1 / 6



45W Twin Head SMD Site Light

9TA45

- 45W 120 PC. SMD LED
- White light color, kelvin : 5700K
- 90 ° vertical rotation & 180 ° horizontal rotation for angle of lighting
- Rechargeable battery : Replaceable 14.8V 5200 mAh Li-ion battery pack
- Accessory : 100-240V to 20V 1.1A charger
- 5 LED battery status indicator & USB 5V 2A output
- Charging time : 4.5 hours
- Material : PA + ABS + PC



Switch mode	Lumen	Operating hours
Work light 25%	750 lm	12h
Work light 50%	1500 lm	6h
Work light 75%	3000 lm	3h
Work light 100%	4500 lm	2h



• 180 ° horizontal rotation



• 90 ° vertical rotation



• Replaceable battery



• Power bank in case of emergency



• Anti-slip handle



• Option to fixation

KT NO.	Applicable area	L x W x H mm	g	
9TA45A	Europe	288 x 176 x 131	2140	1 / 4



Contents

45W Twin Head SMD Site Light		x 1 PC.
AC charger		x 1 PC.
Battery pack		x 1 PC.

40W COB Bluetooth Speaker Site Light

9TA46

- 40W COB LED
- White light color, kelvin : 6500K
- 140° vertical rotation + hiding hook on the bottom
- High performance integrated 10W Bluetooth speaker
- Rechargeable battery : 11.1V 5200 mAh Li-ion
- Accessory : 100-240V to 15V 1.5A charger
- 5 LED battery status indicator & USB 5V 2A out put
- 1 LED Bluetooth indicator
- Quick charging time : 3.5 hours
- Material : TPE + PA + aluminum + PC



Switch mode	Lumen	Operating hours
Eco light	400 lm	20h
Full power light	4000 lm	2h
Music mode	-	5~8h



• AC Charger
• USB out put (Power bank)




• Bluetooth on & battery indicator



• Anti-slip handle



• Option to fixation



• Hiding Hook



• 140 ° vertical rotation

KT NO.	Applicable area	L x W x H mm	g	
9TA46A	Europe	210 x 210 x 100	1450	1 / 4



Bluetooth **4.0** 10M

Contents

40W COB Bluetooth Speaker Site Light		x 1 PC.
AC charger		x 1 PC.




Adjustable Tripod for Site Light

87162

- Can hold one light or 2 lights (with T-Bar)
- Durable heavy duty steel tripod body
- Three section tube diameter : 25mm / 32mm / 38mm
- Adjustable tripod height from 700mm to 1500mm
- Portable, easy to fold and great for transportation
- It is recommended to use with 9TA42 / 9TA45 / 9TA46 / 9TA48 (This product dose not contain lamps, please buy separately)



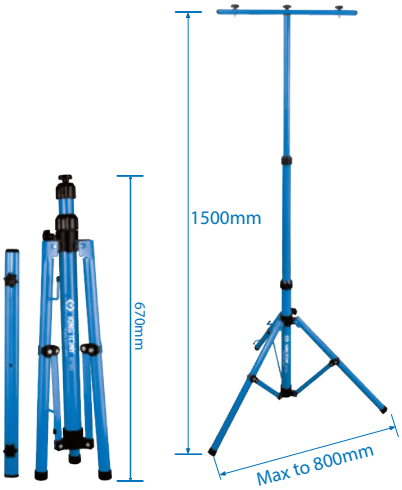

KT NO.	Tube Diameter (mm)	Loading Weight (kg)	Folded Length (mm)	Max height (mm)	g	
87162	38	3.0	700	1500	650	1 / 6

Detachable Underhood Light Shelf


87163

- Two movable base fit all kinds of magnetic lights
- 360° horizontal rotating base for different lighting angle
- Three section length adjustment fit variety of occasions
- Durable heavy duty aluminum body + PA
- Anti-sliding clasp handle
- It is recommended to use with 9TA44W (This product dose not contain lamps, please buy separately)












- Three section length adjustment fit variety of occasions
- 360° horizontal rotating base for different lighting angle

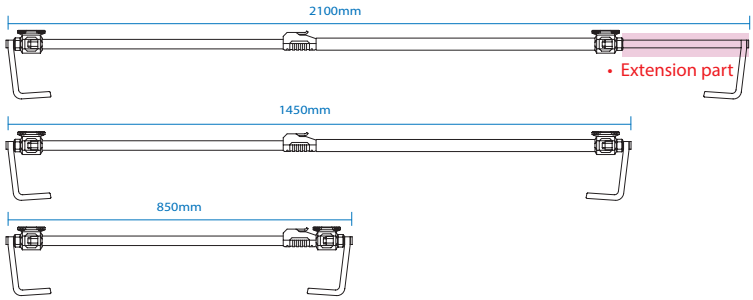

KT NO.	Width (mm)	Height (mm)	Folding length (mm)	Extendable length (mm)	g	
87163	110	180	850	2100	1300	1 / 6

AUTOMOTIVE TOOLS




KING TONY 9BC251A01
KING TONY 43240115Y
9BC42A15
9BC41A14
9BC41A22
9BC42A11

Tool Trolley Contents


286 PC.



Contents No. 934-010MRVD

28.8 CUFT 2.97


- Special tool set for Automobile, suitable for VOLKSWAGEN-GROUP, MERCEDES-BENZ, OPEL, BMW & Japanese passanger car

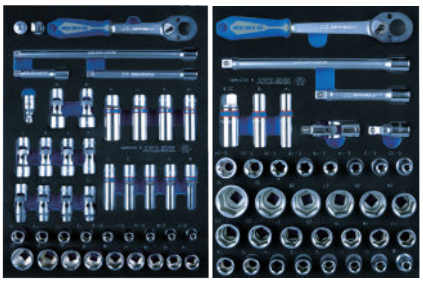


9-3544MRV #9 P.79 | 9-4537MRV #9 P.80



9-4147PRV #10 P.88 | 9-4401MPV #10 P.88 | 9-2565MRV #7 P.76 9-4129PRV #7 P.77

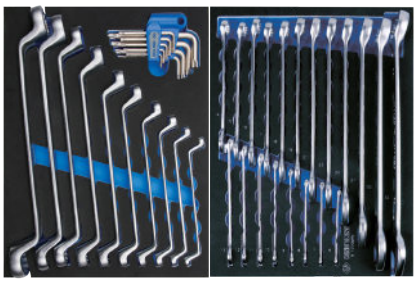

9-90119MRV #9 P.82 | 9-1220MRV #9 P.81

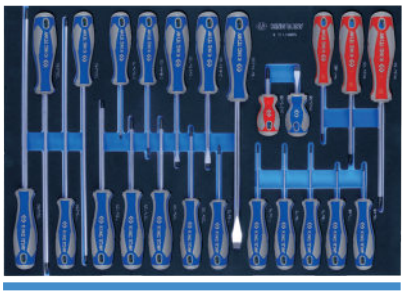

9-31124MRV #6 P.122



9-40104GPV #10 P.88 | 9-40113GPV #10 P.88 | 9-90135MRV #10 P.88 | 9-90118PRV #10 P.89

Tool Trolley Set

286 PC.

92.8 CUFT 15.21



934-010MRV (87434-7B P.37)



934-010MRV-G (87434-7B-G P.37)



934-010MRV-B (87434-7B-B P.37)

98.8 CUFT 15.21



9634-010MRV (87634-7B P.39)



9634-010MRV-G (87634-7B-G P.39)



9634-010MRV-B (87634-7B-B P.39)

ALFA ROMEO

Diesel Engine Setting & Locking Set




9AT2006E


- The set includes flywheel holding tool, crankshaft locking tool and camshaft setting tools
- Suitable for Lancia, Alfa Romeo and Fiat engine
- Use to set and lock engine timing


D | BELT | 6 PC.

1360 | 1 / 10

MODEL:	145 (98-01), 146 (98-01), 147 (01-09) 156 (97-08), 159 (05-09), 166 (98-08) GT (04-09), Brera (05-09), Spider (06-09) Crosswagon (04-08)
ENGINE CODE:	**1.9JTD 8v.** 323.02, 371.01, 182B9.000, 937A2.000 937A3.000, 939A1.000, 939A2.000, 939A7.000 **1.9JTD 16v.** 192A5.000, 192B1.000, 937A4.000 937A5.000, 939A2.000, 939A8.000 **2.4JTD 10v.** 325.01, 342.02, 362.02, 839A6.000 841C.000 **2.4JTD 20v.** 841G.000, 841H.000, 841M.000 939A3.000, 939A9.000





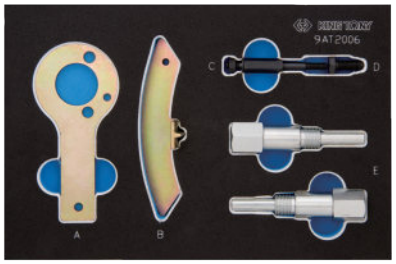

CONTENTS :
- A&C&D - crankshaft locking tool
- B - flywheel holding tool (crank pulley removal)
- E - camshaft setting tool (pair)

BMW

Petrol Engine Twin Camshaft Setting & Locking Set


9AT1018E


- The set includes camshaft / carrier bracket remover & installer tools
- Suitable for BMW petrol 1.8 and 2.0 N42 / N46 (chain) engine

P | CHAIN | 18 PC.

4400 | 1 / 3

MODEL:	**118i.** E87 (04-08) **120i.** E87 (04-08) **316i.** E46 (01-05) **316ti. Compact** E46 (01-05) **318i.** E46 (01-07) **318ti. Compact** E46 (01-05) **318i.** E90 (05-08) **X3.** 2.0i E83 (05-08) **Z4.** 2.0i E85 (04-08) **520i.** E60 (04-08) **320i.** E90 (05-08)
ENGINE CODE:	**N42 / N46** B18, B18A, B20, B20A, B20B







CONTENTS :
- A&H&I - camshaft/carrier bracket
- Mounting fixture
- B - inlet camshaft securing tool (rear)
- C&F - torsion spring remover/installer
- D&E - inlet camshaft securing tool (front)
- G - intermediate lever clamp set (8 PC.)

BMW

Petrol Engine Twin VANOS Service Set




9AT1009E

- The set includes compressed air connector, twin VANOS setting tool and sprocket / chain assembly fixture, timing adjustment plate, pre-load tools
- Suitable for setting / locking popular BMW petrol engine
- Use to adjust engine timing and set / lock engine application

P | CHAIN | 9 PC.

5966 | 1 / 3

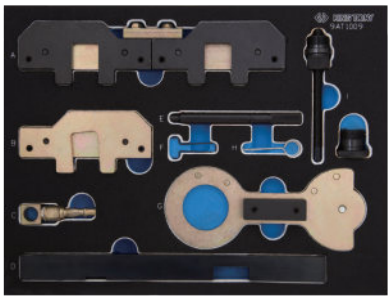


CONTENTS :
- A - camshaft setting plate
- B - timing adjustment plate
- C - compressed air connector
- D - sprocket / chain assembly fixture
- E - flywheel locking pin
- F - tensioner pin (M50)
- G - twin VANOS setting tool
- H - tensioner pin (M52)
- I - tensioner tool


MODEL:

318is. E36 (92-99)
318ti Compact E36 (94-01)
320i. E36 / E46 (92-07)
323i. E36 / E46 (95-01)
325i. E36 / (92-07)
328i. E36 / E46 (95-01)
330i. E46 (00-07)
520i. E39 / E60 (96-05)
523i. E39 (96-00)
525i. E39 / E60 (00-05)
528i. E39 (96-00)
530i. E39 / E60 (00-05)
728i. E38 (94-02)
730i. E65 (02-05)
Z3. (E36) 1.9-3.0 (96-03)
Z4. (E85) 2.2-3.0 (03-06)
X3. (E83) 3.0 (03-06)
X5. (E53) 3.0 (99-07)

ENGINE CODE:

M42 / M44 / M50 / M52
no VANOS (VVT)
18 4S 1, 19 4S 1, 20 6S 2(Early),
25 6S 2(Early)
M50 / M52
Single VANOS (VVT) variants
20 6S 2(Later)
20 6S 3
25 6S 2(Later)
M52(TU) / M54 / M56
Twin VANOS (VVT) variants
20 6S 4
22 6S 1
25 6S 4

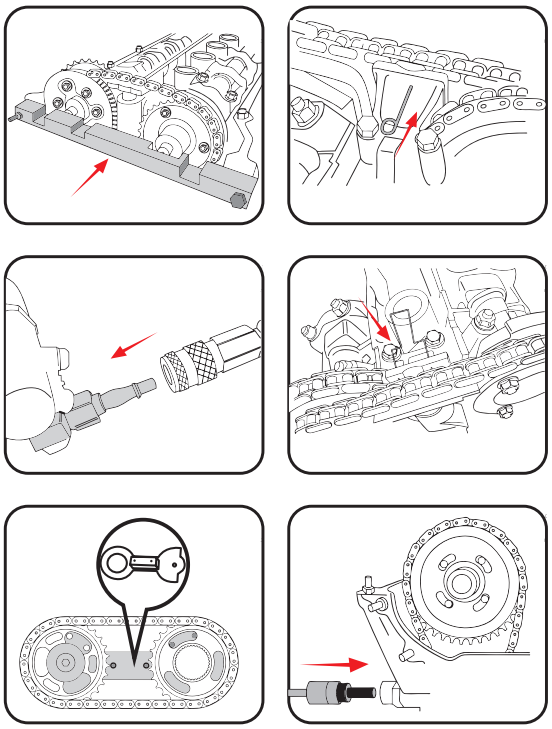

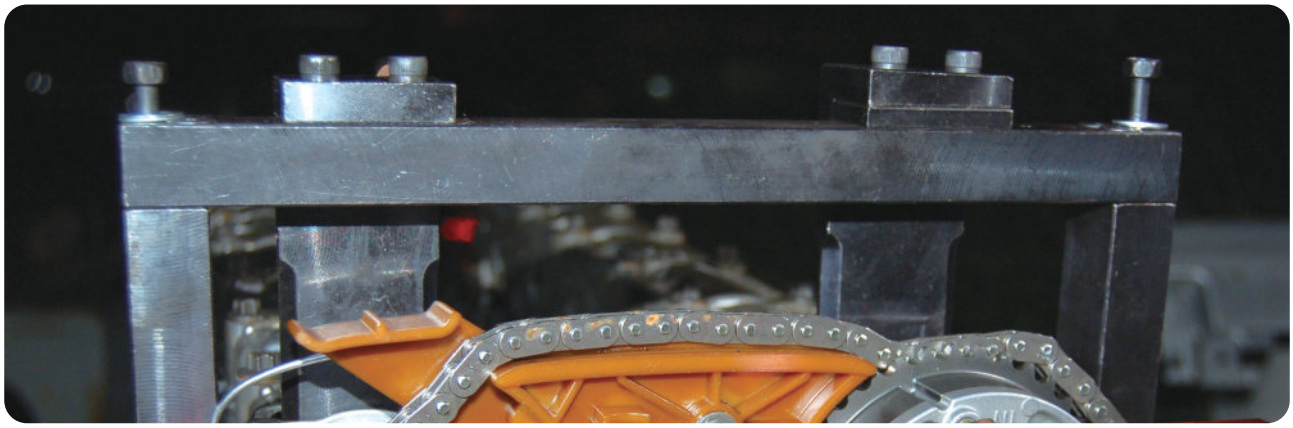

BMW

Petrol Engine Twin Camshaft Setting & Locking Set




9AT1102E


- The set includes camshaft locking plate and flywheel locking pin
- Suitable for M40 engines (also used on the M43 chain driven engine)
- Use to lock the camshaft and crankshaft TDC position to keep their timing relationship while replacing timing belt or carry out other timing belt service

P | CHAIN | 2 PC.

1901 | 1 / 10

MODEL:	**316i** E36 / E46 (93-04) **316i Compact** E36 / E46 (98-01) **318i** E36 / E46 (93-01) **518i** E34 (94-96) **Z3** 1.8 / 1.9 E36 (96-03)
ENGINE CODE:	**M43** 16 4E 2, 16 4E 3 18 4E 2, 19 4E1







CONTENTS :
- A - camshaft locking plate
- B - flywheel locking pin

BMW

Petrol Engine 1.8 To 3.0 Twin Cams Setting & Locking Set




9AT1106E

- The set includes camshaft setting plate, timing adjustment plate, pre-load tool, flywheel locking pin and tensioner pin
- Suitable for setting / locking popular BMW petrol engine
- Suggestion:
  Use with 9AT1-A02 wrench while using this kit on SINGLE VANOS system (on inlet camshaft)
  Use with 9AT1303 while using this set on TWIN VANOS system


P | CHAIN | 6 PC.


3781 | 1 / 5


MODEL:	**318is.** E36 (92-99) **318ti Compact** E36 (94-01) **320i.** E36 / E46 (92-07) **323i.** E36 / E46 (95-01) **325i.** E36 / E46 (92-07) **328i.** E36 / E46 (95-01) **330i.** E46 (00-07) **520i.** E39 / E60 (96-05) **523i.** E39 (96-00)	**525i.** E39 / E60 (00-05) **528i.** E39 (96-00) **530i.** E39 / E60 (00-05) **728i.** E38 (94-02) **730i.** E65 (02-05) **Z3.** (E36) 1.9-3.0 (96-03) **Z4.** (E85) 2.2-3.0 (03-06) **X3.** (E83) 3.0 (03-06) **X5.** (E53) 3.0 (99-07)
ENGINE CODE:	**M42 / M44 / M50 / M52 no VANOS (VVT)** 18 4S 1, 19 4S 1, 20 6S 2(Early), 25 6S 2(Early). **M50 / M52 Single VANOS (VVT) variants** 20 6S 2(Later), 20 6S 3, 25 6S 2(Later), 25 6S 3, 28 6S 1 **M52(TU) / M54 / M56 Twin VANOS (VVT) variants** 20 6S 4, 22 6S 1, 25 6S 4, 25 6S 5, 28 6S 2, 30 6S 3	

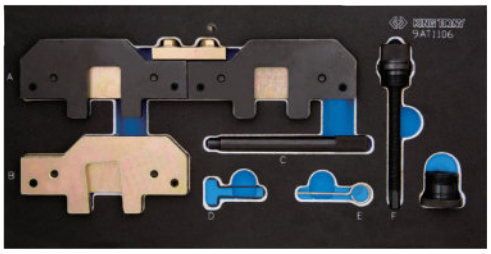


CONTENTS :
- A - camshaft setting plate
- B - timing adjustment plate
- C - flywheel locking pin
- D - tensioner pin (M50)
- E - tensioner pin (M52)
- F - tensioner tool









BMW

Petrol Engine Timing Setting & Locking Set




9AT1206E


- The set includes VANOS alignment plate, camshaft setting tools, flywheel locking pin and timing chain tensioner pre-load tool
- Suitable for 1.6 BMW, 4 cylinder twin camshaft 16v and chain driven petrol engines with VANOS
- Use to check and adjust engine timing


P | CHAIN | 6 PC.

2657 g | 1 / 5

MODEL:	**116i.** E81 E87 (03-09) **316i.** E46 / E90 (01-08) **316Ci.** E46 (01-06) **316ti.** E46 (01-05)
ENGINE CODE:	**N40 / N45 / N45T** B16, B16A, B16AC





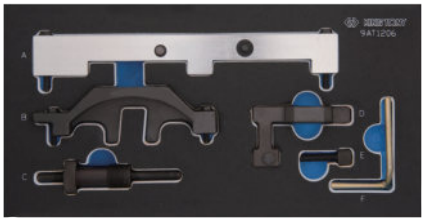

CONTENTS :

- A - VANOS alignment plate
- B - camshaft setting plate (inlet)
- C - timing chain tensioner pre-load tool
- D - camshaft setting plate (exhaust)
- E - camshaft setting plate securing screw
- F - flywheel locking pin

BMW

Diesel Engine 2.5TDS Timing Set




9AT2106E


- The set includes camshaft setting plate, tensioner lever, tensioner retaining pin, flywheel locking pin and pump remove & sprocket retainer
- Suitable for BMW, Land Rover and Opel engine
- Use to retain and support the sprocket and timing chains in correct position when the pump is removed


D | CHAIN | 6 PC.

2480 g | 1 / 5

MODEL:	**1.7 2.5td / tds (Chain)** **318tds.** E36(94-00) **325td / tds.** E36(91-99) **525td / tds.** E34(90-00) **725tds.** E38(95-02)
ENGINE CODE:	**1.7 2.5td / tds (Chain)** M41 / M51





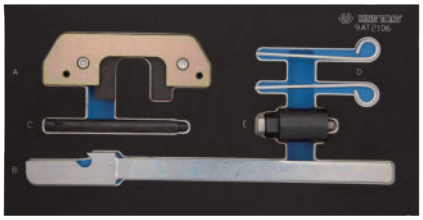

CONTENTS :

- A - camshaft setting plate
- B - tensioner lever
- C - flywheel locking pin
- D - tensioner retaining pin
- E - pump remove & sprocket retainer (2 part)

BMW/ MINI

Petrol Engine Setting & Locking Set – BMW/PSA


9AT1010E


- The set includes camshaft setting tool, crankshaft locking pin & chain tensioner tool
- Suitable for BMW Mini and PSA Peugeot Citroën 1.4/1.6 16v valvetronic direct injection engines
- Use to lock and adjust engine timing


P | CHAIN | 10 PC.

BMW Mini Cooper N12/N14 — 2384 g — 1 / 5

MODEL:	**Clubman**(07-14) **Countryman**(14-16) **Paceman**(14-16) **Roadster**(12-12)
ENGINE CODE:	**N12 1.4/1.6(Valvetronic)** B14, B14AB, B16A **N14 1.6(Direct Injection)** B16A, B16CD/TD, B16TD, B16CD





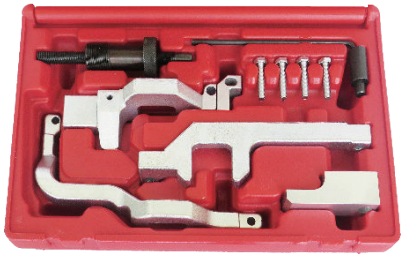

CONTENTS :
- A – camshaft setting tool (inlet)
- B – camshaft setting tool (exhaust)
- C – camshaft setting tool
- D – camshaft setting clamp
- E – crankshaft locking pin
- F – chain tensioner tool
- G – M10 screw*4

BMW/ MINI

Petrol Engine Timing Set




9AT1108E

- Use for BMW & Mini 1.6 litre chain drive petrol engine
- Includes the cam & crankshaft locking tools and chain pre-tension setting tools for TDC position
- Suitable for BMW (N13) & Mini (N18) engines

P | CHAIN | 8 PC.

2527 g — 1 / 10

MODEL:	**BMW 1 Series** 114i F20(2012-15), 116i F20 (2012-15), 118i F20 (2011-15) **BMW 3 Series** 316i F30 (2012-15) **MINI** Cooper S (R56/57) (2010-15) Coupe Cooper S (R58) (2012-15) Roadster (R59) (2012-15) Countryman (R60) (2012-16) Paceman (R61) (2013-16) Clubman (R55) (2011-14)
ENGINE CODE:	**N13** B16A **N18** B16/M0, B16A, B16A/M0, B16A/MO, B16C, B16C/TO, B16M0

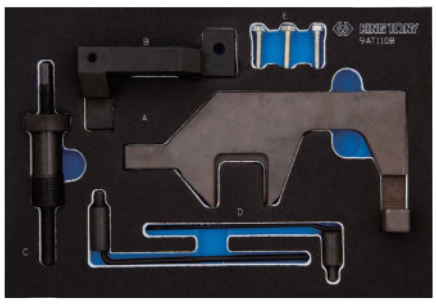

CONTENTS :
- A – camshaft locking tool
- B – camshaft locking tool
- C – chain tensioner tool
- D – crankshaft locking pin

BMW

Diesel Engine Timing Locking Set



9AT2107E

- The set includes camshaft alignment tool, flywheel locking tool, crankshaft pulley turning tool, and also high pressure pump sprocket removal tool
- Suitable for BMW N47 / N47S / N57 2.0 and 3.0 twin camshaft diesel chain drive engine
- Use to set & lock the camshaft and crankshaft when adjusting valve timing on engine correctly

D | CHAIN | 8 PC.


1730 | 1 / 10


MODEL:	**1 Series** 116d/118d/120d/123d E81/82/87/88 (07-12) **3 Series** 316d/318d/320d/325d/330d/330xd E90/91/92/93 (07-12) **5 Series** 520d E60/61 (07-10) 525d/530d/535d F10/11 (10-12) 530d GT/535d GT F07 (09-12) **7 Series** 730d/730Ld/740d/740d xDrive F01/02/04 (08-12) **X Series** X1 sDrive 18d/20d E84 (09-12) X1 xDrive 18d/20d/23d E84 (09-12) X3 20d E83 (07-10) X3 xDrive 1.8d/30d E83 (08-12) X5 30d/xDrive 40d E70 (10-12) X6 xDrive 30d/40d E71/72 (10-12)
ENGINE CODE:	**N47 / N47S** D20A D20B D20T0 D20O0 D20UO **N57** D30U0 D30O0 D30O1 D30T0





CONTENTS :

- A – camshaft Alignment Tool
- B – flywheel Locking Tool
- C – crankshaft Turning Tool
- D/F – high pressure pump sprocket removal tool
- E – tensioner Locking Pin

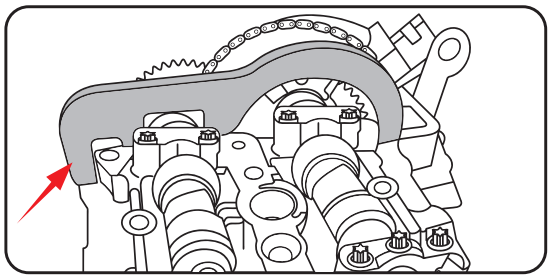





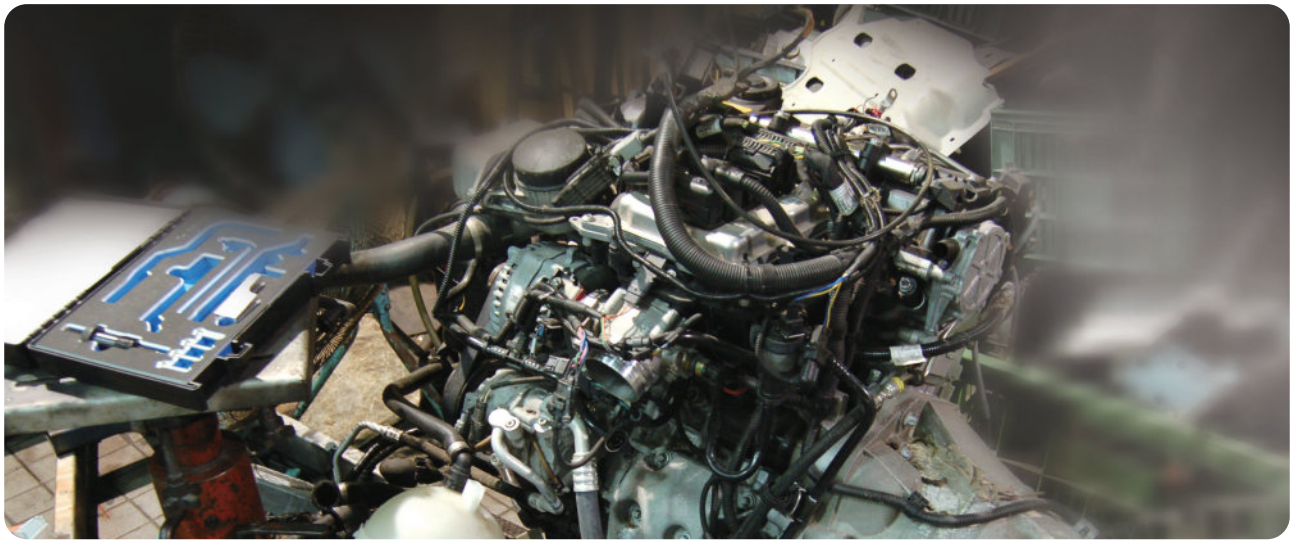

BMW

Petrol Engine Timing Set




9AT1706E


- Use for BMW 2.0 litre chain drive petrol engine
- Includes the VANOS setting tools, camshaft locking tools and chain pre-tension setting tools for TDC position
- Suitable for BMW N20 & N26 engines


P | CHAIN | 8 PC.

4287 g | 1 / 3

MODEL:	**BMW 1 Series** 125i F20/21(2012-14) **BMW 3 Series** 320i/xDrive F30/31 (2012-14), 328i F30/31 (2012-14), 328i/xDrive F30/31 (2012-14) **BMW 5 Series** 520i F10/11 (2010-14), 528i F10/11 (2013-14), 528i/xDrive F10/11 (2011-14) **X1** sDrive18i/20i E84 (2011-14), xDrive20i/28i E84 (2011-14) **X3** xDrive20i/28i F25 (2011-14) **Z4** sDrive18i E89 (2013-14), sDrive20i/28i E89 (2011-14)
ENGINE CODE:	N20 B20A, N20 B20B/U0, N20 B20O0, N26 B20





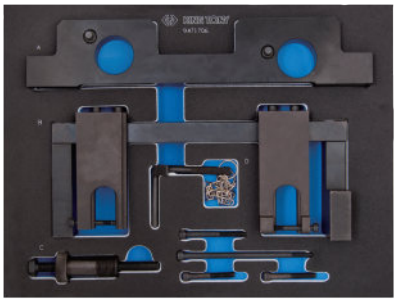

CONTENTS :
- A - VANOS alignments plate
- B - camshaft locking tool
- C - chain tensioner tool
- D - flywheel locking pin

MERCEDES-BENZ

Petrol Engine Timing Set




9AT1606E

- Use for 1.8 litre M271 chain drive petrol engine
- Includes chain tensioner adjust tools and cam pulley bit socket to hold the chain in place
- Suitable for Mercedes- Benz M271

P | CHAIN | 6 PC.

3452 g | 1 / 3

MODEL	ENGINE CODE
C-class 176 (2002-15) **C-class Coupe** (2011-15) **CLC** (2008-12) **CLK** (2002-09) **E-class** (2002-13) **E-class** Coupe / Cabriolet (2004-13) **SLK** (2004-15)	271.820, 271.860, 271.861 271.921, 271.940, 271.941 271.942, 271.943, 271.944 271.946, 271.948, 271.950 271.952, 271.954, 271.955 271.956, 271.957, 271.958
Sprinter (2007-15)	271.951

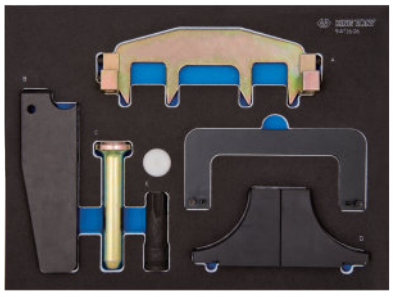

CONTENTS :
- A – camshaft locking tool
- B – cam chain tensioner rail wedge tool
- C – cam chain tensioner drift
- D – cam chain retaining bridge
- E – camshaft pulley bit socket (T100)

BMW


Petrol Engine VANOS Engagement Wrench

9AT1-A02

- For BMW twin camshaft engines with single VANOS unit mounted on inlet camshaft

298 g | 12 / 48

MODEL:	**318is.** E36 (92-99), **318ti Compact** E36 (94-01) **320i.** E36 / E46 (92-07), **323i.** E36 / E46 (95-01) **325i.** E36 / E46 (92-07), **328i.** E36 / E46 (95-01) **330i.** E46 (00-07), **520i.** E39 / E60 (96-05) **523i.** E39 (96-00), **525i.** E39 / E60 (00-05) **528i.** E39 (96-00), **530i.** E39 / E60 (00-05) **728i.** E38 (94-02), **730i.** E65 (02-05) **Z3.** (E36) 1.9-3.0 (96-03) **Z4.** (E85) 2.2-3.0 (03-06) **X3.** (E83) 3.0 (03-06), **X5.** (E53) 3.0 (99-07)
ENGINE CODE:	**M50 / M52 Single VANOS (VVT) variants** 20 6S 2(Later), 20 6S 3 , 25 6S 2(Later) 25 6S 3, 28 6S 1





BMW


Diesel Engine Injection Pump Puller

9AT2-D01

- Specifically designed for holding the sprocket / chain in place when disassembling the VP44 injection pump and high pressure pump
- Common rail fits BMW engines

528 g | 6 / 36

MODEL:	**318d / Compact**(E46) **320d / td Compact**(E46) **330d**(E46), **535d**(E60 / E61), **730d**(E38) **X5 3.0d**(E53), **530d**(E39 / E60 / E61) **525d**(E39 / E60 / E61)
ENGINE CODE:	**M47 / M57** **1 Series** E87, 3 Series E46 / E90 **5 Series** E39 / E60, 6 Series E63 **7 Series** E38 / E65, X3 E83 and E53 / E70





CHEVROLET


Petrol Engine Tension Adjustment Wrench Set (Via Water Pump)

9AT1202

- The set includes 41mm and 46mm tension adjust wrench
- Suitable for Vauxhall / Opel and Chevrolet engines

695 g | 6 / 24

MODEL:	**9AT1202-B(41mm)** **Kalos** (04-08), **Aveo** (06-08), **Espero / Aranos** (95-97), **Nexia** (95-97) **Lanos** (97-03), **Nubira / Lacetti** (97-09) **Cruze** (2009)
ENGINE CODE:	1.4 A13DM A14MS F14S3 1.4 16v. F14D3, 1.5 G15MF 1.5 16v. A15DM A15SMS A15MF 1.6 16v. A16DM A16DMS F16D3 LXT







CONTENTS :

- A - tension adjustment wrench (46mm)
- B - tension adjustment wrench (41mm)

BMW

Petrol Engine Timing Alignment Set




9AT1112E


- The set includes camshaft locking tool, VANOS alignment plate, flywheel locking pin
- Suitable for BMW 2.5/3.0 liters chain drive six cylinder, twin cams 16v petrol engines
- Use to lock camshaft in TDC position when setting or adjusting engines timing


P | CHAIN | 12 PC.

5900 | 1 / 3

MODEL:	**128i.** E82 (07-08) **130i.** E81/87 (05-08) **135iS.** E82 (07-08) **323i.** E90/91/92/93 (04-08) **325i/xi.** E90/91/92/93 (04-08) **328i/xi.** E90/91/92/93 (04-08) **330i/xi.** E90/91/92/93 (04-08) **335i/xi.** E90/91/92/93 (05-08) **523i/Li.** E60/61 (04-08) **525i/Li/xi.** E60/61 (04-08) **528i/xi.** E60/61 (06-08) **530i/Li/xi.** E60/61 (05-08) **535i/xi.** E60/61 (06-08) **630i.** E63/64 (04-08) **730i/Li.** E65/66 (04-08) **X3** 2.5/3.0 E83 (06-08) **X5** 3.0 E70 (06-08) **Z4** 2.5/3.0 E85/86 (05-08)
ENGINE CODE:	**N51 / N52 /N52K** (Valvetronic) **N53 / N54** (Direct Injection)





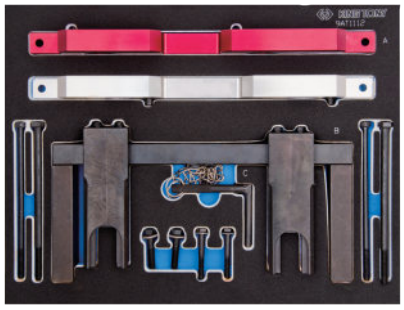

CONTENTS :

- A - VANOS alignment plate (Red for N53/N54, Silver for N51/N52/N52K)
- B - camshaft locking tool
- C - flywheel locking pin

PSA PEUGEOT CITROËN

Petrol Engine Setting & Locking Set – BMW/PSA

9AT1010E


- The set includes camshaft setting tool, crankshaft locking pin & chain tensioner tool
- Suitable for BMW Mini and PSA Peugeot Citroën 1.4/1.6 16v valvetronic direct injection engines
- Use to lock and adjust engine timing

P | CHAIN | 10 PC.

2384 | 1 / 5

MODEL:	**Citroen** C4(08-11) C4 Picasso(08-13) **Peugeot** 207(06-11) 207CC(07-14) 308(07-14) 3008(09-12) 5008(09-11)
ENGINE CODE:	**Citroen** 8FR(EP3) 5FS(EP6) **Peugeot** EP3(8FS) EP6(5FW) EP6DT(5FX) 8FS(EP3) EP6DTS(5FY)





CONTENTS :

- A – camshaft setting tool (inlet)
- B – camshaft setting tool (exhaust)
- C – camshaft setting tool
- D – camshaft setting clamp
- E – crankshaft locking pin
- F – chain tensioner tool
- G – M10 screw*4

PSA PEUGEOT CITROËN


Petrol Engine Timing Set



9AT1021E

- The set includes special flywheel tools and cam/ crankshaft timing pin
- Use to replace timing belt engines of: 1.0 / 1.1 / 1.4 / 1.6 / 1.6VTS / 1.8 16v / 2.0 / 2.0 16V / 2.2
- Include PSA "EW coded" twin-cam 16v engine and HPi versions
- Suitable for PSA Peugeot / Citroen engines

2164 1 / 10

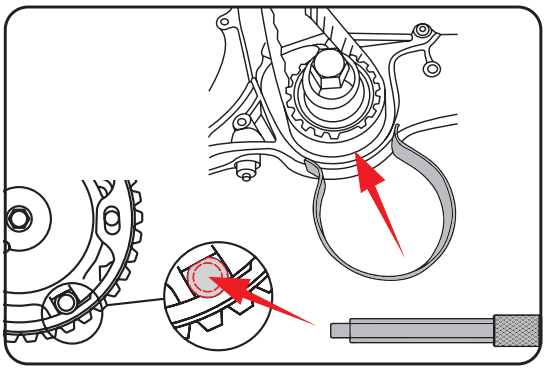



CONTENTS :

- A – timing belt retaining tool
- B – tensioner adjusting tool
- C – flywheel locking tool
- D – flywheel holding tool
- E – flywheel plate locking tool
- F – flywheel locking tool
- G – flywheel locking tool
- H – tensioner locking tool
- I – tensioner locking tool
- J – timing pin

PSA PEUGEOT CITROËN

Diesel Engine Setting Tool (Belt Drive)

9AT2-A01

- The set includes flywheel locking pin, TDC timing pin and tensioner retaining tool
- Use for holding engine timing position when replacing timing belt
- Suitable for Fiat, Iveco, Renault, Citroen / Peugeot, Vauxhall / Opel

CONTENTS :

- A – TDC timing pin
- B – flywheel locking pin (2pc)
- C – tensioner retaining tool




112 12 / 120

MODEL:	**2.8D/Tdi/Hdi** Relay / Jumper (01-06) Boxer (00-06)
ENGINE	8140.43 8140.43S 8140.63

Petrol & Diesel Engine Flywheel Holding & Locking Tool

9AT3-E02

- Used to remove the crankshaft pulley when replacing the timing belt
- The pulley retaining bolt is fitted with high torque and the flywheel must be securely locked during installation / removal
- Jamming tools into the teeth of the flywheel will cause serious damage to both teeth and housing





64 25 / 100

MODEL:	**Petrol 1.0 to 2.0 TU / XU (Belt)** XU 1.6 to 2.0 **Diesel 1.50 to 2 .50 TUD / XUD (Belt)** XU1.6 to 2.0 XD1.8D to 1.9D

FIAT

Petrol Engine Setting & Locking Set




9AT1002E


- The set includes camshaft setting tool and tensioner retaining pin
- Suitable for Vauxhall / Opel & Fiat engines
- Use to lock the camshafts on the correct timing position

P | CHAIN | 2 PC.

1510 | 1 / 10

MODEL:	**Petrol 2.2 16v. Twin Cams(Chain)** Croma (05-09)
ENGINE CODE:	**Petrol 2.2 16v. Twin Cams(Chain)** 194A1.000

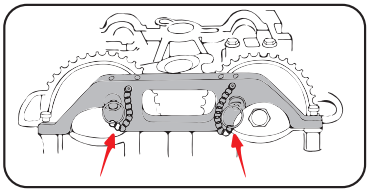

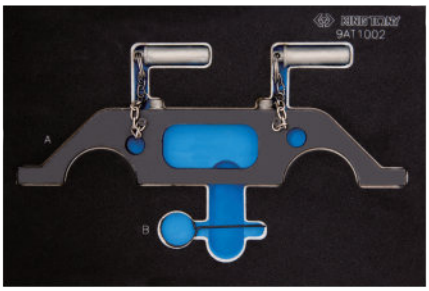

CONTENTS :
- A - camshaft setting tool
- B - tensioner retaining pin

FIAT

Diesel Engine Setting & Locking Tool Set




9AT2006E

- The set includes flywheel holding tool, crankshaft locking tool and camshaft setting tools
- Suitable for Lancia, Alfa Romeo and Fiat engines
- Use to set and lock engines timing


D | BELT | 6 PC.


1360 | 1 / 10


MODEL:	**Diesel** **1.6JTD / 1.9JTD / 2.0JTD / 2.4JTD Multijet(Belt)** Punto (99-06), Grande Punto (05-09) Idea (04-08), Brava/Bravo (98-02) Linea (07-09), New Bravo (07-09) Marea/Weekend (99-03), Stilo (01-06) Croma (05-09), Multipla (99-07) Doblo/Cargo (02-09), Palio Weekend (02-06) Sedici (06-09), Strada Pick-Up (03-06)
ENGINE CODE:	**1.6JTD 16v.** 198A2.000, 198A3.000, 198A6.000 350A2.000 **1.9JTD 8v.** 182B4.000, 182B9.000, 186A6.000 186A8.000, 186A9.000, 188A2.000 188A7.000, 188B2.000, 192A1.000 192A3.000, 192A8.000 **1.9JTD 8v.** 192A9.000, 192B4.000, 192B5.000 199A5.000, 939A1.000, 939A5.000 939A7.000, 223A7.000 **1.9JTD 16v.** 192A5.000, 937A5.000, 939A2.000 939A8.000 **2.0JTD 16v.** 198A5.000 **2.4JTD 10v.** 185A6.000 **2.4JTD 20v.** 939A3.000

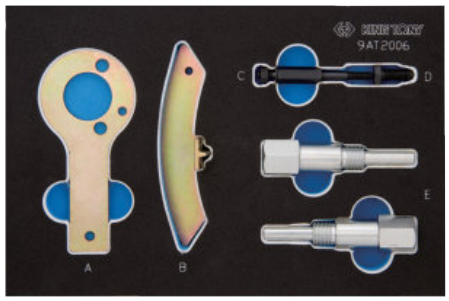

CONTENTS :
- A&C&D - crankshaft locking tool
- B - flywheel holding tool (crank pulley removal)
- E - camshaft setting tool (pair)

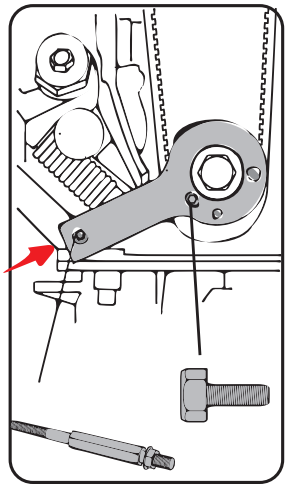






FIAT

Petrol Engine Flywheel Holding Tool

9AT1-E01

- Use to lock the flywheel while removing and replacing the timing belt
- Put it into the teeth of the flywheel to hold the crankshaft up, while releasing or tightening the bolt





51 | 20 / 100

MODEL:	**Stilo** (01-08), **Brava** / Bravo (95-02) **Marea / Weekend** (96-03), **Multipla** (99-09) **Doblo / Cargo** (02-06)
ENGINE CODE:	178B3.000, 182A4.000 182A6.000, 182B6.000


Diesel Engine Setting Tool (Belt Drive)

9AT2-A01

- The set includes flywheel locking pin, TDC timing pin and tensioner retaining tool
- Use for holding engine timing position when replacing timing belt
- Suitable for Fiat, Iveco, Renault, Citroen / Peugeot, Vauxhall / Opel

CONTENTS :

- A – TDC timing pin
- B – flywheel locking pin (2pc)
- C – tensioner retaining tool




112 | 12 / 120

MODEL:	**2.5D / 2.5DT / 2.8D / 2.8JTD** Croma (93-97) Ducato (87-06) Talento (87-02)
ENGINE	8140.21, 8140.27, 8140.47R 8140.43, 8140.43S, 8140.63 8144.67

Petrol Engine Flywheel Holding & Locking Tool

9AT3-E02


- Used to remove the crankshaft pulley when replacing the timing belt
- The pulley retaining bolt is fitted with high torque and the flywheel must be securely locked during installation / removal
- Jamming tools into the teeth of the flywheel will cause serious damage to both teeth and housing





64 | 25 / 100

MODEL:	**Petrol 1.6 16v. Twin Cams (Belt)** Stilo

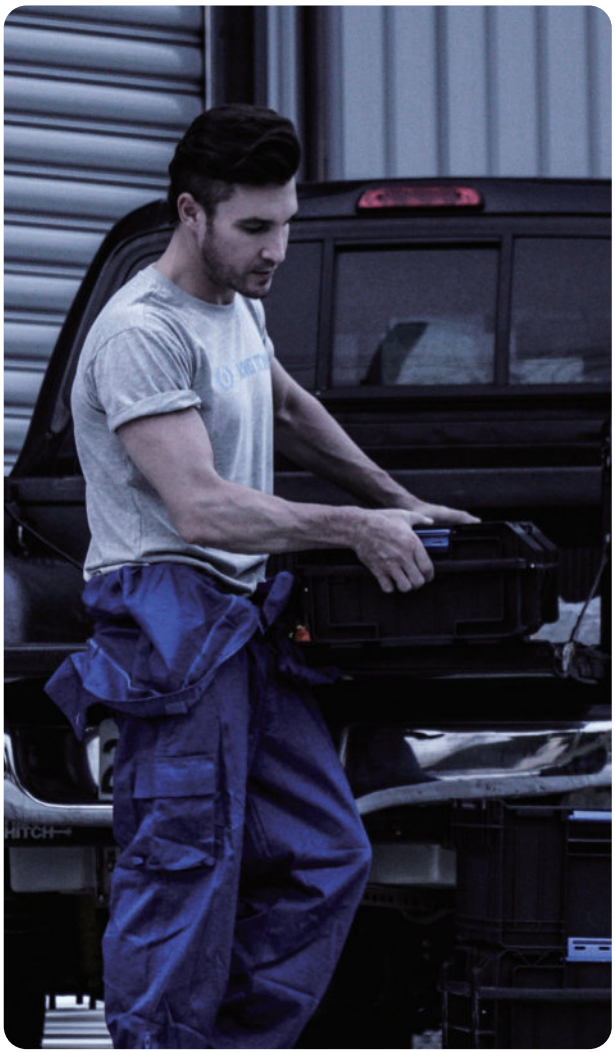

FORD

EcoBoost 1.0 Timing Set




9AT1026E


- Engine Timing Tool Kit suitable for 1.0 petrol EcoBoost and 1.0 SCTi EcoBoost FORD engines.
- Contains tools vital for setting and locking the engine and for setting the position of the variable cam timing units.


16 PC. | P | CHAIN

4.4 kg | 1 / 4

MODEL:	**Fiesta** (2013-2016), **EcoSport** (2013-2015), **B-Max** (2013-2016), **C-Max** (2012-2016), **Transit Courier** (2012-2016), **Transit Connect** (2013-2016), **Focus** (2012-2016), **Grand Tourneo Connect** (2013-2015), **Grand C-Max** (2012-2016), **Mondeo** (2015-2016), **Tourneo Connect** (2013-2015)
ENGINE :	M1CA, M1CB, M1DA, M1DD, M1JA, M1JC, M1JE, M1JH, M2DA, M2DB, M2DC, M2GA, P4JC, P4JD, SFCA, SFCB, SFDB, SFJA, SFJB, SFJC, SFJD, P4JA, P4JB, XMJA, XMJB, M1JA

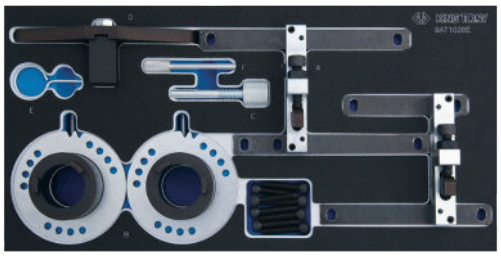


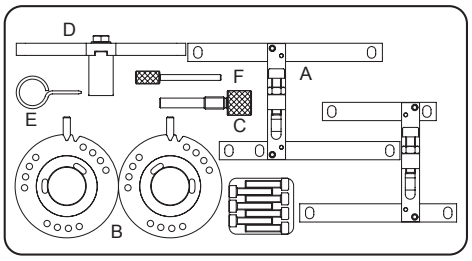



CONTENTS:
- A - Camshaft Locking Tool Set
- B - Camshaft VVT Adjustment Tool Set
- C - Crankshaft Setting Pin
- D - Flywheel Locking Tool
- E - Tensioner Locking Pin
- F - Crankshaft Pulley Positioning Pin

- Remove the starter motor and fit component D in the starter aperture so that its tooth locks the flywheel

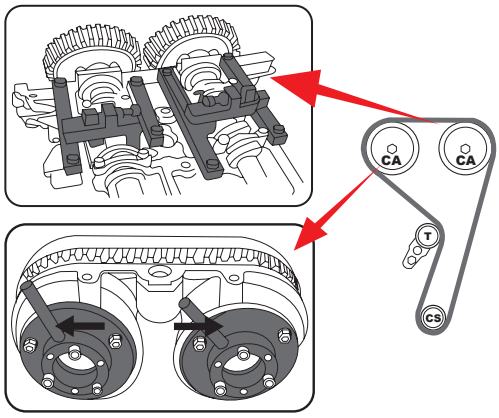

FORD

Petrol Engine Twin Camshaft & Diesel Engine Timing Tool Set




9AT1406E


- The set includes VCT setting plate, camshaft setting plate, crankshaft TDC location pin, tensioner locking pin and flywheel locking tools
- Suitable for 16v. Duratec petrol engine of FORD 1.6 Ti-VCT twin camshaft
- Use to adjust VCT timing on inlet and exhaust camshaft during timing belt replacement

D | P | BELT | 7 PC.

1640 g | 1 / 10

MODEL:	**Focus C-Max** (03-08) **Focus** (04-08) **Mondeo** (07-08)
ENGINE CODE:	HXDA







CONTENTS :
- A&E - flywheel locking tool
- B - camshaft setting plate
- C - crankshaft TDC location pin
- D - tensioner locking pin
- F - VCT setting plate
- G-crankshaft pulley alignment tool

Diesel Engine Timing and Injection Pump Setting & Locking Set




9AT2011E

- The set includes sprocket retaining plate, flywheel & tensioner locking pins
- Suitable for chain drive diesel engine of Ford
- Use to install/remove injection pump & set/lock engine timing

1473 | 1 / 10

MODEL:	Diesel 2.0 / 2.2 / 2.4 TDdi / TDci DURATORQ(CHAIN)
ENGINE CODE:	**2.0Ddi** ABFA, D3FA, F3FA **2.0 TDdi** D5BA, D6BA **2.0 TDci** FMBA, FMBB **2.2 TDci** QJBA~D **2.4 Ddi** D2FA, F4FA **2.4 TDci** FXFA, H9FA, JXFA, PHFA

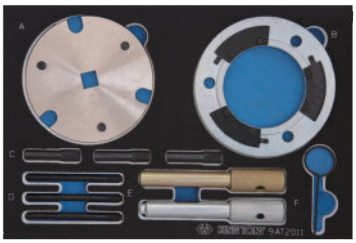

CONTENTS :

- A – access Cover Removal Plate
- B – sprocket Retaining Plate
- C – location Pins (3 PC.)
- D – locking Pins (3 PC.)
- E – flywheel Locking Pins (2 PC.)
- F – tensioner Locking Pin

FORD


Diesel Engine Setting/Locking Tool (Belt Drive)


9AT2-C01


- The set includes crankshaft (oval / round), camshaft and tensioner locking pins
- Suitable for most of general VAG 1.4 / 1.9 / 2.0 TDi PD DOHC engines
- Also for Ford Galaxy models engine


408 | 10 / 40

MODEL:	**Galaxy** 1.9
ENGINE CODE:	ASZ / ANU







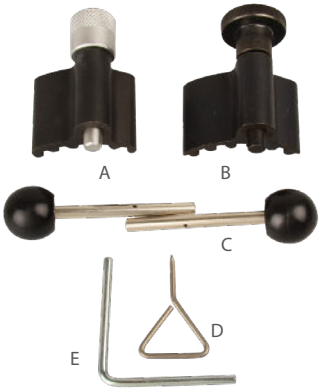

CONTENTS :

- A - Crankshaft Locking Tool (Silver / Oval)
- B - Crankshaft Locking Tool (Black / Round)
- C - Camshaft Locking Pins (2 pcs)
- D - Tensioner Pulley Locking Pin
- E - Auxiliary Belt Tensioner Locking Pin

Petrol Engine Timing Set – Ford 2.0 Ecoboost





9AT1105E


- The set includes cam & crankshaft alignment tool and tensioner locking pin
- Suitable for Ford fitted with SCTi Ecoboost / Ti-VCT 2.0lt direct injection engines
- Camshaft tool use for vehicles manufactured **May 2011** and **after May 2011**

1745 | 1 / 10

MODEL:	**Galaxy**(2010-), **Mondeo**(2010-) **S Max**(2010-), **Focus**(2011-)
ENGINE CODE:	**Galaxy 2.0** TNWA, TNWB, TPWA **Mondeo 2.0** TNBA, TPBA **S Max 2.0** TNWA, TNWB, TPWA **Focus 2.0** MGDA, XQDA





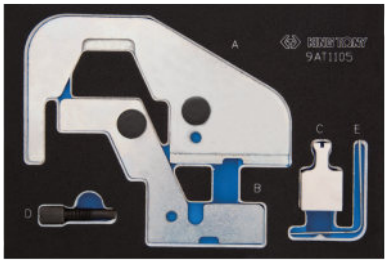

CONTENTS :


- A – camshaft alignment plate
- B – camshaft alignment plate
- C – crankshaft locking tool
- D – crankshaft timing pin
- E – tensioner locking pin

FORD

Petrol & Diesel Engine Flywheel Holding Set

9AT3-E01

- Lock crankshaft in timed position by locating into flywheel
- Suitable for counter-holding crankshaft when releasing or tightening crankshaft pulley bolt





373 | 36 / 36

MODEL:	**1.8 TDi / TDdi / TDCi Petrol Engines(Belt)** Fiesta / Courier, Tourneo Connect, Focus C-Max, Mondeo, S-Max, Galaxy, Transit Connect **2.0TDCi Diesel Engines (Belt)** Focus / C-Max, S-Max, Galaxy **1.6Ti-VCT Petrol Engines(Belt)** Focus, Mondeo, Focus C-Max
ENGINE CODE:	**1.8 TDi / TDdi / TDCi Petrol Engines(Belt)** RTN, RTQ, RTP, BHDB, BHPA, C9DA, C9DB C9DC, F9DA, F9DB, FFBA, FFDA, FFWA HPCA, HPCB, P7PA, P9PA, QYBA, QYWA R2PA, R3PA, RWPA, KKDA **2.0TDCi Diesel Engines (Belt)** AZWA, G6DA, G6DB, G6DC, QXWA **1.6Ti-VCT Petrol Engines(Belt)** HXDA

IVECO

Diesel Engine Setting Tool (Belt Drive)

9AT2-A01

- The set includes flywheel locking pin, TDC timing pin and tensioner retaining tool
- Use for holding engine timing position when replacing timing belt
- Suitable for Fiat, Iveco, Renault, Citroen/Peugeot, Vauxhall/Opel

CONTENTS :

- A – TDC timing pin
- B – flywheel locking pin (2pc)
- C – tensioner retaining tool



112 | 12 / 120

MODEL:	**2.5D/2.8D** Daily (91-06) Turbo Daily (94-00)
ENGINE CODE:	8140.07, 8140.27S, 8140.47 8140.47R, 8140.67F, 8140.97 8140.23, 8140.43C, 8140.43S


LANCIA

Diesel Engine Setting & Locking Set

9AT2006E





- The set includes flywheel holding tool, crankshaft locking tool and camshaft setting tools
- Suitable for Lancia, Alfa Romeo and Fiat engine
- Use to set and lock engines timing

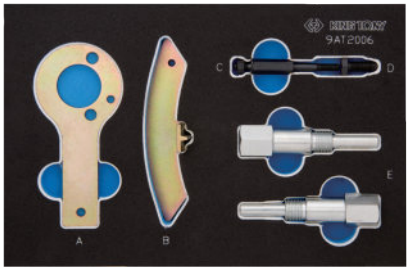

CONTENTS :

- A&C&D - crankshaft locking tool
- B - flywheel holding tool (crank pulley removal)
- E - camshaft setting tool (pair)





1360 | 1 / 10

MODEL:	**2.0JTD / 2.2JTD(Belt)** Lybra (99-07) Musa (04-09) Kappa (98-02) Thesis (02-07)
ENGINE CODE:	**1.9JTD 8v.** 323.02, 371.01, 188B2.000, 937A2.000 **2.4JTD 10v.** 838A8.000, 839A5.000, 839A6.000 **2.4JTD 20v.** 841C.000, 841D.000, 841G.000, 841H.000

LANCIA


Petrol Engine Flywheel Holding Tool

9AT1-E01

- Use to lock the flywheel while removing and replacing the timing belt
- Put it into the teeth of the flywheel to hold the crankshaft up, while releasing or tightening the bolt

51 | 20 / 100

MODEL:	**Delta** (96-99) **Lybra** (99-06)
ENGINE CODE:	182A4.000 182A6.000





Diesel Engine 2.5TDS Timing Set





9AT2106E


- The set includes camshaft setting plate, tensioner lever, tensioner retaining pin, flywheel locking pin and pump remove & sprocket retainer
- Suitable for BMW, Land Rover and Opel engines
- Use to retain and support the sprocket and timing chains in position when the pump is removed

2480 | 1 / 5

MODEL:	**2.5D Turbo (Chain)** Range Rover (94-02)
ENGINE CODE:	256T M51





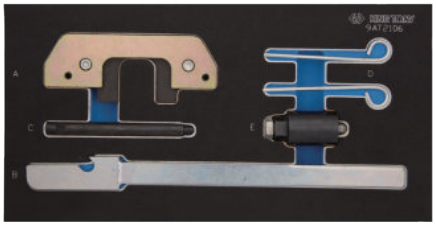

CONTENTS :

- A – camshaft setting plate
- B – tensioner lever
- C – flywheel locking pin
- D – tensioner retaining pin
- E – pump remove & sprocket retainer (2 part)

LAND ROVER


Diesel Injection Pump Puller

9AT2-D01

- Specifically designed for holding the sprocket / chain in place when disassembling the VP44 injection pump and high pressure pump
- Common rail fits BMW engines

528 | 6 / 36

MODEL:	**Freelander** (00-06) **Td4** (2.0d) **Range Rover** (02-06) **Td6** (3.0d)
ENGINE CODE:	204D3 / Td4 (2.0 M47:BMW) 306D1 / Td6 (3.0 M57 : BMW)





RENAULT


Diesel Engine Setting & Locking Set




9AT2008E

- The set includes auxiliary belt tensioner locking pin, camshaft setting tools, crankshaft pulley holding tool, chain tensioner locking pin and crankshaft locking pin
- Suitable for 2.0 dCi chain drive engines of Renault, Nissan and Vauxhall / Opel

D | CHAIN | 8 PC.

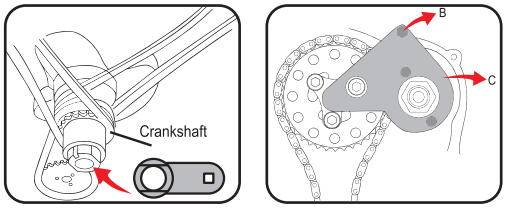

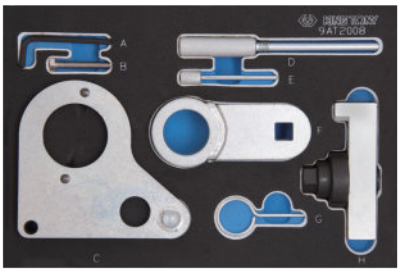


2376 | 1 / 5

MODEL:	**Megane II** (07-09) **Scenic / Grand Scenic** (08-09) **Laguna II** (01-05) **Vel Satis** (05-09) **Espace / Grand Espace** (08-09) **Koleos** (08-09) **Trafi c** (07-09)
ENGINE CODE:	**2,0 dCi M9R** 700, 721, 722, 724, 740, 742, 746, 760 761, 780, 802, 803, 805, 830, 832, 833

CONTENTS :

- A&H - camshaft gear alignment tool
- B&C - camshaft setting plate
- D - crankshaft locking pin
- E - auxiliary belt tensioner locking pin
- F - crankshaft pulley holding tool
- G - chain tensioner locking pin

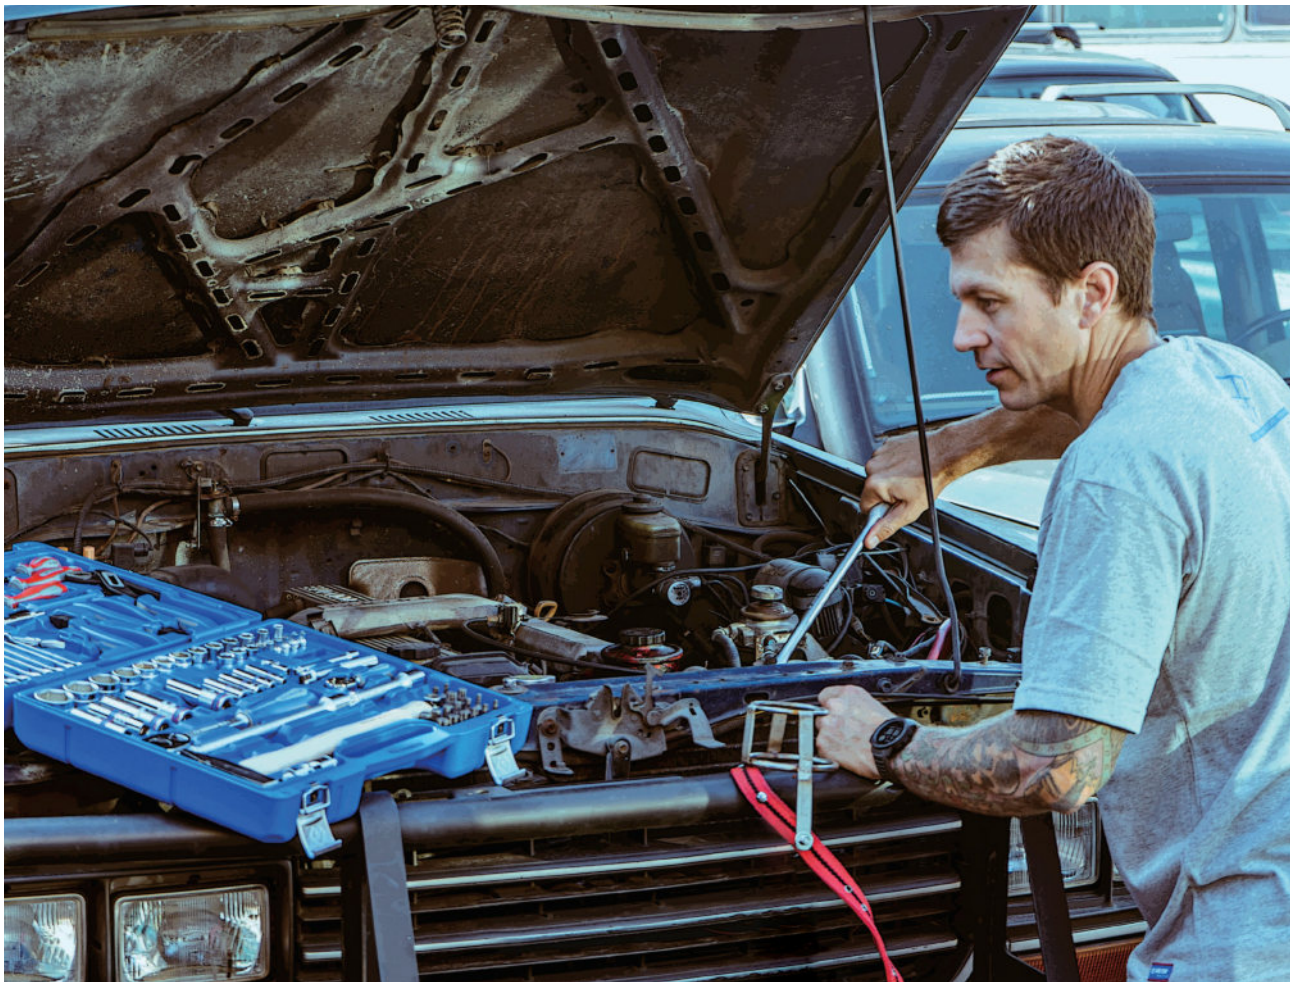



RENAULT

Petrol Engine Timing Locking Set-2.0 16V IDE - F5R

9AT1-A03

- The set includes crankshaft timing pin and camshaft setting plate, to aid timing belt replacement
- Suitable for Renault 2.0 IDE twin cam petrol engines found in Laguna and Megane vehicles







511 g | 10 / 30

MODEL:	**Megane** (99-03) **Laguna II** (01-05)
ENGINE CODE:	F5R700, 701, 740

Diesel Engine Setting Tool (Belt Drive)

9AT2-A01

- The set includes flywheel locking pin, TDC timing pin and tensioner retaining tool
- Use for holding engine timing position when replacing timing belt
- Suitable for Fiat, Iveco, Renault, Citroen / Peugeot, Vauxhall / Opel

CONTENTS :
- A – TDC timing pin
- B – flywheel locking pin (2pc)
- C – tensioner retaining tool



112 g | 12 / 120


MODEL:	**2.5D / 2.5D Turbo / 2.8dTi / 2.8dCi** Trafic (98-00) Master (98-07)
ENGINE CODE:	**S8U** 720, 722, 730, 731, 742, 748 750, 752, 770, 772, 780, 782 **S9U** 700, 702, 704, 714, 740 **S9W** 206, 208, 212, 700, 702

Petrol & Diesel Engine Timing Set(dCi Engines)

9AT3-A03

- The set includes camshaft / crankshaft locking pin and TDC timing pin
- Used for timing belt replacement
- Suitable for Renault 1.5 and 1.9 dCi diesel and petrol engine

CONTENTS :
- A - crankshaft Locking Pin
- B - TDC Timing Pin
- C - camshaft/Crankshaft Locking Pin





RENAULT (Belt)

220 g | 10 / 100

MODEL:	**Diesel** Clio 1.5 dCi (01-08) Clio 1.9 DTi (99-03) Espace 1.9 TDi (97-02) Kangoo 1.5 dCi (04-08) Kangoo 1.9 DTi (99-03) Laguna 1.9 DTi (97-03) Megane II 1.5 dCi (02-05) Megane 1.9 D / TD / TDi (95-03) Scenic II 1.5 dCi (02-05) Scenic 1.9 TD (95-99) **Petrol** Clio 1.8 (92-01) Espace 2.0 (92-01) Laguna 1.8 (92-01) Megane, 2.0 (96-99) R19 1.8 (92-01) F3R Scenic 2.0 (96-99)
ENGINE CODE:	**Diesel** K9K F8Q F9Q **Petrol** F3P F3R

RENAULT


Petrol & Diesel Engine Flywheel Holding & Locking Tool

9AT3-E02

- Used to remove the crankshaft pulley when replacing the timing belt
- The pulley retaining bolt is fitted with high torque and the flywheel must be securely locked during installation / removal
- Jamming tools into the teeth of the flywheel will cause serious damage to both teeth and housing
- Suitable for petrol and diesel engine

64 | 25 / 100

MODEL:	**Petrol 1.2 to 2.2 (Belt)** F3R, F7R, F7P, F3P, E7J F8M and F8Q (early) **Diesel 1.50 to 2.50 TUD / XUD (Belt)** F3R, F7R, F7P, F3P, E7J, F8M and F8Q (early)






NISSAN


Diesel Engine Setting & Locking Tool Set



9AT2008E

- The set includes auxiliary belt tensioner locking pin, camshaft setting tools, crankshaft pulley holding tool, chain tensioner locking pin and crankshaft locking pin
- Suitable for 2.0 dCi chain drive engines of Renault, Nissan and Vauxhall / Opel





2376 | 1 / 5

MODEL:	Primastar (08-09) Qashqai (08-09) X-Trail (07-08)
ENGINE CODE:	**M9R** 780, 830, 832, 833



CONTENTS :

- A&H - camshaft gear alignment tool
- B&C - camshaft setting plate
- D - crankshaft locking pin
- E - auxiliary belt tensioner locking pin
- F - crankshaft pulley holding tool
- G - chain tensioner locking pin

SAAB


Diesel Engine Setting & locking Set



9AT2005E


- The set includes crankshaft locking tool, camshaft setting tools(pair) and a tensioner locking pin
- Suitable for Saab, Vauxhall / Opel engine
- Use to set and lock engines timing

D | BELT | 5 PC.

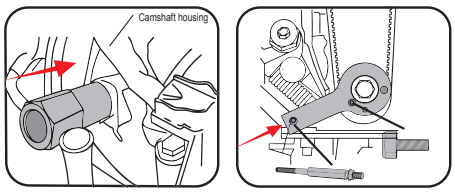

1295 | 1 / 10

MODEL:	**Diesel 2.2D TiD** 9-3 (98-04), 9-5 (02-06)
ENGINE CODE:	**Diesel 2.2D TiD** Z19DT / Z19DTH

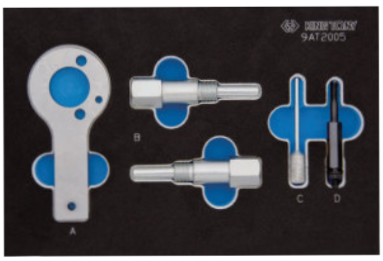

CONTENTS :
- A&D - crankshaft locking tools
- B - camshaft setting tool (pair)
- C - tensioner locking pin

SUZUKI


Diesel Engine Setting & Locking Set


9AT2004E

- The set includes flywheel locking pin, camshaft setting tools, tensioner locking pin
- Use to retain timing position only. DO NOT use them to hold camshafts in position while releasing or tightening the sprocket bolts

1101 | 1 / 10

MODEL:	**Diesel 1.3 DDiS (Belt)** Swift (04-09) Ignis (03-09) Wagon R+ (03-08)
ENGINE CODE:	**Diesel 1.3 DDiS (Belt)** Z13DT





D | BELT | 4 PC.



CONTENTS :
- A– camshaft setting tool set (pair)
- B– flywheel locking pin
- C– tensioner retaining pin

VOLKSWAGEN GROUP AUDI/SKODA/VW/SEAT


Petrol Engine Twin Camshaft Setting & Locking Set - VAG 1.4 / 1.6 FSi (Chain)


9AT1103E

- The set includes camshaft setting plate, TDC position tool (with DTI) and tensioner locking pin
- 9AT1103 'B' TDC positioning tool has to use with 9AT3-F01(not included in this set)

1456 | 1 / 10

MODEL:	**Audi** A3 (03-07) **Volkswagen** Polo (02-08), Golf V (03-08), Golf Plus (05-08) Jetta (06-08), Passat (05-08), Touran (03-07) **Skoda** Octavia II (04-08)
ENGINE CODE:	**1.4 FSI** AXU, BKG, BLN **1.6 FSI** BAG, BLF, BLP, BTS





P | CHAIN | 3 PC.



CONTENTS :
- A - camshaft setting plate
- B - TDC position tool (with DTI)
- C - tensioner locking pin

VOLKSWAGEN GROUP
AUDI/SKODA/VW/SEAT

Diesel Engine Setting & Locking Set - Pumpe Düse

9AT2012E

- The set includes crankshaft & camshaft locking tool, tensioner setting & adjusting tools
- Suitable for belt drive Pumpe Düse diesel engines of VW group vehicles and Ford (Galaxy)
- Use to set & lock engine to make sure timing is in the correct position during timing belt replacement
- Suggestion :
  Check the engine is hydraulic or mechanical tensioner first. (Some of 1.2 1.4 1.9 engines were changed from hydraulic to mechanical.)


1845 | 1 / 10



CONTENTS :

- A - crankshaft locking tool (silver / oval)
- B - crankshaft locking tool (black / round)
- C - camshaft locking pins (2 pcs)
- D - tensioner adjuster (1.2, 1.4 & 1.9)
- E - tensioner adjuster (later 1.9 & 2.0)
- F - tensioner adjust tool (hexagon)
- G - tensioner locking tool
- H - tensioner locking pin (mechanical)
- I - tensioner locking tool (hydraulic)
- J - tensioner setting tool (hydraulic)
- K - auxiliary belt tensioner locking pin

MODEL:	**Audi** A2 (01-06), A3 (01-09), A4 (99-09) A5 (08-09), A6 (98-08), TT (08-09) Q5 (08-09) **Skoda** Fabia (00-07), Fabia II (07-09) Octavia (00-09), Octavia II (04-09) Superb (02-08), Roomster (07-09) **Volkswagen** Lupo(99-05), Polo(99-07), Fox(05-08) Jetta (05-09), Passat (98-09), Beetle (00-09) Touran (03-09), Sharan (99-09) Caddy (03-09), Golf /Bora(98-08) Golf Plus (05-09), Transporter (03-09) **Seat** Arosa (99-05), Altea XL(04-09) Leon (00-09), Toledo (04-09) Alhambra (99-09), Ibiza / Cordoba)(02-09) **Ford** Galaxy (99-06)
ENGINE CODE:	**1.2TDi PD** ANZ, AYZ **1.4TDi PD** AMF, ATL, BAY, BHC, BMS, BNM, BNV, BWB **1.9TDi PD** AJM, AMG, ANU, ARL, ASZ, ATD, ATJ, AUY, AVB, AVF, AVQ, AWX, AXB, AXC, AXR, BEW, BJB, BKC, BKE, BLS, BLT, BMT, BPX, BRB, BRM, BRR,BRS, BRU, BSU, BSW, BTB, BUK, BVK, BXE, BXF **2.0TDi PD** AZV, BDJ, BDK, BGW, BHW, BKD, BKP, BLB, BMA, BMM, BMN, BMP, BMR, BNA, BPW, BRC, BRE, BRF, BRT, BUZ, BVE, BVF, BVG, BVH, BWV **1.9TDi PD (Ford)** ANZ, ASZ, AUY

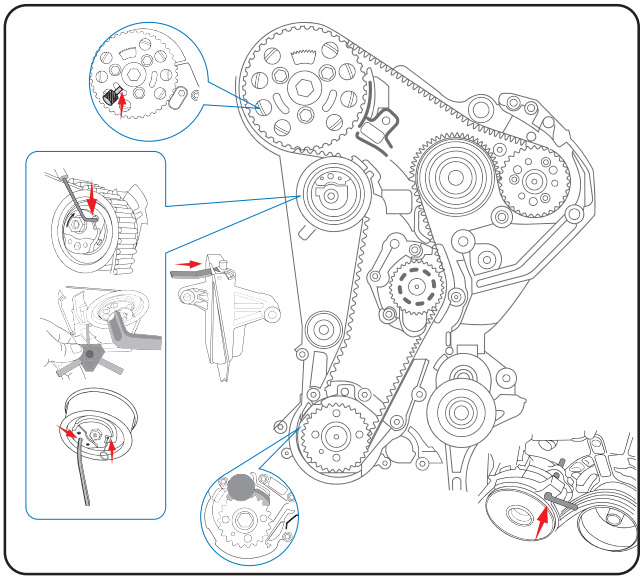

VW/AUDI

VW Audi TIMING TOOL Set VAG 1.6/2.0 TDI CR




9AT2010E


- This set designs to fit the newest common rail diesel engine which is significantly different from the older PD engine.
- The CR engines combines belt and the gear drive by using a toothed belt to transfer the drive from the crankshaft to one of the cam shafts, then using gears to transfer the drive from one cam to the other.

D | CHAIN | 10 PC.

2.7 | 1 / 4


MODEL:	**Audi** A3, A4, A5, A6, Q5 **Volkswagen** Golf, Tiguan, Passat, Eos
ENGINE :	**1.2 TDi** ANY, AYZ **1.4 TDi** AMF, ATL, BAY, BHC, BNM, BNV **1.9 TDi** AJM, AMG, ANJ, ARL, ARX, ASZ, ATD, ATJ, AUY,AVB, AVF, AVQ, AWX, AXB, AXC, AXR, BEW, BJB, BKC, BKE, BLS, BLT, BMT, BPX, BRB, BRM, BRU, BSU, BSV, BSW, BTB, BVK, BXE, BXF **2.0 TDi** AZV, BKD, BDJ, BDK, BGW, BHW, BKP, BLB, BMA, BMM, BMN, BMP, BMR, BNA, BPW, BRC, BRE, BRF, BRT, BSS, BUY, BUZ, BVE,BVF, BVG, BVH, BVW

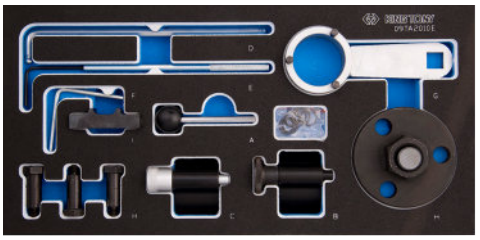

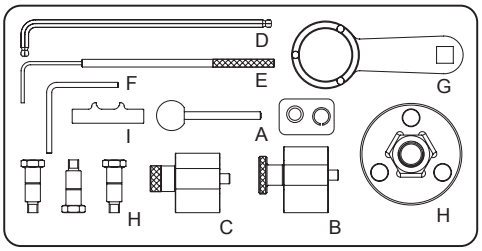

CONTENTS::

- A - Injection pump/ camshaft alignment pin
- B - Crankshaft pulley locking tool(Bored)
- C - Crankshaft pulley locking tool(Non-bored)
- D - Tensioner pulley adjustment tool(2.4mm Hex Key)
- E - Tensioner pulley locking tool
- F - auxiliary tensioner locking tool(3.9mm)
- G - Sprocket holding tool
- H - Cam sprocket hub puller
- I - Oil Pump /Balancer Shaft Alignment Tool

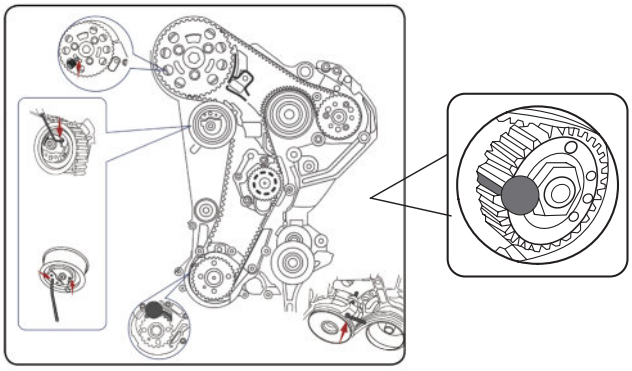

VOLKSWAGEN GROUP AUDI/SKODA/VW/SEAT

Petrol Engine Camshaft Sprocket Holding Tool


9AT1-A01


- For locking the camshaft pulleys when changing the toothed belt
- Engine repairs on 16-valve 1.4/1.6L FSi twin cams injection engine


P | BELT

340 | 6 / 36

MODEL:	**Audi** A2 (00-06) **Seat** Arosa (99-05), Ibiza / Cordoba (99-08) Leon (99-05), Toledo (99-05), Inca (00-04) **Skoda** Fabia (99-07), Octavia (00-08) **Volkswagen** Lupo (98-05), Polo (98-07), Golf / Bora (97-08), Beetle (01-08) Caddy (99-08)
ENGINE CODE:	AFK, AHW, AJV, AKQ, APE, AQQ, AUA, AUB, AXP, ARC, ATN, AUS, AVY, AZD , ARR, BBY, BBZ, BCA, BKY, BAD, BCB

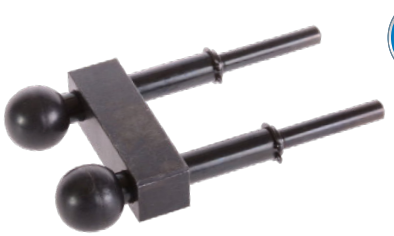






Petrol Engine Chain Tensioner Retainer


9AT1-A04

- Use to hold the chain tensioner in position when removing or installing timing chain
- Suitable for a variety of VAG chain drive engines

46 | 12 / 192

MODEL:	A3, A4, A6, A8, S3, S4, TT, etc
ENGINE CODE:	**Audi** AHA, AMB, AMU, APB, ART, ATC, ATQ, AWM, AWN, AWP, BBD, BCY, BEA, BEL, BFM **VW** AHA, APH, ATQ, AUG, AWM, AWP, AWV, BKF, BNU

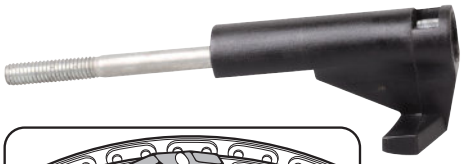

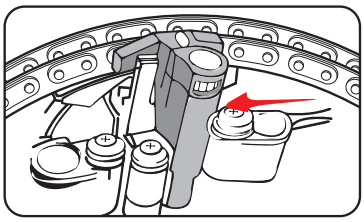


Diesel Engine Setting/Locking Tool (Belt Drive)


9AT2-C01


- The set includes crankshaft (oval/round), camshaft and tensioner locking pins
- Suitable for most of general VAG 1.4/1.9/2.0 TDi PD DOHC engines
- Also for Ford Galaxy models engine


408 | 10 / 40

MODEL:	**Audi** A2 1.4 (02-06), A3 1.9/2.0 (02-08), A4 1.2 (02-05), A4 1.9/2.0 (02-05), A6 1.9 (20-05) **VW** Beetle 1.9 (02-08), Bora 1.9 (02-08), Fox 1.4 (02-08), Golf 1.9 (02-08), Lupo 1.4 (02-08) Polo 1.4/1.9 (02-08), Sharan 1.9 (20-08), Jetta 2.0 (03-), Passat 2.0 (03-), Touran 2.0 (03-) **Seat** Altea 1.9 (05-08), Leon 1.9/2.0 (05-08), Toledo 1.9 (05-08) **Skoda** Octavia II 2.0 (03-06), Fabia 1.4 (03-06)
ENGINE CODE:	**Audi** AMF, ASZ, ATD, AVB, AVF, AWX, AXR, AZV, BHC, BKC, BKD, BKE, BLB, BMN, BNA, BPW, BRB, BRC, BRD, BRE, BRF, BUY, BVA, BVF, BVG **VW** AJM, AMF, ANU, ARL, ASZ, ATD, AUY, AVB, AVF, AWX, AXR, BAY, BMS, BNM, BNZ, BWB **Seat** BJB, BKC, BLS, BMM, BXE **Skoda** AMF, AZV, BKD







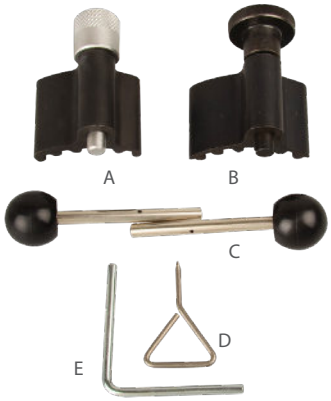

CONTENTS :

- A - crankshaft locking tool (silver / oval)
- B - crankshaft locking tool (black / round)
- C - camshaft locking pins (2 pcs)
- D - tensioner pulley locking pin
- E - auxiliary belt tensioner locking Pin

VAUXHALL/OPEL

Petrol Engine Setting & Locking Set





9AT1002E

- The set includes camshaft setting tool and tensioner retaining pin
- Suitable for Vauxhall / Opel & Fiat engine
- Use to lock the camshafts on the correct timing position

1510 | 1 / 10

MODEL:	**Petrol 2.2 16v. Twin Cams(Chain)** Astra-G (00-06) Astra-H (06-09) Speedster / VX220 (00-06) Vectra-B+C (00-08) Signum (03-08) Zafira-A+B (00-09)
ENGINE CODE:	Z22SE, Z22YH

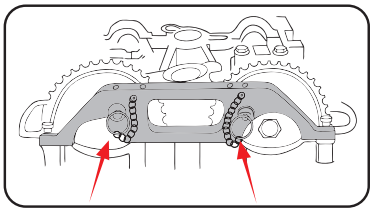

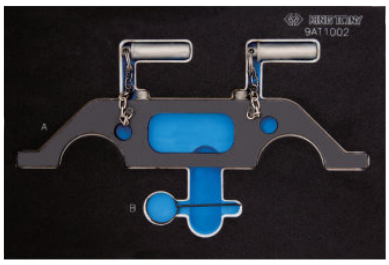

CONTENTS :

- A - camshaft setting tool
- B - tensioner retaining pin

VAUXHALL/OPEL

Petrol Turbo Engine Timing Set




9AT1007E


- The setting & locking set covers a wide range of Vauxhall/Opel and Chevrolet petrol engine.
- Include the necessary tool for setting and locking the camshaft and crankshaft for locking the timing chain tensioner.

7 PC. | P | CHAIN


2.4 | 1 / 4

MODEL:	**Cadillac :** ELR (2014). **Chevrolet :** Aveo (2011-2015), Cruze (2011-2015), Volt (2012-2014),Trax (2013-2015), Orlando (2011-2015). **Holden:** Volt (2012-2014). **Vauxhall / Opel:** Agila (2000-2003), Agila-B (2008-2010), Adam (2012-2015),Ampera (2011-2015), Corsa-C (2000-2014), Corsa-D (2006-2014), Insignia (2011-2015), Meriva-B (2010-2015), Mokka (2012-2015),Zafira-C Tourer (2012-2015), Cascada (2013-2015),Astra-J (2009-2015).
ENGINE :	**1.0 / 1.0 Ecoflex** A10XEP **1.2 / 1.2 Ecoflex** A12XEL, A12XER, LWD/A12XEL, L2Q/A12XEL, LWD/B12XEL **1.4 / 1.4 Ecoflex** A14XER, LUJ/A14NET, LDD/A14XEL, LDD/A14XER, LDD/A14XEL, A14XEL, L2Z/A14XEL, LDD/B14XEJ, LDD/B14XEL, LDD/B14XER, LUJ/B14NEH, LUJ/B14NEL, LUJ/B14NET, LDD, LUU, LUH/A14NEL **1.4 Turbo** LUJ/A14NEL, LUJ/A14NET, LUJ/B14NET **1.6** LDE/A16XER, LDE/B16XER

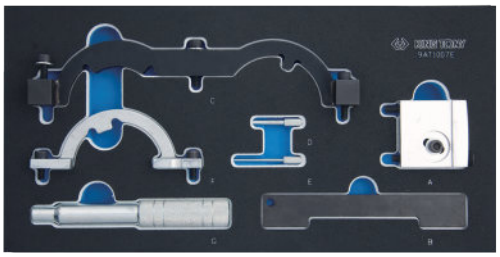

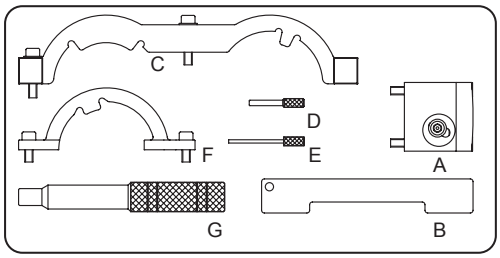

CONTENTS:
- A - Inlet Camshaft Adjusting Tool
- B - Camshaft Locking Plate
- C - Camshaft Sensor Locating Tool
- D - Chain Tensioner Locking Pin 4.0mm
- E - Chain Tensioner Locking Pin 2.5mm
- F - Camshaft Sensor Locating Tool
- G - Crankshaft Locking Pin

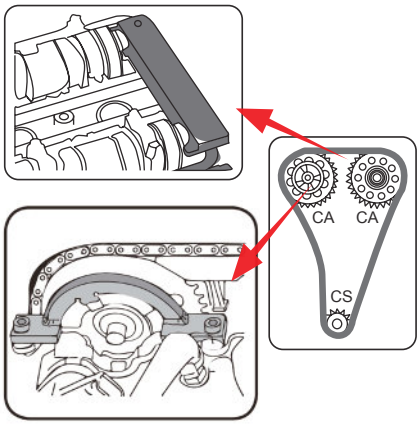

VAUXHALL/OPEL

Petrol & Diesel Engine Tensioner Adjustement Wrench (Via Water Pump)


9AT1202

- The set includes 41mm and 46mm tension adjust wrench
- Suitable for Vauxhall / Opel and Chevrolet engine

P | D | CHAIN | 2 PC.

695 | 6 / 24

MODEL:	**9AT1202 - A(46MM)** **Petrol / 1.8 and 2.0 S.O.H.C** Astra F, Calibra, Frontera C18NZ, C20NE **Diesel / 1.6D and 1.7D** Astra, Cavalier, Vectra 16DA, 17D **9AT1202 - B(41MM)** **Petrol / 1.2 / 1.4 / 1.6 S.O.H.C** Corsa B / C , Combo, Astra-F, Vectra-B C12NE, X12SZ, C14NZ, X14NZ, C14SE X14SZ, X16SZ, X16SZR, Z16SE





CONTENTS :
- A - tension adjustment wrench (46mm)
- B - tension adjustment wrench (41mm)

VAUXHALL/OPEL

Diesel Engine Setting & Locking Set

9AT2004E

- The set includes flywheel locking pin, camshaft setting tools, tensioner locking pin
- Use to retain timing position only. DO NOT use them to hold camshafts in position while releasing or tightening the sprocket bolt




1101 1 / 10

MODEL:	**Diesel 1.3D CDTi (Chain)** Agila (03-08), Agila-B (08-09) Corsa / Combo-C (03-09), Corsa-D (08-09) Tigra-B(04-09), Meriva (04-09) Astra-H (05-09)
ENGINE CODE:	**Diesel 1.3D CDTi (Chain)** Z13DT, Z13DTH, Z13DTJ



CONTENTS :
- A - camshaft setting tool set (pair)
- B - flywheel locking pin
- C - tensioner retaining pin

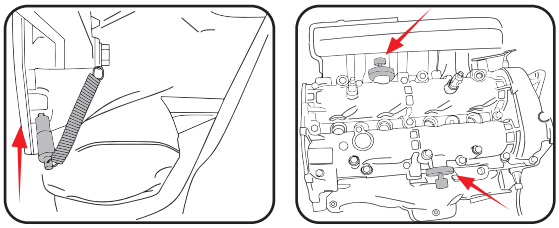

VAUXHALL/OPEL

Diesel Engine Setting & Locking Set




9AT2005E


- The set includes crankshaft locking tool, camshaft setting tools(pair) and a tensioner locking pin
- Suitable for Saab, Vauxhall / Opel engine
- Use to set and lock engines timing




1295 1 / 10

MODEL:	**Diesel 1.9D CDTi / 2.0D CDTi(Belt)** Astra-H (04-09), Vectra-C(04-08) Signum (04-08), Zafira-B (05-09) Insignia (08-09)
ENGINE CODE:	**Diesel 1.9D CDTi / 2.0D CDTi(Belt)** **1.9CDTi** Z19DT, Z19DTH, Z19DTJ, Z19DTL **2.0CDTi** A20DT, LBS, A20DT, LBX, A20DT, LBY A20DT, LCD





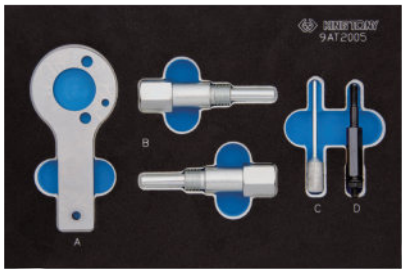

CONTENTS :
- A&D - crankshaft locking tools
- B - camshaft setting tool (pair)
- C - tensioner locking pin

VAUXHALL/OPEL

Diesel Engine Setting & Locking Set





9AT2008E

- The set includes auxiliary belt tensioner locking pin, camshaft setting tools, crankshaft pulley holding tool, chain tensioner locking pin and crankshaft locking pin
- Suitable for 2.0 dCi chain drive engines of Renault, Nissan and Vauxhall / Opel

2376 1 / 5

MODEL:	**Vivaro** (07-08)
ENGINE CODE:	**M9R** 780/782/784







CONTENTS :
- A&H – camshaft gear alignment tool
- B&C – camshaft setting plate
- D – crankshaft locking pin
- E – auxiliary belt tensioner locking pin
- F – crankshaft pulley holding tool
- G - chain tensioner locking pin

VAUXHALL/OPEL

Diesel Engine 2.5TDS Timing Set





9AT2106E


- The set includes camshaft setting plate , tensioner lever , tensioner retaining pin , flywheel locking pin and pump remove & sprocket retainer
- Suitable for BMW, Land Rover and Opel engines
- Use to retain and support the sprocket and timing chain in position when the pump is removed

2480 1 / 5

MODEL:	**Omega-B** (94-01)
ENGINE CODE:	**2.5D Turbo (Chain)** X25DT





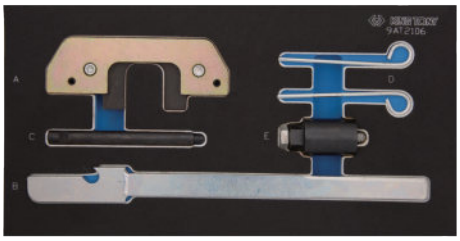

CONTENTS :
- A – camshaft setting plate
- B – tensioner lever
- C – flywheel locking pin
- D – tensioner retaining pin
- E – pump remove & sprocket retainer (2 part)


Diesel Engine Setting Tool (Belt Drive)

9AT2-A01

- The set includes flywheel locking pin, TDC timing pin and tensioner retaining tool
- Use for holding engine timing position when replacing timing belt
- Suitable for Fiat, Iveco, Renault, Citroen / Peugeot, Vauxhall / Opel

112 12 / 120

MODEL:	**2.5D / 2.8D** Arena (97-01) Movano (98-03)
ENGINE CODE:	**S8U** 770, 772 **S9W** 700, 702



A B C

CONTENTS :
- A – TDC timing pin
- B – flywheel locking pin (2pc)
- C – tensioner retaining tool


Diesel Injection Pump Puller

9AT2-D01

- Specifically designed for holding the sprocket / chain in place when disassembling the VP44 injection pump and high pressure pump
- Common rail fits BMW engines

528 g | 6 /36

MODEL:	**Omega - B** (01-03)
ENGINE CODE:	Y25DT





VAUXHALL/OPEL


Petrol Engine Flywheel Holding & Locking Tool


9AT2-E01

- Use to remove the crankshaft pulley while replacing the timing belt
- Put into the teeth firstly, fix steadily on the housing according to manufacturer's guidelines

39 g | 20 / 100

MODEL:	**Astra** (86-91) **Astra-F + G** (91-98) **Ascona-C / Cavalier** (86-88) **Vectra A** (89-95)
ENGINE CODE:	16DA, 17D, 17DR, 17DTL






UNIVERSAL


Camshaft & Injection Pump Sprocket Holding Tool

9AT3-A01

- Use to counter hold camshaft or injection pump sprocket to release the retaining bolt
- For universal diesel and petrol engine

912 g | 6 / 24







UNIVERSAL
Universal Camshaft Pulley Holding Wrench

9AT3-A02

- Use to hold camshaft pulley while loosening and tightening cam sprockets center bolt
- Designed with 4 pair groove pins 7, 10, 14, 16mm
- Adjustable swivel jaw both side application for most engine
- Capacity : 40 ~ 140mm (1-1/2" ~ 8-5/8")
- For universal engine, especially O.H.C. overhead cam engines cars

1000 / 1 / 6







UNIVERSAL
Camshaft Sprocket Puller

9AT3-A04

- Use to hold and remove the camshaft sprocket without damaging the sprocket
- Use with 3/8" square drive tool or 19mm wrench
- Suitable for most sprockets from Ø60 to Ø100 mm

KT NO.	Capacity mm		
9AT3-A04	60~100	1437	1 / 12









UNIVERSAL
Belt Tensioner Lock Pin Set

9AT3-B01

- Designed for retaining tensioner plunger in fixed position while replacing timing belt
- Suitable for common vehicle and engine

17 / 20 / 100






CONTENTS :
- 0.79mm / .0310"
- 1.21mm / .0476"
- 1.41mm / .0560"
- 1.51mm / .0594"
- 1.71mm / .0670"
- 1.92mm / .0760"

UNIVERSAL
Dial Test Indicator

9AT3-F01

- Use to measure and accurately find the piston TDC position
- This tool has to use with TDC Indicator 9AT3-F02
- It can be used for mechanical circularity, flatness.....etc

63 / 1 / 100





UNIVERSAL
TDC Indicator

9AT3-F02

- Use to measure if the cylinder piston is at TDC position
- This tool has to use with Dial Test Indicator 9AT3-F01

292 / 1 / 30



VOLKSWAGEN GROUP
AUDI/SKODA/VW/SEAT

Petrol Engine Timing Set



9AT1306E

P BELT 6 PC.


- The set includes camshaft setting plate, camshaft sprocket adjusting tool, tensioner adjusting tool, tensioner locking pin and crankshaft locking pin
- Suitable for Audi VAG 3.0 V6 petrol engine
- Use to replace timing belt and carry out timing tensioner applications


3668 g | 1 / 5

MODEL:	**Audi** A4 (01-08), A6 (01-08), A8 (03-08) Cabrio (03-08)
ENGINE CODE:	ASN, AVK, BBJ



CONTENTS :
- A - camshaft setting plate (pair)
- B - crankshaft locking pin
- C - camshaft sprocket adjusting tool
- D - tensioner adjusting tool
- E - tensioner locking pin





VOLKSWAGEN GROUP
AUDI/SKODA/VW/SEAT

Petrol Engine Setting & Locking Set



9AT1506E

P CHAIN 6 PC.


- The set includes dial & TDC indicator and camshaft setting tool
- Suitable for 1.2T / 1.4T FSi and 1.4 / 1.6 FSi engines
- Use to check and adjust engine timing


1856 g | 1 / 10

MODEL:	**Audi** A1(10-12), A3(03-12) **Seat** Altea/Altea XL(08-12), Ibiza/Cordoba(08-12) Leon(07-12), Toledo(07-09) **Skoda** Fabia II(07-12), Octavia II(04-12) Roomster(06-12), Superb II(09-12) Yeti(09-12) **VW** Caddy/ Caddy Maxi(10-12), Eos(06-12) Golf(03-12), Golf Plus(03-12), Jetta(06-12) Passat(05-11), Polo(02-12), Scirocco(08-12) Tiguan(07-12), Touran(03-12)
ENGINE CODE:	**1.2T FSi** CBZA, CBZB, CBZC **1.4T FSi** BLG, BMY, BWK, CAVA, CAVB, CAVC, CAVD CAVE, CAVF, CAXA, CAXC, CDGA, CSMA **1.4 FSi** AXU, BKG, BLN **1.6 FSi** BAG, BLF, BLP, BTS



CONTENTS :
- A – camshaft setting plate
- B – TDC indicator
- C – camshaft setting tool
- D – crankshaft locking pin
- E – dial test indicator
- F – tensioner locking pin






Hose Clamp	KT Item	Suitable Car Brand
    Hose Clamp	 9AA11  9AA13  9AA16  9AA21  9AA31  9AA32	Universal VW(Intake), VW, Audi, Opel, Honda, Ford
 Hose Clamp	 9AA17	VW, Audi, Seat, Skoda, Lamborghini
 CLIC Clamp  CLIC-E Clamp  CLIC-R Clamp  CLIC-GR Clamp	 9AA15  9AA25	VW, Audi, Citroen/Peugeot, Fiat, Mercedes-Benz, Opel, Renault, Ford, Volvo
 Screw Clamp  Worm Drive Clamp	 1453-05 / 1453-06 / 1453-07 1453-08 / 1453-10	Universal


Straight Hose Clamp Pliers

9AA11

- Use to remove and install spring clamp
- Swivel V-shaped jaws
- Suitable for universal cars, especially VW, Audi, Opel, Honda, Ford








KT NO.	Ø mm	L inch	L mm	g	
9AA11	55	8-21/32	220	220	12 / 72


Flat Band Hose Clamp Pliers

9AA16

- Use to remove and install spring clamp
- Swivel concave jaws
- Suitable for universal cars, especially VW, Audi, Opel, Honda, Ford








KT NO.	Ø mm	L inch	L mm	g	
9AA16	60	8-21/32	220	213	12 / 72


Wire Hose Clamp Pliers

9AA13

- Use to remove and install wire clamp
- Swivel jaws
- Suitable for universal cars, especially Corbin heater hose








KT NO.	Ø mm	L inch	L mm	g	
9AA13	51	8-21/32	220	238	12 / 72


Curved Hose Clamp Pliers

9AA21

- Use to remove and install spring clamp
- 45° swivel concave jaw with greater access in confined spaces
- Suitable for universal cars, especially VW, Audi, Opel, Honda, Ford








KT NO.	Ø mm	L inch	L mm	g	
9AA21	53	8-21/32	220	224	12 / 48

Flexible Hose Clamp Pliers


9AA31

9AA32

- Use to remove and install spring clamp
- Flexible flat jaw with greater access in confined spaces
- Suitable for universal cars





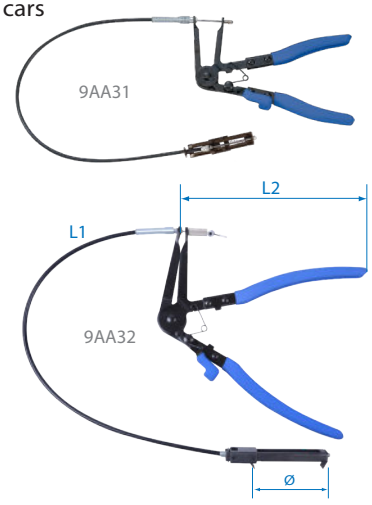

KT NO.	Ø mm	L 1 inch	L 1 mm	L 2 inch	L 2 mm	g	
9AA31	53	25	630	9	225	528	12 / 36
9AA32	77	27-1/4	700	12	310	756	6 / 24

CLIC Hose Clamp Pliers


9AA15

- Use to remove and install CLIC and CLIC-R clamp
- Special-designed jaws
- Suitable for VW, Audi, Opel, Citroen, Peugeot, Fiat, Renault, Mercedes-Benz







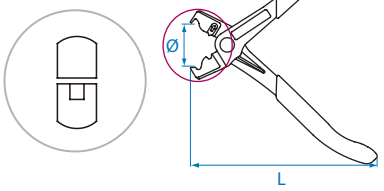

KT NO.	Ø mm	L inch	L mm	g	
9AA15	36	5-19/32	142	223	12 / 72


Fuel Line Hose Clamp Pliers


9AA17

- Use to remove and install fuel line clamp
- Special pick jaws
- Suitable for VW, Audi, SEAT, Skoda









KT NO.	Ø mm	L inch	L mm	g	
9AA17	27	6-3/4	171	188	12 / 60

360° CLIC Hose Clamp Pliers


9AA25


- Use to remove and install CLIC and CLIC-R clamp
- 360° swivel angle
- Suitable for VW, Audi, Opel, Citroen, Peugeot, Fiat, Renault, Mercedes-Benz











KT NO.	Ø mm	L inch	L mm	g	
9AA25	32	7	175	224	12 / 72

Fuel Line Pliers

9AB11

- Improved type can also use for fuel lines with plastic snap-together connectors
- Use for VW, Audi, Fiat, GM, Opel/Vauxhall, Mercedes-Benz



KT NO.	L inch	L mm	g	
9AB11	9	228	312	12 / 72

9AB12

- For removal and replacement of the connections on the in-line fuel filter
- Use for VW, PSA , Fiat, Opel



KT NO.	L inch	L mm	g	
9AB12	6	150	87	12 / 144



Piston Ring Compressor

9AC

- The square adjustment key wrench forces the rings into the grooves and the clutch prevents it from expanding






KT NO.	H inch	H mm	Ø Capacity inch	Ø Capacity mm	g	
9AC125-32	3-1/4	80	2-1/4~5	57~125	260	20 / 60
9AC125-40	4	100	2-1/4~5	57~125	280	20 / 60
9AC175-32	3-1/4	80	3-1/2~7	90~175	300	20 / 60
9AC175-40	4	100	3-1/2~7	90~175	320	20 / 60
9AC175-66	6-3/4	165	3-1/2~7	90~175	530	20 / 40

Engine Cylinder Hone 50~175mm

9AC231-54

- For engine cylinders bores from 50mm to 175mm
- Adjustable spring tension and spread limiter easy to remove carbon
- The hone stones is 220 grit, coarse grade



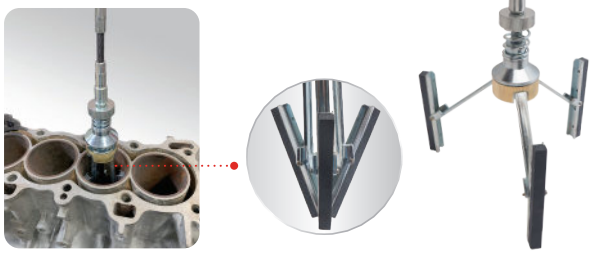


KT NO.	Ø Capacity mm	g	
9AC231-54	50~175	700	6 / 24

Valve Stem Seal Pliers

9AD11

- For removing valve stem seals in multi-valves engine
- Jaw longitudinal toothed - avoids slipping down
- For deeply leveled valve stem seals

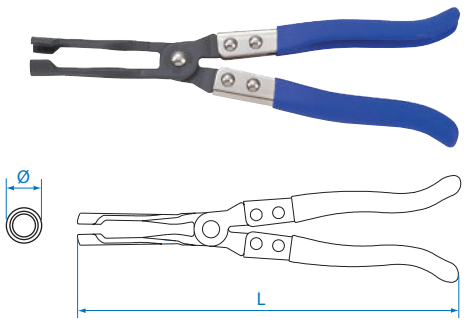

KT NO.	L inch	L mm	Ø mm	g	
9AD11	11	275	9.5	400	12 / 48

Swivel Oil Filter Wrench

9AE31

- Professional swivel PVC dipped handle
- Easy to bend in different positions for reaching into narrow spaces






KT NO.	Ø Capacity mm	g	
9AE31-73	60~73	275	6 / 36
9AE31-85	73~85	283	6 / 36
9AE31-95	85~95	300	6 / 36
9AE31-111	95~111	307	6 / 36
9AE31-121	110~121	309	6 / 36
9AE31-134	120~134	322	6 / 36

Band Type Oil Filter Wrench

9AE32

- Adjustable metal band
- Suitable for filters between Ø65mm to Ø155mm





KT NO.	Ø Capacity mm	g	
9AE32-110	65~110	246	25 / 50
9AE32-155	110~155	252	25 / 50


Quick Grip Oil Filter Wrench Set

9AE33

- Quick-adjustable tightening design
- Band type allows for narrow space
- Non-slip reaction teeth provides better grip



- The design offers a stronger clamping force





KT NO.	Ø Capacity mm	g	
9AE33-110	65~110	305	1 / 25
9AE33-155	110~155	311	1 / 25



Strap Wrench

3203

- Strap wrench for oil filter





KT NO.	Capacity mm	Overall length inch	Overall length mm	g	
3203	Ø 60~140	8-3/4	223	242	50
320300	strap			46	80
3203A0	Ø 60~260	8-3/4	223	300	45
320301	strap			73	80

32067A

- Aluminum alloy handle and strong polyester strap for tight grip
- Suitable for oil filter or any polished pipe







KT NO.	Overall Length inch	Overall Length mm	Capacity mm	g	
32067A	12	295	Ø 60~180	344	25 / 50
3206A00	Polyester strap			35	25 / 50

320760

- Strap wrench for oil filter
- Use with 1/2" square drive tool





KT NO.	Overall length inch	Overall length mm	Capacity mm	g	
320760	11	280	Ø 60~160	256	12 / 72

Chain Wrench

3204

- Chain wrench for oil filter





KT NO.	Capacity mm	Overall length inch	Overall length mm	g	
3204	Ø 60~140	8-3/4	225	359	50

Chain Wrench

3205

- Heavy duty oil filter chain wrench, specially for auto, truck and agricultural equipment
- Flexible in confined space
- Suitable for all types of oil filters





- Adjust to appropriate size of the oil filter.



Swiveling




- Release the chain to reinstate it.

KT NO.	Capacity mm	Chain length mm	g	
320540	Ø 60~105	350	742	6 / 24
320560	Ø 60~160	520	880	6 / 24

Cup Type Oil Filter Wrench

9AE1 — 3/8"

- 3/8" square drive
- Withstands up to 115.2 N·m(85 ft·lb)
- Cup-type design, reduce the possibility to damage oil filters
- Material: Aluminum

KT NO.	Drive size	Diameter inch	Diameter mm	Flutes	Applicable models	g	
9AE1-6414 (Aluminum)	3/8"	2-1/2	64	14	TOYOTA 4 Cylinder (1800CC.2000CC) ,ALLION, AURIS, COROLLA AXIO, ISIS, IST, COROLLA RUMION, COROLLA FIELDER, NOAH, PREMIO, PRIUS, VOXY, WISH, etc…	164	12 / 72

9AE2 — 3/8"

- 3/8" square drive
- Withstands up to 115.2 N·m(85 ft·lb)
- Coated with electro-black oxide finish for protection against rust
- Cup-type design, reduce the possibility to damage oil filters




KT NO.	Drive size	Diameter inch	Diameter mm	Flutes	Applicable models	g	
9AE2-6514	3/8"	2-9/16	65	14	Fits Nissan, Fiat Champ, Hasting. GM/AC, Wix, NAPA, Purolator, Daihatsu, Toyota, Nissan, etc…	222	12 / 48
9AE2-6567	3/8"	2-9/16 & 2-21/32	65 & 67	14	Fits same filters as made in Canada including, PH4386, PH4967, PH6017, PH6018, Daihatsu, Toyota, etc…	222	12 / 45
9AE2-6606	3/8"	2-19/32	66	6	Fiat(Punto, 1.2), Renault(Clio 1.2 Express, Kangoo. Rapid. Twingo), etc....	153	12 / 72
9AE2-7476	3/8"	2-29/32 & 3	74 & 76	15	Fits Fram, AC, Saturn, Opel, VW, Audi, Mercedes, etc....	167	12 / 72
9AE2-7608	3/8"	3	76	8	Fiat(z.B. Marea), Lancia(z.B. Delta), etc....	181	12 / 72
9AE2-7612	3/8"	3	76	12	Fiat(z.B. Ducato, Scudo, Ulysee),Renault, (Megane, Laguna, Espace III.), etc....	167	12 / 72
9AE2-7614	3/8"	3	76	14	Fits Champion, Champ Lee, Purolator, Mopar, VW, Porsche,Mercedes, BMW, Audi, Toyota, Opel, etc....	167	12 / 72
9AE2-8616	3/8"	3-3/8	86	16	Volvo(S40, S60, S70, S80) etc....	188	12 / 72
9AE2-8618	3/8"	3-3/8	86	18	VW. Golf.(MKIII. Tdi, Passat Tdi), Audi A6 Tdi, Renault(Clio, Rapid 1.9D, Laguna.Safrane. Espace 2.1D). Citroen, Peugeot, Renault, etc..	181	12 / 72
9AE2-9210	3/8"	3-40/64	92	10	Fiat, Cinquecento, Coupe, Croma, DAF, Fiat, Panda. Regata, Ritmo Fiat, Seicento. Tempra, Tipo, Lancia(Beta. Dedra. Kappa. Monte. Carlo. Prisma. Thema. Trevi), etc....	181	12 / 72
9AE2-9315	3/8"	3-21/32	93	15	Fits Casite, Champ, Champion, GM, Fram, Hastings,Purolator, Wix, Nissan, Volvo, Mazda, Audi, VW, Porsche, Renault, etc....	181	12 / 72
9AE2-9345	3/8"	3-21/32	93	45	VW-Audi.(TDi 2.4, 2.6, 2.8L), etc....	181	12 / 72
9AE2-9618	3/8"	3-3/4	96	18	Audi(A4 Tdi, VW Passat,97 Tdi), Renault (Laguna 2.2d. Safrane2.2D. Espace 2.2D. R19 2.2D. Rapid, Megane,1.9/2.1D. Tdi) etc..	208	12 / 72
9AE2-10615	3/8"	4-11/64	106	15	Fiat(Ducato 2.5D. Td), etc....	222	12 / 72
9AE2-10815	3/8"	4-8/32	108	15	Volvo(C70. S70. V70. Tdi. TD)(850 Tdi. TD) etc....	222	12 / 72
9AE2-10818	3/8"	4-8/32	108	18	Renault(Espace, Laguna, Master, Safrane, Traffic 2.4, 2.5, 2.8D. TD), etc....	222	12 / 72

Cup Type Oil Filter Wrench Set

9AE2002 — 3/8"

- 3/8" square drive
- Withstands up to 115.2 N·m(85 ft·lb)
- Coated with electro-black oxide finish for protection against rust
- Cup-type design, reduce the possibility to damage oil filters



2 PC.

KT NO.	Drive size	Diameter inch	Diameter mm	Flutes	Applicable models
9AE2-6514	3/8"	2-9/16	65	14	Fits Nissan, Fiat Champ, Hasting. GM/AC, Wix, NAPA, Purolator, Daihatsu, Toyota, Nissan, etc…
9AE2-6567	3/8"	2-9/16 & 2-21/32	65 & 67	14	Fits same filters as made in Canada including, PH4386, PH4967, PH6017, PH6018, Daihatsu, Toyota, etc…

282 g | 1 / 40



Cup Type Oil Filter Wrench Set

9AE2004 — 3/8"

- 3/8" square drive
- Withstands up to 115.2 N·m(85 ft·lb)
- Coated with electro-black oxide finish for protection against rust
- Cup-type design, reduce the possibility to damage oil filters

4 PC.



KT NO.	Drive size	Diameter inch	Diameter mm	Flutes	Applicable models
9AE2-6606	3/8"	2-19/32	66	6	Fiat (Punto, 1.2), Renault (Clio1.2 Express, Kangoo, Rapid, Twingo), etc…
9AE2-7608	3/8"	3	76	8	Fiat (z.B. Marea), Lancia (z.B. Delta), etc…
9AE2-7614	3/8"	3	76	14	Fits Champion, Champ Lee, Purolator, Mopar, VW, Porsche, Mercedes-Benz, BMW, Audi (I.B.A3TD) Opel, etc…
9AE2-9315	3/8"	3-21/32	93	15	Fits Casite, Champ, Champion, GM, Fram, Hastings, Opel, Mazda, Volvo, Mitsubishi, Purolator, Wix, Nissan, VW, Porsche, Renault, Ford, Honda, Audi, etc…

571 g | 1 / 20

Cup Type Oil Filter Wrench Set

9AE2016 3/8"

- 3/8" square drive
- Withstands up to 115.2 N·m(85 ft·lb)
- Coated with electro-black oxide finish for protection against rust
- 1 PC. 1/2"(F)x3/8"(M) adapter
- 1 PC. 3 legs oil filter wrench(63-102mm)







16 PC.

KT NO.	Drive size	Diameter inch	Diameter mm	Flutes	Applicable models	4.00	1 / 5
9AE2-6606	3/8"	2-19/32	66	6	Fiat(Punto, 1.2), Renault(Clio 1.2 Express, Kangoo. Rapid. Twingo), etc....		
9AE2-7476	3/8"	2-29/32 & 3	74 & 76	15	Fits Fram, AC, Saturn, Opel, VW, Audi, Mercedes, etc....		
9AE2-7608	3/8"	3	76	8	Fiat(z.B. Marea), Lancia(z.B. Delta), etc....		
9AE2-7612	3/8"	3	76	12	Fiat(z.B. Ducato, Scudo, Ulysee),Renault, (Megane, Laguna, Espace III.), etc....		
9AE2-7614	3/8"	3	76	14	Fits Champion, Champ Lee, Purolator, Mopar, VW, Porsche,Mercedes, BMW, Audi, Toyota, Opel, etc....		
9AE2-8616	3/8"	3-3/8	86	16	Volvo(S40, S60, S70, S80) etc....		
9AE2-8618	3/8"	3-3/8	86	18	VW. Golf.(MKIII. Tdi, Passat Tdi), Audi A6 Tdi, Renault(Clio, Rapid 1.9D, Laguna.Safrane. Espace 2.1D). Citroen, Peugeot, Renault, etc..		
9AE2-9210	3/8"	3-40/64	92	10	Fiat, Cinquecento, Coupe, Croma, DAF, Fiat, Panda. Regata, Ritmo Fiat, Seicento. Tempra, Tipo, Lancia(Beta. Dedra. Kappa. Monte. Carlo. Prisma. Thema. Trevi), etc....		
9AE2-9315	3/8"	3-21/32	93	15	Fits Casite, Champ, Champion, GM, Fram, Hastings,Purolator, Wix, Nissan, Volvo, Mazda, Audi, VW, Porsche, Renault, etc....		
9AE2-9345	3/8"	3-21/32	93	45	VW-Audi.(TDi 2.4, 2.6, 2.8L), etc....		
9AE2-9618	3/8"	3-3/4	96	18	Audi(A4 Tdi, VW Passat,97 Tdi), Renault (Laguna 2.2d. Safrane2.2D. Espace 2.2D. R19 2.2D. Rapid, Megane,1.9/2.1D. Tdi) etc..		
9AE2-10615	3/8"	4-11/64	106	15	Fiat(Ducato 2.5D. Td), etc....		
9AE2-10815	3/8"	4-8/32	108	15	Volvo(C70. S70. V70. Tdi. TD)(850 Tdi. TD) etc....		
9AE2-10818	3/8"	4-8/32	108	18	Renault(Espace, Laguna, Master, Safrane, Traffic 2.4, 2.5, 2.8D. TD), etc....		
9AE423	3/8"	2-1/2~4	63~102	-	3 legged oil Filter Tool		
9AE221	1/2"	-	-	-	Adaptor 1/2" F x 3/8" M		

Cup Type Oil Filter Wrench

9AE0 — 1/2"

- 1/2" square drive
- Withstands up to 115.2 N·m(85 ft·lb)
- Cup-type design, reduce the possibility to damage oil filters
- Material: Aluminum



KT NO.	Drive size	Diameter inch	Diameter mm	Flutes	Applicable models	g	
9AE0-6414 (Aluminum)	1/2"	-	64	14	TOYOTA.NISSAN	93	1 / 100
9AE0-7414 (Aluminum)	1/2"	-	74	14	AUDI. VW. OPEL. BMW. AUSTIN. 2003+FORD	118	1 / 100

9AE6 — 1/2"

- 1/2" square drive
- Withstands up to 115.2 N·m(85 ft·lb)
- Coated with electro-black oxide finish for protection against rust
- Cup-type design, reduce the possibility to damage oil filters



KT NO.	Drive size	Diameter inch	Diameter mm	Flutes	Applicable models	g	
9AE6-6514	1/2"	2-8/16	65	14	Fits Nissan, Fiat Champ, Hasting. GM/AC, Wix, NAPA, Purolator, Daihatsu, Toyota, Nissan, etc…	112	12 / 72
9AE6-6514A	1/2"	2-9/16	65	14	Fits Nissan, Fiat Champ, Hasting. GM/AC, Wix, NAPA, Purolator, Daihatsu, Toyota, Nissan, etc…	112	12 / 72
9AE6-6567	1/2"	2-9/16 & 2-21/32	65 & 67	14	Fits same filters as made in Canada including, PH4386, PH4967, PH6017, PH6018, Daihatsu, Toyota, etc…	222	12 / 72
9AE6-6606	1/2"	2-19/32	66	6	Fiat (Punto, 1.2), Renault (Clio1.2 Express, Kangoo. Rapid. Twingo), etc…	222	12 / 72
9AE6-6814	1/2"	2-11/16	68	14	Fits Hastings, Mazda, Ford Escort, Capri, Subaru, Fran, PH6607 (Those Fram Filters Made in Korea), Motorcraft, FL816, etc…	222	12 / 72
9AE6-7314	1/2"	2-7/8	73	14	Fits Toyota/Lexus, etc…	222	12 / 72
9AE6-7414	1/2"	2-29/32	74	14	Audi, Volkswagen, BMW, Citroën, Peugeot, Ford, Fiat, Lancia, Mazda, Mercedes-Benz, Nissan, Vauxhall, Opel, Porsche, Renault, Suzuki, Toyota, etc...	153	12 / 72
9AE6-7415	1/2"	2-29/32	74	15	MF, Audi (#056-115-561g), GM. Rover, Chrysler, etc…	222	12 / 72
9AE6-7476	1/2"	2-29/32 & 3	74 & 76	15	Fits Fram, AC, Saturn, Opel, VW, Audi, Mercedes, etc…	243	12 / 72
9AE6-7577	1/2"	2-15/16 & 3-1/32	75 & 77	15	Fits VW, Audi, Casite, GM/AC, Hastings, Wix, NAPA, Ford, Isuzu, Mercedes, Opel, etc…	222	12 / 72
9AE6-7608	1/2"	3	76	8	Fiat (z.B. Marea), Lancia (z.B. Delta), etc…	222	12 / 72
9AE6-7612	1/2"	3	76	12	Fiat (z.B. Ducato, Scudo, Ulysee), Renault, (Megane, Laguna, Espace III), etc…	222	12 / 72
9AE6-7614	1/2"	3	76	14	Fits Champion, Champ Lee, Purolator, Mopar, VW, Porsche, Mercedes, Benz, BMW, Audi (I.B.A3TD) Opel, etc…	243	12 / 72
9AE6-7630	1/2"	3	76	30	Fits Motorcraft only-FL400A, Ford, etc…	243	12 / 72
9AE6-7815	1/2"	3-2/32	78	15	Nissan (#15028H8991), Ford, Toyota, Honda (Accord), etc…	243	12 / 72
9AE6-8015	1/2"	3-9/64	80	15	Fits Opel, Hastings, Fram, Purolator, Nissan, Honda, Motorcraft, Mazda, Isuzu, Subaru filters.	243	12 / 72
9AE6-8082	1/2"	3-9/64 & 3-7/32	80 & 82	15	Fits Wix Filters. Branded for:Mazda,Subaru,Toyota,Honda,Acura,Nissan,NAPA.Etc…	243	12 / 72
9AE6-8414	1/2"	3-3/10	84	14	Mercedes Benz V6/V8 CDi models, etc…	194	12 / 72
9AE6-8616	1/2"	3-3/8	86	16	Volvo (S40, S60, S70, S80), etc…	180	12 / 72

Cup Type Oil Filter Wrench

9AE6 — 1/2"

- 1/2" square drive
- Withstands up to 115.2 N·m(85 ft·lb)
- Coated with electro-black oxide finish for protection against rust
- Cup-type design, reduce the possibility to damage oil filters



KT NO.	Drive size	Diameter inch	Diameter mm	Flutes	Applicable models	g	
9AE6-8618	1/2"	3-3/8	86	18	VW. Golf. (MKIII. TDi, Passat TDi), Audi A6 TDi, Renault (Clio, Rapid1.9D, Laguna, Safrane, Espace 2.1D), Citroen, Peugeot, Renault, etc…	243	12 / 72
9AE6-9015	1/2"	3-17/32	90	15	Fits Honda (Accord). Mitsubishi. Mopar. Isuzu, etc…	180	12 / 72
9AE6-9210	1/2"	3-40/64	92	10	Fiat, Cinquecento, Coupe, Croma, DAF, Fiat, Panda, Regata, Ritmo Fiat, Seicento. Tempra, Tipo, Lancia (Beta. Dedra. Kappa. Monte. Carlo. Prisma. Thema. Trevi), etc…	260	12 / 72
9AE6-9315	1/2"	3-21/32	93	15	Fits Casite, Champ, Champion, GM, Fram, Hastings, Opel, Mazda, Volvo. Mitsubishi, Purolator, Wix, Nissan, VW, Porsche, Renault, Ford, Honda, Audi, etc…	260	12 / 72
9AE6-9336	1/2"	3-21/32	93	36	Fits Ford, Motorcraft only-FL1A, (FLA1B, FL300, FL820 Ford), etc…	260	12 / 72
9AE6-9345	1/2"	3-21/32	93	45	VW-Audi, (TDi 2.4, 2.6, 2.8L), etc…	260	12 / 72
9AE6-9515	1/2"	3-6/8	95	15	Toyota (#15600-41010) Alfa Romeo, GM, Ford, Chrysler.	260	12 / 72
9AE6-9618	1/2"	3-3/4	96	18	Audi (A4.A6, TDi), VW (Passat 97 TDi), Renault (Laguna 2.2D, Safrane2.2D. Espace2.2D.R19 2.2D. Rapid. Megane, 1.9/2.1D.TDi), etc…	260	12 / 72
9AE6-10015	1/2"	3-15/16	100	15	Fits Fram, Motorcraft, Wix, Isuzu, Mitsubishi, etc…	220	12 / 72
9AE6-10615	1/2"	4-11/64	106	15	Fiat (Ducato 2.5D.Td), etc…	190	12 / 72
9AE6-10815	1/2"	4-8/32	108	15	Volvo (C70.S70.V70.TDi.TD) (850 TDi. Turbo Diesel)	190	12 / 72
9AE6-10818	1/2"	4-8/32	108	18	Renault (Espace, Laguna, Master, Safrane, Traffic 2.4 , 2.5, 2.8D. TD), etc…	190	12 / 72

Cup Type Oil Filter Wrench Set

9AE6002 — 1/2"

- 1/2" square drive
- Withstands up to 115.2 N·m(85 ft·lb)
- Coated with electro-black oxide finish for protection against rust
- Cup-type design, reduce the possibility to damage oil filters

2 PC.



KT NO.	Diameter inch	Diameter mm	Flutes	Applicable models	g	
9AE6-6514	2-9/16	65	14	Fits Nissan, Fiat Champ, Hasting. GM/AC, Wix, NAPA, Purolator, Daihatsu, Toyota, Nissan, etc…	282	1 / 40
9AE6-6567	2-9/16" & 2-21/32	65 & 67	14	Fits same filters as made in Canada including, PH4386, PH4967, PH6017, PH6018, Daihatsu, Toyota, etc…		

Cup Type Oil Filter Wrench Set

9AE6030 1/2"

- 1/2" square drive
- Withstands up to 115.2 N·m(85 ft·lb)
- Coated with electro-black oxide finish for protection against rust
- Cup-type design, reduce the possibility to damage oil filters
- Suitable for 3/8" or 1/2" drive tool







30 PC.

KT NO.	Drive size	Diameter inch	Diameter mm	Flutes	Applicable models
9AE6-6514	1/2"	2-8/16	65	14	Fits Nissan, Fiat Champ, Hasting. GM/AC, Wix, NAPA, Purolator, Daihatsu, Toyota, Nissan, etc…
9AE6-6567	1/2"	2-9/16 & 2-21/32	65 & 67	14	Fits same filters as made in Canada including, PH4386, PH4967, PH6017, PH6018, Daihatsu, Toyota, etc…
9AE6-6606	1/2"	2-19/32	66	6	Fiat (Punto, 1.2), Renault (Clio1.2 Express, Kangoo. Rapid. Twingo), etc…
9AE6-6814	1/2"	2-11/16	68	14	Fits Hastings, Mazda, Ford Escort, Capri, Subaru, Fran, PH6607 (Those Fram Filters Made in Korea), Motorcraft, FL816, etc…
9AE6-7314	1/2"	2-7/8	73	14	Fits Toyota/Lexus, etc…
9AE6-7415	1/2"	2-29/32	74	15	MF, Audi (#056-115-561g), GM. Rover, Chrysler, etc…
9AE6-7476	1/2"	2-29/32 & 3	74 & 76	15	Fits Fram, AC, Saturn, Opel, VW, Audi, Mercedes, etc…
9AE6-7577	1/2"	2-15/16 & 3-1/32	75 & 77	15	Fits VW, Audi, Casite, GM/AC, Hastings, Wix, NAPA, Ford, Isuzu, Mercedes, Opel, etc…
9AE6-7608	1/2"	3	76	8	Fiat (z.B. Marea), Lancia (z.B. Delta), etc…
9AE6-7612	1/2"	3	76	12	Fiat (z.B. Ducato, Scudo, Ulysee), Renault, (Megane, Laguna, Espace III), etc…
9AE6-7614	1/2"	3	76	14	Fits Champion, Champ Lee, Purolator, Mopar, VW, Porsche, Mercedes, Benz, BMW, Audi (I.B.A3TD) Opel, etc…
9AE6-7630	1/2"	3	76	30	Fits Motorcraft only-FL400A, Ford, etc…
9AE6-7815	1/2"	3-2/32	78	15	Nissan (#15028H8991), Ford, Toyota, Honda (Accord), etc…
9AE6-8015	1/2"	3-9/64	80	15	Fits Opel, Hastings, Fram, Purolator, Nissan, Honda, Motorcraft, Mazda, Isuzu, Subaru filters.
9AE6-8082	1/2"	3-9/64 & 3-7/32	80 & 82	15	Fits Wix Filters. Branded for:Mazda,Subaru,Toyota,Honda,Acura,Nissan,NAPA. Etc…
9AE6-8616	1/2"	3-3/8	86	16	Volvo (S40, S60, S70, S80), etc…
9AE6-8618	1/2"	3-3/8	86	18	VW. Golf. (MKIII. TDi, Passat TDi), Audi A6 TDi, Renault (Clio, Rapid1.9D, Laguna, Safrane, Espace 2.1D), Citroen, Peugeot, Renault, etc…
9AE6-9015	1/2"	3-17/32	90	15	Fits Honda (Accord). Mitsubishi. Mopar. Isuzu, etc...
9AE6-9210	1/2"	3-40/64	92	10	Fiat, Cinquecento, Coupe, Croma, DAF, Fiat, Panda, Regata, Ritmo Fiat, Seicento. Tempra, Tipo, Lancia (Beta. Dedra. Kappa. Monte. Carlo. Prisma. Thema. Trevi), etc…
9AE6-9315	1/2"	3-21/32	93	15	Fits Casite, Champ, Champion, GM, Fram, Hastings, Opel, Mazda, Volvo. Mitsubishi, Purolator, Wix, Nissan, VW, Porsche, Renault, Ford, Honda, Audi, etc…
9AE6-9336	1/2"	3-21/32	93	36	Fits Ford, Motorcraft only-FL1A, (FLA1B, FL300, FL820 Ford), etc…
9AE6-9345	1/2"	3-21/32	93	45	VW-Audi, (TDi 2.4, 2.6, 2.8L), etc…
9AE6-9515	1/2"	3-6/8	95	15	Toyota (#15600-41010) Alfa Romeo, GM, Ford, Chrysler.
9AE6-9618	1/2"	3-3/4	96	18	Audi (A4.A6, TDi), VW (Passat 97 TDi), Renault (Laguna 2.2D, Safrane2.2D. Espace2.2D.R19 2.2D. Rapid. Megane, 1.9/2.1D.TDi), etc…
9AE6-10015	1/2"	3-15/16	100	15	Fits Fram, Motorcraft, Wix, Isuzu, Mitsubishi, etc…
9AE6-10615	1/2"	4-11/64	106	15	Fiat (Ducato 2.5D.Td), etc…
9AE6-10815	1/2"	4-8/32	108	15	Volvo (C70.S70.V70.TDi.TD) (850 TDi. Turbo Diesel)
9AE6-10818	1/2"	4-8/32	108	18	Renault (Espace, Laguna, Master, Safrane, Traffic 2.4 , 2.5, 2.8D. TD), etc…
9AE433	1/2"	2-9/16~4-23/32	65~120		3 legged oil Filter Tool
9AE221	1/2"	-	-	-	Adaptor 1/2" F x 3/8" M

Kg 6.67 1 / 3

Oil Filter Socket Set

9AE8006 3/8"

- 3/8" square drive
- The set includes sizes 24, 27, 30, 32, 36 and 38mm
- 6 PC. oil filter sockets designed for removal of oil filter canisters and covers
- Withstands up to 115.2 N·m(85 ft·lb)

6 PC.








KT NO.	Drive size	Flutes	Applicable models
9AE8-24	3/8"	6	Audi BMW: 5 / 7 Series (N62) V8 engines from 2004 onward Cadillac: ATS 36
9AE8-27	3/8"	6	BMW, Ford, Fiat, GM, Renault, VAG, PSA Mercedes-Benz: A-CLASS Nissan: 1.5 / 1.9 / 2.2 / 2.5 dCi engines
9AE8-30	3/8"	6	Audi, Skoda, Seat, VW
9AE8-32	3/8"	6	GM, VAG BMW: 335D, X5 35d(09~10), X5 xDrive 35d(11~13) Opel / Vauxhall: Astra-G, Corsa-B, Zafira
9AE8-36	3/8"	6	Audi: A3 2.0(04~08), A4 2.0(04~08) BMW: M52, M54, M60, M62, M70 & M73 engines Ford: Mondeo 2.0D 16V Dura Torq engines, Transit 2.5 & 2.0 diesel engines Jaguar: 2.2D engines Mercedes-Benz: 116MB engine Vito CDi Mini: R56 Opel / Vauxhall: Omega DL 16V, Vectra 2.0, Zafira VAG: VAG 1.9 SDi (ASY), Golf GTI 2.0, Passat 2.0, VR6 Volvo
9AE8-38	3/8"	6	BMW, Volvo Opel / Vauxhall: Vectra 2 liter diesel engines

1.11 | 12 / 24

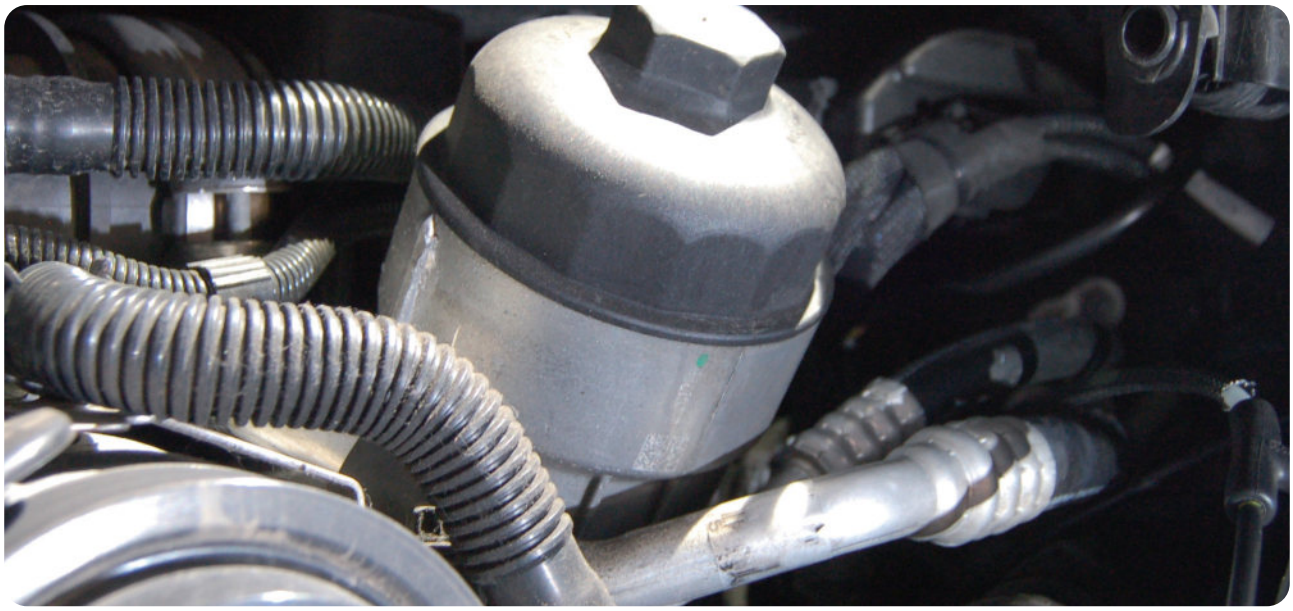


Three-Legs Oil Filter Wrench

9AE42

- The claw-type filter is available for removing all oil filters from 2-1/2" to 4" (63-102mm) in diameter
- Suitable for 3/8" or 1/2" square drive tool
- Coated with electro-black oxide finish for protection against rust
- CW & CCW direction

KT NO.	A inch	B inch	Ø Capacity inch	Ø Capacity mm	g	
9AE42	1/2	3/8	2-1/4~4	63~102	395	12 / 48
9AE221	1/2	3/8	-	-	39	-
9AE433	1/2	3/8	2-9/16~4-23/32	65~120	502	12 / 36






9AE43

- The claw-type filter is available for removing all oil filters from 3" to 4-3/4" (75-120mm) in diameter
- Suitable for 3/8" or 1/2" square drive tool
- Heavy duty design
- CW & CCW direction

KT NO.	A inch	B inch	Ø Capacity inch	Ø Capacity mm	g	
9AE43	1/2	3/8	3~4-3/4	75~120	604	1 / 36




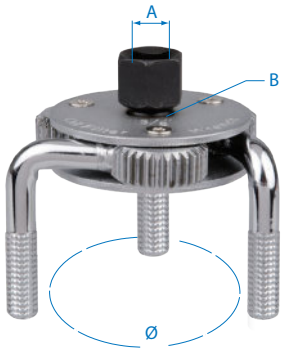

Two Jaws Oil Filter Wrench

9AE52

- The two jaws oil flter wrench is capable of remoring all kinds of oil flter
- Suitable for using with 1/2" square drive tool
- Lost wax coating with electro-black oxide finish for protection against rust
- Specially teeth designed steel jaws





KT NO.	A inch	Ø Capacity inch	Ø Capacity mm	g	
9AE52	1/2	2-3/8~3-1/8	60~80	470	1 / 16
9AE52-110	1/2	3-1/8~4-5/16	80~110	985	1 / 12






9AE53

- The claw-type filter is available for removing all oil filters from 3-1/8" to 4-1/2" (80-115mm) in diameter
- Suitable for using with 1/2" square drive tool
- Coated with electro-black oxide finish for protection against rust

KT NO.	A inch	Ø Capacity inch	Ø Capacity mm	g	
9AE53-115	1/2	3-1/8~4-1/2	80~115	667	6 / 24





Adjustable Oil Filter Pliers

9AE71

- Adjustable sizes from 60 to 140mm
- Serrated jaws

KT NO.	L inch	L mm	Ø Capacity mm	g	
9AE71-90	9	230	60-90	357	12 / 72
9AE71-115	10	260	85-115	400	12 / 60
9AE71-140	14-1/2	365	100-140	897	1 / 20





Locking Grip Oil Filter Pliers

9AE72

- Lock and grip oil filters or any irregular shaped object for quick tightening or removal
- Use for adjusting and fastening at any angle

KT NO.	L inch	L mm	Ø Capacity mm	g	
9AE72	10	254	53-118	458	12 / 48






Hose Pinch & Set

9AF11

- Adjustable edges ensure no damage to hose
- For hoses from Ø15 mm up to Ø60 mm
- Suitable for clamping radiator, heater, fuel, coolant and brake hoses





KT NO.	L inch	L mm	Ø Capacity mm	g	
9AF11-15	6-1/8	155	15	44	12 / 48
9AF11-30	7-9/32	185	30	76	12 / 48
9AF11-60	10	253	60	125	12 / 48



9AF113

- Adjustable edges ensure no damage to hose
- For hoses from Ø15 mm up to Ø60 mm
- Suitable for clamping radiator, heater, fuel, coolant and brake hoses

245 g 12 / 48



Fuel Gauge & Pump Sender Collar Wrench

9AG11

- Use for removing and fitting fuel gauge sender collars to avoid damage
- 3 jaws to ensure high torque and no risk to damage plastic collar
- Use with 19mm wrench or socket
- Suitable for most collars from 89 to 170mm









KT NO.	Ø mm	kg	
9AG11	89~170	1.05	1 / 12

Adjustable Fuel Tank Lid Remover


9AG13

- Use for removing and fitting fuel gauge sender collars to avoid damage
- Special jaws design, no risk to damage plastic collar
- Use with 3/8" DR.
- Suitable for collars from 122 ~ 199mm

560 g | 1 / 24


BMW


BENZ


VW . AUDI
BENZ . BMW



Diesel Injector Extractor Tool

9AN021

- Use to remove injectors without dismantling the engine
- Suitable for Bosch injectors in Mercedes-Benz CDI engines 2.1 L and 2.2 L
- Application : Benz for Vito, Sprinter, Viano, C class, E class, CLC, CLK

2 kg | 1 / 6




6 in 1 Fly Wheel Puller

9XAH1

- This tool is designed to offer 6 different sizes for the Flywheel wheel rings on motorcycles
- Sizes include: M20 x 1.5R / M14 x 1.5R / M16 x 1.5R / M18 x1.5R /| M24 x 1.0R / M27 x 1.0L

730 g | 1 / 24






Valve Spring Compressor Set

9AH31

- Use for compress of motorcycle or small engines valve spring
- Adapter size: 16, 19, 23, 25, 30mm
- Capacity: 130mm
- Throat depth: 100mm

1.31 1 / 12

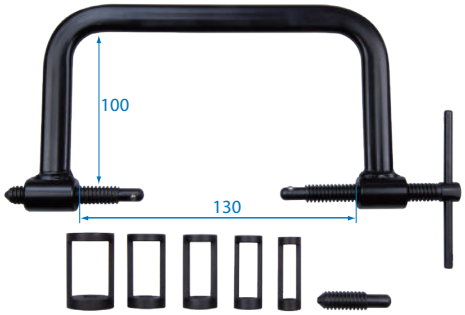


9AH12

- Complete service tool set for OHV & OHC petrol or diesel engines on Audi, Nissan, Toyota, Chrysler, Honda, Mazda, Mitsubishi, Saturn, Lexus, Hyundai, Infiniti, Porsche, Volvo, VW

3.75 1 / 5




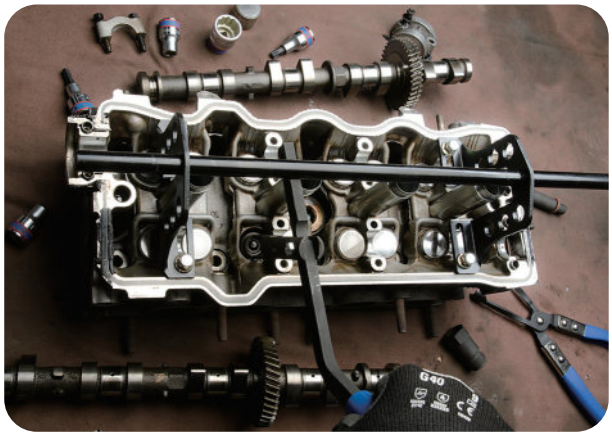


Valve Spring Compressor Set

9AH025

- Suitable for large engines & diesel engines
- Capacity: 35~140mm
- Unique direct action compressor lever gives improved visibility & ease of using in areas of difficult access
- Dual size in 25 and 30mm adapter

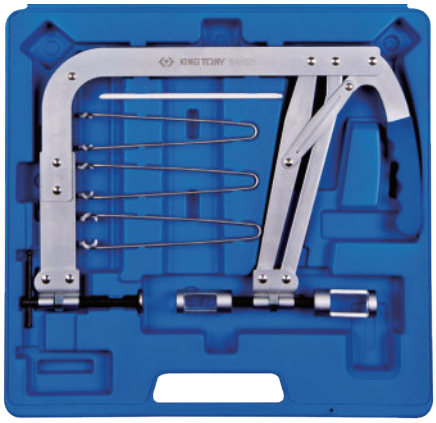



KT NO.	A mm	B mm	L mm		
9AH025	35~140	280	390	5	1 / 5





Valve Lappers

9AH0311

- For hand lapping valves

100 12 / 108




KT NO.	Diameter Cups Size	
9AH0311	1-1/8" (29mm) 5/8" (16mm)	1-3/8" (35mm) 13/16"(21mm)

Heavy Duty Air Valve Lapper Set

9AH0321

- Design for operating in tough environments
- Adjustable speed regulator for precise control during operation
- Complete with rubber caps of 20, 30, 35, 45mm





5 PC.


KT NO.	Free Speed R.P.M	Pistone Stroke inch	Pistone Stroke mm	Overall Length inch	Overall Length mm	Air Inlet inch	Air Hose ID	Average Air Consumption CFM	Average Air Consumption L/min	kg	
9AH0321	5600	1.1	29	9.0	228	1/4	3/8	2.5	71	1.82	1 / 10

Oscillating Valve Lapping Tool

9AH0331

- Facilitates the easy insertion of valves
- Automatic change in direction
- Use with fine grinding paste
- Two different suction cups: 22mm / 28mm
- Working speed(Max):1000rpm

287 g / 10 / 40






Universal Clutch Aligner Set

9AK11


- Designed to make alignment and assembly of clutch
- Specially designed for those vehicles equipped with late-model front wheel drives without pilot bearing in flywheel





3 PC.

CONTENTS :



- 9AK11P03 Ø 23 ~ 27mm
- 9AK11P02 Ø 19 ~ 23mm
- 9AK11P01 Ø 15.5 ~ 20mm


KT NO.	Ø mm	kg	
9AK11	15.5~27	0.60	1 / 20

Cylinder Head Surface Rectifier


9AH41

- Precise test for engine block and cylinder head when reassembling or overhauling an engine
- Work with a feeler gauge
- Suitable for 4 and 6 cylinder engine
- Refer to automotive manufacturer's service manual for the minimum clearance
- Size : 600(L) x 36(W) x 16(H) mm

4.08 kg / 1 / 5

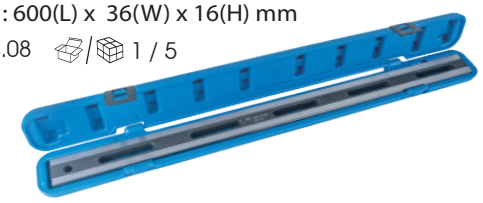






Oxygen Sensor Socket

9AJ3122

3/8"

- For installing and removing oxygen sensors
- Offset design for confined areas







KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
9AJ3122	22	34	38	8	34	178	1 / 100


9AJ4322

1/2"

- For oxygen sensors
- Featuring a slot for the connecting lead







KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
9AJ4322	22	32	30	30	85	294	5 / 60

Oxygen Sensor Socket Set

9AJ017


3/8"+1/2"

- 7 PC. special sockets for removing oxygen sensors
- Suitable for most vehicles : Volkswagen, BMW, PSA, Mercedes-Benz, Ford, etc…

2.33 | 1 / 10

KT NO.	Part.	Size	mm
9AJ4229		1/2"	29
9AJ3322		3/8"	22
9AJ4227		1/2"	27
9AJ3222		3/8"	22
9AJ3127		3/8"	27
9AJ4122		1/2"	22
9AJ3122A		3/8"	22








7 PC.

Diesel injection Socket

9AN4128

- Suitable for Alfa Romeo, Chrysler, Land Rover, Rover, etc…




KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
9AN4128	28	38.1	35.2	15	83	339	5/60



9AN4227

- Suitable for BMW, Fiat, Ford, etc…




KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	
9AN4227	27	36.5	32.2	12.7	78	209	5/60



Man & Benz Truck Diesel Injection Valve Socket


9AN43

- The tool is designed to remove and install diesel injection valve
- Application: MAN 422/403, BENZ Truck, SCANIA

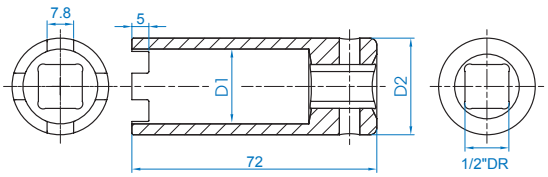

KT NO.	D1 mm	D2 mm	Tooth	g	
9AN43	22	28.4	4	181	10 /80







Self Adjusting Clutch Alignment Setting Tool Set

9AK21

- Prevent damage to system and to keep adapter ring in right position
- Necessary for pre-tensioning self adjusting clutches before removal or installation, avoiding clutch deformation
- Prevents plate distortion
- Suitable for most SAC(Self Adjusting Clutches 3 and 4 holes) equipped on vehicles of FIAT GROUP, VW, AUDI, BMW, Mercedes-Benz, VOLVO, OPEL, RENAULT etc

10.75 | 1 / 2

38 PC.









Pulley Removing Wrench

9AL

- To lock the pulley during removing or assembling any type of pulley retaining bolt

KT NO.	L inch	L mm	Ø mm		
9AL11	14-3/8	365	40~140	540	12 / 36
9AL12	14-3/8	365	40~140	540	12 / 36

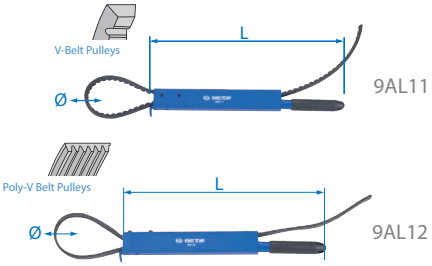





• Compressors



• Water pump pulley



• Alternator pump pulley



• Oil filter removal & assembly

Universal Cooling Pump and Refiller Tool Set


CAUTION DO NOT open the radiator cap on a hot engine

9AM01

- For testing leakage in radiator system
- Vacuum leakage testing and bubble-free refilling
- Special pick hooks to speed up replacement of pipes
- Quick-release coupling on each connections
- Rubber cones with functional diameter 17~40mm

7 PC.

KT NO.	Type			
9AM010	Japan		3.40	1 / 5
9AM011	USA		3.40	1 / 5
9AM012	Europe		3.40	1 / 5









Piston Ring Pliers

9AP

- For removing and mounting piston rings
- Nickel plated

KT NO.	L inch	L mm	Ø Capacity mm	g	pcs/box
9AP100	8-11/32	212	50~100	323	12 / 48
9AP120	8-15/16	227	80~120	354	12 / 48
9AP160	9-61/64	253	110~160	458	12 / 48

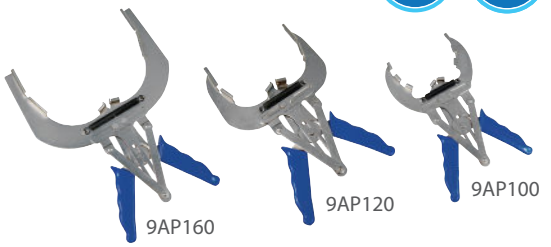

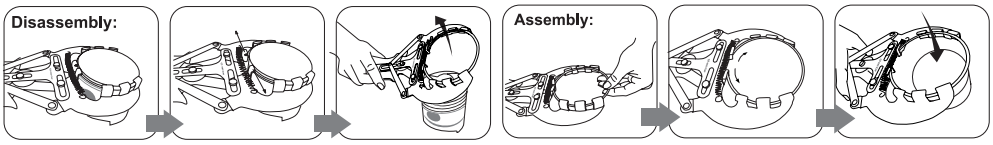

Drain Plug Removal Tool

9AR21 3/8"

- Use for removing and installing of the plastic oil drain plug on the latest VAG vehicle
- 3/8" DR and HEX 17 mm
- For VW, Audi, Skoda, Seat 1.2 / 1.4 / 1.8 / 2.0 TFSI oil drain plug and 1.6 / 2.0 TDI diesel engines cam cover plug

g 20 pcs/box 12 / 288





Plastic Drain Plug

9AR29-S

- Suitable for VW, Audi, Skoda, Seat 1.2 / 1.4 / 1.8 / 2.0 TFSI oil drain plug and 1.6 / 2.0 TDI diesel engines cam cover plug
- Use with removal tool 9AR21
- OEM numbers 06L 103801

g 13 pcs/box 1 / 144







Oil Drain Plug Key Set

9AR11

- Suitable for sump plugs on engine, gearbox and back axle
- Contents :
  Hex key socket : H8, H9, H10, H12, H13, H14, H17 mm
  Square socket : 5/16", 3/8", 7, 8, 10, 11, 12, 13, 14 mm
  Torx socket : T45
  Triangular socket : 10mm
  Spline (TAMPER) socket : M16
  Square drive socket : 10mm
  3/8" drive sliding T-handle

kg 1.70 pcs/box 1 / 10



21 PC.

Diesel Injector Puller Set

9AS11

- The set contains M8, M12, M14, M17 adaptor
- Suitable for various vehicles with Bosch and Lucas type diesel injectors
- Remove stubborn diesel injectors easily and quickly
- New M17 adaptor for GM Vauxhall / Opel injectors X20DTH / Y20DTH series engines

kg 1.11 pcs/box 1 / 20








Why spark plugs need torque tightening ?

1. Modern engines cylinder heads are made of aluminium alloy
2. A correct factory-set gaps can provide best performance

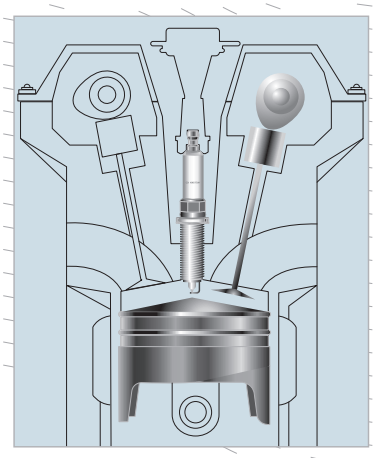

Cylinder head material	Thread diameter (mm)				
	M8	M10	M12	M14	M18
Cast iron	-	10~15 N·m	15~25 N·m	25~35 N·m	35~45 N·m
Aluminium	8~10 N·m	10~12 N·m	15~20 N·m	25~30 N·m	35~40 N·m

Suggested torque for spark plugs with gasket, always follow factory owner's manual

3/8" Spark Plug Sockets

3/8"	Size (inch)	Size (mm)	Type		Socket L(mm) 63	70	90	250
	9 / 16	14	6 pt	Rubber	36B514			
			12 pt	Rubber	36B014		36C014	36D014
			12 pt	Metal clip	367014			
	5 / 8	16	6 pt	Rubber		363516		
			12 pt	Rubber		363016		
			6 pt	Magnet		366516		
			12 pt	Magnet		366016		
	23 / 32	18	12 pt	Rubber	36B018			
			6 pt	Metal clip	367518			
			12 pt	Metal clip	367018			
	13 / 16	20.8	6 pt	Rubber		363521		
			12 pt	Rubber		363021		
			6 pt	Magnet		366521		
			12 pt	Magnet		366021		

1/2" Spark Plug Sockets

1/2"	Size (inch)	Size (mm)	Type		Socket L(mm) 70
	9 / 16	14	6 pt	Rubber	463514RC
			12 pt	Rubber	463014RC
	5 / 8	16	6 pt	Rubber	463516RC
			12 pt	Rubber	463016RC
			6 pt	Magnet	466516C
			12 pt	Magnet	466016
	23 / 32	18	6 pt	Magnet	
	13 / 16	20.8	6 pt	Rubber	463521RC
			12 pt	Rubber	463021RC
			6 pt	Magnet	466521C
			12 pt	Magnet	466021

Torque Wrench & Accessory




KT NO.	Gear Teeth	Square Drive	Torque Range in·lb / ft·lb	Incr.	Torque Range N·m	Incr.
34362-1CG	24	3/8"	40~200 in·lb	1 in·lb	5.1~22.0 N·m	0.12 N·m
34362-2CG	32	3/8"	15~80 ft·lb	0.5 ft·lb	23.7~105.1 N·m	0.7 N·m

KT NO.	Gear Teeth	Square Drive	Torque Range N·m	Incr.
34362-2DG	32	3/8"	20~100 N·m	0.5 N·m
34362-3DG	32	3/8"	10~60 N·m	0.5 N·m



KT NO.	Square Drive	Torque Range N·m	Torque Range ft·lb	Total Length kgf·m
34307-1A	3/8"	27~135 N·m	19.9~99.6 ft·lb	2.75~13.76 kgf·m




KT NO.	Spec.
3814	3/8"F x 1/2"M

Spark Plug Rethreader Set

11305SQ

- Spark plug rethreader set is used for rethreading damaged spark plug threads in aluminum cylinder heads



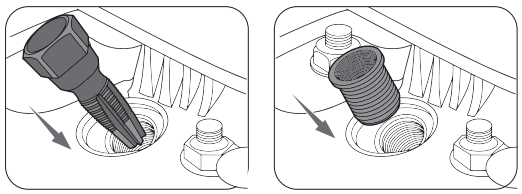

KT NO.	Size mm	Type inch	g	
11305SQ	14	3/8, 7/16, 1/2, 3/4	13	12 / 72

Double Size "L" Handle

1586

- Material : Chrome vanadium alloy steel
- For oil plug






KT NO.	Overall length inch	Overall length mm	Size inch	Size mm	g	
1586-09	9	230	5/16 x 3/8	8 x 10	320	6 / 48

1596

- Material : Chrome vanadium alloy steel
- For oil plug

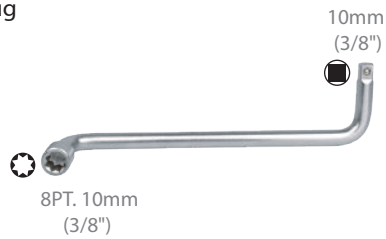


KT NO.	Overall length inch	Overall length mm	Size inch	Size mm	g	
1596-09	9	230	3/8	10	290	6 / 48

Ribe Socket M10S

9AW4911

1/2"

- 6 points
- Use for replacing and removing idler pulley center screw on TOYOTA ALTIS
- 1/2" DR. socket ribe M10S for TOYOTA

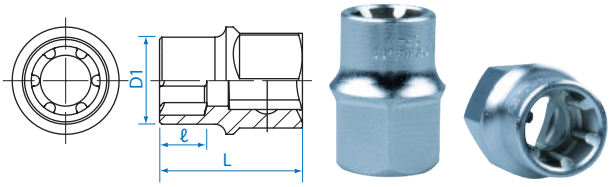


KT NO.	Size	D1 mm	ℓ mm	L mm	g	
9AW4911	M10S	19	10	33.8	16	10 / 200

Ribe Socket M12S

9AW4901

1/2"

- 6 points
- Use for replacing and removing engine head screw and flywheel center screw on NISSAN models
- 1/2" DR. socket ribe M12S for NISSAN

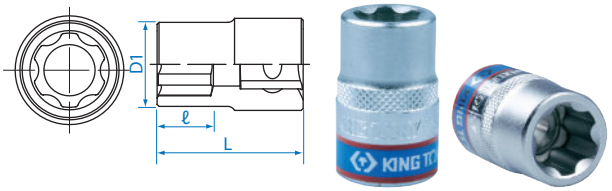

KT NO.	Size	D1 mm	ℓ mm	L mm	g	
9AW4901	M12S	22	14	38	15	10 / 200

Bearing Race and Seal Driver Set

9BA11

- Quick and easy to insert bearing race
- Collars fit most standard wheel bearing sizes
- Helps reduce damage to both race and axle housing
- 9 collar sizes:
  (1)1.574"/40mm (2)1.732"/44mm
  (3)1.968"/50mm (4)2.322"/59mm
  (5)2.480"/63mm (6)2.559"/65mm
  (7)2.834"/72mm (8)2.992"/76mm
  (9)3.189"/81mm

Kg 1.8 / 1 / 10



10 PC.





Universal Bearing Ring Puller


9BA41

- Three jaws with the thin edge provide an equal grip tension to avoid any slide or tilt
- Suitable for all kind of bearing and sleeves diameter 10 to 125mm
- Applicable : For universal vehicles





- Adjustable slide knob for quick control locking



KT NO.	Ø Capacity mm	Kg	
9BA41	10~125mm	3.6	1 / 4

Hose Clamp	KT Item	Suitable Car Brand
 CV Boot Clamp  Ear Clamp	9BB11 	VW, Audi, BMW, Ford, GM, Opel, Nissan, Mercedes- Benz, Mazda, Honda, Chrysler, Citroen, Seat
	9BB12 	
	9BB13 	
 CV Boot Clamp	9BB31 	Universal

Ear Hose Clamp Pliers


9BB11

- Use to remove and install ear clamp
- Special hook jaw easy to hold clamp in position
- Suitable for CV joint boot, vacuum lines, and cooling system









KT NO.	L inch	L mm	A max mm	g	
9BB11	10	260	22.5	364	12 / 48


CV Boot Clamp Pliers


9BB12

- Use to remove and install stainless CV boot clamp
- Can be used with 1/2" flexible handle bar or torque wrench
- Suitable for Audi, Opel, Citroen, SEAT, BMW, Mercedes-Benz, Honda, Nissan, Mazda, Ford, GM, Chrysler












KT NO.	L inch	L mm	A max mm	g	
9BB12	9-1/2	235	12	512.4	6 / 36

CV Boot Clamp Pliers with Socket

9BB13

- Used to remove and install stainless CV boot clamp
- Can be used with 3/8" flexible handle bar or torque wrench
- Suitable for Audi, Opel, Citroen, SEAT, BMW, Mercedes-Benz, Honda, Nissan, Mazda, Ford, GM, Chrysler

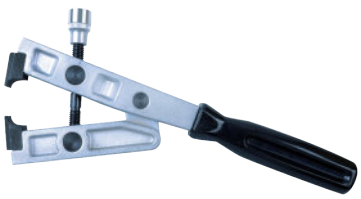



KT NO.	L inch	L mm	A max mm	g	
9BB13	11	278	45	888	6 / 24

CV Boot Clamp Installer

9BB31

- Used to cut and install clamp with built-in cutting arm
- Includes locking device and ratchet function
- Suitable for general vehicle types

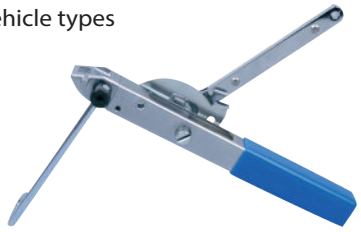Lock



Cut





KT NO.	L inch	L mm	g	
9BB31	6-1/2	124	347	12 / 36

CV Joint Assembly Removal Tool

9BB42

- Separates the CV Joint from the axle without removing the drive shaft
- Reduces the risk of damaging the transmission, or the CV joint
- Multiple hole pattern allows adjustment to different depths
- Suitable for most vehicles equipped with Constant Velocity U-joints

Kg 1.77 / 1 / 10

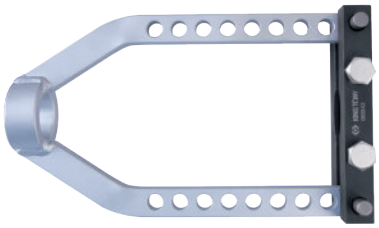Exhaust Pipe Hanger

9BP11

- Used to remove rubber holders from exhaust brackets
- Suitable for general vehicle types





KT NO.	L inch	L mm	A max mm	g	
9BP11	10	250	60	339	12 / 36

Exhaust Clamp Pliers

9BP21

- Used to remove and install exhaust clamps
- Include spring and locking mechanism
- Suitable for Citroen/Peugeot, Renault and prizing open types of exhaust clamps



KT NO.	L inch	L mm	A max mm	g	
9BP21	12	300	60	496	12 / 36

Handbrake Cable Pliers

9BC11

- For hand brake cable removal and replacing
- Suitable for Audi, BMW, Citroen, Nissan, Peugeot, Seat, Renault, Rover, etc





KT NO.	L inch	L mm	A max mm	B mm	g	
9BC11	9	230	60	5	198	12 / 48

Disc Brake Piston Separator

9BC21

- Heavy duty drop forged construction
- Fits in brake caliper to push back pistons for new brake pads installation






KT NO.	Max capacity inch	Max capacity mm	g	
9BC21	2-7/8	75	1130	1 / 20


Drum Brake Spring Pliers

9BC121

- Designed to remove and replace brake retaining spring on drum brakes








KT NO.	L inch	L mm	g	
9BC121	8-1/2	215	305	6 / 72

Universal Disc Brake Wind-Back Tool Set


9BC22

- Magnetic socket adapter
- Including 9 adapters for brake assemblage
- For rotating pistons back into caliper to provide clearance for new pads
- Prevents damage to the piston and boot
- Suitable for VW, Audi, Ford, Nissan, Alfa romeo, Rover, Saab, Subaru, Toyota, Jaguar, and most of the general motors

kg 2.87 1 / 6

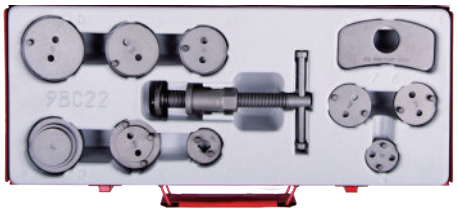


11 PC.

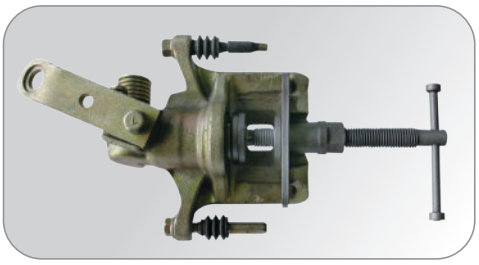

HGV Drum Brake Spring Pliers

9BC124

- Designed to remove and replace brake retaining spring on drum brakes
- Extra strong version for HGV air or hydraulic drum brakes





KT NO.	L inch	L mm	g	
9BC124	20-5/8	525	1250	3 / 6


Universal Disc Brake Wind-Back Tool Set

9BC23


- For rotating pistons back into caliper to provide clearance for new pads
- Prevents damage to the piston and boot
- Suitable for BMW, Ford, VW, Audi, Porsche, Saab, Opel, Volvo, Jaguar, Citroen, Peugeot, Renault, Lauxhall, Lancia, Alfa romeo, Fiat, Nissan, Honda, Subaru, Toyota, Mitsubishi
- Contents:
  21 PC. Adapters for brake assemblage
  3 PC. Backing pads
  2 PC. Rotating caliper with 3/8" DR. (right/left side threaded)
  2 PC. Hex key: 7, 8mm
  2 PC. Pin punch : Ø 5.5, 6mm
  1 PC. 3/8" DR. x 12mm hex key socket

4.87 / 1 / 4

31 PC.

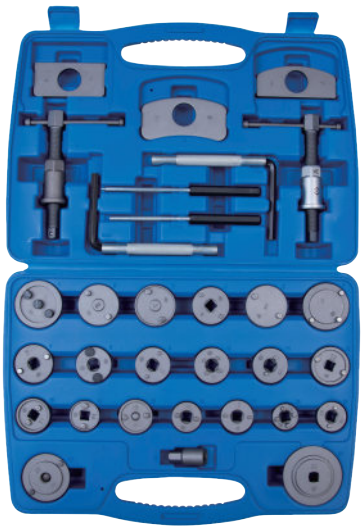





Brake Caliper Piston Tool


9BC24A


- For rotating pistons back into caliper to provide clearance for new pads
- Fast and easy to use, prevents damage to the piston and boot
- Fits most European and Japanese vehicles



3 PC.

KT NO.	Capacity A(mm)	Capacity B(mm)		
9BC24A	22	33	700	5 / 30

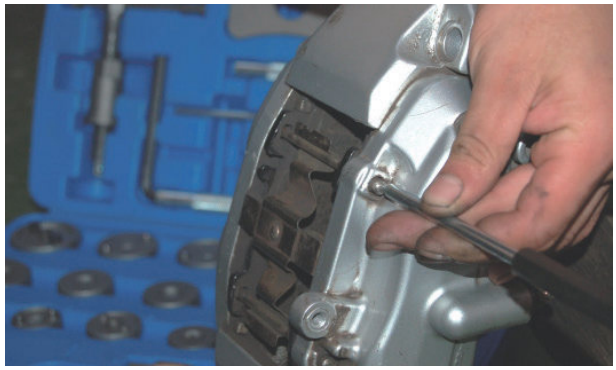

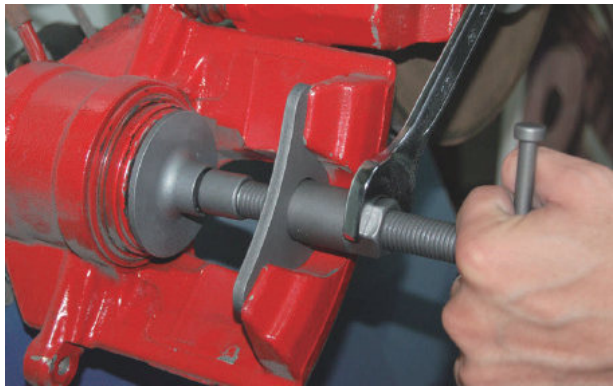


Pneumatic Disc Brake Wind-Back Tool

9BC251A01

- Designed to make disc brake services faster and energy saving
- Tool can be turned left and right ward - suitable for regular and reverse-threaded pistons
- Pneumatic powered tool is able to wind pistons back simply pressing a button

1.35 | 1 / 10





Increase the use of space



Magnetic



Pneumatic Disc Brake Wind-back Tool Set


9BC251

- Air operated ram applies pressure to caliper piston, while the handle is rotated by hand
- Easy to use- works on standard workshop air supply
- Reversible- works on both RH and LH applications
- Can be used on wind back and push back piston
- Supplied with adaptor, which covers a wide range of popular vehicles
- Full range of additional specialist adaptors available
- Suitable for Mercedes-Benz, BMW, Audi, VW, Opel, Volvo, Jaguar, Citroen, Fiat, Peugeot, Alfa romeo, Saab, Lancia, Toyota, Honda, Nissan, Mitsubishi, Isuzu, Mazda, Subaru, GM, Ford, Rover

3.20 | 1 / 5



18 PC.

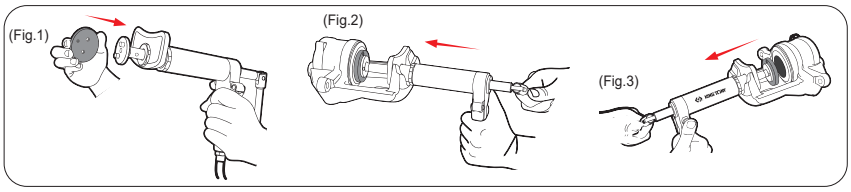


Universal Disc Brake Wind-Back Tool Set

9BC26

- Prevents damage to the piston and boot
- For rotating pistons back into caliper to provide clearance for new pads
- Suitable for FORD, ROVER, HONDA, Mercedes-Benz, TOYOTA, VW, AUDI, NISSAN, BMW, MAZDA, MITSUBISHI

1.38 | 1 / 12

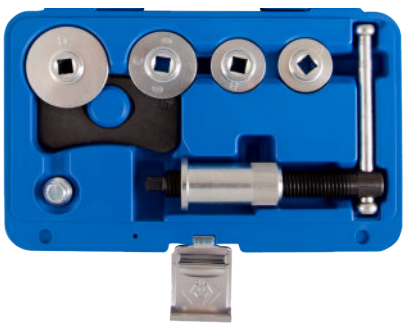

7 PC.

Brake Bleeder Valve Collection Bottle

9BC32

- It contains a brake oil check valve, a silicone hose, and a universal rubber adapter that is compatible with most vechicles
- Complete with a metal hanging hook
- Capacity : 1000 ml

420 | 1 / 12







CAUTION


Always keep the tool clean after using

Brake Bleeder Wrench Set

9BC5001MR

- Wrench size : 7, 8, 9, 10, 11mm
- Use on any vehicle, SUV, light truck or motorcycle brake caliper
- Combine wrench & socket to make loosening and tightening easily
- Ideal for bleeding brake system and hydraulic clutch system without removing the wheels
- High quality material internal seal to upgrade durability
- Silicone tube has the characteristics of acid and alkali proof, corrosion resistance, wear resistance, high and low temperature resistance
- Brake bleeder socket wrench prevents air backflow into brake system

6 PC.

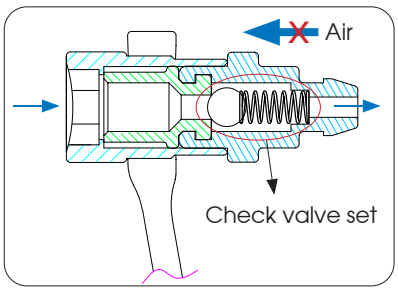



Contents	0.73 kg / 1 / 10	
	9BC5107M	7mm
	9BC5108M	8mm
	9BC5109M	9mm
	9BC5110M	10mm
	9BC5111M	11mm
	9BC32P021	

Blow case size (mm) :
260 x 160 x 60 (0.08 cuft)




Universal Sleeve Removal and Installation Set

9BD101

- Can easily extract and draw in bearings, bushes, seals with this comprehensive tools
- Reduces the possibility of damaging the bearing/ suspension housings
- Tool doesn't designed to be used with the impact wrench

26 PC.

18.0 kg / 1 / 1

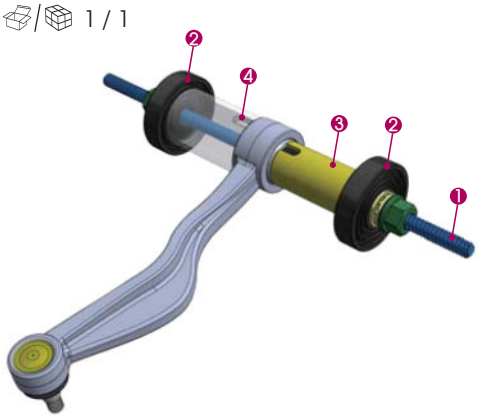



No.	
1	M10 x P1.5 spindle and two fixing nuts with bearing
1	M12 x P2.0 spindle and two fixing nuts with bearing
1	M14 x P2.0 spindle and two fixing nuts with bearing
1	M16 x P2.5 spindle and two fixing nuts with bearing
2	Step discs with A and B sides (2 pcs)
3	Golden sockets (11 pcs) marked with A
4	Silver socket (9 pcs) marked with B

Socket sizes OD x ID mm	
A	44 x 34 mm, 46 x 36 mm, 54 x 44 mm, 56 x 46 mm, 58 x 48 mm 66 x 56 mm, 68 x 58 mm, 70 x 60 mm, 78 x 68 mm, 80 x 70 mm 82 x 72 mm
B	48 x 38 mm, 50 x 40 mm, 52 x 42 mm, 60 x 50 mm, 62 x 52 mm 64 x 54 mm, 72 x 62 mm, 74 x 64 mm, 76 x 66 mm


Ball Joint Extractor

9BE11

- Drop forged steel body









KT NO.	A mm	B(mm) Max	B(mm) Min	C mm	D mm	E mm		
9BE11	160	50	12	19	19	25	1080	1 / 12

9BE21

- Special design 2 stage operation, suits most cars and light trucks ball joints in steering & suspension
- Suitable for most European and Japanese vehicles









KT NO.	A mm	B(mm) Max	B(mm) Min	C mm	D mm	E mm		
9BE21	160	50	12	20	22	32	1270	1 / 12

9BE4

- For quick and easy separation of ball joint pivots of pitman arms, steering tie rods, ball joints, etc
- Suitable for general trucks and vehicles
- For better safety operation & avoid damage







KT NO.	A mm	B mm	C mm	D mm		
9BE41	36	40	18	17	364	1 / 36
9BE42	46	48	23	17	558	1 / 36
9BE43	62	62	29	19	925	1 / 12
9BE44	64	76	40	24	1658	1 / 12
9BE45	77	100	46	24	1858	1 / 12

Impact Ball Joint Separator

9HBE4 3/4"

- Use for quick separation of ball joint for heavy goods vehicle
- Extra deep design for tight space
- Use with impact tools





Heavy Goods Vehicle Ball Joint Separator

Size (mm)	Application
30	BMW (E39), Benz(W203/W210/W211/W220/ W221), Mitsubishi Delica, Canter, Toyota Dyna etc…
39	"4 tons and European truck: Scania, Benz, MAN 414 drag link and Hino etc..."
47	"8.8 tons~10.5 tons truck: Hino, Isuzu, Nissan, UD,Fuso etc..."
58	Scania etc…
62	"15 tons~35 tons: Hino, Isuzu, Nissan, Fuso truck and bus etc…"
67	MAN(FE410A) etc…



KT NO.	A mm	B mm		
9HBE4-30	30	95	2320	6 / 6
9HBE4-39	39	95	2320	6 / 6
9HBE4-47	47	95	2320	6 / 6





KT NO.	A mm	B mm		
9HBE4-58	58	120	4200	6 / 6
9HBE4-62	62	120	4366	6 / 6
9HBE4-67	67	120	4200	6 / 6

Hydraulic HGV Ball Joint Separator & Set

9HBE81

- Use for separating ball joint for heavy goods vehicles
- Design for operating manually or by 12 tons hydraulic ram
- Strengthen fork and lever for greater force to be applied

3 PC.

7.00 1 / 2



capacity	
Jaw opening	70mm
Jaw width	36mm





9HBE083

- Use for separating ball joint for heavy goods vehicles
- Design for operating manually or by 12 tons hydraulic ram
- Interchangeable jaws width : 30 / 34 / 40mm

5 PC.

8.50 1 / 2







Jaw Opening size :
30, 34, 40 mm




Track Rod End Remover & Installer

9BE51

9BE52

- Removes and replaces the axial joint
- Hex part on the end of tool : works with 27 mm wrench or 1/2" DR. ratchet





KT NO.	L inch	L mm	Ø Capacity mm		
new 9BE51	15-3/4	400	28~35	1635	1 / 10
9BE52	15-3/4	400	35~45	2140	1 / 10


Multi-Purpose Inner Tie Rod Tool

9BE62

9BE63 1/2"

- Use for replace inner tie rod ends without removing the rack and pinion
- Internal serrated design to make grip tight
- Use with ratchets and extensions by 1/2" DR.
- Suitable for most vehicles & trucks







KT NO.	L inch	L mm	Ø Capacity mm		
9BE62	3-1/4	81.50	33~42	370	24
9BE63	3-7/16	87.56	42~50	422	24

Universal Adjustable Wheel Bearing Lock Nut Wrench

9HBN01 3/4"


- For disassemble and assemble vario nut and cap
- Extra slim design suitable to reach narrow space for special nut
- Use with 3/4" DR. tools and suggest to lock by torque wrench
- Application for 6PT, 8PT and round nut
- Adjustable open jaw 50~150mm

Contents:
3 pairs round adapter for round nut : 6mm, 8mm ,10mm
3 pairs square adapter for round nut : 1/4", 5/16", 3/8"

3.68 1 / 5

13 PC.

3/4" DR.

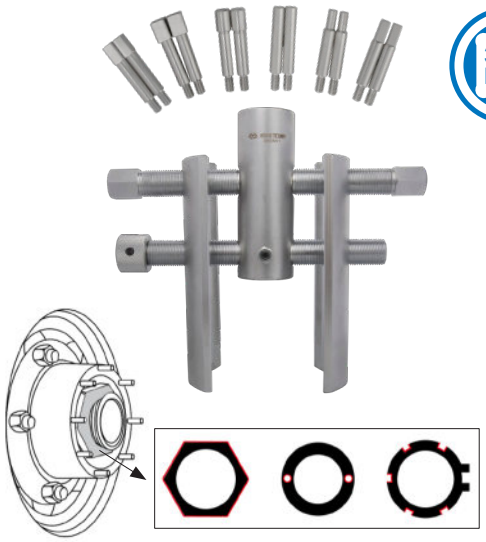

Drop Forged Coil Spring Compressor Set

9BF11 9BF21

- Drop forged SCM435 jaws & leaded screws
- Both 21mm 6-point sockets and 1/2" wrench are available
- Suitable for limited space under wheel arch

6 PC.



9BF11



9BF21






KT NO.	L mm		mm		
9BF11	85 / 370	1/2"	21	2.40	1 / 6
9BF21	85 / 270	1/2"	21	3.36	1 / 6


Coil Spring Compressor Set

9BF31


- Developed for "Macpherson" suspensions, using a range of 3 sets interchangeable monobloc forks
- Spring specification / use :
  A : Ø80~115mm
  B : Ø110~150mm
  C : Ø140~195mm
- Suitable for BMW, Ford, VW, Audi, Porsche, Saab, Opel, Volvo, Nissan, Honda, Mitsubishi, Subaru, Toyota

8 PC.









KT NO.	L mm	Capacity mm		
9BF31	460	40~300	15.00	1 / 1

Steering Wheel Puller Set

9BG11

- Easy to remove and install steering wheel for cars and trucks
- 2 sets 17mm hex head puller with pointed and flat cups
- 4 sets side bolts
- Small plate Dia. :
  1"~3-11/16" 25~95mm
- Large plate Dia. :
  1-1/8"~5" 28~125mm
- Side bolts size :
  3 PC. 5/16" UNC x 3-1/2" lon g puller bolts
  3 PC. 5/16" UNF x 3" long puller bolts
  3 PC. 3/8" UNC x 3" long puller bolts
  3 PC. 3/8" UNF x 3" long puller bolts

4.10 1 / 6





18 PC.

Coil Spring Compressor Set


9BF33

- Suitable for BMW, Audi, Chevrolet, Citroen, Fiat, Ford, Honda, Hyundai, Kia, Lancia, Mazda, Benz, Mitsubishi, Nissan, Opel, Peugeot, Renault, Seat, Tesla, Toyota, Volvo
- Can be operated with impact wrench
- Spring specification/use:75~155 mm
- Stroke: 106~293 mm
- Max load: 6,400 kgf·m (62,765 N·m)

5.5 | 1 / 4

3 PC.





- Place upper and lower discs on spring



- Insert the main tool body into the spring



- Insert through the disc and make a half turn to connect the tool and disc




- Turn the hex nut on the main tool body lower end to fix all parts



- Use an air/impact wrench to compress the spring






- Special pins on tool body to mesh with grooves on discs to create a secure connection

Wheel Balancing Weight Tool

9BK11

- Ideal for fitting and removing wheel balance weights



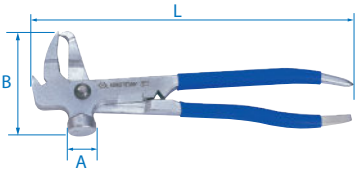

KT NO.	L inch	L mm	A mm	B mm	g	pcs/box
9BK11	10	250	22	86	420	10 / 50

Tire Lever

9BK41

9BK43

- Straight pattern with profiled shank








9BK41



9BK43





KT NO.	L inch	L mm	A mm	B mm	g	pcs/box
9BK41-20	8	200	21.6	11	104	10 / 50
9BK41-28	11	280	22.7	13.5	239	10 / 50
9BK41-38	15	380	24.5	13.5	358	10 / 50
9BK41-53	21	530	28	12	930	10 / 20
9BK41-65	25	650	30	15	1075	10 / 20
9BK43-65	25	650	30	15	1100	10 / 20

Tire Valve Installer

9BK31

9BK32

- Use for replacement and fitting tire valves
- Composite body prevents damage onto alloy wheel
- 180 degree pivoting head
- 310mm plastic handle



9BK31

118 | 12 / 144




9BK32

353 | 6 / 48








- For removal & installing valve cores

Tire Lever

9BK41-73

- To install and remove the tire from wheel rim
- Precision forged with greater leverage design
- Special design for 17" to 22.5" tire

KT NO.	L inch	L mm	A (mm)	B (mm)	g	box
9BK41-73	28-3/4	730	22	64.4	1618	1 / 10

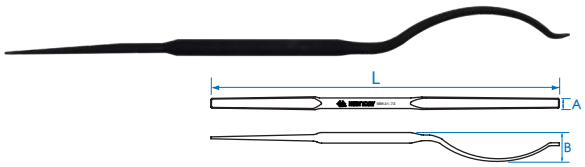


Tire Valve Core Torque Tool / Installer Torque Screwdriver

34102-040M

- Preset torque setting in order to remove & install valve cores correctly
- Prevent overloaded torque to cause damage on valves sensor cores
- Preset torque is 0.45 N·m (4.0 lbf·in)
- Ergonomics design with PP handle

62 g 20 / 100



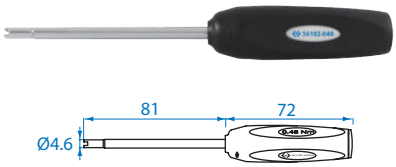


Digital Tire Gauge

9BM120

- Tyre pressure gauge specification :
  Unit range :
  0-100 psi / 0~7.0 bar / 0~7.0 Kgf-cm² / 0~700 kpa
  Display resolution :
  0.1 psi / 0.01 bar / 0.01 Kgf-cm² / 0.01 kpa
- Tread depth gauge specification :
  Unit range : 0-22mm / .8"(Gauge : mm / inch)
  Display resolution : 0.01mm / .001"

KT NO.	A mm	B mm	L mm	g	box
9BM120	53	38	101	53	12 / 96









Digital Tire Tread Depth Gauge


9BM811

- Digital large LED LCD screen display
- Material : ABS Plastic, stainless steel needle
- One-touch switch between Metric / Inch system interchange
- Zero setting at any position
- Mini size, hand-held and portable
- Unit range : 0-25.4mm / 0-1"
- Display resolution : 0.01mm / .0005"

KT NO.	øD mm	A mm	B mm	L mm	g	box
9BM811	1.5	60	9	116	39.6	25 / 100






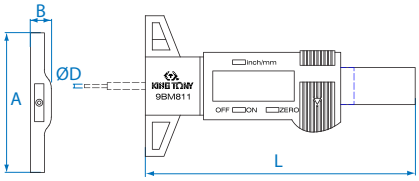


Tire Air Bead Seater

9HBL

- Capacity : 5 Gallon
- Used for seating tires for cars, trucks, ATVs, tractors
- Air gauge for easy and accurate air volume readings
- Can be used for tire sizes up to 24.5"

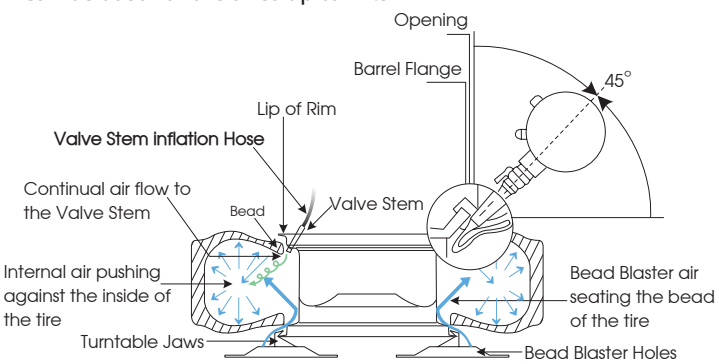

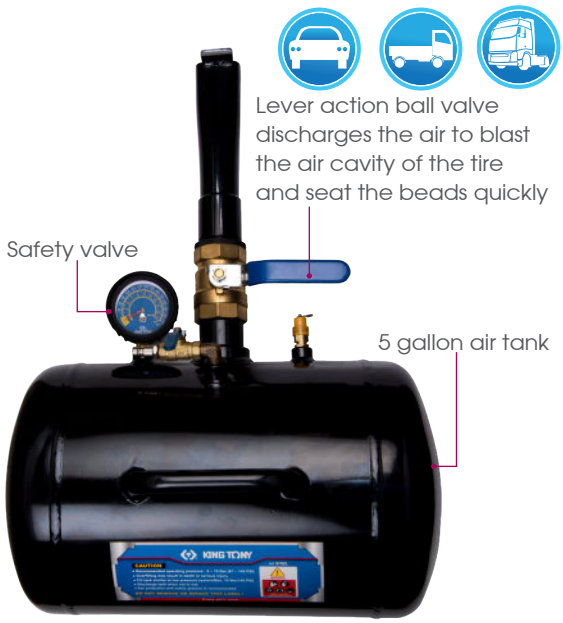

KT NO.	Type	Capacity	Max. pressure	kg	
9HBL11-05	America	5 gallon (20 L)	145 PSI (10 bar)	11.0	1
9HBL12-05	Europe				

3-In-1 Inflator

9BM


- Diaphragm pressure gauge
- Accuracy : ANSI B40.100 ± 3% ~ ± 2% ~ ± 3%
- Special rubber housing protects manometer against light impacts
- 3 functions(check, release, inflator) all together on the press handle
- Variable trigger, two control position inflate / deflate leve
- Flexible 400MM high pressure rubber hose with clip-on air tire chuck
- Pressure range : 0-160 PSI (9BM21) / 0-220 PSI (9BM22)
- Built in hang-up hook allows easy storage



9BM2110
9BM2111
9BM2210
9BM2211



9BM2210A
9BM2211A

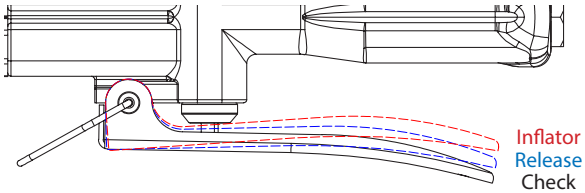





9BM2-01



9BM2-02

KT NO.	Pressure range (Psi)	Air Inlet (BSPT/NPT)	L (mm) L1	L2	Air hose (ID)	g	
9BM2110	160	1/4"-19 BSPT	Ø13 x 400	180	3/8"	500	1 / 12
9BM2111	160	1/4"-18 NPT	Ø13 x 400	180	3/8"	500	1 / 12
9BM2210	220	1/4" BSPT	Ø13 x 400	180	3/8"	520	1 / 12
9BM2211	220	1/4" NPT	Ø13 x 400	180	3/8"	520	1 / 12
9BM2210A	220	1/4" BSPT	Ø13 x 400	180	3/8"	600	1 / 12
9BM2211A	220	1/4" NPT	Ø13 x 400	180	3/8"	600	1 / 12
9BM2-01	(included in all 9BM series)		20		-	25	-
9BM2-02	(included in 9BM2210A & 11A only)		185		-	105	-


Wheel Lock Screw Socket Set

9BW0120 VW

- Used to permit servicing of customer vehicles, even lose the key
- Applicable for installing and removing locks of most VW models
- Chrome molybdenum, alloy steel chrome plated
- Work with 17mm hex tool
- Contents :
  #521,#522,#523,#524,#525,#526,#527,#528,#529,#530,#531,#532,#533,#534,#535,#536,#537,#538,#539,#540

2.9 / 1 / 5

20 PC.






9BW0220 BMW

- Used to permit servicing of customer vehicles, even lose the key
- Applicable for installing and removing locks of most BMW models
- Chrome molybdenum, alloy steel chrome plated
- Work with 17mm hex tool
- Contents :
  #041,#042,#043,#044,#045,#046,#047,#048,#049,#050,#051,#052,#053,#054,#055,#056,#057,#058,#059,#060

1.94 / 1 / 5

20 PC.






9BW0221 BMW

- Used to permit servicing of customer vehicles, even lose the key
- Applicable for installing and removing locks of most BMW models
- Chrome molybdenum, alloy steel chrome plated
- Contents :
  #30/13PT, #31/15PT, #32/16PT, #33/17PT, #34/18PT, #35/19PT, #36/20PT, #37/21PT, #38/22PT, #40/23PT, #13/16PT, #12/14PT, #11/15PT, #16/10PT, #15/11PT, #14/12PT, #19/8PT, #18/13PT, #17/7PT, #20/9PT, #494517M (1/2"DR. x 17mm)

1.48 / 1 / 10

21 PC.






Locking Nuts & Bolt

WSB01

- Long Bolt



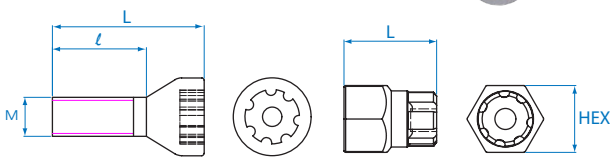


KT NO.		HEX	Thread M	ℓ mm	L mm
WSB012802-5		-	M12 x 1.5	28	47
		13/16	-	-	29
WSB013006-5		-	M14 x 1.5	30	49
		13/16	-	-	29

WSN04

- Long Lock Nut



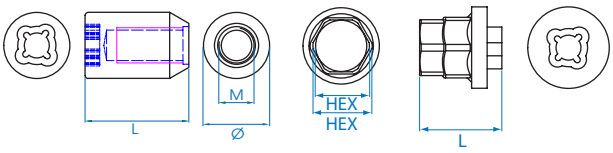


KT NO.		HEX	Ø	Thread M	L mm
WSN043601-5		-	23	M12 x 1.25	36
		19 x 13/16	-	-	28
WSN043602-5		-	23	M12 x 1.5	36
		19 x 13/16	-	-	28

WSN14

- Lock Nut



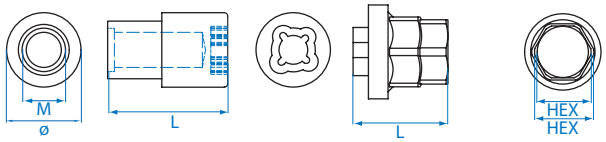


KT NO.		HEX	Ø	Thread M	L mm
WSN143601-5		-	23	M12 x 1.25	36
		19 x 13/16	-	-	28
WSN143602-5		-	23	M12 x 1.5	36
		19 x 13/16	-	-	28

WSB02

- Cone Seat Bolt Lock



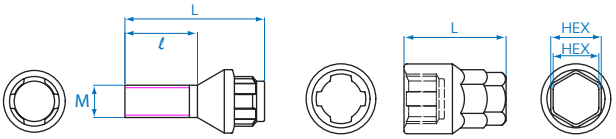


KT NO.		HEX	Thread M	ℓ mm	L mm
WSB022701-5		-	M12 x 1.25	27.5	52.5
		17 x 3/4	-	-	38

- Material - chrome molybdenum alloy steel
- Finishing - phosphate sunk

Impact Socket for Hybrid Wheel Bolts Mercedes-Benz

9BW4501 — 1/2"

- Durable outer sleeve protects polished wheels and lug nut
- Suitable for Hybrid wheel bolts on e.g. MERCEDES-BENZ C-Class type 204, 204X E-Class type 211, 212, 207 SLK type 172 M-Class type 164, 166 S-Class type 221, 222 CL-Class type 216

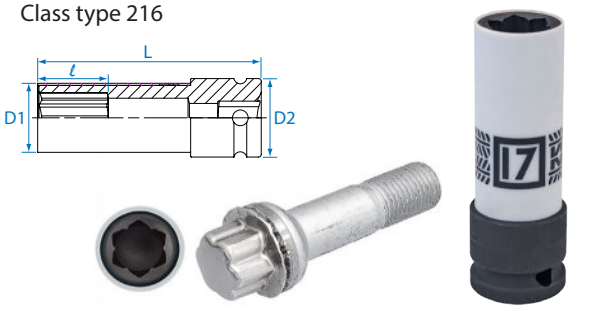


KT NO.	Size mm	D1 mm	D2 mm	ℓ mm	L mm		
9BW4501	17	26.4	30	26	85.5	229	5 / 60

Impact Socket for Special Profile Wheel Bolts

9BW4502 — 1/2"

- Durable outer sleeve protects polished wheels and lug nut
- Suitable for Wheel nuts with special profile 21 mm on HYUNDAI i30, Tucson and KIA

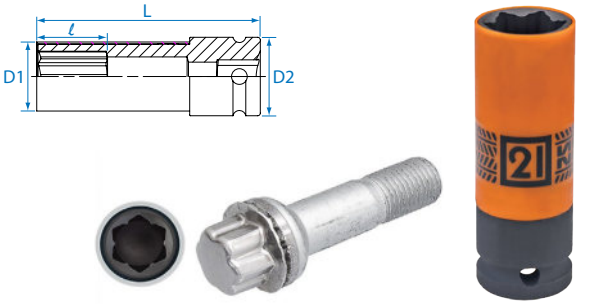


KT NO.	Size mm	D1 mm	D2 mm	ℓ mm	L mm		
9BW4502	21	28.5	30	26	85.5	252	5 / 60

10 Point Socket 20MM

9BW4801 — 1/2"

- 1/2" DR.
- 10 points
- Use for replacing and removing retaining screw on rear trailing arm on HONDA CR-V

KT NO.	mm	D1 mm	ℓ mm	L mm		
9BW4801	20	25	15	38	88.0	10 / 160

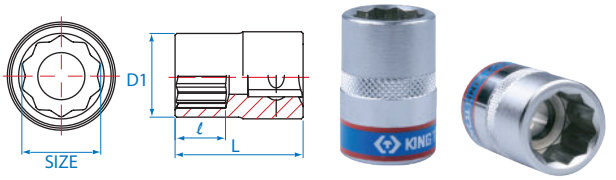





Stud/Hub Cleaning Tool & Set

9BK72

KT NO.	L inch	mm	g	
9BK72-12	7/16	12	25.2	100
9BK72-13	1/2	13	25.4	100
9BK72-14	9/16	14	25	100
9BK72-16	5/8	16	25.6	100
9BK72-22	7/8	22	33.6	100
9BK72-28	1-1/18	28	38	100



9BK73

KT NO.	mm	g	
9BK73-14	14	13.2	100
9BK73-22	22	13.8	100
9BK711	150	101.8	100



9BK7008

- For cleaning corrosion from studs, especially useful for cleaning around the base of studs
- Includes one quick change handle and adaptor

8 PC.

KT NO.	Contents		g 545	10
9BK72		12, 13, 14, 16, 22, 28		
7704-50		1/2"		
9BK711		1/2"		



9BK7009

- For cleaning corrosion from hubs and studs, especially useful for cleaning around the base of studs
- Includes one quick change handle and adaptor

8 PC.

KT NO.	Contents		g 480	10
9BK72		14, 22		
9BK73		14 x 2, 22 x 2		
7704-50		1/2"		
9BK711		1/2"		



Lubrication-Grease Gun


9BU11


- Ideal for machine, automobile, farm and garden equipments, other vehicles etc.



9BU11T



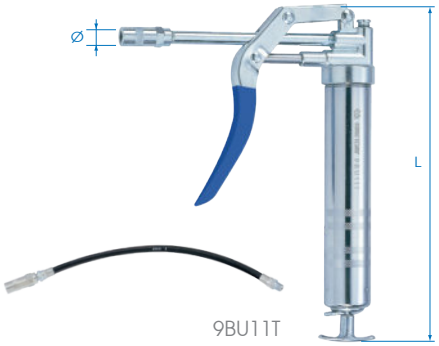



KT NO.	L inch	L mm	Ø Screw thread	High pressure PSI	High pressure bar	Capacity c.c.	Capacity oz	Kg	
9BU111	10-5/8	267	1/8 x 28 PT	4000	275	120	3	0.61	1 / 30
9BU112	10-5/8	267	M10 x 1.0P	4000	275	120	3	0.61	1 / 30
9BU111T	10-5/8	267	1/8 x 28 PT	4000	275	120	3	0.68	1 / 30
9BU112T	10-5/8	267	M10 x 1.0P	4000	275	120	3	0.68	1 / 30

9BU111/ 9BU111T For general market except North America, Germany, South Africa, Egypt
9BU112/ 9BU112T For Germany, South Africa, Egypt, etc.

Lubrication-Grease Gun with 12" Tube


9BU143T

- Ideal for machine, automobile, farm and garden equipments, other vehicles etc.



9BU153T



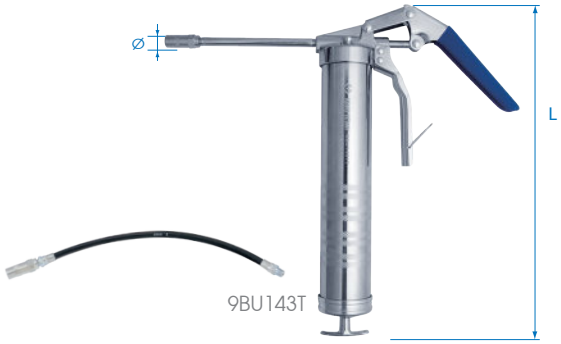

KT NO.	L inch	L mm	Ø Screw thread	High pressure PSI	High pressure bar	Capacity c.c.	Capacity oz	Kg	
9BU1432T	14-1/2	368	M10 x 1.0P	7000	483	400	14	1.36	1 / 12


9BU1531T For general market except North America, Germany, South Africa, Egypt
9BU1432T / 9BU1532T For Germany, South Africa, Egypt, etc.

Lubrication-Grease Gun

9BU2

- Ideal for machine, automobile, farm and garden equipments, other vehicles etc.



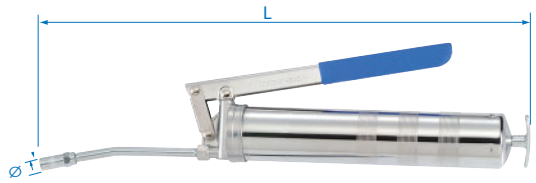

KT NO.	L inch	L mm	Ø Screw thread	High pressure PSI	High pressure bar	Capacity c.c.	Capacity oz	Kg	
9BU241	14	360	1/8 x 28 PT	10000	700	400	14	1.18	1 / 16
9BU242	14	360	M10 x 1.0P	10000	700	400	14	1.18	1 / 16
9BU251	14.2	365	1/8 x 28 PT	10000	700	500	16	1.52	1 / 16
9BU252	14.2	365	M10 x 1.0P	10000	700	500	16	1.52	1 / 16
9BU241 / 9BU251	For general market except North America, Germany, South Africa, Egypt								
9BU242 / 9BU252	For Germany, South Africa, Egyp t, etc.								

Lubrication-Grease Gun with 12" Tube

9BU2T

- Ideal for machine, automobile, farm and garden equipments, other vehicles etc.



9BU8109
9BU8209
9BU8112
9BU8212



KT NO.	L inch	L mm	Ø Screw thread	High pressure PSI	High pressure bar	Capacity c.c.	Capacity oz	Kg	
9BU241T	14	360	1/8 x 28 PT	10000	700	400	14	1.24	1 / 16
9BU242T	14	360	M10 x 1.0P	10000	700	400	14	1.24	1 / 16
9BU251T	14.2	365	1/8 x 28 PT	10000	700	500	16	1.63	1 / 16
9BU252T	14.2	365	M10 x 1.0P	10000	700	500	16	1.63	1 / 16
9BU8109	9	229	1/8 x 28 PT						
9BU8209	9	229	M10 x 1.0P						
9BU8112	12	305	1/8 x 28 PT						
9BU8212	12	305	M10 x 1.0P						
9BU241T / 9BU251T	For general market except North America, Germany, South Africa, Egypt								
9BU242T / 9BU252T	For Germany, South Africa, Egypt, etc.								

Portable Bearing Packer

9BU41

- Quick and easy way to pack bearings with less mess
- Suitable for bearing diameter up to 90 mm
- Press the cap until old grease forced out and replaced by fresh grease

505.2 | 1 / 36







Oil Suction Gun

9BT2

- Designed for all purpose, quickly draining and filling oil and other fluids for clutches, agricultural, and industrial chemical, additives, transmission on differentials, brake master cylinders, oil filters or other type of sumps or sampling engine oil
- Features 11" flexible plastic hose

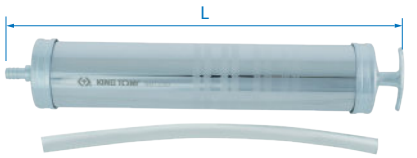

KT NO.	L inch	L mm	Capacity c.c.	Capacity oz		
9BT250	13.4	340	500	16	770	1 / 20
9BT2100	17.3	440	1000	32	1238	1 / 20

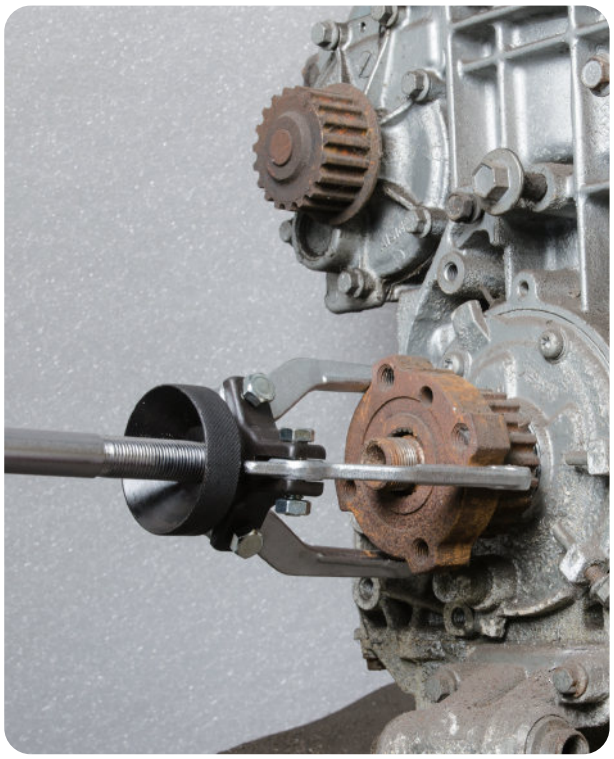

Slide Hammer Puller Set

9BQ01

- 5 lbs / 2.2 kgs slide hammer with 500 mm shaft make more powerful
- Three types to use : internal/external puller, plate puller, dent puller
- Use for remove vehicle Hub, rear axle, bearing or repair dent, etc.

7.5 | 1/2




17 PC.

CONTENTS:

- 1 PC. 500 mm T handle shaft
- 1 PC. 5 lbs / 2.2 kgs hammer
- 1 PC. Axle puller
- 1 PC. Hub puller
- 1 PC. Hook
- 1 PC. Locking pliers puller
- 1 PC. Dent puller
- 1 PC. Central bolt
- - Hex 19mm x 5/8" x 18UNF x L140mm
- 1 PC. Twin head
- 1 PC. Tripe head
- 1 PC. Adjustable nut
- 3 PC. 3.5" leg
- 3 set nut & bolt



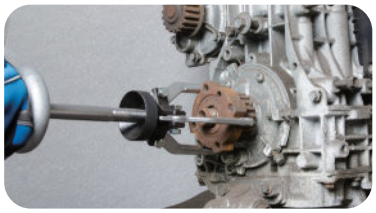

Axle Puller With Slide Hammer

9BQ11

- 5 lbs / 2.2 kgs slide hammer
- 500 mm T handle shaft

4 | 1 / 4

3 PC.



CONTENTS:


- 1 PC. 500 mm T handle shaft
- 1 PC. 5 lbs / 2.2 kgs hammer
- 1 PC. Axle puller

Auto Body Repair Tool

CAUTION Please wear proper safety gear while working.

9CF110

- Bumping hammer
- Flat face

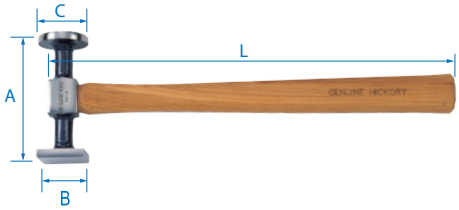

KT NO.	A mm	B mm	C mm	L mm		
9CF110	98.5	38	40	325	440	6 / 36

9CF120

- Light shrinking hammer - smooth
- Flat face + milled square face



KT NO.	A mm	B mm	C mm	L mm		
9CF120	98	40	38	325	467	6 / 36

9CF130


- Straight pick & finishing hammer



KT NO.	A mm	B mm	L mm		
9CF130	138	40	325	467	6 / 36

9CF131

- Curved pein & finishing hammer

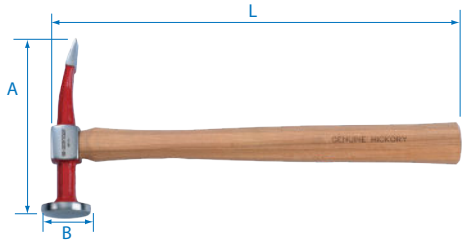

KT NO.	A mm	B mm	L mm		
9CF131	140	40	325	467	6 / 36

9CF132

- Stright pein & finishing hammer






KT NO.	A mm	B mm	L mm		
9CF132	141	40	325	460	6 / 36

9CF210

- Utility dolly



KT NO.	A mm	B mm	L mm		
9CF210	69	64	42.3	1380	6 / 12




Auto Body Repair Tool & Set

CAUTION Please wear proper safety gear while working.

9CF220


- Curved dolly



KT NO.	A mm	B mm	L mm	kg	
9CF220	58.6	45	133	1630	6 / 12

9CF230

- Heel dolly



KT NO.	A mm	B mm	L mm	g	
9CF230	60	30	79.3	1130	6 / 12

9CF240

- Toe dolly



KT NO.	A mm	B mm	L mm	g	
9CF240	58.5	29.1	121	1400	6 / 12

9CF241

- Thin toe dolly



KT NO.	A mm	B mm	L mm	g	
9CF241	55	24	118	960	6 / 12

9CF-107 / 9CF-207 / 9CF-307

- All drop forged medium(SAE/AISI 1045,1055) carbon steel
- Hammers are hardened and tempered, including 3 hardwood handled hammers and 4 dollies

7 PC.



9CF-107



9CF-207



9CF-307

KT NO.	Contents			kg	
9CF-107	 9CF130	 9CF240	 9CF110	7.50	1 / 2
9CF-207	 9CF131	 9CF241	 9CF120	7.10	
9CF-307	 9CF132		 9CF220  9CF230  9CF210	7.10	

Pneumatic Dent Puller

9CH212

- With 3 LB (1.36 kgs) sliding hammer
- With brass valve and 1/4" air plug
- With 13" length inlet hose
- With 2 PC. pads (120mm , 150mm)
- Air exhaust from the handle
- Working pressure 90 PSI

3.5 | 1/4





Bodywork File & Set

9CM01

- Used for sheet-metal working
- Suitable for flat and curved surfaces
- Double-sides file with radial shape
- Lightweight aluminium body
- 1 PC. file included





KT NO.	Version	Teeth inch	Length mm	g	
9CM01	rough	8	355	1580	1 / 20

9CM2

- Used for sheet-metal working
- Suitable for flat and curved surfaces
- Double-sides file with radial shape
- For 9CM11



KT NO.	Version	Teeth inch	Length mm	g	
9CM209	rough	8	355	330	1 / 50
9CM212	fine	12	355	330	1 / 50

Slide Hammer Bodywork Puller Set

9CH01

- 6 lbs / 2.7 kgs slide hammer with 540 mm shaft make more powerful
- Variety attachment adaptor suitable for different situation
- Use for vehicle body panel and chassis or other metal distortion etc.


8.50 | 1/2



CONTENTS:

- 1 PC. 540 mm handle shaft
- 1 PC. 6 lbs / 2.7 kgs hammer
- 1 PC. Large curve hook
- 1 PC. Small curve hook
- 1 PC. Large 90° hook
- 1 PC. Small 90° hook
- 1 PC. Flat squashed attachment
- 1 PC. Straight attachment
- 1 PC. Double attachment
- 1 PC. Tapping screw
- 1 PC. Hook attachment with chain







Putty Knife

9CJ1112 1-1/4"



KT NO.	A inch	A mm	L inch	L mm	g	
9CJ1112	1-1/4	32	8-1/2	218	60.0	24 / 144

9CJ1120 2"



KT NO.	A inch	A mm	L inch	L mm	g	
9CJ1120	2	50	8-1/2	218	70.0	24 / 144

Putty Knife

9CJ1130 — 3"



KT NO.	A inch	A mm	L inch	L mm	g	24 / 144
9CJ1130	3	76	8-1/2	218	82	24 / 144

Stainless Steel Putty Knife Set

9CJ013



3 PC.

Contents — 0.20 kg — 1 / 24



9CJ1112 | 9CJ1120 | 9CJ1130

Bolstered Scraper

9CJ2112 — 1-1/4"



KT NO.	A inch	A mm	L inch	L mm	g	24 / 144
9CJ2112	1-1/4	32	8-1/2	218	120	24 / 144

9CJ2212 — 1-1/4"



KT NO.	A inch	A mm	L inch	L mm	g	24 / 144
9CJ2212	1-1/4	32	8-1/2	218	120	24 / 144

Bolstered Scraper

9CJ2120 — 2"



KT NO.	A inch	A mm	L inch	L mm	g	24 / 144
9CJ2120	2	50	8-1/2	218	140	24 / 144

Stainless Steel Bolstered Scraper Set

9CJ023



3 PC.

Contents — 0.40 kg — 1 / 24



9CJ2112 | 9CJ2212 | 9CJ2120

Pinch Weld Scraper

9CJ3104 — 1/2"



KT NO.	A inch	A mm	L inch	L mm	g	24 / 144
9CJ3104	1/2	12	6-1/2	168	75	24 / 144

9CJ3105 — 5/8"



KT NO.	A inch	A mm	L inch	L mm	g	24 / 144
9CJ3105	5/8	15	8-1/2	218	108	24 / 144

Pinch Weld Scraper

9CJ3106 3/4"



KT NO.	A inch	A mm	L inch	L mm	g	
9CJ3106	3/4	19	6-1/2	168	75	24 / 144

Multi Purpose Single Edge Razor Scraper

9CJ61-40

- Ideal for scraping labels and decals
- Comfortable TPR handle for maximum grip
- Accepts all standard single edge razor blades



KT NO.	A inch	A mm	L inch	L mm	g	
9CJ61-40	1-1/2	40	9	235	145	6 / 72

Stainless Steel Pinch Weld Scraper Set

9CJ033



3 PC.

Contents

0.26 | 1 / 24



9CJ3104 9CJ3105 9CJ3106

Mini Panel Removal Set

9CI016

- Easy to remove small trim items and panels with slim profile
- Made from impact resistant high quality nylon
- Applicable: Air vents, door panels, door locks, dash trim, internal fittings, etc.

0.30 | 12 / 48

6 PC.








Long Nose Clamp

9CD14

- Drop forged chrome molybdenum alloy steel for maximum strength
- Jaw width : 32mm
- 3 Ton straight pulling capacity

1.83 | 1 / 10



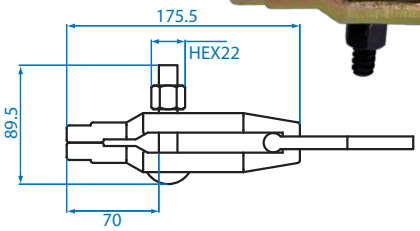


Large Pull Clamp With Top Pull

9CD21

- Drop forged chrome molybdenum alloy steel for maximum strength
- Jaw width : 37mm
- Two-way pull operation
- Dual self-tightening serrated jaws for a positive grip
- Capacity : 3 ton (straight way), 2 ton (cross way)

2.45 | 1 / 6






Small Pull Clamp With Top Pull

9CD31

- Drop forged chrome molybdenum alloy steel for maximum strength
- Jaw width : 44mm
- 44mm wide mouth with teeth
- With top pull and 360 degree self tightening pull ring
- Dual self-tightening serrated jaws for a positive grip
- Ideal for work in tight areas
- Capacity : 5 ton (straight way), 2 ton (cross way)

2.38 / 1 / 6

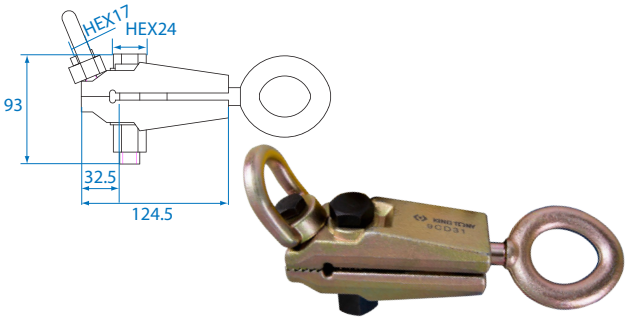

Windscreen Remove Tool Set

9CW01

- Use for removing glued of vehicle windows
- Use A with C to pierce the wire through the adhesive beads
- Use the cutting wire with B to remove adhesive beads



CONTENTS :

- A - Wire feeder tool
- B - Wire pull handle - pair
- C - Triangle cutting wire - 22 meters





KT NO.	Wire L m	T Handle L mm	g	
9CW01	22	330	456	8 / 32

Double Suction Pad Holder

9CW21

- Lifting up to 65 kg in horizontal position
- Adjustable handle designed for curved surface
- Ø120mm rubber vacuum cup can prevent from the damage of surface and grip tightly
- Use for holding glass, tiles, sheet metal, etc.





KT NO.	Ø mm	Load capacity kg	g	
9CW21	120	65	805	4 / 8

Single Suction Pad Holder

9CW22

- Lifting up to 40 kg in horizontal position
- Ø120mm rubber vacuum cup can prevent from the damage of surface and grip tightly
- Use for holding glass, tiles, sheet metal…





KT NO.	Ø mm	Load capacity kg	g	
9CW22	120	40	351	6 / 48

Alternator Tool & Set

- Specialized in removing & installing freewheel pulleys on alternator
- Ideal for dismantling and assembling the free wheel pulley while changing the alternator or pulley
- The pulley shaft is held in place with the bit on 1/2" DR. socket whilst the nut is undone using the 33 teeth union nut with 19mm spanner
- Suitable generator brand: Bosch, Valeo, Magetic Marelli, Denso, etc.
- It's also interchangeable and comprehensive components to work on VW, Audi, Citroen/ Peugeot, Mercedes, Renault, BMW, Flat, Ford, Toyota, etc.

9DA103 — 1/2"

- M10 spline



KT NO.	Size	Overall length mm	g	
9DA103	M10	113	151	10 / 120

9DA104 — 1/2"

- T50 Star




KT NO.	Size	Overall length mm	g	
9DA104	T50	113	151	10 / 120

Alternator Tool & Set


9DA022

- Specialized in removing & installing freewheel pulleys on alternator
- Suitable generator brand : Bosch, Valeo, Magetic Marelli, Denso, etc.
- It's also interchangeable and comprehensive components to work on VW, Audi, Citroen/Peugeot, Mercedes, Renault, BMW, Fiat, Ford, Toyota, etc.

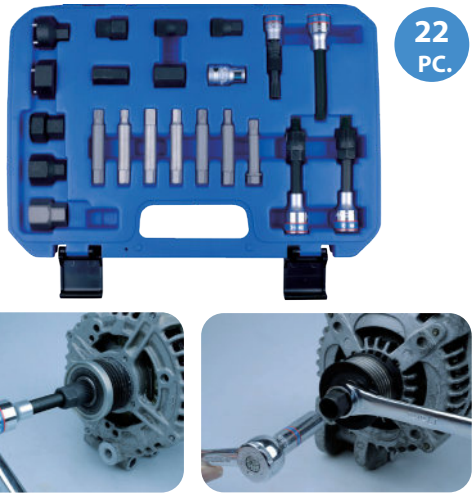

CONTENTS:

- 3 PC. Combined bit socket –
- 3/8" DR. x M10 x 90mmL / 1/2" DR. x T50 x 113mmL / 1/2" DR. x M10 x 113mmL
- 1 PC. Spline bit socket 1/2" DR. x M10 x 110mmL
- 3 PC. 33 teeth socket –15mm HEX x19mm / 15mm Hex x17.5mm / 22mm Hex
- 2 PC. Hex nut –22mm x 30mmL (Ø12.0mm) / 17mm x 35mmL (Ø14.7mm)
- 1 PC. - 35mm Round x 17mm hex (four pin)
- 1 PC. - 38mm Hex adaptor (three pin)
- 1 PC. - 28.6mm Round x H28 x H22 x 32mmL
- 2 PC. - Hexagon head nut –28H x H19 x 35mmL / 28H x H21 x 36mmL
- 1 PC. - M10 x H12 bit 64mmL
- 6 PC. - 10mm shank head bits 75mmL –T40 / T50 / M8 / M10 / H8 / H10
- 1 PC. - 1/2" DR. Bit holder

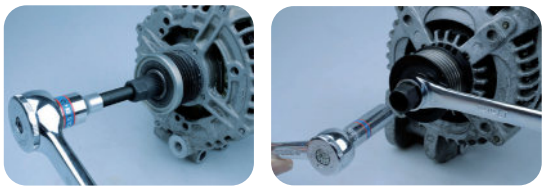


2.57 | 1 / 5


Spark Plug Boot Pliers

9DB201

- Remove spark plug cables safely and prevent cable damage
- Pliers' handles and jaws are coated with a heavy-duty plastic for sure grip





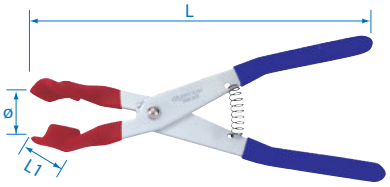


KT NO.	L mm	Ø mm	L1 mm	g	
9DB201	260	12~20	20	289	6 / 36

Automotive Voltage Tester

9DC23

- Insulated alligator clip with 150 cm cable
- 2 LEDs indicate positive(+)/negative(-) polarity
- Test voltage 3~48V
- For application of D.C. circuits only
- Two testing methods as illustration



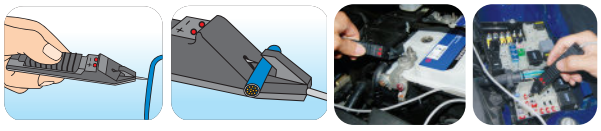


KT NO.	L mm	Test range	g	
9DC23	150	3~48V	52	10 / 100


Circuit Tester

9DC22

- Bronze body housing
- Cover cap for contact needle
- Bulb of 24V/3W interchangeable
- For 6/12/24V DC systems
- For application of D.C. circuits only







KT NO.	L mm	Test range	g	box
9DC22	107	6~24V	50	20 / 200

Digital Display Circuit Tester

9DC242

- For 6/12/24V DC systems
- For application of DC circuits only
- Check if the circuit is electrified or not by stainless steel stylus
- Bigger heavy duty insulated alligator ground clip
- 3M long retractable cable
- LCD display easy to read digital voltage display
- Powered from the power source being measured, no batteries required
- CE approval EN 61000-6-3(2007) , EN 61000-6-1(2007)
- Do not use on air bags
- Ultra-V will burn circuit board





Specification	
Measured valtage	5~28V
Testing current	<10mA
Operating temp	-10~50° C
Operating humidity	<80%

KT NO.	Test range	g	box
9DC242	6, 12, 24	225	10 / 60



Positive (+) polarity



Negative (-) polarity

Circuit Tester with Nixie Display

9DC243

- For 12/24/48V DC systems
- For application of DC circuits only
- Check if the circuit is electrified or not by stainless steel stylus
- Test by car battery or negative ground conversion
- 3M long retractable cable
- 1M extension cable
- Powered from the power source being measured, no batteries required
- Nixie display easy to read digital voltage display
- CE approval EN 61000-6-3(2007) , EN 61000-6-1(2007)
- Do not use on air bags
- Ultra-V will burn circuit board



(-) polarity (+) polarity (-) polarity < 0.3V > 62V





Specification	
Measured valtage	0.3~60V
Testing current	<10mA
Operating temp	0~50° C
Operating humidity	≦ 80%

KT NO.	Test range	g	box
9DC243	12, 24, 48	277	10 / 60



Positive (+) polarity



Negative (-) polarity

Battery Tester

9DD21

- Test battery hydrometer quickly
- Use to check battery condition and charge state
- Detects hot or cold overcharge accurately
- For 6 / 12 / 24 volt system

85 / 10 / 100





Anti-freeze & Coolant Tester

9DD22

- Use to check condition of antifreeze and coolant (Ethylene Glycol)
- Ideal for avoiding winter freeze-ups and summer overheating

85 / 10 / 100






Mechanic's Stethoscope

9DH11

- Ears covered with plastic, effective to separate from outside noise
- 210mm extension probe can expand the space while operating or using in narrow space
- Quickly to find and detect the abnormal noise with the probe
- Use for detecting various vehicles parts or machine equipment

147 / 12 / 72





Vehicle Battery Tester

9DC51

- Test a 12V lead-acid battery of any vehicle
- CCA testing(SAE/DIN/EN/IEC/CA standard)
  -Working voltage: DC 9~15V
- Engine starting voltage test
  -Measures the minimum voltage when the engine starts
- Charging voltage test
  -About 14 volts
- CCA Level bar indication
  -LOW / MID / HIGH
- LCD with background light

KT NO.	Test range(V)	Size(mm) L x W x H		
9DC51	9 ~ 15	135 x 78 x 33	374	1 / 30





Digital Glow Plug Tester

9DM1A1

- Suitable for steel and ceramic glow plugs
- LCD Display
- Short circuit protection & reverse charging protection
- Auto power off : 110 seconds
- 9V batteryx1 (included)
- CE approval

KT NO.	Glow plug(V)	Size(mm) L x W x H		
9DM1A1	3.5-4.4-5-7-8.5 10-11-24	135 x 78 x 33	356	1 / 40





Gasoline Engine Injection Pressure Tester Kit

9DP1101

- Used to identify and diagnose low fuel pressure
- Shockproof gauge with dual reading of 0~120 PSI and 0~8 bar
- Various kit of adapters for most injection systems of European, Japanese and American vehicles, includes Bosch CIS, GM TBI and MFI system





81 PC.

5.0 kg | 1 / 4

No.	Dedcription	No.	Dedcription
1	1 PC. (0-120 psi/0-8bar)	20	1 PC. Adapter (M14 male-female)
2	1 PC. Connector Hose	21	1 PC. Adapter (M10 male-M12 male)
3	1 PC. Connector Hose	22	1 PC. Adapter (M10 female-M12 male)
4	1 PC. Connector Hose	23	1 PC. Adapter (M8 female-M12 male)
5	1 PC. Connector Hose	24	2 PC. Adapter (M8 male-M12 male)
6	1 PC. Connector Hose	25	1 PC. Adapter (M14 male-M12 male)
7	1 PC. Connector Hose	26	1 PC. Adapter (M16 male-M12 male)
8	1 PC. Connector Hose	27	1 PC. Adapter (Banjo bolt M12)
9	2 PC. Connector Tube (5/8"-18 male nut)	28	1 PC. Adapter (Banjo bolt M12)
10	2 PC. Connector Tube (5/8"-18 invert flare nut)	29	1 PC. Adapter (Banjo bolt M10)
11	2 PC. Adapter (M16 female~5/8")	30	1 PC. Adapter (Banjo bolt M8)
12	2 PC. Adapter (M14 female~3/8")	31	1 PC. Adapter (Banjo bolt M6)
13	2 PC. Adapter (M16 female~3/8")	32	1 PC. Adapter
14	2 PC. Adapter (M14 female~3/8")	33	1 PC. Adapter (M8 male-M12 male)
15	2 PC. Adapter (M16 ar-10mm)	34	1 PC. Adapter (M16 female-M12 male)
16	1 PC. Adapter	35	1 PC. Adapter (M14 female-M12 male)
17	1 PC. Manifold Adapter	36	1 PC. Gauge Hook
18	1 PC. Manifold Adapter	37	1 PC. Repair Pack
19	1 PC. Adapter (90 degrees)		

Gasoline Compression Tester Kit

9DP130

- Suitable for petrol engines on lawn mowers, motorbikes, cars, trucks and so on.
- Quickly diagnose problems with pistons, rings, and valves
- Gauge has dual color scale with 0-300 PSI, 0-20 Kpa
- Easy pressure release button on side of tester
- Brass corrosion resistant fittings

8 PC.



9DP1301

3 PC.



9DP1302

KT NO.	Max Pressure		
9DP1301	300PSI / 20Kpa	1206	1 / 10
9DP1302	300PSI / 20Kpa	1100	1 / 10

Diesel Engine Compression Tester Kit

9DP2301

- Suitable for testing cars and light commercial vehicles with direct or indirect injection on diesel engine
- Gauge reading range from 0-1000 PSI (0-70 bar)
- Includes a pressure gauge, various connect adapter and replacement seal & washer





11 PC.

2.58 kg | 1 / 6

No.	Dedcription	No.	Dedcription
A	1 PC. 2-1/2" gauge with 420mm hose	H	1 PC. Glow plug adapter (114mm*M10*1.25)
B	1 PC. Glow plug adapter (73.5mm*M10*1.25)	I	1 PC. Glow plug adapter (119mm*M10*1.0)
C	1 PC. Glow plug adapter (54mm*M12*1.25)	J	1 PC. Dummy injector (75mm*M20*1.5)
D	1 PC. Glow plug adapter (72mm*M14*1.25)	K	1 Set Seal & washer
E	1 PC. Dummy injector (114mm)	L	1 PC. 90° Elbow
F	1 PC. Dummy injector (64mm*M24*2.0)	M	1 PC. Clamp plate
G	1 PC. Stanadyne dummy (112mm)		

Oil Pressure Tester Kit


9DP3201

- Suitable for testing engine oil pressure and transmission pressure
- Applicable to both gasoline and diesel engines, also suitable for passenger cars and light trucks
- Gauge reading range from 0-150 PSI (0-10 bar)
- Provided with an oil filter clamp for piercing through oil filter canister when oil pressure switch is hard to access

2.10 kg | 1 / 5

Adapter

Black (Imperial threads)	Silver (Metric threads)
1/2" x 20 UNF	M10 x P1.0
3/8" x 20 UNF	M12 x P1.5
1/4" x 18 NPTF	M14 x P1.5
1/8" x 27 UPT	M16 x P1.5
R 1/8" DIN	M18 x P1.5

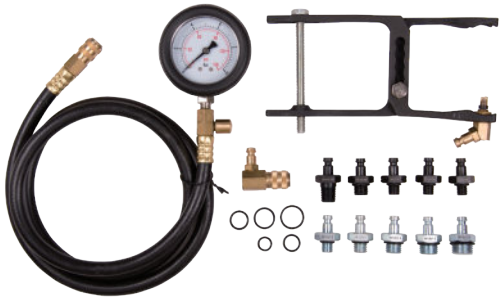

13 PC.







Universal Terminal Release Tool Set


9DT11

- Suitable for most of the vehicles, VW Group, BMW, Opel, Renault, Ford, Daimlerchrysler, Fiat, Toyota and Saab
- Use to loose contacts easily or carry out other applications in the field of car electricity

A	9DT11-1	ABS 4.0mm round terminal
B	9DT11-2	3.5mm round terminal
C	9DT11-3	1.5mm round terminal
D	9DT11-4	Maxi power timer
E	9DT11-5	Pit pod / Faston 6.3mm
F	9DT11-6	JPT / SPT
G	9DT11-7	Micro timer ii
H	9DT11-8	Standard tool
I	9DT11-9	Standard 2.72mm
J	9DT11-10	Standard 1.48mm
K	9DT11-11	Standard 1.89mm
L	9DT11-12	Micro standard

850 g | 1 / 10



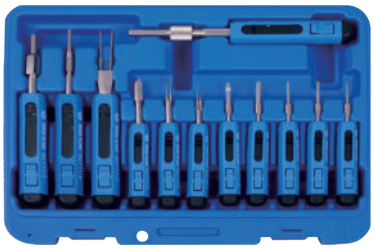12 PC.

Safety Goggles

9CK-101

- Soft PVC frame & lens high impact clear polycarbonate
- Anti-dust and anti-impact vents

KT NO.	L1 inch	L1 mm	L2 inch	L2 mm	g	
9CK-101	2-7/8	74	6	153	70	20 / 200




Steel Wire Brush

9CZ101

- Material : wood handle / steel wire
- Wire brush with three rows

KT NO.	H mm	L1 mm	L2 mm	g	
9CZ101	22	258	105	65	24 / 144



Pressure Oil Can

9TB225 | 9TB500

- Material: Plastic body (9TB225)
- Material: Metal body (9TB500)





KT NO.	Capacity c.c.	g	
9TB225	225	103	1 / 160
9TB500	500	302	10 / 60

Clip Removal Pliers

9TC101

- For removal of door inner-linings and other trim items held in place by plastic rivets





KT NO.	L inch	L mm	g	
9TC101	9	230	241	12 / 48

Flexible A/C Detective Light

9TQ31

KT NO.	L1 mm	L2 mm	L3 mm	g	
9TQ31	34	400	140	107	1 / 5





Refillable Pressure Sprayer

9TBA600

CAUTION Always wear eye protection while using this tool

- Suitable for lubrication, cleaning brake systems, removing dust and applying anti-rust
- Two-position folding nozzle for a standard or long stream spray pattern for narrow and difficult to reach areas
- Do not use with strong chemical or corrosive fluid tool
- The aluminum alloy material uses a one-piece seamless structure to withstand high pressure
- Increase in thickness makes the product less prone to deformation and stronger
- The trigger is not affected by recoil force and is easy to operate
- Max pressure 350 Psi (25Kg /cm^2)
- Safety valve pressure : 140Psi (9.84 Kg /cm^2)

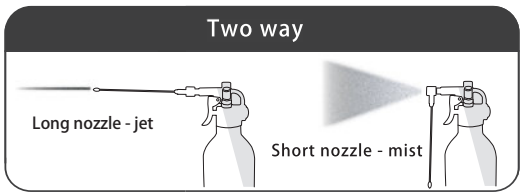






KT NO.	L inch	L mm	capacity	g	
9TBA600	11	280	600 c.c.	330	1 / 12

9TBA650

- Suitable for lubrication, cleaning brake systems, removing dust and being anti-rust
- Two-position folding nozzle for a standard or long stream spray pattern for narrow and areas which are difficult to reach
- Aluminum canister
- Do not use with strong chemical or corrosive fluid

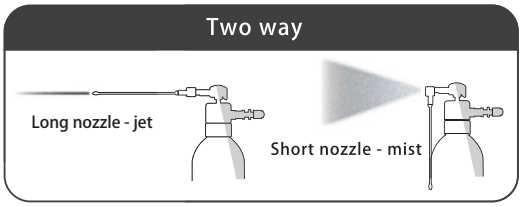





KT NO.	L inch	L mm	capacity	g	
9TBA650	11	287	650 cc	290	1 / 12

spare nozzle #9TBA650BTK

Pry Bar & Set

- Grip material - PP+TPR
- Chrome vanadium alloy steel

9TK1

- Packaged in plastic tray
- Pry bars are for prying and levering
- Sturdy blade minimizing lever spring effect
- It's hardened and tempered for maximum durability



KT NO.	L mm	g	
9TK108	204	110	6 / 72
9TK112	312	286	6 / 48
9TK118	458	514	6 / 48
9TK124	608	655	6 /36

9TK014



4 PC.

Contents Kg 1.87 5 / 10




9TK108, 9TK112, 9TK118, 9TK124

Jumbo Pry Bar & Set

9TK2

- For heavy-duty application
- Includes straight, 90, 75, 30 degree tip for variety situation to use
- Extra long pry bar makes more powerful for prying and levering

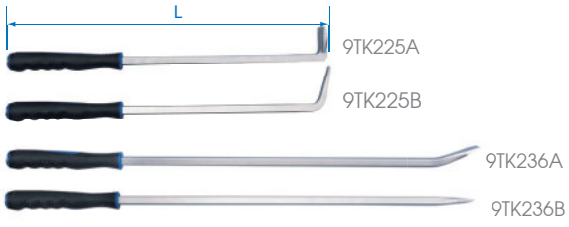

KT NO.	L inch	L mm	Type	Kg	
9TK225A	25	625	90°	1.43	1 / 6
9TK225B	25	625	75°	1.39	1 / 6
9TK236A	36	930	30°	1.91	1 / 12
9TK236B	36	930	Straight	1.91	1 / 12

9TK024



4 PC.

Contents Kg 9.34 1 / 2



9TK225A
9TK225B
9TK236A
9TK236B


Rolling Head Pry Bar & Set

- Material - chrome vanadium alloy steel
- Finishing - Black phosphate with polished head



9TK3

- With a long tapered end for alignments and a rolling head for prying

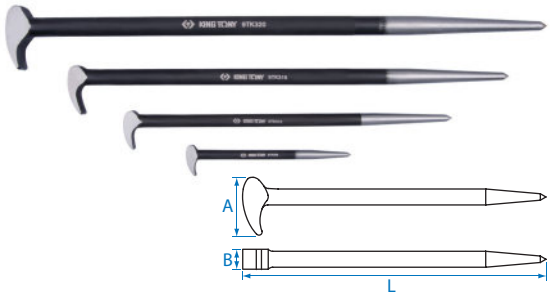

KT NO.	L inch	L mm	A mm	B mm	g	
9TK306	6	151	29.0	10.0	75	10 / 200
9TK312	12	305	36.5	12.3	252	2 / 40
9TK316	16	405	45.6	14.5	501	2 / 20
9TK320	20	504	60.2	18.0	952	2 / 20

9TK034



4 PC.

Contents Kg 1.73 1 / 8



9TK306
9TK312
9TK316
9TK320


Door Upholstery Remover


- Grip material - PP+TPR
- Chrome vanadium alloy steel

48280180

43280212

- Special tool to remove the lining and clip of the car



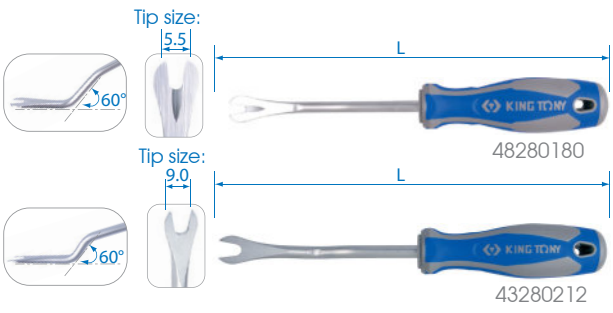


KT NO.	Tip mm	L mm	Type	g	
48280180	5.5	210	60°	90	12 / 144
43280212	9	240	60°	134	12 / 144

Hook & Pick Set

43250115Y


- 10" Bent-pick

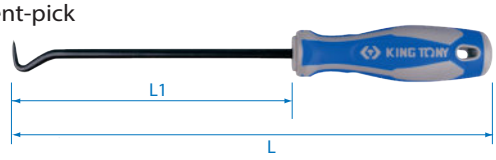

KT NO.	L mm	L1 mm	g	
43250115Y	260	150	94	12 / 144

43260115Y


- 10" Hook-pick

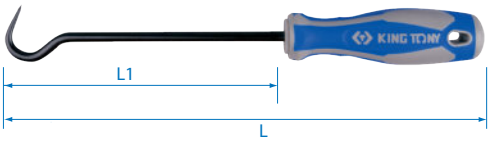

KT NO.	L mm	L1 mm	g	
43260115Y	260	150	96	12 / 144

43270115Y


- 10" 90°-pick



KT NO.	L mm	L1 mm	g	
43270115Y	260	150	94	12 / 144

43290115Y

- 10" Straight-pick

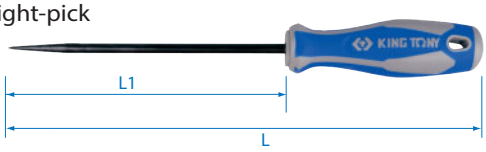

KT NO.	L mm	L1 mm	g	
43290115Y	260	150	91	12 / 144

9-30904AY

- Use for scribing, alignment, installing and removing O rings, seals, cotter pins and washers



4 PC.






Contents	kg 0.43	1 / 10
43250115Y	43270115Y	
43260115Y	43290115Y	

43240115Y

- Wide scraper
- Use for removing old gaskets more easily and quickly



KT NO.	L mm	L1 mm	g	
43240115Y	260	150	149	12 / 144

30914AY

- Use for scribing, alignment, installing and removing O rings, seals, cotter pins and washers



4 PC.

Contents	g 62.8	6 / 72
43350175Y	43360175Y	
43370175Y	43390175Y	

Hook & Pick Set

9-30909AY

Tray category #8 (375 x 187mm)

- Use for scribing, alignment, installing and removing O rings, seals, cotter pins and washers
- Use for removing old gaskets more easily and quickly

9 PC.

Contents — 0.69 kg — 1 / 12

	43250115Y		43350175Y
	43260115Y		43360175Y
	43270115Y		43370175Y
	43290115Y		43390175Y
	43240115Y		




Radiator Hose Removal Tools

- Grip material - PP+TPR
- Chrome vanadium alloy steel


432A0113

- 9-1/2" Lightening type removal tools
- 9-1/2" U type removal tools

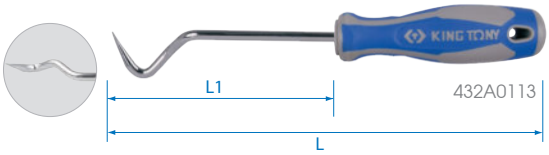

KT NO.	L mm	L1 mm	g	/
432A0113	240	130	93	12 / 96

432A0213

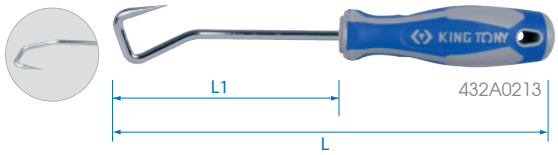


KT NO.	L mm	L1 mm	g	/
432A0213	240	130	101	12 / 96

Magnetic Flexible Handle

- Grip material - PP+TPR

2121


- Enhanced flexible conduit for perfect shaping
- More powerful magnetic force

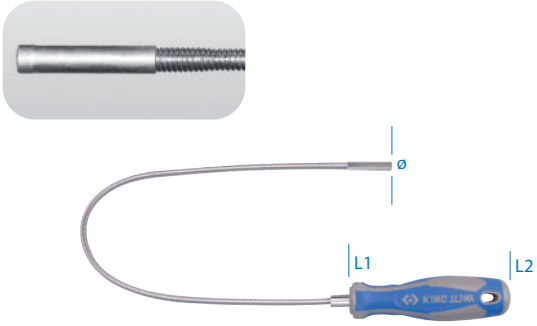



KT NO.	Size	Dia x length(mm) L1	L2	Magnetic power(kg)	g	/
2121-12	12"	Ø 7 x 305	415	0.5	100	1 / 100
2121-18	18"	Ø 7 x 457	567	0.5	120	1 / 80

2121A

- Powerful magnet retrieves metal objects up to 3kg
- Slide cap prevents retrieving foreign objects
- Enhanced flexible conduit for perfect shaping
- Grip Material-PP+TPR
- Chrome vanadium alloy steel

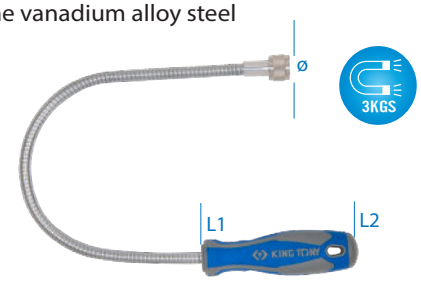






KT NO.	Size	Dia x length(mm) L1	L2	Magnetic power(kg)	g	/
2121A-15	15"	Ø18 x 381	491	3	250	1 / 25
2121A-18	18"	Ø18 x 457	567	3	270	1 / 25

Magnetic Pick-Up Tool

2124

- Compact and ergonomic design for comfortable holding
- Enhanced flexible conduit for perfect shaping
- Solid crimping for holding tube and flexible conduit
- More powerful magnetic force
- Comfortable pushing strength

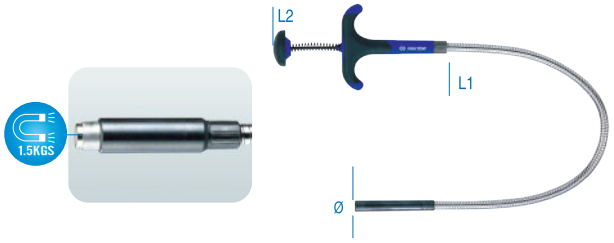


KT NO.	Size	Dia x length(mm) L1	L2	Magnetic power(kg)		
2124-18	18"	Ø13.5 x 450	610	1.5	181	1 / 36

Magnetic Claw Pick-Up Tool

2126A-18

- Compact and ergonomic design for comfortable holding
- Enhanced flexible conduit for perfect shaping
- Solid crimping for holding tube and flexible conduit
- Maximum claw width 1-1/4"
- Comfortable pushing strength






KT NO.	Size	Dia x length(mm) L1	L2			
2126A-18	18"	Ø15 x 440	600	1-1/4"	258	1 / 36

3 in 1 Pick-Up Tool

2129-24

- Compact and ergonomic design for comfortable holding
- Enhanced flexible conduit for perfect shaping
- Solid crimping for holding tube and flexible conduit
- More powerful magnetic force
- Hook type claw
- Clamp light
- Comfortable pushing strength
- Lithium cell : LR521 x 3

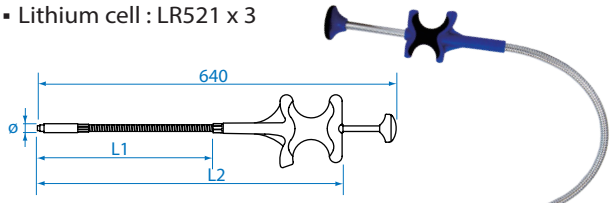





KT NO.	Size	Dia x length(mm) L1	L2	Magnetic power(kg)			
2129-24	24"	Ø13 x 470	570	0.4	1-1/4"	280	12 / 48

Telescoping Magnetic Pick-Up Bar

2128-26

- Pen style for carring conveniently





KT NO.	Extendable Length mm	Magnetic Power		
2128-26	130~640	3.5LBS/1.6KGS	45.6	50 / 200

Multi-Function Telescoping Bar

9TQ21


87 | 50 / 100

► Magnetic Pick-Up Bar



- Magnetic power : 1.3 lbs / 0.6 kgs
- Extendable length : 635 mm

► 38 mm Diameter Inspection Mirror



- To inspect hidden or narrow areas
- Double ball joint links swivel mirror for viewing to 360°

► Scriber



- To mark lines on workpieces
- To clean the water-spurting hole of the windscreen wiper



3 in 1 Flexible Inspection Bar

9TQ02

203 12 / 72




► Magnetic Pick-Up Bar




- Magnetic power : 3.5 lbs / 1.6 kgs
- Length : 450 mm

► Blub



- Size:2.2 V , 0.25 A
- Operates On 2 AA Batteries
- (Not Included)

► Inspection Mirror



- 50 x 25 mm playground shape
- To inspect hidden or narrow areas
- Double ball joint links swivel mirror

Videoscope

- 5.5mm lens with 6 LED, can be used for shooting video or taking photo (1080P HD Camera 1920 x 1080 resolution)
- The videoscope is suitable for visually inspecting areas that are difficult to access over a great distance
- CE / ROSH / FCC certification
- IP67 waterproof rating

9TQ11

- Handheld version
- 4.3 inch LCD display with 1080P resolution
- Equipped with 2600mAh Li-ion battery, can be continuous use for 3 hours
- UN38.8 certification

740 1 / 8

Contents	
	Protective cap
	Hook
	Magnet
	Side mirror
	Charging cable







9TQ12

- Wifi version
- Before use, download the inskam APP, both IOS & Android are applicable
- Equipped with 1800mAh Li-ion battery, can be continuous use for 2-3 hours

331 1 / 45



Contents	
	Protective cap
	Hook
	Magnet
	Side mirror
	Charging cable





10-1/2" Internal-External Heavy Duty Circlip Pliers Set


45115PP

- Internal & External circlip pliers 10-1/2" 265 mmL, maximum spread 45 mm
- Interchangeable tips 0°, 15°, 45°, 90°
- Internal ring 65~140 mm, External ring 65~120 mm
- Interchangeable tips 2.75 mm and 3.00 mm
- Heavy duty pliers with ratcheting locking device large rings are easily controlled


Contents

68GS-11	1 PC. Internal straight circlip pliers
68RS-11	1 PC. External straight circlip pliers
68GR-01	1 Set. 15° Internal interchangeable (Ø3mm, Black)
68GQ-01	1 Set. 45° Internal interchangeable (Ø3mm, Black)
68GB-01	1 Set. 90° Internal interchangeable (Ø3mm, Black)
68RR-01	1 Set. 15° External interchangeable (Ø2.75mm, Silver)
68RQ-01	1 Set. 45° External interchangeable (Ø2.75mm, Silver)
68RB-01	1 Set. 90° External interchangeable (Ø2.75mm, Silver)
68ZZ-01	1 Set - Screws (6 PC. M5x0.8)

External Use



Internal Use





15 PC.

KT NO.	L inch	L mm	Spread inch	Spread mm	Ø mm	Ø mm	kg	
45115PP	10-1/2	267	2	50	-	-	1.30	1 / 10
68GS-11	10-1/2	267	2	50	65~140	3	0.31	25 / 50
68RS-11	10-1/2	267	2	50	65~120	2.75	0.32	25 / 50

16" Internal-External Heavy Duty Circlip Pliers Set


45211PP

- Internal & External circlip pliers 16" 400 mmL, maximum spread 85 mm
- Interchangeable tips 0°, 45°, 90°
- Internal ring 78-155 mm, External ring 88~165 mm
- Interchangeable tips 3.00 mm
- Heavy duty pliers with ratcheting locking device large rings are easily controlled


Contents

68GS-16	1 PC. Internal straight circlip pliers
68RS-16	1 PC. External straight circlip pliers
68GQ-02	2 Set. 45° Internal interchangeable
68GB-02	2 Set. 90° Internal interchangeable
68ZZ-02	1 Set - Screws (6 PC. M6x1.0)

External Use



Internal Use





11 PC.

KT NO.	L inch	L mm	Spread inch	Spread mm	Ø mm	Ø mm	kg	
45211PP	16	406	3-1/4	85	-	-	3.32	1 / 6
68GS-16	16	406	3-1/4	85	78~155	3	0.93	1 / 25
68RS-16	16	406	3-1/4	85	88~165	3	0.97	1 / 25

Kneeling Mat

9TG11

- Kneeling mat makes working more comfortable during repairing wheels, brakes and exhausts
- Make the chemicals and oil resistant
- Easily clean surface
- Light and small, easy to carry and available to hang it






KT NO.	L mm	A mm	B mm		
9TG11	455	214	30	126	1 / 18


LED Folding Mat

9TG21

- Folding mechanics mat for mechanics sit / kneel and lie on it
- 24 SMD LED lights
- Brightness : 600 Lumen(lm)
- 3 x AA batteries not included
- Folds for easy storage
- Make the chemicals and oil resistant

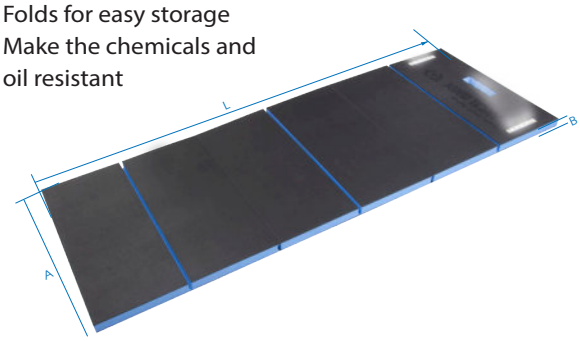





KT NO.	L mm	A mm	B mm		
9TG21	1150	420	24	992	1 / 10

LED Kneeling Mat

9TG12

- Kneeling mat with work lights for under car repair or useful as a head protector
- 24 SMD LED lights
- Brightness : 600 Lumen(lm)
- 3 x AA batteries not included
- Make the chemicals and oil resistant







KT NO.	L mm	A mm	B mm		
9TG12	460	270	30	320	1 / 25

Plastic Car Creeper

87C23-B

- Designed for 2 side storage trays, for easily picking up for small parts or tools
- Vinyl-covered foam pad brings more comfortable while working
- 280 lb. weight capacity
- 1-1/4" ground clearance



KT NO.	Size mm		
87C23-B	1010 x 475 x 130 (40")	5000	1

Steel Creeper

87C24-B

87C25-B

- Designed with comfortable sponge cushion
- 300 lbs capacity
- 6 PC. durable swivel casters
- Long size Vinyl-covered foam pad brings more comfortable while working
- All steel construction frame makes it more strong and durable



87C24-B



87C25-B

KT NO.	Size mm		
87C24-B	920 x 425 x 95 (36")	5600	1
87C25-B	1020 x 425 x 110 (40")	7400	1

Wing Protector

9TP11

- Protection from unwanted scratches, dents and dirt
- Magnetic attachment keeps paintwork safe from damage
- Rugged, padded imitation leather and reinforced edges provide a perfect, cushioned working area



KT NO.	Size mm		
9TP11	1050 x 650	649	1 / 8

Wing Protector

9TP12

- Protection from unwanted scratches, dents and dirt
- Magnetic attachment keeps paintwork safe from damage
- Rugged, padded imitation leather and reinforced edges provide a perfect, cushioned working area



KT NO.	Size mm		
9TP12	1050 x 650	649	1 / 8

9TP22

- Protection from unwanted scratches, dents and dirt
- Magnetic attachment keeps paintwork safe from damage
- Suction cup attachment keeps paintwork safe from damage
- Rugged, padded imitation leather and reinforced edges provide a perfect, cushioned working area
- 3 suction cups attached





- Suction cup can be strongly adsorbed on the aluminum alloy material

KT NO.	Size mm		
9TP22	1050 x 650	650	1 / 8



Oil Drain Pan

9TT11-18

- This 18 litre Oil Drain Pan includes easy grip, large carrying handles and integral spout for pouring waste oil or fluids into a recycling container. The anti-splash lip prevents spillage. Ideal for draining antifreeze or oil. (Not suitable for spray gun cleaner)





CONTENTS :

- 18 litre capacity
- Anti-splash lip
- Integral spout
- Ideal for draining antifreeze or oil
- Meets PAHS regulations



KT NO.	L mm	W mm	H mm	g	
9TT11-18	681	570	130	920	15

Wheel Axle Oil Drain

9TT21-03

- When the professional technician reaches for an oil drainer pan it has to be light yet strong, a convenient size for the task in hand and easily cleaned
- The wheel Axle Oil Drain is designed for HGVs, features a 3 litre capacity and is fits snugly into the dish of the wheel to catch the waste oil as it is drained from the axle. It is also stable on the workshop floor and easy to handle





CONTENTS :

- Wheel axle oil drain pan with pouring lip
- Manufactured from PE plastic
- 3 litre capacity

KT NO.	L mm	W mm	H mm	g	
9TT21-03	316	246	156	390	20

Drum Drain Basin


9TT31-20

- Plastic basin installed on drum for receiving waste oil
- Intended to be installed at a standard barrel, the drain lid marries with the barrel inlet allowing simple and efficient draining of waste oil from filters etc
- Features ribbed drainage channels and a filter gate to catch foreign objects





KT NO.	ø mm	H mm	g	
9TT31-20	600	155	1700	5

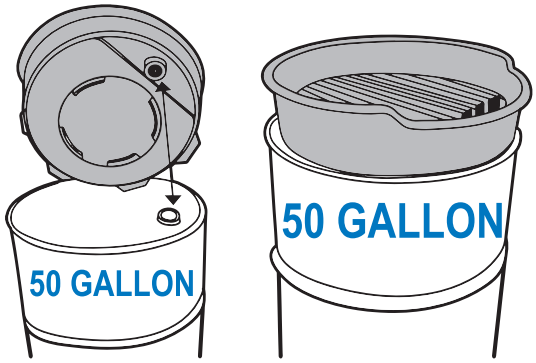

10L Pneumatic Oil(ATF) & Liquid Dispenser

9TV13

- Use to extract, transfer and dispense fluid quickly, safety and cleanly
- Non-spark, one man in same step can operate
- Provide with the safety valve, pre-setting 43 PSI (3 Bar), the exceed pressure will be relief automatically
- Provide with the pressure gauge, can be read & control the pressure in the tank more easily
- Provide 2 way control valve for dispensing more safety
- 8 PC. one touch transportation adapter









KT NO.	Max. Capacity	Working pressure (PSI)	Temperature range	Air inlet	g	
9TV13-100	10 L	90	-19°C~140°C	1/4"	4750	1

Manual Fluid Extractor

9TV21-09

- Capacity : 9 litre
- Use for extracting all types of engines oil, transmission fluid and lubricants of cars, marine, stationary, motorbikes engines etc.





KT NO.	Max. Capacity	Temperature range	g	
9TV21-09	9 L	-19°C~90°C	4750	1 / 2


- Silicon hose x 1.2 m
- Nylon hose x 1.1 m
- Nylon hose x 1.0 m



Pneumatic Grease Pump 20L

9TU11

- The barrel body is made of high-grade steel plate. It can contain 5 gallons(20L) of barrel packed grease from all nations around the world
- Suitable for all sorts of machinery, vehicles, airplanes, ships, etc. The efficient instrument for infusing grease powerfully for lubrication & maintenance purpose
- Pump of separate type: utilize the principle of liquid getting pumped & driven by air compressor to draw in liquid. There are two independent & separate cycle systems of pump out there, which prevents air- compressor-exhaust moisture from getting to the grease inside the barrel and deteriorating its quality

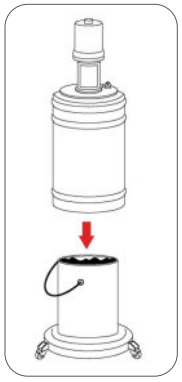



KT NO.	Air Input Pressure (bar)	Air Input Pressure (PSI)	Pressure Ratio	Grease Output Pressure (bar)	Grease Output Pressure (PSI)	Deliver Rate (cc/sec)	N.W.	G.W.	kg	CUFT
9TU11-20	4-9	60-130	45 :1	180-405	2700-5850	30	17	20.5	21.0	6.4

Hand Grease Pump 20L

9TU21

- 20L tank for 5 gallons grease oil
- Suitable for #00,#0,#1,#2 grease oil
- Included 1.8m length hose & pistol sprayer
- 1/4" High pressure 10,000 psi W.P oilfield hose
- Portable equipment with single pull handle
- Suitable for all sorts of machineries, vehicles, airplanes, ships, etc.







KT NO.	Transmission rate	Hose Length	N.W.	G.W.	CUFT
9TU21-20	4 cc/stroke	1.8 m	8.2 Kg	9.4 Kg	2.2

Oil Transfer Bucket Pump 20L

9TW21

- Lever pump 20 L tank for oil
- Suitable for diesel fuel, lubricating oils up to SAE 90 and Non-corrosive fluids
- Included 1.8m length hose & sprayer
- Portable equipment with single pull handle





KT NO.	Deliver Rate	Hose Length	Outlet tube	N.W.	G.W.	CUFT
9TW21-20	65 cc/stroke	1.8m	3/8"	7.8 Kg	8.5Kg	2.2



ST

STARTER


Socket Set

ST2346MR 1/4"

Blow case size (mm) :
254 x 147 x 46 (0.16 cuft)



46 PC.



2766DK

Contents		1.06	1 / 12
2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14		
2033	T8, T10, T15, T20, T25, T30, T40		
2035	H3, H4, H5, H6, H7, H8		
2031	PH1, PH2, PH3		
2032	4, 5.5, 7		
2038	PZ1, PZ2, PZ3		
1115-14	H1.27, H1.5, H2, H2.5		
2766-55G	2791	2222-02 2222-04	
2571-45	2312-06	2179DF	

Socket Set

ST4028MR

ST4528MR

ST4028SR 1/2"

ST4528SR 1/2"

Blow case size (mm) :
387 x 223 x 58 (0.18 cuft)




ST4028MR/ST4528MR



ST4028SR/ST4528SR

24 PC.




4766DK

KT NO.		Contents		4.10	1 / 4
ST4028MR	4330MRC	8, 9, 10, 11, 12, 13, 14, 15, 16 17, 18, 19, 21, 22, 24, 27, 30, 32	463021HC		
ST4028SR	4330SRC	5/16", 3/8", 7/16", 15/32" 1/2",9/16", 19/32", 5/8", 11/16" 3/4", 25/32", 13/16", 7/8" 15/16",1", 1-1/16", 1-3/16", 1-1/4"			
ST4528MR	4335MRC	8, 9, 10, 11, 12, 13, 14, 15, 16 17, 18, 19, 21, 22, 24, 27, 30, 32	463521HC		
ST4528SR	4335SRC	5/16", 3/8", 7/16", 15/32" 1/2",9/16", 19/32", 5/8", 11/16" 3/4", 25/32", 13/16", 7/8" 15/16",1", 1-1/16", 1-3/16", 1-1/4"			



4766-10G



4251-05RH
4251-10RH

4572-12H

4791RH

Socket & Wrench Set

SC7083MR

Blow case size (mm) :
422 x 275 x 85 (0.35 cuft)



SC7583MR 1/4"+1/2"



83 PC.

5.65 1 / 4

KT NO.	Contents
SC7083MR	2330M 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 4330MRC 14, 15, 16, 17, 18, 19, 20, 22, 24, 27, 30, 32 463016RC 463021HC
SC7583MR	2335M 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 4335MRC 14, 15, 16, 17, 18, 19, 20, 22, 24, 27, 30, 32 463516HC 463521HC

1060 8, 10, 11, 12, 13, 14, 17, 19
2031 PH1, PH2
2032 4, 5.5, 6.5
2033 T8, T10, T15, T20, T25, T27, T30
2035 H3, H4, H5, H6
2038 PZ1, PZ2
1836P PH3, PH4
1836S 8 x 1.2, 10 x 1.6, 12 x 2.0
1836T T40, T45, T50, T55

1836H H8, H10, H12, H14
1836Z PZ3, PZ4
2766-55G
4766-10G
4251-05RH
2222-02
2222-04
79831
4222-10
2312-06
7702-25
3824
2571-45H
2179DF
414810S
2791
4791RH

Socket & Wrench Set

SC7396MR 1/4"+1/2"

Metal case size (mm) :
422 x 275 x 85 (0.35cuft)

Contents

5.5 1 / 4



96 PC.

	2335M	4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14
	2235M	6, 8, 10, 12, 13, 14
	4335MRC	10, 12, 13, 14, 15, 16, 17, 18, 19, 22, 23, 27, 32
	4535M	15, 16, 17, 19, 24
	1060	8, 10, 12, 13, 14, 15, 16, 17, 18, 19
	1836H	H8, H10, H12, H14
	1836T	T50, T55, T60
	1025S	3.0, 4.0, 5.0, 6.0
	1025P	PH1, PH2 x 2, PH3
	1025Z	PZ1, PZ2 x 2, PZ3
	1025T	T10, T15, T20, T25, T27, T30, T40
	1025H	H3, H4, H5, H6
	1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H
	1025R	RB2
	753-63	
	7702-25	
	2766-55G	4766-10G
	2571-45H	2179DF
	4222-10	2222-02 2141
	2791	4791RH 3824 414810S

Socket & Wrench Set

SC7096MR

SC7596MR 1/4"+1/2"

Blow case size (mm) :
422 x 275 x 85 (0.35 cuft)



96 PC.


6.22 kg | 1 / 4

KT NO.	Contents
SC7096MR	2330M: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 2230M: 6, 7, 8, 9, 10, 11, 12, 13 4230MC: 14, 15, 17, 19, 22 4330MRC: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32 463016RC 463021HC 2031: PH1, PH2 2032: 4, 5.5, 6.5 2033: T8, T10, T15, T20, T25, T27, T30 2035: H3, H4, H5, H6 2038: PZ1, PZ2 1836P: PH3, PH4 1836S: 8x1.2, 10x1.6, 12x2.0 1836T: T40, T45, T50, T55 1836H: H7, H8, H10, H12, H14 1836Z: PZ3, PZ4 1115-03: 1.5, 2, 2.5 2766-55G 4766-10G 2179DF 4222-10 2222-02 2222-04 4251-05RH 2571-45H 2791 4791RH 414810S 3824 7702-25 2745
SC7596MR	2335M: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 2235M: 6, 7, 8, 9, 10, 11, 12, 13 4235MC: 14, 15, 17, 19, 22 4335MRC: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32 463516HC 463521HC

Socket & Wrench Set


SC7010MR

Blow case size (mm) :
422 x 275 x 85 (0.35 cuft)

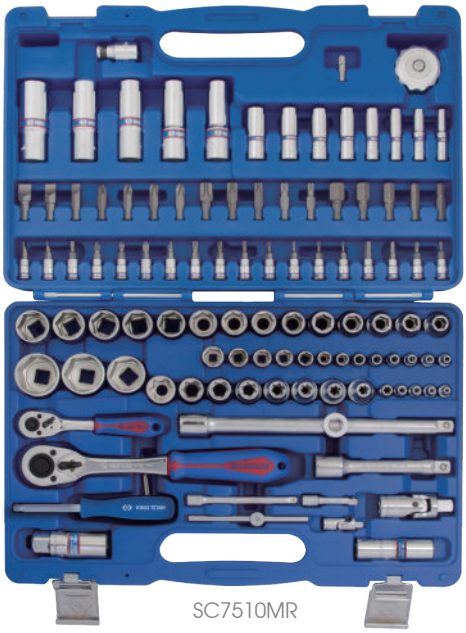

SC7510MR 1/4"+1/2"

110 PC.

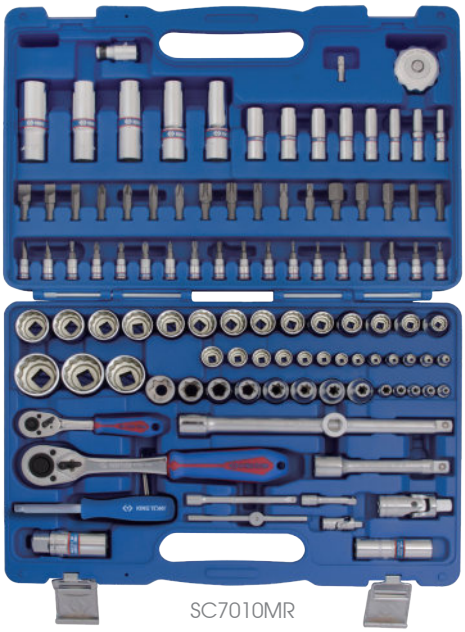

KT NO. | Contents | 6.90 | 1 / 4

SC7010MR

- 2330M — 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
- 2230M — 6, 7, 8, 9, 10, 11, 12, 13
- 4230MC — 14, 15, 17, 19, 22
- 4330MRC — 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32
- 463016RC
- 463021HC

SC7510MR

- 2335M — 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
- 2235M — 6, 7, 8, 9, 10, 11, 12, 13
- 4235MC — 14, 15, 17, 19, 22
- 4335MRC — 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32
- 463516HC
- 463521HC

Common

- 2375M — E4, E5, E6, E7, E8
- 4375M — E10, E11, E12, E14, E16, E18, E20, E24
- 2031 — PH1, PH2
- 2032 — 4, 5.5, 6.5
- 2033 — T8, T10, T15, T20, T25, T27, T30
- 2035 — H3, H4, H5, H6
- 2038 — PZ1, PZ2
- 1836P — PH3, PH4
- 1836S — 8x1.2, 10x1.6, 12x2.0
- 1836T — T40, T45, T50, T55, T60
- 1836H — H7, H8, H10, H12, H14
- 1836Z — PZ3, PZ4
- 1115-03 — 1.5, 2, 2.5

- 2766-55G
- 4766-10G
- 2179DF
- 4222-10
- 2571-45H
- 2222-02
- 2222-04
- 4251-05RH
- 2791
- 4791RH
- 3824
- 414810S
- 7702-25
- 2745

Socket & Wrench Set

SC9043MR

Blow case size (mm) :
560 x 400 x 110 (0.87 cuft)



SC9543MR 1/4"+3/8"+1/2"



143 PC.

13.7 kg | 1 / 2

KT NO.	Contents
SC9043MR	2330M: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10 4330MRC: 8, 10, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 27, 30, 32 463016RC, 463021HC 2375M: E4, E5, E6, E7, E8 3330M: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17, 18, 19, 21, 22 4375MC: E10, E12, E14, E16, E20 1025P: PH0, PH1, PH2, PH3 1025S: 4, 5.5, 7 1025U: T10H, T15H, T20H, T25H, T27H, T30H, T40H 1025H: H2, H3, H4, H5, H6, H7, H8, H10 1025Z: PZ0, PZ1, PZ2, PZ3 1421: PH2 x 38, PH1 x 80 1461: PH2 x 100 1422: 6.5 x 38, 5.5 x 75 1462: 6.5 x 150 1060: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24 1930: 8 x 10, 10 x 12, 11 x 13, 12 x 14, 17 x 19 1145MR: H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10 2222-02, 2222-04, 2222-06 3221-03, 3221-06 4251-03R 4222-10 2312-06 2179DF 3781-11F 4452-18FR 2141 4581-10 79831 6111-07 2766-55G 4766-10G 6011-10R 79093-03M 3824 3812 2791, 3792, 4791RH 7821-30
SC9543MR	2335M: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10 4335MRC: 8, 10, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 27, 30, 32 463516HC, 463521HC 2375M: E4, E5, E6, E7, E8 3330M: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 17, 18, 19, 21, 22 4375MC: E10, E12, E14, E16, E20 1025P: PH0, PH1, PH2, PH3 1025S: 4, 5.5, 7 1025U: T10H, T15H, T20H, T25H, T27H, T30H, T40H 1025H: H2, H3, H4, H5, H6, H7, H8, H10 1025Z: PZ0, PZ1, PZ2, PZ3 1421: PH2 x 38, PH1 x 80 1461: PH2 x 100 1422: 6.5 x 38, 5.5 x 75 1462: 6.5 x 150 1060: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24 1930: 8 x 10, 10 x 12, 11 x 13, 12 x 14, 17 x 19 1145MR: H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10 2222-02, 2222-04, 2222-06 3221-03, 3221-06 4251-03R 4222-10 2312-06 2179DF 3781-11F 4452-18FR 2141 4581-10 79831 6111-07 2766-55G 4766-10G 6011-10R 79093-03M 3824 3812 2791, 3792, 4791RH 7821-30

Ball Hex Key

ST1120MR

- Extra long arm with ball point type
- DIN ISO 2936



KT NO.	mm	mm	mm	g	
ST112012MR	H12	57	262	283	8 / 48
ST112014MR	H14	70	294	441	8 / 48
ST112017MR	H17	80	337	740	4 / 32
ST112019MR	H19	89	379	1044	4 / 16

ST1145MR

- Standard arm type
- Hex head
- DIN ISO 2936



KT NO.	mm	mm	mm	g	
ST114512MR	H12	57	137	166	10 / 120
ST114514MR	H14	70	154	261	6 / 72
ST114517MR	H17	80	177	439	4 / 48
ST114519MR	H19	89	199	619	4 / 32

Hex Key Set

ST20219MR



9 PC.

Spec.	Contents	g	
Standard arm	ST1145MR H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	300	6 / 48

ST20209MR



9 PC.

Spec.	Contents	g	
Extra long arm	ST1125MR H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	480	8 / 48

ST20213MR



13 PC.

Spec.	Contents	g	
Standard arm hex-head key	ST1145MR H2, H2.5, H3, H4, H5, H6, H7, H8, H10, H12, H14, H17, H19	1880	2 / 8

ST20208MY



8 PC.

Spec.	Contents	g	
Extra long arm	ST1125MY H2, H2.5, H3, H4, H5, H6, H8, H10	480	8 / 48

Hex Key Set

ST20109MR



9 PC.

Spec.	Contents	0.48 kg / 8 / 48
Extra long arm / ball	ST1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10

ST20419PR



9 PC.

Spec.	Contents	470 g / 8 / 48
Extra long arm / Tamper resistant	ST1127R	T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H, T50H

ST20203MR



13 PC.

Spec.	Contents	330 g / 1 / 4
Extra long arm / ball	ST1120MR	H2, H2.5, H3, H4, H5, H6, H7, H8, H10, H12, H14, H17, H19

ST20203SR



13 PC.

Spec.	Contents	330 g / 1 / 4
Extra long arm / ball	ST1120SR	5/64, 3/32, 1/8, 5/32, 3/16, 7/32, 1/4, 5/16, 3/8, 1/2, 9/16, 5/8, 3/4

Tool Trolley

ST87432-5B

ST87434-7B

5 Drawer & 7 Drawer Tool Trolley

- Heavy duty ball bearing slides
- 5"x1-1/4" casters with locking break
- One piece wall constructed and powder coating
- Central locking system
- Oil can holder / optional side pull handle bar
- 2mm anti-slipping rubber top mat
- Overall size : W670 x D460 x H812 mm

ST87432-5B 52 kg
ST87434-7B 60 kg
CUFT 12.64



ST87432-5B




ST87434-7B

TOOL DIAMOND BLOCKS


SET A

TS00108


01 HAND SOCKET



02 RATCHET




03 COMBINATION WRENCH



04 PHILLIPS SCREWDRIVER



05 PORTABLE TOOL BOX




06 SHELF TROLLEY



07 WORKBENCH



08 MEASURING TAPE





WARNING:
CHOKING HAZARD
SMALL PARTS, NOT FOR CHILDREN UNDER 3 YEARS



KING TONY
Enjoy your work

TOOL DIAMOND BLOCKS

SET B

TS00208


01 IMPACT SOCKET



02 IMPACT WRENCH




03 COMBINATION PLIERS



04 SLOTTED SCREWDRIVER



05 RATCHET TUBING CUTTER




06 TOOL TROLLEY



07 LED LAMP



08 TOOL BOX





WARNING:
CHOKING HAZARD
SMALL PARTS, NOT FOR CHILDREN UNDER 3 YEARS



Promotional Merchandise

Business & Office

Leather Male Wallet



ZS104

Size : 115 x 90 mm

Briefcase (Leather)



ZS107

Size : 400 x 350 x 80 mm

Leather Belt (Male)



ZS108

Ball-Bearing Pen



ZS402

Ball-Bearing Pen



ZS405

Ruler 30cm



ZS408

Notepaper



ZS517

Size : 75 x 75 mm

Mouse Pad



ZS306

Size : 180 x 180 x 3 mm

A4 Shape Clear File



ZS409

Size : 310 x 220 mm


Mat



ZS411

Size : 530 x 367 x 2 mm

Mat

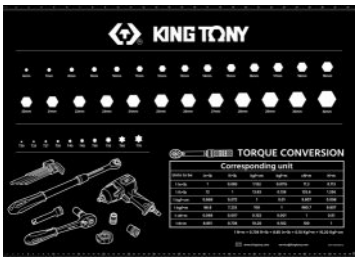





ZS418K new

Size : 700 x 500 x 2 mm

Leisure Products

Golf Umbrella



ZS116

Size : 68 x 8K

Personal Cooler Bag



ZS120-S new

Size : 290 x 150 x 210 mm
Weight : 352g

Handbag



ZS119

Size : 360 x 380 x 100 mm

Paper Cup



ZS511

Coaster



ZS514

Size : 99 x 99 mm

Stainless Grilling & Barbecue Utensils



ZS572

Mug



ZS606 new

Size : 900 x 240 mm
Capacity : 550ml

Beach Towel



ZS155

ZS155A

Size : 740 x 1400mm
80% Polyester
20% Nylon

Door mat

ZS417 new

Size :
600 x 900 x 08mm
PVC



Merchandise

Mini Pocket Tools



ZS522

Mini Pocket Tools



ZS524

Key Ring



ZS533

Mini Pocket Tools



ZS540

Clothes

Work Clothing



ZS109

Overall	Waist.(inch)	Hip(inch)
ZS109 - L	34"	48"
ZS109 - XL	36"	50"
ZS109 - 2L	38"	52"
ZS109 - 3L	41"	54"

Work Clothing



ZS112

Overall	Waist.(inch)	Hip(inch)
ZS112 - L	36"	44"
ZS112 - XL	40"	48"
ZS112 - 2L	44"	52"
ZS112 - 3L	48"	56"

Work Hat



ZS110

Hoodie



ZS146

Overall	Chest girth (inch)
ZS146 - S	51"
ZS146 - M	53"
ZS146 - L	56"
ZS146 - XL	61"
ZS146 - 2L	64"

Windbreaker Jacket



ZS141

Overall	Chest girth(inch)
ZS141 - S	44"
ZS141 - M	46"
ZS141 - L	48"
ZS141 - XL	50"
ZS141 - 2L	52"
ZS141 - 3L	54"

T-shirt




ZS142W



ZS142B

Overall	Shoulder width (inch)	Chest girth (inch)
S	16"	38"
M	17"	40"
L	18"	42"
XL	18-1/2"	44"
2L	19"	46"
3L	19.5"	48"

Polo-shirt

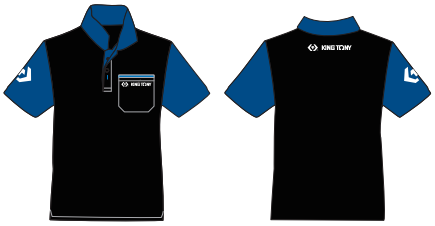

ZS126 new

Overall	Length (inch)	Sleeve length (inch)	Chest girth (inch)	Shoulder width (inch)
ZS126 - S	27"	9"	41"	18"
ZS126 - M	27.5"	9"	43"	19"
ZS126 - L	28"	10"	45"	20"
ZS126 - XL	29"	10"	47"	20.5"
ZS126 - 2L	29"	10"	50"	21.5"



Sales Support

Small Flag



ADFLAG

Size : 254 x 160 mm

Big Flag



ADFLAG1

Size : 930 x 1430 mm


Outdoor Flag



ADFLAG2

Size : 2100 x 600 mm

Canvas Strip



ADCV-01



ADCV-02

Size : 3000 x 800 mm

Stickers



ADSTK21KT	909 x 450 mm
ADSTK22KT	506 x 226 mm
ADSTK23KT	264 x 42 mm

Stickers



ADSTK31KT

Size : 660 x 160 mm

Stickers



ADSTK-C1

Size : ø - 250 mm



ADSTK-H2


Size : ø - 250 mm

Folding Tent



ZS115

ZS115-1



- Quick and easy to set up
- Tent roof made of high quality 600D fabric
- Waterproof and UV resistant
- Full structure made of robust steel
- Adjustable height, max to 3400 mm
- Includes practical carrier bag

KT NO.	Spec.	Height (mm)	kg	
ZS115	3000 x 3000 mm (not included ZS115-1)	3400	22	1 / 1
ZS115-1	2100 x 3000 mm Side curtain	-	0.9	1 / 15



ZS115-1 x 3




- Full truss structure



- Hanging capacity up to 70 kgs




- Foot pad comes with stake hole



- 3 section of height adjustment

Display Stand Series

Display Stand



87306A

Overall Size -
W 1000 x D 500 x H 2200 mm
Attachment-
1 PC. lamp case
2 PC. shelve
6 PC. steel plate with hole
40 PC. Black hooks
(170 x Ø3.6mm)
Weight - 46 Kg / Cuft - 5.9


Double-sided Display Stand



87307A

Overall Size -
W 1000 x D 960 x 2200 mm
Attachment-
2 PC. Lamp case(1 LED , 2 spotlights)
4 PC. Shelve
12 PC. Steel plate with hole
40 PC. Hooks
Weight - 75 Kg / Cuft - 12.16


Display Board



87203

Wall hanging type 30 PC. hook included
Overall Size -
W 725 x D 14 x H 900 mm
Weight - 11.50 Kg / Cuft - 0.328

Display Hook



87301- 494A 4" x Ø 4 mm
87301- 496A 6" x Ø 5.2 mm
87301- 498A 8" x Ø 5.2 mm
87301- 499A 9" x Ø 8 mm

Display Stand



87301-36(White)

Overall Size -
W 902 x D 268 x H 143 mm
Weight - 6.5 Kg / Cuft - 0.62



Hammer Hook






91431

Overall Size -
W 40 x D 210 x H 240 mm
Weight - 411.6 g / Cuft - 0.072

Steel Rack Hook





91432


Idea for hanging display & presenting tool set
230mm maximum depth
5kg maximum tool weight (heavier & longer items, you can put 2 PC. to hold)


Impact Wrench Hook



91451-01A(1/4"-19 BSPT)
91451-01B(1/4"-18 NPT)
91451-01F(1/4"-19 BSPT)

Wrench Display








87157-06

Capacity : 6 PC.
For all measuring tape
(1900 27x30~41x46 Series)
Size:100x100x46mm
Weight - 0.22 Kg
Cuft - 0.72

Wrench Display







87157-09

Capacity : 9 PC.
For all measuring tape
(1900 5.5x7~27x29 Series)
Size:100x100x46mm
Weight - 0.22 Kg
Cuft - 0.72

Side Panel for Display Stand



ADVT-04

Size : 240 x 900 mm

Side Panel for Display Stand



ADVT-05

Size : 240 x 900 mm

Magnetic Base




91422

Signage for Display Stand



ADVT-03X


Size : 960 x 55 mm
Magent

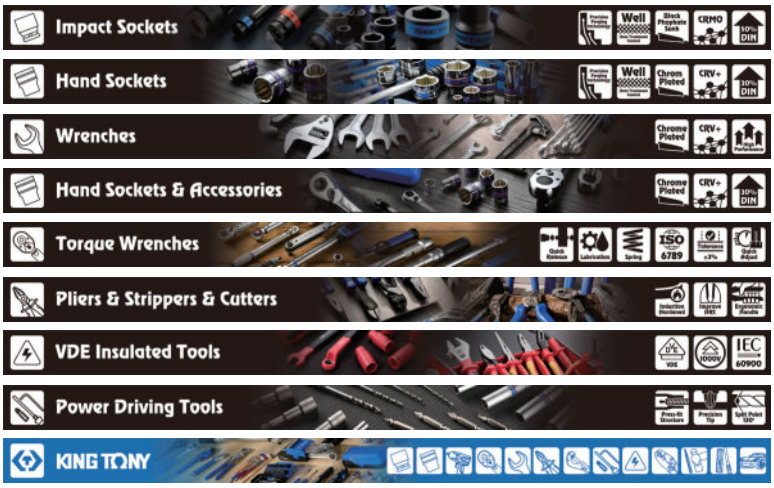

ADVT-031
ADVT-032
ADVT-033
ADVT-034
ADVT-035
ADVT-036
ADVT-037
ADVT-038
ADVT-039

Tool Display

Display Shelf for L-wrench

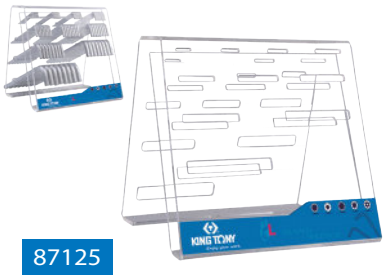

87125

Overall Size - W 220 x D 260 x H 5 mm
Weight 135g / Cuft 1.10
Reference : 2020H0MR

Display Stand



87152

Overall Size -W400 x D230 x H470 mm
Weight - 1.20 Kg / Cuft - 1.53

Display Rack for Torque Wrench



87153

Overall Size -W 330 x D 255 x H 475 mm
Weight - 1.23 Kg / Cuft - 1.41

Tools Display Stand



Overall Size -
W 280 x D 170 x H 45 mm
Weight - 1.2 Kg / Cuft 1.35

Impact Wrench Display Stand




87156A

Overall Size -
W 280 x D 170 x H 45 mm
Weight - 1.9Kg / Cuft 0.31



Contents



Socket Shelf



87102

87103

Width can be adjustable to display multiple socket series
Single serial socket size tab attached

Overall Size -
W 415 x D 336 x H 320 mm
Weight - 6.85 Kg(87102)
6.37 kg(87103)
Cuft - 0.67

Reference:
3568MR
4072MR / 4572MR
4072SR / 4572SR
4066MR / 4566MR
4066SR
4472MP/4472SP
4466MP/4466SP

Screwdriver Shelf



87105 87107 87111

87105-W 595 x D 240 x H 210 mm
Weight - 3.40 Kg Cuft - 1.97
87107-W 383 x D 136 x H 130 mm
Weight - 0.86 Kg
87111-W 655 x D 240 x H 210 mm
Weight - 3.80 Kg Cuft - 2.2

Reference:
87105 (31416MR)
(31516MR)
87107 (31419MR)
87110 (31512MR)
87111 (31519MR)


Impact Wrench Display Stand



- 871061A(1/4"-19 BSPT)
- 871061B(1/4"-18 NPT)
- 871061F(1/4"-19 BSPT)

Reference :
Applied for 3/8"&1/2" DR. air tools

Screwdriver Shelf

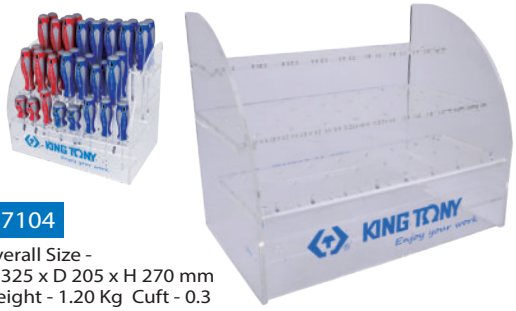

87104

Overall Size -
W 325 x D 205 x H 270 mm
Weight - 1.20 Kg Cuft - 0.3

Metal Holder for Flat Chisel



87108

Metal Holder



8711B

Overall Size -
W 600 x D 240 x H 60 mm
Weight - 6.20 Kg
Cuft - 0.9
Reference :
1090PR1




KING TONY


Sign List

Internal hexagon	External hexagon	Bi - hexagon	Spline head	Spline head - tamper resistant	Internal torx	External torx	External torx - tamper resistant	Double square
torx plus- tamper resistant	torx plus	Ribe bit socket	Phillips head	Slotted head	Pozidriv	PlusMinus	Internal square	External square
External square	Ribe socket 12 mm	Ribe socket 10 mm	Axial lock nut	Square	Crowfoot	Hook wrench	External KM locknut	Internal KM locknut
Speical profile for wheel nut	Claw Pickup	Internal square	Hexagon	Pentagon	Ball hex	Flat face - roung	Flat face - square	Milled square face
Internal circlip	External circlip	Thin serrated	Coarse serrated	Smooth	With opening spring	Round jaws	Half-round jaws	Flat & point jaws
Soft wire	Medium hard wire	Hard wire	Piano wire	Europe	America & Asia	Australia & New Zealand	English	Australia
Changeable blade	Guide rollers	Cutter wheel	Outside diameter (O.D.)	Wall thickness	Inside diameter (I.D.)	(mm) Capacity of open jaw	Diameter	
Center cut	With bevel	With small bevel	With very small bevel	Without bevel				
Max. torque	Air inlet	Free speed	Air pressure	Std. bolt size	Air hose	Anvil type	Avg. air consumption	Sound
Vibration level	Litre capacity	Q'ty / Carton	Q'ty / Box	Q'ty / Bag	Q'ty / Blister card	(g)(kg) Weight		
Light weight	1000V	ESD	ISO	CE certificate	VDE certificate	G.S. approval	TUV certificate	



HGV	Commercial Vehicles	Small commercial vehicles	Passenger cars	Buses	Construction vehicles	Agricultural machinery	Motorcycles	Engine series
Agricultural machinery-tiller	Chassis	Steel construction	Assembly line	Factory	Diesel engine	Petrol engine	Timing belt	Timing chain
Strobe	IP Protection	Adjustable lighting	Lumen	Lighting for hours	Watt	Adjustment button	Thickness	Magnetic
USB cable	USB charger	Cable length	Charging time	DC charger	AC charger	Li-ion battery	Battery	IK07/ IP20
10 cm range								





It all fits together

■ DIN screwdrivers

Slotted screws

Size	2x0.4	2.5x0.4	3x0.5	3.5x0.6	4x0.8	5.5x1	6.5x1.2	8x1.2	10x1.6
Metric screws									
Flat head M — ISO 2009		1.6	2	2.5	3	3.5	4 5		
M — DIN 963		1.6	2	2.5	3 3.5	4	5		
Oval head M — ISO 2010		1.6	2	2.5	3	3.5	4 5		
M — DIN 964		1.6	2	2.5	3 3.5	4	5		
Cheese head M — ISO 1207						3.5	4	5	6
M — DIN 84		1.6 1.8	2	2.5		4	4	5	6
Pan head M — ISO 1580		1.6	2	2.5	3	3.5	4	5	6
M — DIN 85					3	3.5	4 5		6
M — DIN 920		2.5	3/3.5	4	5	6	8		10
M — DIN 921		1.6	2	2.5	3 3.5	4		5	6
Set M — ISO 4766 7435 — DIN 551 417	2.5 3	3.5	4		5 6		8		
M — ISO 4735 — DIN 427	2.5 3	3.5	4		5 6		8		14
Self tapping screws									
Flat head B — ISO 1482			2.2		2.9	3.5	4.2 4.8		
B — DIN 7972			2.2		2.9	3.5 3.9	4.2 4.8		
Oval head B — ISO 1483			2.2		2.9	3.5	4.2 4.8		
B — DIN 7973			2.2		2.9	3.5 3.9	4.2	4.8	6.3
Pan head B — ISO 1481			2.2		2.9	3.5		4.2 4.8	5.5 6.3
B — DIN 7971				2.9	2.9	3.5		4.2 4.8	5.5 6.3

Phillips + Pozidriv

Size	00	0	1	2	3	4
Metric screws						
Flat head M — ISO 7046 — DIN 965		1.6 2	2.5 3	3.5 5	6	8 10
Oval head M — ISO 7047 — DIN 966		1.6 2	2.5 3	3.5 5	6	8 10
Pan head M — ISO 7045 — DIN 7985		1.6 1.8	2.5 3	3.5 5	6	8 10
Self tapping screws						
Flat head B — ISO 7049 — DIN 7981			2.2 2.9	3.5 4.8	5.5 6.3	
Oval head B — ISO 7050 — DIN 7982			2.2 2.9	3.5 4.8	5.5 6.3	
Pan head B — ISO 7051 — DIN 7983			2.2 2.9	3.5 4.8	5.5 6.3	
ANSI screws		0-1	2-4	5-10	12-16	18-...

■ How to find the correct screwdriver

	Slotted	Phillips	Pozidriv	Torx	Torx	Square	Hex	Nut
Classic Screwdriver	1412	1411						
SoftFinish Screwdriver	1422	1421	1428	1423	1427	1424		
Classic Screwdriver (Heavy Duty)	1482	1481						
SoftFinish Screwdriver (heavy Duty)	1462	1461						
Nutspinner								1450 5450 1453
SoftFinish Electric	1472	1471	1478					
Precision Screwdriver	1432	1431		1433				
Exchangeable ratchet Screwdriver	32809	32809		32809				
Two-way screwdriver	2411 1317 2431	2411 1317 2431	1317	1317 2433			1317	32810
Torque Screwdriver							3411	

Internal Torx			For torx head screw										
			T5	T6	T7	T8	T9	T10	T15	T20	T25	T27	T30	T40
mm			1.42	1.70	1.99	2.31	2.50	2.74	3.27	3.86	4.43	4.99	5.52	6.65
Metric screws														
Cheese head M	ISO 4762	DIN 912	*	2	*	2.5		3		4	5	**	6	
Flat head M	ISO 4760	DIN 963 965	*	*	*	2.5		3	3.5	4	5	**	6	8
Oval head M	ISO 7047 2010	DIN 964 966	*	2	*	2.5		3	3.5	4	5	**	6	
Cheese head M		DIN 7984 6912	*	*	*	2.5		3		4	5	**	6	
Oval head M	ISO 7045	DIN 7985	*	2	*	2.5		3	3.5	4	5	**	6	
Flat head M	ISO 10642	DIN 7991	*	*	*	2.5		3		4	5	6	**	8
Self tapping screws														
Pan head B	ISO 7049	DIN 7981 7982	*	2.2	*	2.9		3.5	3.9	4.2 5.5	4.8	**	6.3	
Flat head B	ISO 7050	DIN 7972 7983	*	2.2	*	2.9		3.5	3.9	4.2	4.8 5.5	**	6.3	
Oval head B	ISO 7051	DIN 7973	*	2.2	*			3.5	3.9	4.2	4.8 5.5	**	6.3	8

*** Screws for tungsten carbide inserts** **** Special screws**

Index	
ISO International standard	
DIN German standard	
M Metric screws	Thread diameter
M Set screw metric	Thread diameter
M Metric nut	Thread diameter
B Self tapping screw	Thread diameter
	Symbols
Tool drive = screwdriver socket	
for screws with internal drive	
Took drive = Nutdriver socket	
for screws with head drive	



Bits / Sockets for S size

TORX internal screw		T5	T6	T7	T8	T9	T10	T15	T20	T25	T27
	S(ref.mm)	1.42	1.7	2	2.32	2.5	2.74	3.28	3.86	4.43	4.99
	Screws(ref)	M1.5	M2	M2.5	M2.5	M3	M3/M3.5	M3.5/M4	M4/M5	M4.5/M5	M4.5/M5/M6
		T30	T40	T45	T50	T55	T60	T70	T80	T90	T100
	S(ref.mm)	5.52	6.65	7.82	8.84	11.23	13.26	15.54	17.58	19.95	22.16
	Screws(ref)	M6/M7	M7/M8	M8/M10	M10	M12	M14	M16	M18	M20	M22

SPLINE		M4	M5	M6	M8	M10	M12	M14	M16	M18	M20
	S(ref.mm)	3.6	4.8	6	7.2	9.6	11.41	13.22	15.63	16.85	19.25
	Screws(ref)	M4	M5	M6	M8	M10	M12	M14	M16	M18	M20

RIBLE		M5	M6	M7	M8	M9	M10	M12	M13	M14	M16
	S(ref.mm)	5	6	7	8	9	10	12	13	14	16
	W(ref.mm)	1.1	1.3	1.4	1.7	1.9	2.2	2.6	3	3.1	3.5
	Screws(ref)	M6	M8		M10	M10	M12				

IPR		IPR8	IPR9	IPR10	IPR15	IPR20	IPR25	IPR27	IPR30	IPR40	IPR45	IPR50	IPR55	IPR60
	S(ref.mm)	2.14	2.33	2.58	3.07	3.63	4.16	4.70	5.22	6.27	7.32	8.32	10.54	12.45

TORX external screw		E4	E5	E6	E7	E8	E10	E11	E12	E14	E16	E18	E20
	S(ref.mm)	3.83	4.72	5.69	6.17	7.47	9.37	10.03	11.12	12.85	14.71	16.64	18.41
	Screws(ref)	M3	M4	M5	M6	M6/M7	M8	M8/M10	M10	M12	M12	M14	M16
		E22	E24	E26	E28	E30	E32	E34	E36	E38	E40	E42	E44
	S(ref.mm)	20.24	22.1	23.85	25.65	27.38	29.16	30.96	32.82	34.67	36.37	38.2	39.98
	Screws(ref)	M18	M18/M20										


SQUARE		RB00	RB0	RB1	RB2	RB3	RB4
	S(ref.mm)	1.30	1.80	2.30	2.86	3.38	4.85



Torque Data

mm	mm	mm	Bolts and nuts classes (SAE threads, triangular shape, high pitch 0.15 coefficient)					
			4.8 Torque N · m	5.8 Torque N · m	6.8 Torque N · m	8.8 Torque N · m	10.9 Torque N · m	12.9 Torque N · m
M3	5.5	2.5	0.64	0.8	0.91	1.21	1.79	2.09
M4	7	3	1.48	1.83	2.09	2.78	4.09	4.79
M5	8	4	2.93	3.62	4.14	5.5	8.1	9.5
M6	10	5	5	6.2	7.1	9.5	14	16.4
M8	13	6	12.3	15.2	17.4	23	34	40
M10	16	8	24	30	34	46	67	79
M12	18	10	42	52	59	79	116	136
M14	21	12	67	83	94	127	187	219
M16	24	14	105	130	148	198	291	341
M18	27	14	145	179	205	283	402	471
M20	30	17	206	254	291	402	570	667
M22	34	17	283	350	400	552	783	917
M24	36	19	354	438	500	691	981	1148
M27	41	19	525	649	741	1022	1452	1700
M30	46	22	712	880	1005	1387	1969	2305
M33	50	24	968	1195	1366	1884	2676	3132
M36	55	27	1242	1534	1754	2418	3435	4020
M39	60		1614	1994	2279	3139	4463	5223
M42	65	32	1995	2464	2816	3872	5515	6453
M45	70		2497	3085	3525	4847	6903	8079
M48	75	36	3013	3722	4254	5849	8330	9748
M52	80		3882	4795	5480	7535	10731	12558
M56	85	41	4839	5978	6832	9394	13379	15656
M60	90		6013	7428	8490	11673	16625	19455
M64	95	46	7233	8935	10212	14041	19998	23402

* In order not over-tighten the fastener, please refer manufacturer's service manual, or TORQUE DATA for tightening torque information
* Torque tightening is refer to "thread dimension" of screw, which is M3~M64 size mention above table

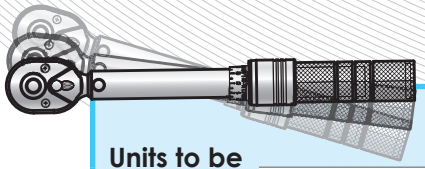

Torque Conversion

Units to be	Corresponding unit					
	in · lb	**ft · lb**	**kgf · cm**	**kgf · m**	**cN · m**	**N · m**
1 in · lb	1	0.083	1.152	0.0115	11.3	0.113
1 ft · lb	12	1	13.83	0.138	135.6	1.356
1 kgf · cm	0.868	0.072	1	0.01	9.807	0.098
1 kgf · m	86.8	7.233	100	1	980.7	9.807
1 cN · m	0.088	0.007	0.102	0.001	1	0.01
1 N · m	8.851	0.738	10.20	0.102	100	1

1 N · m = 0.738 ft · lb = 8.85 in · lb = 0.10 Kgf · m = 10.20 Kgf · cm










Torque Data

IMPERIAL

inch	threads per inch	Bolts and nuts classes (SAE threads, triangular shape, high pitch 0.15 coefficient)			
		307A A Torque ft · lb	5 Torque ft · lb	8 Torque ft · lb	9 Torque ft · lb
Coarse Thread Series					
1/4	20	32 in · lb	76 in · lb	107 in · lb	126 in · lb
5/16	18	66 in · lb	157 in · lb	221 in · lb	259 in · lb
3/8	16	10	23	33	38
7/16	14	16	37	52	61
1/2	13	24	57	80	94
9/16	12	35	82	115	135
5/8	11	48	113	159	186
3/4	10	85	200	282	331
7/8	9	136	322	455	533
1	8	204	483	681	799
1-1/4	7	409	840	1363	1597
1-1/2	6	711	1462	2371	2779
Fine Thread Series					
1/4	28	37 in · lb	87 in · lb	123 in · lb	144 in · lb
5/16	24	73 in · lb	174 in · lb	245 in · lb	287 in · lb
3/8	24	11	26	37	43
7/16	20	18	41	58	68
1/2	20	27	64	90	105
9/16	18	39	91	128	151
5/8	18	54	127	180	211
3/4	16	94	223	315	369
7/8	14	150	355	502	588
1	14	229	542	765	896
1-1/4	12	453	930	1509	1768
1-1/2	12	800	1645	2668	3127

* note : Torque-Tension relationship for ASTM A307 Grade A(SAE J2), SAE J429 Grade 5, SAE J429 Grade 8 & FNL Grade 9 Bolts
* note : Torque values for 1/4" and 5/16" are in in·lb. All other torque values are in ft·lb

Hanger No. List

	Hanger No.	Suitable Size	Hanger No. (with product)
Socket Hanger for 1/4" DR. Socket	08782100 	1/4"DR. Socket	 KT No. & D1
Socket Hanger for 3/8" DR. Socket	08783100 	3/8"DR. Socket	 KT No. & D1
Socket Hanger for 1/2" DR. Socket	08784100 	1/2"DR. Socket	 KT No. & D1
Socket Hanger for 3/4" DR. Socket	08786100 	3/4"DR. Socket	 KT No. & D1
Hanger for 1/4" DR. Accessories	08782102 	1/4"DR. Ratchet, sliding T-handle, flexible handle	 KT No. & D1
Hanger for 3/8" DR. Accessories	08783102 	3/8"DR. Ratchet, sliding T-handle, flexible handle	 KT No. & D1
Hanger for 1/2" DR. Accessories	08784102 	1/2"DR. Ratchet, sliding T-handle, flexible handle	 KT No. & D1
Hanger for Wrench	8781103 choose suitable hangers according to different sizes 	For example,1060 6~9mm	 KT No. & D1
Hanger for Wrench & Nut Spinner	8781100 choose suitable hangers according to different sizes 	For example,1060 10~19mm & nut spinner	 KT No. & D1
Hanger for Wrench	8781101 choose suitable hangers according to different sizes 	For example,1060 20~23mm	 KT No. & D1
Hanger for Wrench	8781102 choose suitable hangers according to different sizes 	For example,1060 24~32mm	 KT No. & D1
Hanger for Speed Wrench	087837(size)KT 	Speed wrench, open-side speed wrench size, 8~24mm	 KT No. & D1
Hanger for Screwdriver	8785100 choose suitable rubber rings according to different sizes 	Screwdriver, hex key, spline L-wrench, star L-wrench, L-type wrench, T-type wrench	 KT No. & D1
Hanger for Power Driving	8785001 	Power driving 9.5mm groove	 KT No. & D1

Index

10 xxx

1005APR.....472
1005GQ.....495
1006APR.....472
1006GPN.....474
1006PR.....473
1006PRN.....473
1009GPN.....474
1009PR.....473
1009PRN.....473
1010CMR.....406
1010PR.....473
1011MQ.....392
1014GPN.....474
1015GQ.....495
1015MQ.....392
1015PQ.....392
1016PR.....473
1020-08.....333
1020-09.....333
1020-10 333
1020-11 333
1020-12 333
1020-13 333
1020-14 333
1020-15 333
1020-16 333
1020-17 333
1020-18 333
1020-19 333
1023EQ 392
1025PRN.....473
102500P 388
102500P.B 388
102500R 389
102500R.B 389
102501P 388
102501P.B 388
102501R 389
102501R.B 389
102501Z 389
102501Z.B 381
102502P 388
102502P.B 388
102502P-S1 398
102502H 388
102502H.B 388
102502R 389
102502R.B 389
102502Z 389
102502Z.B 389
102502Z-S1 398
102503H 388
102503H.B 388
102503P 388
102503P.B 388
102503R 389
102503R.B 389
102503S1 388
102503S1.B 388
102503Z 389
102503Z.B 389
102504H 388
102504H.B 388
102504M 388
102504P 388
102504P.B 388
102504S1.....388
102504S1.B 388
102504S2 388
102504S2.B 388
102505H 388
102505H.B 388
102505M 388
102505S1 388
102505S1.B 388
102506H 388
102506H.B 388
102506M 388
102506S1.....388
102506S1.B 388
102506T 388
102506T.B 388
102507H 388
102507H.B 388
102507S1 388
102507S1.B 388
102507T 388
102507T.B 388
102507U 388
102507U.B 388
102508H 388
102508H.B 388
102508M 388
102508S1 388
102508S1.B 388
102508S2 388
102508S2.B 388
102508T 388
102508T.B 388
102508U 388
102508U.B 388
102508V 388
102509T 388
102509T.B 388
102509U 388
102509U.B 388
102509V 388
102510H 388
102510H.B 388
102510M 388
102510T 388
102510T.B 388
102510T-S1 398
102510U 388
102510U.B 388
102510V 388
102512P 388
102512P.B 388
102515H 388
102515H.B 388
102515T 388
102515T.B 388
102515T-S1 398
102515U 388
102515U.B 388
102515V 388
102520T 388
102520T.B 388
102520T-S1 398
102520U 388
102520U.B 388
102520V 388
102525H 388
102525H.B 388
102525T 398
102525T.B 388
102525T-S1 398
102525U 388
102525U.B 388
102525V 388
102527T.....388
102527T.B 388
102527U 388
102527U.B 388
102527V 388
102530T 388
102530T.B 388
102530T-S1 398
102530U 388
102530U.B 388
102530V 388
102535S1 388
102535S1.B 388
102535T 388
102535T.B 388
102540T 388
102540T.B 388
102540U 388
102540U.B 388
102540V 388
102545S1 388
102545S1.B 388
102545T 388
102545T.B 388
102550T 388
102550T.B 388
102555S1 388
102555S1.B 388
102555S2 388
102555S2.B 388
102565S1 388
102565S1.B 388
1025PRN.....473
1026CQ-AM 397
1031-10R 331
1031-11R 331
1031-12R 331
1031-13R 331
1031-14R 331
1031-15R 331
1031-16R 331
1031-17R 331
1031-18R 331
1031-19R 331
1031-22R 331
1031-24R 331
1031-26R 331
1031-27R 331
1031-30R 331
1031-32R 331
1031-33R.....331
1031-34R 331
1031-35R 331
1031-36R 331
1031-38R 331
1031-41R 331
1031-46R 331
1031-48R 331
1031-50R 331
1032CQ 398
1032CQ01 398
1035MR 408
1036MR 408
1036ZQ 496
1040CQ 392
1041CQ-EB 411
1042CQ 392
1043CQ 392
1044CQ 393
1044MR 408
1045MR 409
1045MR01-EB 410
1048MR 394
1049CQ.....409
1060-06 322
1060-07 322
1060-08 322
1060-09 322
1060-10 322
1060-11 322
1060-12 322
1060-13 322
1060-14 322
1060-15 322
1060-16 322
1060-17 322
1060-18 322
1060-19 322
1060-20 322
1060-21 322
1060-22 322
1060-23 322
1060-24 322
1060-25 322
1060-26 322
1060-27 322
1060-28 322
1060-29 322
1060-30 322
1060-32 322
1060-55 322
1061-06 319
1061-07 319
1061-08 319
1061-09 319
1061-10 319
1061-11 319
1061-12 319
1061-13 319
1061-14 319
1061-15 319
1061-16 319
1061-17 319
1061-18 319
1061-19 319
1061-20 319
1061-21 319
1061-22 319
1061-23 319
1061-24 319
1061-25 319
1061-26 319
1061-27 319
1061-28 319
1061-29 319
1061-30 319
1061-32 319
1062-06 320
1062-07 320
1062-08 320
1062-09 320
1062-10 320
1062-11 320
1062-12 320
1062-13 320
1062-14 320
1062-15 320
1062-16 320
1062-17 320
1062-18 320
1062-19 320
1062-20 320
1062-21 320
1062-22 320
1062-23 320
1062-24 320
1062-25 320
1062-26 320
1062-27 320
1062-28 320
1062-29 320
1062-30 320
1062-32 320
1063-06 324
1063-08 324
1063-11 324
1063-14 324
1063-15 324
1063-16 324
1063-18 324
1063-21 324
1063-22 324
1063-30 324
1063-32 324
1067-06 324
1067-07 324
1067-08 324
1067-09 324
1067-10 324
1067-11 324
1067-12 324
1067-13 324
1067-14 324
1067-15 324
1067-16 324
1067-17 324
1067-18 324
1067-19 324
1067-20 324
1067-21 324
1067-22 324
1067-23 324
1067-24 324
1067-25 324
1067-26 324
1067-27 324
1067-28 324
1067-29 324
1067-30 324
1067-32 324
1071-33 322
1071-34 322
1071-35 322
1071-36 322
1071-38 322
1071-41 322
1071-42 322
1071-44 322
1071-46 322
1071-48 322
1071-50 322
1071-55 322
1071-60 322
1071-65 322
1071-70 322
1071-75 322
1071-80 322
1071-85 322
1080-06 341
1080-07 341
1080-08 341
1080-09 341
1080-10 341
1080-11 341
1080-12 341
1080-13 341
1080-14 341
1080-15 341
1080-16 341
1080-17 341
1080-18 341
1080-19 341
1080-20 341
1080-21 341
1080-22 341
1080-23 341
1080-24 341
1080-25 341
1080-26 341
1080-27 341
1080-28 341
1080-29 341
1080-30 341
1080-32 341
1081-06 341
1081-07 341
1081-08 341
1081-09 341
1081-10 341
1081-11 341
1081-12 341
1081-13 341
1081-14 341
1081-15 341
1081-16 341
1081-17 341
1081-18 341
1081-19 341
1081-20 341
1081-21 341
1081-22 341
1081-23 341
1081-24 341
1081-25 341
1081-26 341
1081-27 341
1081-28 341
1081-29 341
1081-30 341
1081-32 341
1084-08 340
1084-09 340
1084-10 340
1084-11 340
1084-12 340
1084-13 340
1084-14 340
1084-15 340
1084-16 340
1084-17 340
1084-18 340
1084-19 340
1090PR1 472
10A0-24 334
10A0-27 334
10A0-30 334
10A0-32 334
10A0-36 334
10A0-41 334
10A0-46 334
10A0-50 334
10A0-55 334
10A0-60 334
10A0-65 334
10A0-70 334
10A0-75 334
10A0-80 334
10A0-85 334
10A0-90 334
10A0-95 334
10A0-A0 334
10A0-A5 334
10A0-B0 334
10A0-B5 334
10A0-C0 334
10A0-C5 334
10B0-24 334
10B0-26 334
10B0-27 334
10B0-30 334
10B0-32 334
10B0-36 334
10B0-41 334
10B0-46 334
10B0-50 334
10B0-55 334
10B0-60 334
10B0-65 334
10B0-70 334
10B0-75 334
10B0-80 334
10B0-85 334
10B0-90 334
10B0-95 334

Index

10B0-A0 334
10B0-A5 334
10B0-B0 334
10B0-B5 334
10B0-C0 334
10B0B-24..... N15
10B0B-26..... N15
10B0B-E18..... N15
10B0B-E20..... N15
10B0B-E24..... N15
10C0-24 334
10C0-27 334
10C0-30 334
10C0-32 334
10C0-36 334
10C0-41 334
10C0-46 334
10C0-50 334
10C0-55 334
10C0-60 334
10C0-65 334
10D0-08 325
10D0-09 325
10D0-10 325
10D0-11 325
10D0-12 325
10D0-13 325
10D0-14 325
10D0-15 325
10D0-16 325
10D0-17 325
10D0-18 325
10D0-19 325
10F0-17P 325
10F0-19P 325
10F0-21P 325
10F0-22P 325
10F0-23P 325
10F0-24P 325
10F0-26P 325
10F0-27P 325
10F0-29P 325
10F0-30P 325
10F0-32P 325
10F0-36P 325
10F0-38P 325
10F0-41P 325
10F0-46P 325
10F0-50P 325
10F0-55P 325
10F0-60P 325
10F0-65P 325
10F0-70P 325
10F0-75P 325
10F0VE-07..... 429
10F0VE-08..... 429
10F0VE-09..... 429
10F0VE-10..... 429
10F0VE-11..... 429
10F0VE-12..... 429
10F0VE-13..... 429
10F0VE-14..... 429
10F0VE-15..... 429
10F0VE-16..... 429
10F0VE-17..... 429
10F0VE-18..... 429
10F0VE-19..... 429
10F0VE-20..... 429
10F0VE-21..... 429
10F0VE-22..... 429
10F0VE-23..... 429
10F0VE-24..... 429
10G0VE-07..... 429
10G0VE-08..... 429
10G0VE-09..... 429
10G0VE-10..... 429
10G0VE-11..... 429
10G0VE-12..... 429
10G0VE-13..... 429
10G0VE-14..... 429
10G0VE-15..... 429
10G0VE-16..... 429
10G0VE-17..... 429
10G0VE-18..... 429
10G0VE-19..... 429
10G0VE-21..... 429
10G0VE-22..... 429
10G0VE-24..... 429

11 xxx

110115SQ..... N20
1106MR 326
1106MR01 326
1108MR 326
1108SR 326
11101SQ 407
11104PR 474
11104PR10 474
1110MR 326
1112MR 326
1112MRN 326
1112SR 326
111946 334
112002MR 414
112003MR 414
112004MR 414
112005MR 414
112006MR 414
112007MR 414
112008MR 414
112010MR 414
112015MR 414
112025MR 414
11205SQ 489
11208SQ 489
11225SQ 490
112261 334
112310R 416
112315R 416
112320R 416
112325R 416
112327R 416
112330R 416
112340R 416
112345R 416
112350R 416
112502MR 412
112502SR 412
112503MR 412
112503SR 412
112504MR 412
112504SR 412
112505MR 412
112505SR 412
112506MR 412
112506SR 412
112507MR 412
112508MR 412
112508SR 412
112510MR 412
112510SR 412
112512MR 412
112512SR 412
112514MR 412
112515MR 412
112516SR 412
112517MR 412
112518SR 412
112519MR 412
112522MR 412
112525MR 412
112525SR 412
112576 334
112605MR 413
112606MR 413
112608MR 413
112610MR 413
112612MR 413
112710R 416
112715R 416
112720R 416
112725R 416
112727R 416
112730R 416
112740R 416
112745R 416
112750R 416
113002MR 414
113002SR 414
113003MR 414
113003SR 414
113004MR 414
113004SR 414
113005MR 414
113005SR 414
113006MR 414
113006SR 414
113007SR 414
113008MR 414
113008SR 414
113010MR 414
113010SR 414
113012SR 414
113015MR 414
113025MR 414
113025SR 414
11305SQ 571
113086 334
11310SQ 489
11311MQ 496
11325SQ..... 497
11328SQ..... 497
11406SQ 490
11409SQ02..... 475
11409SQ03..... 475
11409SQ04..... 475
11409SQ05..... 475
11409SQ06..... 475
11409SQ08 475
11427SQ02..... 475
11427SQ03..... 475
11427SQ04..... 475
11427SQ05 475
11427SQ06..... 475
11427SQ08 475
114310R 416
114315R 416
114320R 416
114325R 416
114327R 416
114330R 416
114340R 416
114345R 416
114350R 416
114502MR 412
114502SR 412
114503SR 412
114504SR 412
114505SR 412
114506SR 412
114508SR 412
114510SR 412
114512SR 412
114516SR 412
114518SR 412
114520SR 412
114524SR 412
114525SR 412
114503MR 412
114504MR 412
114505MR 412
114506MR 412
114507MR 412
114508MR 412
114510MR 412
114515MR 412
114525MR 412
114555MR 412
114605MR 413
114606MR 413
114608MR 413
114610MR 413
114612MR 413
114710R 416
114715R 416
114720R 416
114725R 416
114727R 416
114730R 416
114740R 416
114745R 416
114750R 416
115002MR 421
115003MR 421
115004MR 421
115005MR 421
115006MR 421
115008MR 421
115010MR 421
115025MR 421
11509SQ05..... 475
11527SQ05..... 475
115310R 422
115315R 422
115320R 422
115325R 422
115327R 422
115330R 422
115340R 422
115345R 422
115350R 422
1153A05R 423
1153A06R 423
1153A07R 423
1153A08R 423
1153A09R 423
1153A10R 423
1153A15R 423
1153A20R 423
115502MR 421
115503MR 421
115503SR 421
115504MR 421
115504SR 421
115505MR 421
115505SR 421
115506MR 421
115506SR 421
115508MR 421
115508SR 421
115510MR 421
115510SR 421
115512SR 421
115525MR 421
115525SR 421
115H05M-10 346
115H06M-10 346
115H07M-10 346
115H08M-10 346
115H08M-14 346
115H09M-10 346
115H10M-10 346
115H10M-14 346
115H11M-10 346
115H12M-10 346
115H13M-10 346
115H13M-14 346
116002MR 420
116003MR 420
116004MR 420
116005MR 420
116006MR 420
116007MR 420
116008MR 420
116010MR 420
116025MR 420
116310R 420
116310TR 420
116315TR 420
116320TR 420
116325TR..... 420
116327TR..... 420
116330TR..... 420
116340TR..... 420
116345TR..... 420
116350R 420
116350TR..... 420
1163A05R 423
1163A06R 423
1163A07R 423
1163A08R 423
1163A09R 423
1163A10R 423
1163A15R 423
1163A20R 423
116502MR 420
116503MR 420
116504MR 420
116505MR 420
116506MR 420
116507MR 420
116508MR 420
116510MR 420
116525MR 420
118406M 346
118407M 346
118408M 346
118409M 346
118410M 346
118411M 346
118412M 346
118413M 346
118414M 346
118417M 346
118508M 346
118509M 346
118510M 346
118511M 346
118512M 346
118513M 346
118514M 346
118517M 346
118519M 346
119502M 423
119503M 423
119504M 423
119505M 423
119506M 423
119508M 423
119510M 423
119525M 423
11A310R 422
11A315R 422
11A320R 422
11A325R 422
11A327R 422
11A330R 422
11A340R 422

12 xxx

1207MR 323
1207SR 323
1208MR 323
1210MR 323
12107MRN 336
12107MRN01..... 336
12109MRS01 321
1211MR 323
1211MRN 323
1211SR 323
1211SR01 323
1211SR02 323
12112MRN 336
12112MRS02 321
12114MRN 336
1212MR 323
1212MR01 323
1213SRN..... 323
1214MR 323
1214MR01 323
1214MRN..... 323
1214MRN05 323
1214SR 323
1214SRN01 323
1215MR 323
1215MR01 323
1215MR02 323
1215MRN01 323
1215MRN02 323
1216SR 323
1216SRN 323
1218MR01 323
1218MRN 323
12207SRN..... 337
12208SRS..... 321
122A06MR..... N15
122A06MR01..... N15
122A07MRN01..... 337
122A07MRN02..... 337
122A09MRS01 321
122A12MRN 337
122A12MRS02 321
122A14MRN 337
1224CRN 323
1226MR 323
1226MRN 323
1266MR 324
1272MR 324
1275MR 324
1275MRN 324
1282MR 325
12916MQ1 498
12939MQ1 498
12939MQ-A 498
12939MQ-A03 .. 498
12939SQ1 498
12939SQ-A 498
12939SQ-A03 .. 498
1296MRN 323
12A0MRN 319
12A09MRS01 321
12A1MRN 319
12A2MRS02 321
12A3MRN 319
12A4MRN 319
12B4MRN 319
12C7MRN01 319
12C8MRN 319
12D06MRS..... 321
12D06MRS01..... N15
12D09MRN 320
12D09MRS01 321
12D10MRN 320
12D12MRS 321
12D12MRS01..... 321
12D13MRN 320

Index

12D14MRN05....320
12D15MRN.....320
12D15MRN01....320
12D18MRN.....320
12D21MRN 320
12D26MRN.....320
12D06MRS01.....N15
12FVE08MRN..429
12FVE10MRN..429

13 xxx

13012MR 336
13013MR 336
1305SR.....332
1306MR 332
1306MRN 332
131101P 403
131102P 403
131103P 403
13113MR 336
131501P 403
131502P 403
131503P 403
1317012PN 386
1317012ZN 386
1317046SN 386
1317057SN 386
1317115TN 386
1317225TN 386
1317340TN 386
1317401PN 386
131744BHN 386
1317501ZN 386
131755BHN 386
1317602PN 386
131766BHN 386
1317702ZN 386
132A13MR 337
132A13MR01.....N16
134501P 403
134502P 403
134503P 403
1360012P 389
1360022P 389
1360023P 389
1360023Z 389
1360451Z 389
1360552P 389
1360552Z 389
1360703P 389
136501P 403
136502P 403
136503P 403
13A6502P 403
13B6502P 403

14 xxx

1406PR 332
14103GP 288
14108SRN 339
14110003 380
14110104 380
14110204 380
14110204-E* 380
14110205-E* 380
14110206 380
14110206-E* 380
14110208-E* 380
14110214 380
14110306 380
14110308 380
14120303 380
14120404 380
14120806 380
14120808 380
14125504 380
14126504 380
14126504-E* 380
14126506 380
14126506-E* 380
14126514 380
14210023 376
14210104 376
14210112 376
14210116 376
14210132 376
14210204 376
14210206 376
14210212 376
14210214 376
14210216 376
14210306 376
14220303 376
14220404 376
14220503 376
14220504 376
14220512 376
14220516 376
14220806 376
14220807 376
14220808 376
14221008 376
14225503 376
14225504 376
14225505 376
14225506 376
14226504 376
14226506 376
14226512 376
14226514 376
14226516 376
14230602 377
14230702 377
14230803 377
14230903 377
14231003 377
14231503 377
14231510 377
14232004 377
14232010 377
14232504 377
14232510 377
14232704 377
14233005 377
14233010 377
14234006 377
14240206 377
14270803 377
14270903 377
14271003 377
14271503 377
14272004 377
14272504 377
14272704 377
14273005 377
14274006 377
14280023 377
14280104 377
14280132 377
14280204 377
14280306 377
14311003 439
14311015 439
14311103 439
14311115 439
14312003 439
14312015 439
14313003 439
14313015 439
14320615 439
14320815 439
14321003 439
14321015 439
14321503 439
14321515 439
14321803 439
14321815 439
14322003 439
14322015 439
14322503 439
14322515 439
14323003 439
14323015 439
14323503 439
14323515 439
14324003 439
14324015 439
14330403 439
14330415 439
14330503 439
14330515 439
14330603 439
14330615 439
14330703 439
14330715 439
14330803 439
14330815 439
14330902 439
14330903 439
14331002 439
14331003 439
14331502 439
14331503 439
14332002 439
14332003 439
1450-04 387
1450-05 387
1450-06 387
1450-07 387
1450-08 387
1450-09 387
1450-10 387
1450-11 387
1450-12 387
1450-13 387
1450-45 387
1450-55 387
1453-05 387
1453-06 387
1453-07 387
1453-08 387
1453-10 387
14610103 381
14610204 381
14610206 381
14610306 381
14620806 381
14620807 381
14621008 381
14621012 381
14621210 381
14625504 381
14626504 381
14626506 381
14710003 431
14710104 431
14710204 431
14710306 431
14720303 431
14720404 431
14720807 431
14722503 431
14723504 431
14725505 431
14726506 431
14740105 431
14740206 431
14780003 431
14780104 431
14780204 431
14780306 431
147E0104..... 431
147E0204..... 431
14810103 382
14810204 382
14810204-E* 382
14810205 382
14810205-E* 382
14810306 382
14810412 382
14825503 383
14826504 383
14826504-E* 383
14826505-E* 383
14826506 383
14820806 383
14821012 383
14902JMR01.....N16
14A10132 379
14A10204 379
14A10214 379
14A10306 379
14A20303 379
14A20404 379
14A20808 379
14A25504 379
14A25505 379
14A26506 379
14A26514 379
14A80132 379
14A80204 379
14B10103 382
14B10204 382
14B10206 382
14B10306 382
14B20807 382
14B25504 382
14B26506 382

15 xxx

15001012P 340
15001113P 340
15001214P 340
15001317P 340
15001415P 340
15001417P 340
15001719P 340
15001721P 340
15001921P 340
15001922P 340
15001924P 340
15002123P 340
15002224P 340
15002326P 340
15002427P 340
15002430P 340
15002632P 340
15002730P 340
15002732P 340
15003032P 340
15003236P 340
15003638P 340
15003641P 340
15003841P 340
151001P 403
151002P 403
151003P 403
151501P 403
151502P 403
151503P 403
155001P 403
155002P 403
155003P 403
15631612 346
15631615 346
15631618 346
15631818 346
15632112 346
15632115 346
15632118 346
15661615 346
15661618 346
15661818 346
15662115 346
157501P 403
157502P 403
157503P 403
1586-09 571
1589262.....207
1589384.....207
1596-09 571

16 xxx

1606MR 327
1611MR 327
163604H 390
163605H 390
163605M 391
163606H 390
163606M 391
163607H 390
163608H 390
163608M 391
163609H 390
163609M 391
163610E 391
163610H 390
163610M 391
163610T 390
163610U 391
163612H 390
163612M 391
163614M 391
163615E 391
163615T 390
163615U 391
163620E 391
163620T 390
163620U 391
163625E 391
163625T 390
163625U 391
163627E 391
163627T 390
163627U 391
163630E 391
163630T 390
163630U 391
163640E 391
163640T 390
163640U 391
163645E 391
163645T 390
163645U 391
163650E 391
163650T 390
163650U 391
163655E 391
163655T 390
163655U 391
163660E 391
163660T 390
163660U 391
168004H 390
168005H 390
168005M 391
168006H 390
168006M 391
168007H 390
168008H 390
168008M 391
168009H 390
168009M 391
168010E 391
168010H 390
168010M 391
168010T 390
168010U 391
168012H 390
168012M 391
168014M 391
168015E 391
168015T 390
168015U 391
168020E 391
168020T 390
168020U 391
168025E 391
168025T 390
168025U 391
168027E 391
168027T 390
168027U 391
168030E 391
168030T 390
168030U 391
168040E 391
168040T 390
168040U 391
168045E 391
168045T 390
168045U 391
168050E 391
168050T 390
168050U 391
168055E 391
168055T 390
168055U 391
168060E 391
168060T 390
168060U 391

17 xxx

1706MR 328
1707SR 328
1708MR 328
1708MR01 208
1710MR 328
1712MR 328
1712MRN 328
1712MRN01 328
174010H 243
174010H 253
174012H 243
174012H 253
174014H 243
174014H 253
174017H 243
174017H 253
174019H 243
174019H 253
174022H 243
174022H 253

18 xxx

1805MR 341
1808MR 341
1812MR 341
181202P 389
181203P 389
1826MR 389
183203H 389
183204H 389
183205H 389
183206H 389
183207H 389
183208H 389
183210H 389

Index

183212H 389
183215T 390
183220T 390
183225T 390
183227T 390
183230T 390
183240T 390
183245T 390
183250T 390
183601P 389
183602P 389
183602Z 390
183603P 389
183603Z 390
183604H 389
183604P 389
183604Z 390
183605H 389
183606H 389
183607H 389
183608H 389
183608S 389
183609S 389
183610H 389
183610S 389
183611S 389
183612H 389
183612S 389
183614H 389
183614S 389
183620T 390
183625T 390
183627T 390
183630T 390
183635T 390
183640T 390
183645T 390
183650T 390
183655T 390
183660T 390
1842MR 340
187015T 390
187020T 390
187025T 390
187027T 390
187030T 390
187040T 390
187045T 390
187050T 390
188002P 389
188003P 389
188004P 389
188008S 389
188010S 389
188012S 389

19 xxx

19000607 326
19000708 326
19000809 326
19000810 326
19000911 326
19001011 326
19001012 326
19001013.....326
19001113 326
19001213 326
19001214 326
19001314 326
19001317 326
19001415 326
19001417 326
19001617 326
19001618 326
19001719 326
19001819 326
19001921 326
19001922 326
19002022 326
19002123 326
19002224 326
19002326 326
19002426 326
19002427 326
19002430 326
19002528 326
19002632 326
19002729 326
19002730 326
19002732 326
19003032 326
19003036 326
19003236 326
19003436 326
19003641 326
19004146 326
19005507 326
19100607 333
19100809 333
19100810 333
19101011 333
19101012 333
19101213 333
19101214 333
19101415 333
19101417 333
19101617 333
19101719 333
19101819 333
19101921 333
19102022 333
19102123 333
19102427 333
1912MR 341
1912MRN 341
19200608 332
19200711 332
19201012 332
19201418 332
19201622 332
19202024 332
1926MR 341
19300810 332
19300911 332
19301011 332
19301012 332
19301113 332
19301213 332
19301214 332
19301315 332
19301417 332
19301719 332
19301922 332
19312224 333
19312427 333
19313032 333
19500810 330
19501012 330
19501113 330
19501214 330
19501315 330
19501417 330
19501618 330
19501719 330
19501922 330
195404R 253
195419H 253
195419H 258
195422H 253
195422H 258
195424H 253
195424H 258
195427H 253
195427H 258
195430H 253
195430H 258
195432H 253
195432H 258
19600607 327
19600809 327
19600810 327
19601011 327
19601012 327
19601113 327
19601213 327
19601214 327
19601415 327
19601417 327
19601617 327
19601719 327
19601819 327
19601921 327
19602022 327
19602123 327
19602224 327
19602326 327
19602426 327
19602427 327
19602732 327
19603032 327
19611415 327
19611617 327
19611819 327
19700607 328
19700809 328
19700810 328
19701011 328
19701012 328
19701113 328
19701213 328
19701214 328
19701314 328
19701415 328
19701417 328
19701617 328
19701719 328
19701819 328
19701921 328
19701922 328
19702022 328
19702123 328
19702224 328
19702326 328
19702426 328
19702427 328
19702528 328
19703032 328
199104R 344
19911722 344
199306R 344
19932433 344
19932427 344
19961721 344
19980016 345
19991921 345
19991921A 345
199920R 345
19992224 345
19992224A 345
19992427 345
19992427A 345
19992432 345
19992432A 345
199925R 345
19992730 345
19992730A 345
19992732 345
19992732A 345
19992733 345
19992733A 345
19992833 345
19992833A 345
19993032 345
19993032A 345
19993233 345
19993233A 345
19993238 345
19993238A 345
19993821 345
19993821A 345
19993822 345
19993822A 345
19994121L 345
19994121LA 345
19A00607 335
19A00809 335
19A01011 335
19A01213 335
19A01415 335
19A01617 335
19A01819 335
19A02022 335
19A02123 335
19A02426 335
19A02528 335
19A02729 335
19A03032 335
19A0-09 335
19A0-15 335
19B00810 329
19B01011 329
19B01012 329
19B01113 329
19B01214 329
19B01315 329
19B01417 329
19B01618 329
19B01719 329
19B01921 329
19B02224 329
19C00607 329
19C00809 329
19C01011 329
19C01213 329
19C01415 329
19C01617 329
19C01819 329
19C02022 329
19C02123 329
19C02426 329
19C02528 329
19C03032 329

1A xxx

1A06MR.....333

1B xxx

1B06MR.....333

1C xxx

1C08MR 329
1C12MR 329

1F xxx

1F06MRN.....330

1E xxx

1E10MR 331
1E11MR 331

20 xxx

20002UB 417
20107MR01 414
20107SR 414
20108MR 414
20109MR 414
20109MRU 417
20109MW 415
20109MW-S 415
20119MR01 414
20110MR 414
201101X 138
201102X 138
201103X 138
201104X 138
201208X 138
201235X 138
201255X 138
20129SR 414
201308X 139
201309X 139
201310X 139
201315X 139
201320X 139
201325X 139
201327X 139
201330X 139
201340X 139
201503MX 138
201504MX 138
201505MX 138
201506MX 138
201506SX 138
201508MX 138
201508SX 138
201510MX 138
201801X 139
201802X 139
201803X 139
201804X 139
2019MR 152
2019SR 414
201A09MR 418
201B09MR 418
20208MR 412
20208MR01 413
20208SR01 413
20209MR 412
20209SR02 412
2020H0MR.....413
2021MR 153
20210MR 413
20218MR 412
20219MR 412
20219SR 412
2027MRE 153
2030CR 154
20307PR 417
20308PR 417
20309PR 417
2031MR 154
203101 139
203102 139
203103 139
203104 139
20317MR 419
20318PR 417
20319PR 417
20319PRU 417
203204 139
203207 139
203208 139
203210 139
203235 139
203255 139
203265 139
203308 140
203309 140
203310 140
203315 140
203320 140
203325 140
203327 140
203330 140
203340 140
203503 139
203504 139
203504S 139
203505 139
203505S 139
203506 139
203506S 139
203507 139
203507S 139
203508 139
203508S 139
203510 139
203510S 139
203512S 139
2035VE03 426
2035VE04 426
2035VE05 426
2035VE06 426
203708 140
203709 140
203710 140
203715 140
203720 140
203725 140
203727 140
203730 140
203740 140
203801.....140
203802.....140
203803.....140
203A19PR.....418
20407PR 417
20409PR 417
20419PR 417
2044SRV 157
2048MRV 157
204B29PR.....418
20505PR01 413
20515PR01 413
20A16MR 419
20A17MR 419

21 xxx

2104PR 150
2107PR 150
2109PR 150
21108MR 422
2114TR 150
2119PR 150
21-20-07MR 481
21-20-101 481
21-20-102 481
21208MR 422
21208SR 422
2121-12 605
2121-18 605
2121A-15.....605
2121A-18.....605
2124-18 606
2126A-18 606
2127-06M 489
2127-08M 489
2127-11M 489
2127-14M 489
2127-18M 489
2127A-06M 489
2127A-08M 489
2127A-11M 489
2127A-14M 489
2127A-18M 489
2127A-24M 489
2127A-33M 489
2127A-50M 489
2127PR 149

Index

2127SR 149
2128-26 606
2128PR 400
2129-24 606
21-30-09MR 481
21309PR 422
213312DF 148
2138PR 400
2141 149
2142 149
2166DF 393
2176DF..... 148
2177DF 148
2178DF 148
2178TG 148
2178VE-05 426
2179DF 148
21A107 348

22 xxx

22106MR 421
22108MR 421
22118MR 421
22208MR 421
22218MR 421
2221-02 147
2221-03 147
2221-04 147
2221-06 147
2221-10 147
2221-12 147
2221VE-04..... 426
2221VE-06..... 426
2223-02 147
2223-04 147
22306TR 421
22309TR 421
223004M..... 138
223005M..... 138
223006M..... 138
223007M..... 138
223008M..... 138
223009M..... 138
223010M..... 138
223011M..... 138
223012M..... 138
223013M..... 138
223014M..... 138
223045M 138
223055M 138
22319TR 421
223504M 137
223505M 137
223505S 137
223506M 137
223506S 137
223507M 137
223507S 137
223508M 137
223508S 137
223509M 137
223509S 137
223510M 137
223510S 137
223511M 137
223511S 137
223512M 137
223512S 137
223513M 137
223514M 137
223514S 137
223515M 137
223516S 137
223518S 137
223545M 131
223555M 137
227504M 138
227505M 138
227506M 138
227507M 138
227508M 138
2293-02 147
2293-03 147
2293-04 147
2293-06 147

23 xxx

231008M 138
231010M 138
231010S 138
231012S 138
2311-06 147
2311-12 147
2311-18 147
2311MR 149
2312-06..... 147
2313MR 150
23208MR..... 422
233004M 137
233005M 137
233005S 137
233006M 137
233006S 137
233007M 137
233007S 137
233008M 137
233008S 137
233009M 137
233009S 137
233010M 137
233010S 137
233011M 137
233011S 137
233012M 137
233012S 137
233013M 137
233014M 137
233014S 137
233015S 137
233016S 137
233045M 137
233055M 137
23308PR 423
2331SRV..... 156
233504M 137
233505M 137
233505S 137
233506M 137
233506S 137
233507M 137
233507S 137
233508M 137
233508S 137
233509M 137
233509S 137
233510M 137
233510S 137
233511M 137
233511S 137
233512M 137
233512S 137
233513M 137
233514M 137
233514S 137
233515M 137
233515S 137
233516S 137
233518S 137
233532M 137
233545M 137
233555M 137
2335VE05M..... 426
2335VE06M..... 426
2335VE07M..... 426
2335VE08M..... 426
2335VE09M..... 426
2335VE10M..... 426
2335VE11M..... 426
2335VE12M..... 426
2335VE13M..... 426
2335VE14M..... 426
237504M 138
237505M 138
237506M 138
237507M 138
237508M 138
237510M 138

24 xxx

24110204 380
24110214 380
24308PR 423
24311030 440
24311140 440
24312020 440
24330610 440
24330715 440
24330820 440
24330915 440
2452-05F 148
2452DK 148
2452DK 149
2453-05F 149

25 xxx

2501MR 146
2509MR 149
2509SR 149
2510SR 150
2511MR 150
2513MR 149
2513MRD1 149
2515MR 146
2516MR 152
2516MRV03 155
2516SR 152
2518MR 152
2518MR01 152
2518SR 152
2519MR 152
2519SR 152
2521MR 153
2524MRV 155
2525MRE 153
2526MR 154
2526SR 154
2527MRE..... 153
2528MRV 156
2530CR 154
2531MR 154
2534MRV 156
253504M 234
253505M 234
253506M 234
253507M 234
253510M 234
253513M 234
253514M 234
253545M 234
253555M 234
2539MR 154
2539MRV04 396
2539MR-AM 151
2540MR 155
2544SRV..... 157
2547MR-EB 410
2548MRV..... 41
2549MR-EB 158
2550MRV..... 158
2551MR 155
2551MR01 155
2553MRV..... 157
2553MRV01 158
2555MR 393
2565MRV 156
2571-45..... 149
2575MR 155
25VE01MRV..... 426

27 xxx

2725-55F 143
2725-55G 143
2725DK 143
2745 146
2746..... 394
2747..... 146
2747DR 146
2752-06G 143
2752DK 143
2752-45G 143
2755-55G 143
2755DK 143
2760-04 145
2760DK01 145
2761-55F 143
2761-55P 143
2761DK 143
2769-55F 144
2769-55P 303
2769DK 144
276A-04G 145
276ADK 145
276B-0225..... 142
2771-55F 144
2771-55G 144
2771DK 144
2771VE-55..... 426
2773-55GS..... 141
2773DK..... 144
2774-55F 144
2774-55G 144
2774DK 144
2779-55F 144
2779-55G 144
2779DK 144
2781-06P 145
2781DK 145
2789-06F..... 145
2789DK 145
2792 147
2793 148

28 xxx

2813..... 148
2863P..... 234

30 xxx

30106AMRB 379
30107AMRB 379
30115MR 378
30116AMRB 379
30117MR 378
30118MR 378
30127MR 378
3013MR 170
3013SR 170
3020MR 173
3020MR02 173
30206AMRB 382
30206MR 381
3020SR 173
3020SR02 173
302102 166
302103 166
302104 166
302205 166
302208 166
302210 166
302308 166
302309 166
302310 166
302315 166
302320 166
302325 166
302327 166
302330 166
302340 166
302345 166
302350 166
3023MR 173
3023MRV11..... 175
3024MR 173
3024SR 173
302503 166
302504 166
302505 166
302506 166
302507 166
302508 166
302509 166
302510 166
302512 166
3025VE04 427
3025VE05 427
3025VE06 427
3025VE08 427
3025VE10 427
302708 166
302709 166
302710 166
302715 166
302720 166
302725 166
302727 166
302730 166
302740 166
302745 166
302750 166
3027MR 174
3027SR 174
302D08 166
302D09 166
302D10 166
302D15 166
302D20 166
302D25 166
302D27 166
302D30 166
302D40 166
302D45 166
302D50 166
302D55 166
302D60 166
30307PR 378
30309PR 378
30315PR 378
30316PR 378
30317PR 378
30319PR 378
3032SRV..... 175
3033MRV..... 176
3034MR 174
3036CR 174
303906 166
303907 166
303908 166
303909 166
303910 166
305101 235
305102 235
305103 235
305104 235
305208 235
305210 235
305255 235
305310 236
305315 236
305320 236
305325 236
305327 236
305330 236
305340 236
305345 236
305350 236
305355 236
305360 236
3054MR 176
305504M 235
305505M 235
305504S..... 235
305505S 235
305506M 235
305506S 235
305507M 235
305507S 235
305508M 235
305508S 235
305510M 235
305510S 235
305512M 235
305512S 235
305514M 235
305516M 235
305516S 235
305517M 235
305545S 235
3055CR..... 175
30605MR 432
30606MR..... 432
30607MR 432
30607MR02 432
30615MR 432
30617MR 432
306320 236
306325 236
306327 236
306330 236
306340 236
306345 236
306350 236
306355 236
306504M 235
306505M 235
306506M 235
306508M 235
306510M 235
30914AY 604
30VE31MPV.....N12

31 xxx

3103PR 172
3105PR 171
3106PR 170
3108PR8 171
3109PR8 171
31107MR 378
31116MR 378
3113PR 172
3116PR 170
3119PR8 171
31216MR..... 378
3121PR 171
3129PR 170
3131PR8 171
31416MR 384
31419MR 441
31427MR..... 385
3146PR 171

Index

314708S 236
314710M 236
314710S 236
314808S 170
314810S 170
314810M 170
3149PR8 171
31512MR 384
31512MR01 384
31516MR 384
31519MR 384
3178VE-08 427

32 xxx

3203 343
3203 554
320300 343
320300 554
320301 343
320301 554
3203A0 343
3203A0 554
3204 343
3204 554
320540 554
320560 554
3206A00 344
3206A00 554
32067A 344
32067A 554
320760 554
3209-120 ..... N18
3209-135 ..... N18
3209-220 ..... N18
32108MR 440
32118MR 440
3213MR 172
3214-35 485
3214-60 485
321510M 159
321512M 159
32209MR 440
32218MR 440
3221-03 169
3221-06 169
3221-10 169
3221-16 169
3221-18 169
3221-24 169
3221VE-06 427
3221VE-10 427
3223-02 169
3223-03 169
3223-06 169
3223-10 169
3223-14 169
323007M 160
323008M 160
323008S 160
323009M 160
323010M 160
323010S 160
323011M 160
323012M 160
323012S 160
323013M 160
323014M 160
323014S 160
323015M 160
323016M 160
323016S 160
323017M 160
323018M 160
323018S 160
323019M 160
323020S 160
323021M 160
323022M 160
323022S 160
323024M 160
323024S 160
323026S 160
323028S 160
323030S 160
323032S 160
32309PR 440
323506M 160
323507M 160
323508M 160
323508S 160
323509M 160
323510M 160
323510S 160
323511M 160
323512M 160
323512S 160
323513M 160
323514M 160
323514S 160
323515M 160
323516M 160
323516S 160
323517M 160
323518M 160
323518S 160
323519M 160
323520S 160
323521M 160
323522M 160
323522S 160
323524M 160
323524S 160
323526S 160
323528S 160
323530S 160
323532S 160
3235VE08M 427
3235VE10M 427
3235VE12M 427
3235VE14M 427
32518MR 386
32518MR01 387
32518MR02 387
32526MRN 395
32540MR 396
3260-03P 236
3260-04P 236
3260-05P 236
3260-06P 236
3260-08P 236
3260-10P 236
32607MR 440
327504M 161
327505M 161
327506M 161
327507M 161
327508M 161
327510M 161
327511M 161
327512M 161
327514M 161
327516M 161
327518M 161
32808MR 395
32809MR 393
3293-03 169
3293-06 169
3293-10 169

33 xxx

33108MR 378
3311-06 169
3311-12 169
33121 283
33122 283
333006M 159
333007M 159
333008M 159
333008S 159
333009M 159
333010M 159
333010S 159
333011M 159
333011S 159
333012M 159
333012S 159
333013M 159
333014M 159
333014S 159
333015M 159
333015S 159
333016M 159
333016S 159
333017M 159
333018M 159
333018S 159
333019M 159
333019S 159
333020M 159
333020S 159
333021M 159
333022M 159
333022S 159
333023M 159
333024M 159
333024S 159
333026S 159
333028S 159
333030S 159
333032S 159
333506M 159
333507M 159
333508M 159
333508S 159
333509M 159
333510M 159
333510S 159
333511M 159
333511S 159
333512M 159
333512S 159
333513M 159
333514M 159
333514S 159
333515M 159
333515S 159
333516M 159
333516S 159
333517M 159
333518M 159
333518S 159
333519M 159
333519S 159
333520M 159
333520S 159
333521M 159
333522M 159
333522S 159
333523M 159
333524M 159
333524S 159
333526S 159
333528S 159
333530S 159
333532S 159
3335VE06M 427
3335VE07M 427
3335VE08M 427
3335VE09M 427
3335VE10M 427
3335VE11M 427
3335VE12M 427
3335VE13M 427
3335VE14M 427
3335VE15M 427
3335VE16M 427
3335VE17M 427
3335VE18M 427
3335VE19M 427
3335VE20M 427
3335VE21M 427
3335VE22M 427
3335VE24M 427
333E 161
333E10M 161
333E11M 161
333E12M 161
333E14M 161
333E16M 161
333E18M 161
333E20M 161
33411-040 271
33411-041 271
33411-050 271
33411-051 271
33411-71 288
33412-050 271
33412-051 271
33421-040 271
33421-041 271
33431-050 270
33431-051 270
33431-065 272
33461-100 268
33461-101 268
33481-095 273
33481-096 273
33491-030 269
33491-031 269
335008M 164
335009M 164
335010M 164
335011M 164
335012M 164
335013M 164
335014M 164
335015M 164
335016M 164
335017M 164
335018M 164
335019M 164
335108M 164
335109M 164
335110M 164
335111M 164
335112M 164
335113M 164
335114M 164
335115M 164
335116M 164
335117M 164
335118M 164
335119M 164
33611-055 272
33611-056 272
33621-075 272
33621-076 272
33622-075 272
33622-076 272
33631-110 273
33631-111 273
33632-110 273
33632-111 273
33671-160 275
33672-160 275
33681-100 273
33681-101 273
337504M 161
337505M 161
337506M 161
337507M 161
337508M 161
337510M 161
337511M 161
337512M 161
337514M 161
337516M 161
337518M 161
33811-150 276
33812-150 276
33831-180 276
33832-180 276
33841-180 274
33842-180 274
33851-120 274
33851-121 274
33851-250 278
33852-120 274
33852-121 274
33852-250 278
33861-200 277
33862-200 277
33871-160 275
33872-160 275
33911-250 278
33912-250 278
33921-300 278
33922-300 278

34 xxx

34011 310
34011-1DG 310
34011-2DG 310
34011-1EG 310
34011-2EG 310
3406MP 237
34102-040M 582
3419PP 237
34207-1A 309
34211-3DG 310
34223-1A 305
34223-1B 305
34223-1C 305
34223-1DK1 305
34262-1CG 293
34262-1DG 293
34262-1DK 293
34262-1GG 293
34262-2DG 303
34262-3DG 293
34266-1FG 303
34366-1FG 303
34466-1FG 303
34466-2FG 303
34466-3FG 303
34666-1DK 303
34666-1FG 303
34666-3DK 303
34666-3FG 303
3426A-1DG 296
3426A-1DK02 296
3426A-1DK02 298
3426A-1EG 296
3426A-2DG 296
3426A-2EG 296
3426C-1DF 295
3426C-1DK 295
3426C-2DF 295
3426E-1DK 302
3426E-1HG 302
34307-1A 309
34323-1A 305
34323-1B 305
34323-1C 305
34323-1DK1 305
34323-2A 305
34323-2B 305
34323-2C 305
34323-2DK1 305
3432F-1DK 304
3432F-1KF 304
3432F-3KF 305
343506M 234
343507M 234
343508M 234
343508S 234
343509M 234
343510M 234
343510S 234
343511M 234
343512M 234
343512S 234
343513M 234
343514M 234
343514S 234
343515M 234
343516M 234
343516S 234
343517M 234
343518M 234
343518S 234
343519M 234
343520M 234
343520S 234
343521M 234
343522M 234
343522S 234
343523M 234
343524M 234
343524S 234
343526S 234
343528S 234
34362-1CG 293
34362-1DG 293
34362-1DK 293
34362-1DK 303
34362-1GG 293
34362-2CG 303
34362-2DG 293
34362-2DK 293
34362-2GG 293
34362-3DG 293
34367-2AG 308
34367-2DK 308
3436A-1DK 298
3436A-1DK01 298
3436A-1DK02 298
3436A-2DG 296
3436A-2DK 298
3436A-2DK02 298
3436A-2EG 296
3436C-1DF 295
3436C-1DK 295
3436C-2DF 295
3436E-1DK 302
3436E-1HG 302
3436E-2HG 302
3436E-3HG 302
34407-1A 309
34407T-1A 309
34417-1A 307
34423-1A 305
34423-1B 305
34423-1C 305
34423-1DK1 305
34423-2A 305

Index

34423-2B 305
34423-2C 305
34423-3DK 305
344251A12MR 305
3442F-1DK..... 304
3442F-1KF 304
3442F-3KF 304
34440 311
34440A 311
3445G-1FB 306
34462-1CG 293
34462-1DG 293
34462-1DK..... 293
34462-1DK..... 303
34462-1EG 293
34462-1GG 293
34462-2CG 293
34462-2DG 293
34462-3DG..... 293
34462-3DK..... 293
34462-3DK..... 303
34462-4DG 293
34462-2FG 293
34462-2GG 293
34462-3GG 293
34464-1DK 304
34464-1FG 304
34464-2FG 304
34467-1AG 308
34467-1DK 308
3446A-1DG 296
3446A-1DK 298
3446A-1DK02 .. 296
3446A-1DK03... 296
3446A-1DK 298
3446A-1DK02 .. 298
3446A-1EG 296
3446A-2DG 296
3446A-2EG 296
3446E-1DK 302
3446E-1HG 302
3446E-2HG 302
3446E-3HG 302
34486 311
34486-05A 311
34486-P03 311
34488 311
34488-05A 311
34488-26 312
34488-26DK 312
34488-P03 311
34501107M 298
34501108M 298
34501108S 298
34501109M 298
34501110M 298
34501110S 298
34501111M 298
34501112M 298
34501112S 298
34501113M 298
34501114M 298
34501114S 298
34501115M 298
34501116M 298
34501116S 298
34501117M 298
34501118M 298
34501118S 298
34501119M 298
34501120S 298
34501121M 298
34501122M 298
34501122S 298
34501124M 298
34501124S 298
34501127M 298
34501130M 298
34501132M 298
34501136M 298
34501213M 299
34501214M 299
34501215M 299
34501216M 299
34501216S 299
34501217M 299
34501218M 299
34501218S 299
34501219M 299
34501220S 299
34501221M 299
34501222M 299
34501222S 299
34501223M 299
34501224M 299
34501224S 299
34501225M 299
34501226M 299
34501226S 299
34501227M 299
34501228S 299
34501230M 299
34501230S 299
34501232M 299
34501232S 299
34501234M 299
34501236M 299
34501236S 299
34501238M 299
34501240M 299
34501240S 299
34501241M 299
34501248S 299
34501410M..... 299
34501411M..... 299
34501412M..... 299
34501413M 299
34501414M 299
34501416M 299
34501417M 299
34501418M 299
34501419M 299
34501421M 299
34501422M..... 299
34502107M 299
34502108M 299
34502108S 299
34502110M 299
34502110S 299
34502111M 299
34502112M 299
34502112S 299
34502113M 299
34502114M 299
34502114S 299
34502115M 299
34502116M 299
34502116S 299
34502117M 299
34502118M 299
34502118S 299
34502119M 299
34502120S 299
34502121M 299
34502122M 299
34502122S 299
34502124S 299
34502126S 299
34502128S 299
34502213M 300
34502214M 300
34502215M 300
34502216M 300
34502216S 300
34502217M 300
34502218M 300
34502218S 300
34502219M 300
34502220S 300
34502221M 300
34502222M 300
34502224M 300
34502224S 300
34502227M 300
34502230M 300
34502232M 300
34502234M 300
34502236M 300
34502241M 300
34503102R 298
34503103R 298
34503104R 298
34503203R 298
34503204R 298
34503206R 298
34504236M 300
34504245M 300
34504255M 300
34504262M 300
34504275M 300
34504290M 300
34505102R 300
34505201R 300
34510 301
345101E08MR .. 301
345102D08MR .. 301
345102E08MR .. 301
345104D08MR .. 301
34512-1CG 297
34512-1DG 297
34512-1EG 297
34512-1FG 297
34512-2CG 297
34512-2DG 297
34512-2EG 297
34512-2FG 297
34512-3CG 297
34512-3DG 297
34512-3EG 297
34512-3FG 297
34512-4DG 297
3452-08F 169
3452-10F 169
34520DK 301
345201D11MR .. 301
345201E11MR .. 301
345202C11MR .. 301
345202D11MR .. 301
345202E11MR .. 301
345203D11MR .. 301
345203E11MR .. 301
34522-1CG 297
34522-1DG 297
34522-1EG 297
34522-1FG 297
34522-2CG 297
34522-2DG 297
34522-2EG 297
34522-2FG 297
34522-3CG 297
34522-3DG 297
34522-3EG 297
34522-3FG 297
34522-4DG 297
34522-5DG 297
34522-6DG 297
34522-7DG 297
34522-8DG 297
34522-9DG 297
3452407MR 300
3452DK 169
3453-08F 169
3453DK 169
34607-1A 310
3465G-1FB 306
3465G-2FB 306
3465G-3FB 306
34660 311
34660A 311
34662-1CG 293
34662-1DG 293
34662-1DK 293
34662-1GG 293
34662-2CG 293
34662-2DG 293
34662-2FG 293
34662-2GG 293
34662-3CG 293
34662-3DG 293
34662-3DK1 293
34662-4EG 293
34662-3GG 293
34666-1DK..... 303
34666-1FG..... 303
34666-2FG..... 303
34666-3FG..... 303
3466A-1DK 298
3466A-1DK01 298
3466E-1DK 302
3466E-1HG 302
3466E-2HG 302
34688 311
34688-05A 311
34688-P01 311
34688-P02 311
34688-P03 311
3485G-1DB 306
3485G-2DB 306
34862-1CG 293
34862-1DG 293
34862-1EG 293
34862-1GG 293
34862-2CF 294
34862-2CG 294
34862-2DF 294
34862-2DG 294
34862-2DK 293
34862-2DK 294
34862-2EF 294
34862-2EG 294
34862-2FF 294
34862-1FG 294
34862-2FG 294
34862-2GG 294
34862-3CF 295
34862-3DK 295
34862-3DK90 295
34862-3DK91 295
34862-3DK92 295
34862-3FF 295
3488A03MP 313

35 xxx

3508MR 172
3508MR10 170
3508SR 172
35105MR 380
35107MR 380
3511-06 348
3511-10 348
35114MR 383
35114MR01 383
35116MR01 380
3513MR 170
3520MR 173
3520MR02 173
35208MR 381
3523MR 173
3523MRV10..... 175
3523MRV11 175
3524MR 173
3527MR 174
3533MRV..... 176
3534MR 174
353506M 234
353507M 234
353508M 234
353508S 234
353509M 234
353510M 234
353510S 234
353511M 234
353512M 234
353512S 234
353513M 234
353514M 234
353514S 234
353515M 234
353516M 234
353516S 234
353517M 234
353518M 234
353518S 234
353519M 234
353520S 234
353522S 234
353524S 234
3537MR 174
3545MRV 176
3568MR 177
3571-08 169
357505M 235
357506M 235
357507M 235
357508M 235
357510M 235
357512M 235
357514M 235
35VE01MRV..... 427

36 xxx

3609MR10 164
3611-06P 342
3611-06R 342
3611-08P 342
3611-08R 342
3611-10P 342
3611-10R 342
3611-12P 342
3611-12R 342
3611-15HP 342
3611-15HR 342
3611-18HP 342
3611-18HR 342
3611-24HP 342
3611VE-06..... 429
3611VE-08..... 429
3611VE-10..... 429
3611VE-12..... 429
3612MR 164
3614-08R 342
3616-10 343
3616S-08P 343
3616S-14P 343
3619MR10..... 164
36206MR 383
363016 163
363021 163
3631-10R 342
363516 163
363521 163
3641-35 343
3641-50 343
3641-80 343
3641-C0 343
3641-I0 343
365014B 162
365016A 162
365016B 162
366021 163
366516 163
366521 163
367018 163
367021 163
367514 163
367516 163
367518 163
367521 162
36A014 162
36B014 162
36B018 162
36B514 162
36C014 162
36D014 162

37 xxx

3709MR10 165
3716MR 163
372110S 339
372111M 339
372112M 339
372112S 339
372114S 339
372115M 339
372116M 339
372116S 339
372118M 339
372118S 339
372120S 339
372122S 339
372124S 339
37221-030 283
37221-031 283
37235-030 284
37235-031 284
3725-08F 167
3725-08G 167
3725DK 167
373008M 335
373009M 335
373010M 335
373011M 335
373012M 335
373013M 335
373014M 335
373015M 335
373016M 335
373017M 335
373018M 335
373019M 335
373021M 335
373022M 335
373024M 335
373108M 336
373109M 336
373110M 336
373111M 336
373112M 336
373113M 336
373114M 336
373115M 336
373116M 336
373117M 336
373118M 336
373119M 336
373121M 336

Index

373122M 336
373124M 336
373127M 336
373130M 336
373132M 336
373202H 339
373202R 339
373203R 339
373204R 339
373210S 337
373212S 337
373214S 337
373216S 337
373218S 337
373220S 337
373222S 337
373224S 337
373228S 337
373230S 337
37321-050 283
37321-051 283
373225H 339
37323-080 284
37323-081 284
37334-080 283
37334-081 283
37335-030 284
37360809M 338
37361011M 338
37361013M 338
37361213M 338
37361415M 338
37361618M 338
37361719M 338
37370607M 338
37370809M 338
37371011M 338
37371213M 338
37371415M 338
37371618M 338
37372123M 338
37372224M 338
373811M 338
373812M 338
373813M 338
373814M 338
373815M 338
3739J0813M N16
3739J1619M N16
373A07M 337
373A08M 337
373A09M 337
373A10M 337
373A11M 337
373A12M 337
373A13M 337
373A14M 337
373A15M 337
373A16M 337
373A17M 337
373A18M 337
373A19M 337
373A21M 337
373A22M 337
373A24M 337
37423-080 284
37423-081 284
37434-080 283
37434-081 283
37435-075 284
37435-076 284
375010M 165
375011M 165
375012M 165
375012S 165
375013M 165
375014M 165
375014S 165
375015M 165
375016M 165
375016S 165
375017M 165
375018M 165
375018S 165
375019M 165
375020S 165
375022S 165
375024S 165
3752-09G 167
3752DK 167
3755-08G 167
3755DK 167
3760-45 167
3760DK01 167
3761-08F 167
3761-08P 167
3769-08F 168
3769-08P 168
3769DK 168
3771-08G 168
3771DK 168
3771VE-08 427
3774-08G 168
3774DK 168
3779-08F 168
3779-08G 168
3779DK 168
3781-11F 168
3781-11P 168
3781DK 168
378508M 163
378509M 163
378510M 163
378512M 163
378514M 163
378516M 163
3792 170
3794 170
3795-18 348
3795-24 348
3795-30 348
3796P 236

38 xxx

3812 170
3814 170
3814 570
3862P 236
3864P 236
3893EW 169
3893EW-01 169
3893EW-01 169
3893EW-02 147
3893EW-02 169

39 xxx

39122008M 497
39123010M 497
39123012M 497
39124012M 497

3E xxx

3E07PR 171

40 xxx

4010MR 193
4010SR 193
4012MR 197
4012SR 197
401408M 180
401409M 180
401410M 180
401411M 180
401412M 180
401413M 180
401414M 180
401419M 180
401505M 242
401506M 242
401507M 242
401508M 242
401508S 242
401509M 242
401510M 242
401510S 242
401512M 242
401512S 242
401513M 242
401514M 242
401516S 242
401517M 242
401519M 242
4016SR 197
402102 183
402103 183
402104 183
402208 183
402210 183
402212 183
402214 183
402216 183
402320 184
402325 184
402327 184
402330 184
402340 184
402345 184
402350 184
402355 184
402360 184
402370 184
4024MR 198
4024SR 198
4025VE04 428
4025VE05 428
4025VE06 428
4025VE08 428
4025VE10 428
402503 183
402504 183
402505 183
402506 183
402506S 183
402507 183
402507S 183
402508 183
402508S 183
402509 183
402509S 183
402510 183
402510S 183
402511 183
402512 183
402512S 183
402514 183
402514S 183
402516S 183
402517 183
402518S 183
402519 183
402520S 183
402524S 183
402605 183
402606 183
402608 183
402610 183
402612 183
402614 183
402616 183
402618 183
4026MR 200
4026MR03 200
4026MR04 200
4026SR 200
4026SR03 200
402720 184
402725 184
402727 184
402730 184
402740 184
402745 184
402750 184
402755 184
402760 184
4028MR 199
4028SR 199
402A10 184
402B16 184
402B18 184
4030CR 201
4030CR01 201
4031MR 198
4031SR 198
4032MR 199
4032SR 199
403320 184
403325 184
403327 184
403330 184
403340 184
403345 184
403350 184
403355 184
403360 184
403370 184
4033MR 198
4033MR03 201
4033SR 198
4034MR 201
4034MR06 201
403504 183
403505 183
403506 183
403507 183
403508 183
403509 183
403510 183
403511 183
403512 183
403514 183
403517 183
403519 183
4035VE04 428
4035VE05 428
4035VE06 428
4035VE08 428
4035VE10 428
403605 183
403606 183
403608 183
403610 183
403612 183
403614 183
403720 184
403725 184
403727 184
403730 184
403740 184
403745 184
403750 184
403755 184
403760 184
404108 184
4042CR 202
4042CR02 202
4044CR 202
404605 183
404607 183
404608 183
404610 183
404612 183
404614 183
4047MR 203
404904 184
404905 184
404906 184
404907 184
404908 184
404909 184
404910 184
404912 184
404913 184
404914 184
404916 184
404925 184
405320 242
405325 242
405327 242
405330 242
405340 242
405345 242
405350 242
405355 242
405360 242
405370 242
405504M 242
405505M 242
405506M 242
405506S 242
405507M 242
405508M 242
405508S 242
405510M 242
405510S 242
405512M 242
405512S 242
405513M 242
405514M 242
405514S 242
405516M 242
405516S 242
405517M 242
405518M 242
405519M 242
405608M 242
405610M 242
405612M 242
40603GP 430
406325 242
406327 242
406330 242
406340 242
406345 242
406350 242
406355 242
406360 242
406504M 243
406505M 243
406506M 243
406508M 243
406510M 243
406512M 243
406514M 243
406608 183
406609 183
406610 183
406612 183
406614 183
406616 183
4066MR 181
4066SR 181
4072MR 179
4072SR 179
407505M 243
407506M 243
407508M 243
407510M 243
407512M 243
407514M 243
409616M 243
40D006 183
40D008 183
40D010 183
40D506 183
40D508 183
40D510 183

41 xxx

41026MR 108
41026MRD 108
4104PR 190
4105PR 194
4106PR 193
4108FR 204
4108PR10 194
4109PR 196
4109PR10 194
4110PR 196
4110PR10 193
4110SR10 193
4111FR 204
4112FR 204
4116FR01 204
4116PR 194
4117PR 196
4118MR 193
4119PR 196
4119PR10 194
4120PR 196
4120PR10 194
4121-11GR 190
4126PR 194
4128PR 196
4136PR 194
414708S 243
414710M 243
414710S 243
414808S 243
414810M 243
414810S 243
4148PR10 181
414A08S 243
41526MR 108
41526MRD 102
41517MRV 109
41517MRVD 109
41542MRV 109
41542MRVD 109
4178VE-08 428

42 xxx

4208MR 195
4208MR10 193
4208SR 195
42104GP 359
42104GP01 359
42107GX 463
42114GP 360
42116GP 360
4213MR 195
42124GP 359
42124GP01 359
42124GP04 359
4215MR 195
42154GP 195
4216MR 195
4220MR 197
4221-18 190
4221-24 190

Index

4221-30 190
4221-36 190
42213GP01 359
4223-02R 190
4223-05R 190
4223-10R 190
4223MR 197
4224MR 199
423008M 179
423009M 179
423010M 179
423010S 179
423011M 179
423012M 179
423012S 179
423013M 179
423014M 179
423014S 179
423015M 179
423016M 179
423016S 179
423017M 179
423018M 179
423018S 179
423019M 179
423020M 179
423020S 179
423021M 179
423022M 179
423022S 179
423023M 179
423024M 179
423024S 179
423025M 179
423026M 179
423026S 179
423027M 179
423028M 179
423028S 179
423029M 179
423030M 179
423030S 179
423032M 179
423032S 179
423033M 179
423034M 179
423034S 179
423036M 179
423036S 179
423038S 179
423040S 179
423508M 180
423509M 180
423510M 180
423510S 180
423511M 180
423512M 180
423512S 180
423513M 180
423514M 180
423514S 180
423515M 180
423516M 180
423516S 180
423517M 180
423518M 180
423518S 180
423519M 180
4251VE-05 428
4251VE-10 428
423520M 180
423520S 180
423521M 180
423522M 180
423522S 180
423523M 180
423524M 180
423524S 180
423525M 180
423526M 180
423526S 180
423527M 180
423528M 180
423528S 180
423529M 180
423530M 180
423530S 180
423532M 180
423532S 180
423533M 180
423534M 180
423534S 180
423536M 180
423536S 180
423538M 180
423538S 180
423540S 180
423541M 180
423542S 180
423544S 180
423546S 180
423548S 180
424508M 180
424509M 180
424510M 180
424512M 180
424513M 180
424514M 180
42503PR 361
42504PR 361
4251-02R 190
4251-03R 190
4251-04R 190
4251-05R 190
4251-06R 190
4251-08R 190
4251-10R 190
4251VE-05 428
4251VE-10 428
425508M 180
425509M 180
425510M 180
425512M 180
425513M 180
425514M 180
4260-03P 243
4260-04P 243
4260-05P 243
4260-06P 243
4260-08P 243
4260-10P 243
4260-12P 243
4260-16P 243
4269-08-90 244
4269-08-A0 244
4269-08-B0 244
4269-08-C0 244
4269-08-D5 244
4269-08-F0 244
4269-08-G0 244
4269-08-H5 244
4269-08-J0 244
4269-08-K0 244
427508M 181
427510M 181
427512M 181
427514M 181
427516M 181
427518M 181
427520M 181
427522M 181
427524M 181
4293-02 190
4293-05 190
4293-10 190

43 xxx

4306MRN 204
4308MR 195
4308MR10 193
4311-16F 190
4311-16G 190
4311MR 193
4313MR01 195
4315MR 195
4316MR 195
4320MR 197
4324MR 199
43240115Y 604
4325MR 200
43250115Y 604
43260115Y 604
43270115Y 604
43290115Y 604
43280212 603
432A0113 605
432A0213 605
433008MR 178
433009MR 178
433010MR 178
433010SR 178
433011MR 178
433012MR 178
433012SR 178
433013MR 178
433013SR 178
433014MR 178
433014SR 178
433015MR 178
433015SR 178
433016MR 178
433016SR 178
433017MR 178
433018MR 178
433018SR 178
433019MR 178
433019SR 178
433020MR 178
433020SR 178
433021MR 178
433022MR 178
433022SR 178
433023MR 178
433024MR 178
433024SR 178
433025MR 178
433025SR 178
433026MR 178
433026SR 178
433027MR 178
433028MR 178
433028SR 178
433029MR 178
433030MR 178
433030SR 178
433032MR 178
433032SR 178
433033MR 178
433034MR 178
433034SR 178
433036MR 178
433036SR 178
433038SR 178
433040SR 178
433044SR 178
433506MR 178
433507MR 178
433508MR 178
433509MR 178
433510MR 178
433510SR 178
433511MR 178
433512MR 178
433512SR 178
433513MR 178
433514MR 178
433514SR 178
433515MR 178
433515SR 178
433516MR 178
433516SR 178
433517MR 178
433518MR 178
433518SR 178
433519MR 178
433519SR 178
433520MR 178
433520SR 178
433521MR 178
433522MR 178
433522SR 178
433523MR 178
433524MR 178
433524SR 178
433525MR 178
433525SR 178
433526MR 178
433526SR 178
433527MR 178
433528MR 178
433528SR 178
433529MR 178
433530MR 178
433530SR 178
433532MR 178
433532SR 178
433533MR 178
433534MR 178
433534SR 178
433536MR 178
433536SR 178
433538MR 178
433538SR 178
433539MR 178
433540SR 178
433541MR 178
433546MR 178
4335VE08M 428
4335VE10M 428
4335VE11M 428
4335VE12M 428
4335VE13M 428
4335VE14M 428
4335VE15M 428
4335VE16M 428
4335VE17M 428
4335VE18M 428
4335VE19M 428
4335VE20M 428
4335VE21M 428
4335VE22M 428
4335VE24M 428
4335VE27M 428
4335VE30M 428
4335VE32M 428
433E 181
433E18M 181
433E20M 181
433E22M 181
433E24M 181
433E26M 181
433E28M 181
433E30M 181
433E32M 181
437508M 181
437510M 181
437511M 181
437512M 181
437514M 181
437516M 181
437518M 181
437520M 181
437522M 181
437524M 181

44 xxx

4405MXL 248
4407MP 249
4408MP 246
4408SP 246
4410MP 247
4410MP01 247
4410SP 247
44106AMP01 280
44108AMP01 280
44116MP 279
44116MP04 279
44116MP10 279
44118MP 279
44118MP04 279
44118MP10 279
4412MP 246
4413MP 247
4414MP 246
4414SP 246
441517M 241
441519M 241
441521M 241
441522M 241
4415MP 247
4415MP03 247
4416SP 247
4417PP 249
4418MP 249
4419MP 247
4421MP01 ..... N14
4423MP 246
443008M 239
443009M 239
443010M 239
443011M 239
443012M 239
443013M 239
443014M 239
443015M 239
443016M 239
443017M 239
443018M 239
443019M 239
443020M 239
443020S 239
443021M 239
443022M 239
443023M 239
443024M 239
443024S 239
443027M 239
443028S 239
443030M 239
443030S 239
443032M 239
443032S 239
443034S 239
443036M 239
443036S 239
443040S 239
443042S 239
443048S 239
443508M 239
443509M 239
443510M 239
443510S 239
443511M 239
443512M 239
443512S 239
443513M 239
443514M 239
443514S 239
443515M 239
443516M 239
443516S 239
443517M 239
443518M 239
443518S 239
443519M 239
443520M 239
443520S 239
443521M 239
443522M 239
443522S 239
443523M 239
443524M 239
443524S 239
443525M 239
443526M 239
443526S 239
443527M 239
443528M 239
443528S 239
443529M 239
443530M 239
443530S 239
443532M 239
443532S 239
443533M 239
443534M 239
443534S 240
443536M 239
443536S 240
443538M 239
443538S 240
443540S 240
443541M 239
443542S 240
443546M 239
4452-15FR 190
4452-18FR 190
4452-24FR 190
4452DK 190
4452DK1 190
4453-15F 190
4453-18F 190
4457MP 249
4461-24G 191
4462-18F 190
4462-24F 191
4462DK 191
4466MP 240
4466MP-A 240
4466MP-DA 240
4466MP-DB 240
4466SP 240
4466SP-A 240
4466SP-D 240
4467PP 249
4472MP 238
4472MP-A 238
4472MP-D 238
4472SP 238
4472SP-A 238
4472SP-D 238
4476MP 249
44801AMP 281
44801AMP01 281
44801BMP 281
44801FMP 281

Index

44801FMP01 281
44802AMP 281
44802BMP 281
44802FMP 281
44803AMP 282
44803BMP 282
44803FMP 282
4481PP1 244
44904MP 248
44904MP01....N13
44904MP02....N13
44905MP 248
44906MP 248
44907MP....N13
44K732M 230
44K738M 230
44K745M 230
44K752M 230
44K758M 230
44K832M 230
44K838M 230
44K845M 230
44K852M 230
44K858M 230
44K928M 229
44K932M 229
44K938M 229

45 xxx

4501MR 196
4503MR01 345
4505MR 204
4505SR 204
4506MR 345
4510MR 193
4510SR 193
4511-06 348
4511-10 348
45115PP 608
4511MR 196
4511SR 196
4512MR 197
4512SR 197
4516MR 197
4516SR 197
45211PP 608
4523MRV01....203
4524MR 198
4524MRV04 203
4524SR 198
452513M 238
452514M 238
452517M 238
452519M 238
452521M 238
452522M 238
452524M 238
4526MR 200
4526MR03 200
4526MR15 203
4526SR 200
4526SR03 200
4528MR 199
4528SR 199
453008M 237
453009M 237
453010M 237
453011M 237
453012M 237
453013M 237
453014M 237
453015M 237
453016M 237
453016S 237
453017M 237
453018M 237
453018S 237
453019M 237
453020M 237
453020S 237
453021M 237
453022M 237
453022S 237
453023M 237
453024M 237
453024S 237
453025M 237
453026M 237
453026S 237
453027M 237
453028M 237
453028S 237
453029M 237
453030M 237
453030S 237
453032M 237
453032S 237
453033M 237
453034M 237
453034S 237
453036M 237
453036S 237
453038M 237
453038S 237
453041M 237
4531MR 198
4531SR 198
4532MR 199
4532SR 199
4533MR 198
4533MR03 201
4533SR 198
4534MR 201
4534MR06 201
453508M 238
453509M 238
453510M 238
453510S 238
453511M 238
453512M 238
453512S 238
453513M 238
453514M 238
453514S 238
453515M 238
453516M 238
453516S 238
453517M 238
453518M 238
453518S 238
453519M 238
453520M 238
453520S 238
453521M 238
453522M 238
453522S 238
453523M 238
453524M 238
453524S 238
453525M 238
453526M 238
453526S 238
453527M 238
453528M 238
453528S 238
453529M 238
453530M 238
453530S 238
453532M 238
453532S 238
453533M 238
453534M 238
453534S 238
453535M 238
453536M 238
453536S 238
453537M 238
453538M 238
453538S 238
453539M 238
453540S 238
453541M 238
453546M 238
4535MR 202
4542CR 202
4542CR02 202
4544CR 202
4547MR 203
4566MR 181
4572-10 191
4572-12 191
4572DK 191
4572MR 179
4572SR 179
4573-10R 191
4573DK 191
457510M 242
457512M 242
457514M 242
457516M 242
457518M 242
457520M 242
4581-10 191
4583-12R 191
4584-12R 191
45VE01MRV 428

46 xxx

463014RC 182
463014RC 570
463016RC 182
463021RC 182
463021R 570
463514RC 182
463514RC 570
463516RC 182
463516R 570
463521R 570
466016 182
466016 570
466021 182
466021 570
466516C 182
466516 570
466521C 182
466521 570
467014C 182
467016 182
467021 182
467514C 182
467516 182
467521 182

47 xxx

4724-01 373
4724-11G 373
4724DK 373
4725-10FR 185
4725-10GR 185
4725-12BR 185
4725-12FR 185
4725-12GR 185
4725DKR01 185
4752-12G 186
4752DK 186
4755-10G 185
4755DK 185
4756-10G 185
4756DK 185
4760-05 186
4760-05G 186
4760DK01 186
4762-10F 186
4762-10G 186
4762-10P 186
4762-15G 186
4762DK 186
4768-10F 186
4768-10G 186
4768-10P 186
4768-15F 186
4768-15G 186
4768DK 186
4771-10BR 186
4771-10FR 186
4771-10GR 186
4771DK 186
4771VE-10 428
4772-10F 187
4772DK01 187
4773-10GS 188
4773-22GS 189
4773DK 188
4774-10F 187
4774-10G 187
4774DK 187
4779-10BR 187
4779-10FR 187
4779-10GR 187
4779DK01 187
4781-12F 187
4781DK 187
4791R 192
4793 192
4794 192
4795-18 348
4795-36 348
4796P 245
4797P 245
4798P 245
4799P 245

48 xxx

4813 191
4815MP04 248
4815MP05 248
4816 191
48280180 603
483510M 240
483511M 240
483512M 240
483513M 240
483514M 240
483516M 240
483517M 240
483519M 240
483521M 240
483522M 240
483523M 240
483524M 240
483526M 240
483527M 240
483530M 240
483535M 240
4844R 192
4863P 245
4866P 245
4873P 245

49 xxx

49151719M 241
49151921M 241
49152122M 241
49152123M 241
49152426S 241
493008M 240
493009M 240
493010M 240
493011M 240
493012M 240
493013M 240
493014M 240
493015M 240
493016M 240
493017M 240
493018M 240
493019M 240
493020M 240
493021M 240
493022M 240
493023M 240
493024M 240
493027M 240
493030M 240
493032M 240
493036M 240
493510M 240
493510S 241
493511M 240
493512M 240
493512S 241
493513M 240
493514M 240
493514S 241
493516M 241
493516S 241
493517M 241
493518S 241
493519M 241
493520S 241
493521M 241
493522M 241
493522S 241
493523M 241
493524M 241
493524S 241
493526M 241
493526S 241
493527M 241
493528S 241
493530M 241
493530S 241
493532S 241
493534S 241
493536S 241
493538S 241
493540S 241
494515M 241
494517M 241
494519M 241
494521M 241
494522M 241
495517MX 241
495519MX 241
495521MX 241

4B xxx

4B5510M 243
4B5511M 243
4B5512M 243
4B5512S 243
4B5513M 243
4B5514M 243
4B5514S 243
4B5515M 243
4B5516M 243
4B5516S 243
4B5517M 243
4B5518S 243
4B5520S 243
4B5521M 243
4B5522M 243
4B5522S 243
4B5526S 243
4B5528S 243
4B5530S 243

4E xxx

4E08PR N17

50 xxx

5022MR 213
5022SR 213
502503H 388
502503H.B 388
502504H 388
502504H.B 388
502505H 388
502505H.B 388
502506H 388
502506H.B 388
502507H 388
502507H.B 388
502508H 388
502508H.B 388
502509H 388
502509H.B 388
502510H 388
502510H.B 388
5039CR 213
5060-08 322
5060-10 322
5060-12 322
5060-14 322
5060-16 322
5060-18 322
5060-20 322
5060-22 322
5060-24 322
5060-26 322
5060-28 322
5060-30 322
5060-32 322
5060-34 322
5060-36 322
5060-40 322
5063-14 324
5063-16 324
5063-18 324
5071-42 322
5071-44 322
5071-46 322
5071-48 322
5071-50 322
5071-52 322
5071-54 322
5071-56 322
5071-58 322
5071-60 322
5071-62....322
5071-64 322
5084-16 322
5084-18 222

51 xxx

5169PR 393

54 xxx

5450-08 387
5450-10 387

55 xxx

5522MR 213

57 xxx

572210M 347
572212M 347
574208M 347
574212M 347
574213M 347
574214M 347

Index

575208M 347
575210M 347
575212M 347
575213M 347
575214M 347
575217M 347
576208M 347
576210M 347
576213M 347
576214M 347
576217M 347
577406M 347
577407M 347
577408M 347
577409M 347
577410M 347
577411M 347
577412M 347
577413M 347
577414M 347
577415M 347
577416M 347
577417M 347
577418M 347
577419M 347

59 xxx

59000810 326
59001012 326
59001214 326
59001416 326
59001618 326
59001820 326
59002022 326
59002224 326
59002628 326
59003032 326
59003034 326
59003236 326
59003640 326
59301012 332
59301214 332
59301618 332
59301820 332
59302224 332
59302428 332
59601214 327
59601618 327
59602022 327
59602428 327
59603032 327
59700810 328
59701012 328
59701214 328
59701416 328
59701618 328
59701820 328
59702022 328
59702224 328
59702428 328
59702628 328
59703032 328
59703436 328
59703640 328
59703842 328

60 xxx

6011-05R 360
6011-07 360
6011-07R 360
6011-10 360
6011-10R 360
6012-07 360
6012-10 360
6013-10R 360
6014MR 209
6014MR12 210
601514M 253
601517M 253
601519M 253
601521M 253
601522M 253
601524M 253
601527M 253
601530M 253
601532M 253
6016MR 209
6016SR 209
602360 207
602370 207
602380 207
602390 207
6023A0 207
6023MR 209
6023SR 209
602514 207
602517 207
602519 207
602522 207
6031-07 360
6031-07R 360
6031-10 360
6031-10R 360
609616M 253
609616M10H 253
609616M12H 253
609616M14H 253
609616M17H 253
609616M19H 253
609616M22H 253
609622M 253
609622M19H 253
609622M22H 253
609622M24H 253
609622M27H 253
609622M30H 253
609622M32H..... 253

61 xxx

6111-06 353
6111-07 353
6111-08 353
6112-09 353
6114-05 353
6116-07A 430
6116-08A 430
6121-06X 362
6121-09X 362
6131-12 356
6131-12P01 356
6131-14 356
6131-14P01 356
6131-18 356
6131-18P01 356
6131-24 356
6131-24P01 356
6131-30 356
6131-30P01 356
6131-36 356
6131-36P01 356
6131-42 356
6131-42P01 356
6133-08 356
6141-06C 456
6141-08C 456
6146-08A 430

62 xxx

6207-05 436
6211-06 353
6213-06 353
6214-05 353
6214-45 353
6216-06A 430
6217-05 436
6224CR 209
6226CR 210
623030M 206
623032M 206
623033M 206
623036M 206
623039M 206
623041M 206
623046M 206
623050M 206
6231-07 353
6232-08 353
623517M 206
623518M 206
623519M 206
623520M 206
623521M 206
623522M 206
623523M 206
623524M 206
623525M 206
623526M 206
623527M 206
623528M 206
623529M 206
623530M 206
623531M 206
623532M 206
623533M 206
623534M 206
623535M 206
623536M 206
623537M 206
623538M 206
623539M 206
623540M 206
623541M 206
623542M 206
623543M 206
623544M 206
623545M 206
623546M 206
623547M 206
623548M 206
623549M 206
623550M 206
623551M 206
623552M 206
623553M 206
623554M 206
623555M 206
623556M 206
623557M 206
623558M 206
623559M 206
623560M 206
623563M 206
623565M 206
623570M 206
6236-07A 430
6247-05 436
6251-04 207
6251-08 207
6251-16 207
6260-04 254
6260-04P 254
6260-07 254
6260-07P 254
6260-10 254
6260-10P 254
6260-13 254
6260-13P 254
6271-05C 437
6271-65C 437

63 xxx

6311-06 354
6311-08 354
6313-06 354
6314-05 354
6314MR 209
6314MR12 210
6315-06 361
6315-09 361
6316MR 209
6317-06 437
6318-08A 430
6319-11C 354
6323MR 209
6329-13C 354
633017M 205
633019M 205
633021M 205
633022M 205
633022S 205
633023M 205
633024M 205
633024S 205
633026M 205
633026S 205
633027M 205
633028M 205
633028S 205
633029M 205
633030M 205
633030S 205
633032M 205
633032S 205
633033M 205
633034M 205
633034S 205
633035M 205
633036M 205
633036S 205
633038M 205
633038S 205
633040S 205
633041M 205
633042M 205
633042S 205
633044S 205
633046M 205
633046S 205
633048M 205
633048S 205
633050M 205
633054M 205
633055M 205
633050S 205
633052S 205
633054S 205
633056S 205
633058M 205
633058S 205
633060M 205
633060S 205
633062S 205
633063M 205
633064S 205
633065M 205
633066S 205
633068S 205
633070M 205
633070S 205
633072S 205
633074S 205
633076S 205
633078S 205
633080S 205
633082S 205
633084S 205
633086S 205
633088S 205
6331-06 355
6331-08 355
6334-05 354
633517M 206
633518M 206
633519M 206
633520M 206
633521M 206
633522M 206
633523M 206
633524M 206
633525M 206
633526M 206
633527M 206
633528M 206
633529M 206
633530M 206
633531M 206
633532M 206
633533M 206
633534M 206
633535M 206
633536M 206
633537M 206
633538M 206
633539M 206
633540M 206
633541M 206
633542M 206
633543M 206
633544M 206
633545M 206
633546M 206
633547M 206
633548M 206
633549M 206
633550M 206
633551M 206
633552M 206
633553M 206
633554M 206
633555M 206
633556M 206
633557M 206
633558M 206
633559M 206
633560M 206
633562M 206
633563M 206
633564M 206
633565M 206
633570M 206
6336-08A 430
6337-06 437
6339-13C 354
6347-05 438
6377-55 437
63A7-05 438
63B7-05 438

64 xxx

6408MP 255
6408MP10 255
6408SP10 255
6409MP 255
6409MP03 255
6409SP10 255
6410MP 255
6410SP 255
6411-06 355
64114FMP 282
64114AMP 282
6411MP 254
6424MP.....N14
6431-10C 355
6431-11C 355
643519M 251
643521M 251
643522M 251
643523M 251
643524M 251
643524S 251
643525M 251
643526M 251
643526S 251
643527M 251
643528M 251
643528S 251
643529M 251
643530M 251
643530S 251
643532M 251
643532S 251
643533M 251
643534M 251
643534S 251
643535M 251
643536M 251
643536S 251
643538M 251
643538S 251
643540M 251
643540S 251
643541M 251
643542M 251
643542S 251
643543M 251
643544M 251
643544S 251
643546M 251
643546S 251
643548M 251
643548S 251
643550M 251
643550S 251
643552S 251
643554S 251
643555M 251
643556S 251
643558S 251
643560M 251
643560S 251
643562S 251
643564S 251
643565M 251
6452-18F 207
6452-30F 207
6452DK 207
6462-40P 207
6462DK 207
6463-08C 355
647518M 252
647520M 252
647522M 252
647524M 252
64801AMP 282
64801BMP 282
64801FMP 282
6482-24G 208
6482DK 208
64K765M 230
64K770M 230
64K775M 230
64K780M 230
64K865M 230
64K870M 230
64K875M 230
64K880M 230
64K975M 229

Index

65 xxx

651017M 249
651018M 249
651019M 249
651021M 249
651022M 249
651023M 249
651024M 249
651026M 249
651027M 249
651028M 249
651029M 249
651030M 249
6511-10 356
6511-10C 356
6511-13C 356
6511-17C 356
651417M 252
651419M 252
651420M 252
651421M 252
651514M 250
651515M 250
651516M 250
651517M 250
651518M 250
651519M 250
651521M 250
651522M 250
651523M 250
651524M 250
651525M 250
651526M 250
651527M 250
651528M 250
651529M 250
651530M 250
6516-10 355
6516-10A 430
6516-10C 355
6517-08C 355
6517-10C 355
6517-12C 355
6518-10C 357
6521-13 369
6521-16 369
6521-21 369
6521-26 369
6522 ..... N18
6522-12 ..... N18
6522-16 ..... N18
6522-22 ..... N18
6522-25 ..... N18
6522-29 ..... N18
653017M 250
653019M 250
653021M 250
653022M 250
653023M 250
653024M 250
653026M 250
653027M 250
653028M 250
653029M 250
653030M 250
653032M 250
653033M 250
653034M 250
653035M 250
653036M 250
653038M 250
653040M 250
653041M 250
653042M 250
653046M 250
653063M 250
653065M 250
653070M 250
6531-10 369
6531-12 369
6531-14 369
6531-18 369
6531-24 369
6531-36 369
6531-48 369
6532-08 370
6532-10 370
6532-12 370
6532-14 370
6532-18 370
6532-24 370
6532-36 370
6532-48 370
6533-10L 370
6533-12L 370
6533-14L 370
6533-18L 370
6533-24L 370
6533-36L 370
6533-48L 370
653513M 250
653517M 250
653518M 250
653519M 250
653521M 250
653522M 250
653522S 251
653523M 250
653524M 250
653524S 251
653526M 250
653526S 251
653527M 250
653528M 250
653528S 251
653529M 250
653530M 250
653530S 251
653531M 250
653532M 250
653532S 251
653533M 250
653534M 250
653534S 251
653535M 250
653536M 250
653536S 251
653538M 250
653538S 251
653540M 250
653540S 251
653541M 250
653542M 250
653542S 251
653543M 250
653544M 250
653544S 251
653545M 250
653546M 250
653546S 251
653548M 250
653548S 251
653550M 250
653550S 251
653552M 250
653552S 251
653554M 250
653554S 251
653555M 250
653556S 251
653557M 250
653558M 250
653558S 251
653560M 250
653560S 251
653562S 251
653563M 250
653564S 251
653565M 250
653566S 251
653568S 251
653570M 250
653570S 251
653572S 251
653574S 251
653576S 251
6572-20 208
6572DK 208
657524M 252
657526M 252
657528M 252
657530M 252
657532M 252
6581-12 208
6581-18 208
6585-19 208
65SS-07 359

66 xxx

6605-08 361
6615-06 362
6615-11 362
6615-18 362
6625-06 362
6625-11 362
6625-18 362
6655-09 361
6665-09 361
66SB-07 358
66SS-07 358
66HB-07 358
66HS-07 358

67 xxx

6711-06 355
6716-06A 430
6721-10 465
6724-20F 207
6724DK 207
6732-09 465
6741-06 465
6751-44 459
6755-05 460
6756-05 460
6761-07 459
6762-08 459
6778-20FS 207
6778DK 207
6779-20F 207
6779DK 207
6781-85 463
6781P0A 463
6781P0B 463
6781P0C 463
6781P0D 463
6781P0F 463
6781P0H 463
6791 208
6797P 253
6798P 253
67A1-07 459
67B1-06 460
67B2-05 461
67B3-55 461
6BB11 439
6BC141-1 441
6BC141A 441
67F1-08 463
67G 464
67G0005 463
67G1-09 464
67G1P01 464
67GB-09 464
67GBP01 464
67GG-09 464
67GH-09 464
67GHP01 463
67GHP01 464
67GJ-09 464
67GJP01 463
67GJP01 464
67GK-09 464
67GKP01 463
67GKP01 464
67GL-09 464
67GLP01 464
67GLP01 463
67GN-09 463
67GN-09 464
67GNP01 463
67GNP01 464
67HB-07 358
67HS-07 358
67SB-07 358
67SS-07 359

68 xxx

6814 208
6818 208
683517M 252
683519M 252
683521M 252
683522M 252
683523M 252
683524M 252
683526M 252
683527M 252
683529M 252
683530M 252
683532M 252
6864 254
6864P 254
6868 254
6868P 254
6874 254
6874P 254
68GB-01 608
68GB-02 608
68GR-01 608
68GS-11 608
68GS-16 608
68GQ-01 608
68GQ-02 608
68HB-05 358
68HB-07 358
68HB-07L 359
68HB-10 358
68HS-05 358
68HS-07 358
68HS-10 358
68RB-01 608
68RR-01 608
68RS-11 608
68RS-16 608
68RQ-01 608
68SB-05 358
68SB-07 358
68SB-10 358
68SS-05 358
68SS-07 358
68SS-10 358
68ZZ-01 608
68ZZ-02 608

69 xxx

6921-05 353
6921-05C 353
6921-06 353
6921-06C 353
6921-07 353
6921-07C 353
6927-05 436
693519M 252
693521M 252
693522M 252
693523M 252
693524M 252
693524S 252
693526M 252
693526S 252
693527M 252
693528S 252
693529M 252
693530M 252
693530S 252
693532M 252
693532S 252
693534S 252
693536S 252
693538S 252
693540S 252

6A xxx

6AB12-55 453
6AB13-06 453
6AB14-06 454
6AB14-65 454
6AB21-65 453
6AB31-75 453
6AB33-95 455
6AC51-26 466
6AC52-12 466
6AD10-325 456
6AD10-3P01 456
6AD16-500 456
6AD17-150 456
6AD23-400 456
6AF11-125 443
6AF21-165 443
6AG11-20 444
6AH01-1 444
6AH01-2 444
6AH01-3 444
6AH01-4 444
6AH11 444
6AH12 444
6AH13 444
6AH14 444

6B xxx

6BB11 488
6BC100 443
6BC200 443
6BC141-1 441
6BC141A 441
6BC200 443
6BC210A 441
6BC210B 441
6BC210C 441
6BC210D 441
6BC210F 442
6BC23-1 442
6BC23A 441
6BC23B 441
6BC23F 441
6BC24A 441
6BC24B 441
6BC24C 441
6BC24F 441
6BC26-1 442
6BC26-3 442
6BC26A 441
6BC26B 441
6BC26C 441
6BC26F 441
6BC3007 442
6BC372 442
6BC372-1 442
6BC372-2 442
6BC372-3 442
6BC372-4 442
6BC372-5 442
6BD11 442
6BD22 442
6BE11-07 443
6BE12-07 443
6BE16-07 443
6BF11-17 442
6BF21-17 442
6BJ21 488
6BJ901 488

6C xxx

6CB02 450
6CB21 450
6CB31 448
6CB41 449

70 xxx

7003MR 222
7010MR 223
7011MR 216
7028MR 224
7053MR01 225
7077MR 218
7081MR 219
7082MR 217
7087MR 220
7096MR 215
7098MR 221

71 xxx

711002P 399
711002P-S1 401
711102H 399
711102H-S1 401
711103H 399
711103H-S1 401
711104H 399
711104H-S1 401
711105H 399
711105H-S1 401
711106H 399
711106H-S1 401
711107H 399
711107H-S1 401
711108H 399
711110H 399
711110T 399
711110T-S1 401
711110U 400
711110U-S1 402
711115T 399
711115T-S1 401
711115U 400
711115U-S1 402
711120T 399
711120T-S1 401
711120U 400
711120U-S1 402
711125H 399
711125H-S1 401
711125T 399
711125T-S1 401
711125U 400
711125U-S1 402
711127T 399
711127T-S1 401
711127U 400

Index

711127U-S1 402
711130T 399
711130T-S1 401
711130U 400
711130U-S1 402
711140T 399
711140T-S1 401
711140U 400
711140U-S1 402
7112PR 212
7113PR 212
711501P 399
711501P-S1 399
711502H 401
711502P 399
711502P-S1 399
711503H 401
711503P 399
711503P-S1 399
711504H 401
711505H 399
711505H-S1 401
711506H 399
711506T 401
711506T-S1 399
711507H 399
711507H-S1 401
711507T 399
711507T-S1 401
711508H 399
711508T 401
711508T-S1 401
711509T 399
711509T-S1 401
711510T 399
711510T-S1 401
711512SH-S1 ... 399
711515T 401
711515T-S1 399
711520T 401
711520T-S1 399
711525T 401
711525T-S1 399
711527T 401
711527T-S1 212
711530T 212
711530T-S1 399
711540T 401
711540T-S1 400
7120PR 402
7120PR01 399
715000P 401
715000P-S1 399
715001P 399
715001P-S1 401
715002P 399
715002P-S1 401
715003P 399
715003P-S1 401
715004P 399
715004P-S1 401
715000R 400
715000R-S1 402
715001R 400
715001R-S1 402
715001Z 400
715001Z-S1 402
715002H 399
715002H-S1 401
715002R 400
715002R-S1 402
715002Z 400
715002Z-S1 402
715003H 399
715003H-S1 401
715003P..... 399
715003P-S1..... 401
715003R 400
715003R-S1 402
715003S1 399
715003S1-S1 401
715003Z 400
715003Z-S1 402
715004H 399
715004H-S1 401
715004S1 399
715004S1-S1 401
715004S2 399
715004S2-S1 401
715005H 399
715005H-S1 401
715005S1 399
715005S1-S1 401
715006H 399
715006H-S1 401
715006S1 399
715006S1-S1 401
715006T 399
715006T-S1 401
715007H 399
715007H-S1 401
715007T 399
715007T-S1 401
715008H 399
715008H-S1 401
715008T 399
715008T-S1 401
715009T 399
715009T-S1 401
715009U 400
715009U-S1 402
715010T 399
715010T-S1 401
715010U 400
715010U-S1 402
715012SH 399
715012SH-S1 401
715014SH 399
715014SH-S1 401
715015T 399
715015T-S1 401
715015U 400
715015U-S1 402
715020T 399
715020T-S1 401
715020U 400
715020U-S1 402
715025H 399
715025H-S1 401
715025T 399
715025T-S1 401
715025U 400
715025U-S1 402
715027T 399
715027T-S1 401
715027U 400
715027U-S1 402
715030T 399
715030T-S1 401
715030U 400
715030U-S1 402
715035S1 399
715035S1-S1 401
715040T 399
715040T-S1 401
715040U 400
715040U-S1 402
715045S1 399
715045S1-S1 401
715050T 399
715050T-S1 401
715055S1 399
715055S1-S1 401
715065S1 399
715065S1-S1 401
716502P 399
716502P-S1 401
717000R 400
717000R-S1 402
717001P 399
717001P-S1 401
717001R 400
717001R-S1 402
717001Z 400
717001Z-S1 402
717002H 399
717002P 399
717002P-S1 401
717002R 400
717002R-S1 402
717002Z 400
717002Z-S1 402
717003H 399
717003P 399
717003P-S1 401
717003R 400
717003R-S1 402
717003Z 400
717003Z-S1 402
717004H 400
717005H 402
717005H-S1 402
717006H 399
717006H-S1 399
717006T 399
717006T-S1 401
717007H 399
717007T 401
717007T-S1 399
717008H 399
717008T 399
717008T-S1 399
717009T 399
717009T-S1 401
717010T 399
717010T-S1 401
717010U 400
717010U-S1 402
717015T 399
717015T-S1 401
717015U 400
717015U-S1 402
717020T 399
717020T-S1 401
717020U 400
717020U-S1 402
717025H 399
717025T 399
717025T-S1 401
717025U 400
717025U-S1 402
717027T 399
717027T-S1 401
717027U 400
717027U-S1 402
717030T 399
717030T-S1 401
717030U 400
717030U-S1 402
717040T 399
717040T-S1 401
717040U 400
717040U-S1 402
719001P 399
719001P-S1 401
719001Z 400
719001Z-S1 402
719002P 399
719002P-S1 401
719002Z 400
719002Z-S1 402
719003P 399
719003P-S1 401
719003Z 400
719003Z-S1 402

72 xxx

721102P 400
721102P-S1 402
726502P 400
726502P-S1 402
727502P 400
727502P-S1 402

73 xxx

731101P 400
731101P-S1 402
731102P 400
731102P-S1 402
731103P 400
731103P-S1 402
731152P 403
731502P 400
731502P-S1 402
731503P 400
731503P-S1 402
731552P 403
734501P 400
734501P-S1 402
734502P 400
734502P-S1 402
734503P 400
734503P-S1 402
734551P 403
734552P 403
736501P 400
736501P-S1 402
736502P 400
736502P-S1 402
736503P 400
736503P-S1 402
736552P 403

74 xxx

74010 493
74020 493
74030 493
74040 493
74060 493
741002P 400
741002P-S1 402
7411PP 246
741502P 400
741502P-S1 402
742002P 400
74250 493
74260 493
74270 493
743002P 400
743003P 400
74410 494
74412 494
74414 494
74416 494
745002P 400
745002P-S1 402
74512 494
74514 494
74613 494
747501P 400
747501P-S1 402
747502P 400
747502P-S1 402
747503P 400
747503P-S1 402
74A00..... 485

75 xxx

750-100 403
750-150 403
750-50A 403
750-60 403
750-75 403
75035-06..... 496
7503MR 222
751-60 403
751-75 403
75101-08G 495
75101-10G 495
75102-08G 495
75102-10G 495
7510MR 223
7511MR 216
75135-06..... 496
752-100 404
752-150 404
752-300 404
752-60 404
752-75 404
75201-08G 495
75201-10G 495
75202-08G 495
75202-10G 495
75235-06..... 496
7528MR 224
7528MR01 224
75302-08G 495
75302-10G 495
753-63 404
75335-06..... 496
754-90 404
75402-08G 495
75402-10G 495
75435-06..... 496
755-300 404
755-400 404
75501-08G 495
75501-10G 495
75502-08G 495
75502-10G 495
75535-06..... 496
7553MR01 225
7558MR 213
7577MR 218
7581MR 219
7581MR01 219
7582MR 217
7587MR 220
7587MR01 220
7587SR 220
7596MR 215
7598MR 221
759-140 404
75A105M 405
75A106M 405
75A108M 405
75A110M 405
75A112M 405
75A114M 405
75A116M 405
75RF09M.....N16

76 xxx

7601012M 405
7601013M 405
7605512M 405
7606508S 405
7606510S 405
7606512M 405
7606512S 405
7607510M 405
76103-04 471
76104-05 471
76104-74G 473
76105-06 471
76106-74G 473
76108-74G 473
7611006M 405
7611008M 405
76110-74G 473
7611010M 405
7611012M 405
7611013M 405
7611014M 405
7611506M 405
7611507M 405
7611508M 405
7611510M 405
7611512M 405
7611513M 405
7611514M 405
7612006M 405
7612008M 405
7612010M..... 405
7612012M 405
7612014M 405
76125-74G 473
7614208S 405
7614210S 405
7614512S 405
7616505M 405
7616506M 405
7616507M 405
7616508M 405
7616508S 405
7616510M 405
7616510S 405
7616512M 405
7616513M 405
7616512S 405
7616514M 405
7616514S 405
76210-10 472
76213-04 472
76213-06..... 472
76215-05 472
76217-06 472
76218-75G 473
76219-75G 473
76220-84G 473
76222-84G 473
76220-07 472
76223-08 472
76224-10 472
76226-12 472
76301-05 471
76302-05 471
76302-74G 473
76303-05 471
76303-74G 473
76304-05 471
76304-74G 473
76305-05 471
76305-74G 473
76306-05 471
76306-74G 473
76307-05 471
76308-05 471
76308-74G 473
76309-06 471
76310-06 471
76402-45 472
76402-55G 473
76403-05 472
76403-06 472
76403-06G 473
76404-06 472
76404-07G 473

Index

76405-65 472
76405-08G 473
76406-07 472
76406-84G 473
76407-84G 473
76408-08 472
76408-88G 473
76409-88G 473
76410-85 472
76410-09G 473
76410-14G 473
76412-09 472
76412-10G 473
76412-14G 473
7641206P 492
76414-10 472
76414-11G 473
76414-14G 473
76416-12G 473
76416-14G 473
76505-05..... 472
76717-05 474
76721-06 474
76724-08 474
76729-10 474
76804-05 474
76807-06 474
76B808M 406
76B809M 406
76B812M 406
76B813M 406
76B814M 406
76B815M 406
76B816M 406
76B819M 406
76B821M 406
76C1108M 406
76C1109M 406
76C1110M 406
76C1111M 406
76C1112M 406
76C1113M 406
76C1114M 406
76C1117M 406
76C1119M 406
76C1121M 406
76C1123M 406
76C1124M 406

77 xxx

7702-25 406
7702-50 406
7702-75 406
7703-50 406
7704-50 406
77131-06 484
77131-08 484
77141-06 484
77141-08 484
77328-26 484
77335-25 484
77340-20 484
7743-56 406
7744-60 406
7773GS 187

78 xxx

78106.....N17
7811-08 470
7811-12 470
7811-16 470
7811-24 470
7811-32 470
7811-40 470
7821-30 470
7821-50 470
7821-80 470
7822-30 470
7822-40 470
7822-45 470
7822-50 470
7823-10 470
7823-15 470
7823-20 470
7833-10 470
7833-12 470
7833-15 470
7833-20 470
7834-50 470
7842-22 471
7842-28 471
7842-35 471
7842-45 471
7842-60 471
7848-60 471
7848-80 471
7851-08 471
7851-16 471
7851-24 471
7851-32 471
7851-40 471
7851-48 471
7851-64 471
7852-23 470
7852-55 470
7861-08 470
7861-16 470
7861-20 470
7861-24 470
786P06.....N17

79 xxx

79062-12 483
79063-06 484
79063-12 484
79063-20 484
79063-40 484
79093-02M 482
79093-03C 482
79093-03M 482
79093-05C 482
79093-05M 482
79093-05M1 482
79093-08M..... 482
79093-08C..... 482
79094-02M 482
79094-03C 482
79094-03M 482
79094-05C 482
79094-05C1 482
79094-05M 482
79094-08M 482
79094-08C 482
79095-05M 482
79095-05M-S 482
7911-12 494
7912-0111 366
7912-21 366
7912-22 366
7912-23 366
7912-2311 366
7913-42 369
7913-4211 369
7913A-63 369
7913A-6311..... 369
7913B-35 368
7913B-3511..... 368
7914A-35 367
7914A-0111..... 367
7914C-70 367
7914C-7021 367
7915-30 367
7915-3011..... 367
7915A-19 368
7915A-28 368
7916-0111..... 368
7916-12M 368
7916-15M 368
7916-21M 368
7918-A0 366
7918-A011..... 366
7921-12 495
7932-04 457
7933-45 457
7935-08 457
7941-08 457
7945-07P01 455
7946-07 455
7946-07-S 456
7962-03 478
7962-04 478
7962-06 478
7962-08 478
7962-12 478
7962B-05 478
7962B-06 478
7962B-08 478
7962B-10 478
7962B-35 478
7963-03 478
7963-04 478
7963-06 478
7963-08 478
7963-12 478
7962B1PR 478
796401MR 480
7965-02 478
79711 481
7971-07 458
7971-07P02 458
79721 481
79731 482
7977-07 458
7977-07-S 458
7977-07P02 458
7978-07..... 458
7978-07-S 458
7978-07P02 458
79815 512
79831 512
79833 512
79900-04 285
79900-10 285
79900-13 285
79900-20 285
79901-04 285
79901-10 285
79901-13 285
79901-20 285
7990A0.....N18
7990A-P02.....N19
7990A-P03.....N19
7990A-P04.....N19
7990A-P05.....N19
7990A-P06.....N19
7990A-P07.....N19
7990A-P08.....N19
79910-10 287
79910-15 287
79911-10 287
79911-15 287
79912-10 287
79912-15 287
79953-10 286
79953-15 286
79960-10 286
79960-15 286
79960-20 286
79962-10 286
79962-15 286
79962-20 286
79982-06 285
79982-10 285
799A0-23C 287
799A0-33C 287
799A0-43C 287
799A1-23C 287
799A1-33C 287
79A21-30 485
79A22-30..... 485
79B1-01..... 385

7A xxx

7AA105 487

7C xxx

7CA0107M 371
7CA0110S 371
7CA0606S 372
7CA0606S1 372
7CA11-12S 372
7CA11-15M 372
7CA11-16M 372
7CA11-16S 372
7CA11-20S 372
7CA11-24S 372
7CA15-10M 373
7CA22BP01 371
7CA22BP10M .. 371
7CA22P01 371
7CA22P20S 371
7CA61-A01 372
7CA61-A011 372
7CA61-A02 372
7CA61-A021 372
7CA61-A03 372
7CA61-A031 372
7CA61-A04 372
7CA61-A041 372
7CA61-B01 372
7CA61-B011 372
7CA61-B02 372
7CA61-B021 372
7CA61-B03 372
7CA61-B031 372
7CA61-B04 372
7CA61-B041 372
7CA61P01 372
7CA61P02 372
7CA61P03 372
7CA81-30H 487
7CA82-30 487

7D xxx

7DM1160 483

7E xxx

7E61001 496
7E111 409
7E111 410
7E51180-60 407
7E51180-80 407

7H xxx

7HA03 373
7HA11 373
7HA21 373

7K xxx

7K09MP 230
7K09MP01 230

80 xx

8015MR 212
801524M.....N14
801527M.....N14
801530M.....N14
801532M.....N14
801536M.....N14
8015SR 212
809622M 258
809622M19H 258
809622M22H 258
809622M24H 258
809622M27H 258
809622M30H 258
809622M32H 258

82 xxx

820001 58
820002 58
820003 58
820005 58
820011 58
8251-08 211
8251-16 211
8260-07 259
8260-07P 259
8260-10 259
8260-10P 259
8260-13 259
8260-13P 259
827011 59

83 xxx

833036M 211
833038M 211
833041M 211
833046M 211
833046S 211
833048S 211
833050M 211
833054M 211
833054S 211
833055M 211
833058M 211
833060M 211
833060S 211
833063M 211
833064S 211
833065M 211
833067M 211
833070M 211
833071M 211
833072S 211
833075M 211
833076S 211
833077M 211
833080M 211
833084S 211
833094S 211
8330A0S 211

84 xxx

8404MP..... 260
84087637BKT 42
8408MP 260
8408MP02 260
8409MP 260
8410MP 260
8410SP 260
843524M 257
843527M 257
843528M 257
843530M 257
843530S 257
843532M 257
843532S 257
843533M 257
843534M 257
843534S 257
843535M 257
843536M 257
843536S 257
843538M 257
843538S 257
843540M 257
843540S 257
843541M 257
843542M 257
843542S 257
843544S 257
843546M 257
843546S 257
843548M 257
843548S 257
843550M 257
843550S 257
843552M 257
843552S 257
843554M 257
843554S 257
843555M 257
843556S 257
843558M 257
843558S 257
843560M 257
843560S 257
843562S 257
843564S 257
843565M 257
843566S 257
843568S 257
843570S 257
843570M 257
843572S 257
8462-40P 211
8462DK 211
84700002B 59
84700003B 59
84700011B 59

85 xxx

851417M 257
851419M 257
851420M 257
851421M 257
851422M 257
851426S 257
852421M 257
853417M 258
853419M 258
853421M 258
853519M 256
853521M 256
853522M 256
853523M 256
853524M 256
853524S 256
853525M 256
853526M 256
853526S 256
853527M 256
853528M 256
853528S 256
853529M 256
853530M 256
853530S 256
853532M 256
853532S 256
853533M 256
853534M 256
853534S 256
853535M 256
853536M 256
853536S 256
853537M 256
853538M 256
853538S 256
853540M 256
853540S 256

Index

853541M 256
853542M 256
853542S 256
853544M 256
853544S 256
853545M 256
853546M 256
853546S 256
853548M 256
853548S 256
853550M 256
853550S 256
853552M 256
853552S 256
853553M 256
853554M 256
853554S 256
853555M 256
853556S 256
853558M 256
853558S 256
853560M 256
853560S 256
853562S 256
853563M 256
853564S 256
853565M 256
853566M 256
853566S 256
853568M 256
853568S 256
853570M 256
853570S 256
853571M 256
853572S 256
853574S 256
853575M 256
853576S 256
853578S 256
853580M 256
853580S 256
853582S 256
853584S 256
853585M 256
853586S 256
853588S 256
853590M 256
853590S 256
853595M 256
853592S 256
853594S 256
853596S 256
8535A0S 256
8535A0M 256
8535A4S 256
8535A8S 256
8535B2S 256
85451735M..... 258
85451941M..... 258
85452038M..... 258
85452041M..... 258
85452141M..... 258
8572-25 211
8572DK 211
8581-26 211

87 xxx

870208 150
870311 172
870406 150
870406 172
870406 194
870410 194
870422 150
870422 172
870422 194
87102 630
87103 630
87104 385
87104..... 630
87105 630
871061A 289
871061A 630
871061B 289
871061B 630
871061F 630
871061F 289
87107..... 630
87108 474
87108 630
87110 630
87111 630
87118 482
8711B 630
87125 629
87137 51
8714101B 51
87152 629
87153 629
87154 629
87154-01..... 289
87154-01..... 629
87156 289
87156 629
87156A 289
87156A 629
87157-06 628
87157-09 628
87162 515
87163 515
8720 150
87201 47
87203..... 628
8720813D1..... 150
8730 172
87301-494A 628
87301-496A 628
87301-498A 628
87301-499A 628
87306-36-B 628
87307A 628
8730811D1..... 172
8740 194
87401-2 49
87401-3 49
87401-3H 49
87402 50
87404 50
87405-1 55
87405-2 55
87405-3 55
87405-9 55
87407 50
87408 50
8740809D1..... 194
87411-6B 48
87411-9B 48
87417-10B 48
87419-5B 48
87421-3B 49
87422-3B 49
87431-5BE 46
87432-15 42
87432-17 42
87432-23 42
87432-24 42
87432-31 42
87432-32 42
87432-33 42
87432-34 42
87432-41 42
87432-52 42
87432-5B 37
87432-5B-B 37
87432-5B-G 37
87432-5G 37
87432-5G-B 37
87432-5G-G 37
87434-7B 37
87434-7B-B 37
87434-7B-G 37
87434-7G 37
87434-7G-B..... 37
87434-7G-G 37
87435-13B 38
87441-1B 43
87441-3B 43
87446-3B-KR 44
87446-3B-KB 44
87452B-B..... 45
87452C-B..... 45
87502 47
87502-01 44
87502-02 44
87502-050 44
87502-051 44
87502-054 44
87502-058 44
87502-061 44
87502-064 44
87502-068 44
87502-11 44
87502-12 44
87502P01 47
87502P02 46
87502P03 46
87502P011 47
87502P012 47
87512 47
8760 208
8760807D1 208
87634-7B 38
87634-7B-B 38
87634-7B-G 38
87711C 51
87721B 51
87722B 52
87723B 53
87724D 52
87731D 53
87732D 52
87733D 52
8779-32F 211
8779DK 211
8797 259
8797P 259
87A05 50
87A051 50
87A05-KB 50
87A051-KB 50
87A08 50
87C23-B 609
87C24-B 610
87C25-B 610
87C34-3B-B 45
87D11-01A-KB 26
87D11-01A-KG 26
87D11-02A-KB 24
87D11-02A-KG 24
87D11-03A-KB 27
87D11-03A-KG 27
87D11-04A-KB 27
87D11-04A-KG 27
87D11-05A-10 33
87D11-05A-KB 27
87D11-05A-KG 27
87D11-06A-B 31
87D11-06A-G 31
87D11-071A-B 32
87D11-071A-G 32
87D11-08A 31
87D11-08SA 31
87D11-09A 31
87D11-09SA 31
87D11-10A 31
87D11-10SA 31
87D11-11A-KB 28
87D11-11A-KG 28
87D11-12A-KB 28
87D11-12A-KG 28
87D11-13A-KB 32
87D11-13A-KG 32
87D11-14A 33
87D11-14SA 33
87D11-15A-KB 32
87D11-15A-KG 32
87D11-16A-B 33
87D11-16A-G 33
87D11-17A-KB 26
87D11-17A-KG 26
87D11-18A-KB 25
87D11-18A-KG 25
87D11-19A-KB 28
87D11-19A-KG 28
87D11-20A-K 30
87D11-20LA-K 30
87D11-21A-KB 26
87D11-21A-KG 26
87D11-22A-KB 26
87D11-22A-KG 26
87D11-23A-KB 30
87D11-23A-KG 30
87D11-24A-K 29
87D11-25A-KB 29
87D11-25A-KG 29
87D11-26A-K 31
87D11A-KB 23
87D11A-KG 23
87D11X01SA-KB .. 19
87D11X01SA-KG . 19
87D11X02SA-KB .. 20
87D11X02SA-KG . 20
87D11X03A-KB ... 21
87D11X03A-KG ... 21
87D11X04A-KB ... 21
87D11X04A-KG ... 22
87D11X05A-KB ... 22
87D11X05A-KG ... 32
87D11X06A-KB..... 32
87D11X06A-KG..... 32
87D11X06SA-KB .. 32
87D11X06SA-KG . 32
87E02-051A 33
87E02-053A 33
87E02-061A 33
87E02-063A 33
87G001DQ-BK 41
87G11-4B-BK 41
87G31-7B-BK 40
87G41-B 43
87SQ3-11..... N9
87SQ3-12..... N9
87SQ3-13..... N9
87SQ3-22..... N9
87SQ3-31..... N9
87SQ3-32..... N9
87SQ3-23.....N10
87SQ3-33.....N10
87SQ3-41.....N10
87SQ3-42.....N10
87SQ3-51.....N10
87SQ31-6B-BK.... N5
87SQ31-7B-BK.... N5
87SQ31-8B-BK.... N5
87SQ32-8B-BK.... N6
87SQ32-9B-BK.... N6
87SQ32-10B-BK.... N6
87SQ33-6B-BK..... N6
87SQ33-7B-BK..... N6
87SQ33-8B-BK..... N6
87SQ34-10B-BK.... N8

88 xxx

8816 211
883524M 257
883527M 257
883529M 257
883530M 257
883532M 257
883533M 257
883534M 257
883535M 257
883536M 257
883538M 257
883541M 257
8866 259
8866P 259
8869 259
8869P 259

9- xxx

9-1011GP 128
9-10112MR 124
9-10112MRV 77
9-10115MR 119
9-102A12MR 124
9-102A15MR 119
9-1044CQV 89
9-1112MRV 82
9-1205MR 116
9-12110MR 128
9-12120MR 119
9-1215MR03 133
9-91215MRV.....N11
9-1216MR 116
9-1216MR01 116
9-1216MR03 116
9-1217MR 132
9-1218MR 116
9-1219MR01 116
9-1220MRV 81
9-1272MR 117
9-1282MR 117
9-12A1MR 129
9-12A1MRV 82
9-12C7MR 127
9-12D20MRV 81
9-12FVE15MRV 84
9-12FVG15MRV ... 84
9-1303MR 123
9-1606MR 132
9-1606MR01 132
9-1608MR 117
9-1609MR 117
9-1709MR 117
9-1711MR 118
9-1716MR 132
9-1812MR 118
9-1838MR 118
9-1905MR 123
9-1905MR 330
9-1912MR 118
9-1C08MR 119
9-20110MR 124
9-2044SRV 86
9-2048MRV 86
9-21-20-07MRV .. 89
9-22108MR 121
9-22108MRV 83
9-22124MRV50 74
9-22308TR 121
9-22308TRV 83
9-2331SRV 76
9-2516MRV03 90
9-2524MRV 90
9-2526MR 123
9-2528MRV 90
9-2534MRV 76
9-2544SRV 86
9-2548CR 111
9-2548CR01 111
9-2548CRV 70
9-2548MRV 86
9-2550MRV 78
9-2553MRV 87
9-2553MRV01 87
9-2565MRV 76
9-25VE01MRV 77
9-30106MR 132
9-30110CR 122
9-30206MR 132
9-30208MRV..... 83
9-30216MRV 89
9-3023MR01..... 114
9-3023MRV11 .. 87
9-30612MRV 85
9-30904AY 127
9-30904AY 604
9-30904AYV 78
9-30909AY 127
9-30909AY 605
9-30909AYV 79
9-31006MR 131
9-31106MR 124
9-31124MRV 75
9-31110MR 122
9-31110MRV..... 75
9-31909PR 122
9-31919MR 125
9-31920MRV 74
9-34128FR 122
9-3523MR 114
9-3523MRV10 87
9-3523MRV11 87
9-3544MRV 79
9-35VE01MRV 78
9-35VE02MRV.....N12
9-3612MR 127
9-40102GP 111
9-40102GPV 70
9-40103GP 124
9-40104GPV 88
9-40112GPV 70
9-40113GPV 88
9-40122GPV 70
9-40203GP 132
9-4026MR02 110
9-40207GP 120
9-40207GP01 120
9-4029CR 133
9-4057MR 126
9-40604GP 120
9-40606GPV 85
9-40618GP 128
9-4116FR 132
9-4116FR03 132
9-4119PR 123
9-4120PR 123
9-4128FR 124
9-4129PRV 76
9-4138PR 126
9-4138PRV 76
9-4143FRV 77
9-4147PRV 88
9-4156PR 133
9-42102GPV 70

Index

9-42114GP 111
9-42114GPV 70
9-42116GPV 82
9-42144GP 120
9-4219MR 131
9-4219MR07 131
9-4219SR08 131
9-4221MRV 79
9-4235MR 129
9-4319MR 131
9-4319MR01 131
9-4319MR02 131
9-4319MR05 131
9-4328MR 114
9-4333MR 114
9-4333MR03 114
9-4335MR 129
9-4338MR 130
9-4338MR01 130
9-4338MR03 130
9-4401MPV 88
9-4419MPV 81
9-44214GPV 88
9-4427MP 126
9-4429MPV 77
9-4435MP 129
9-44803AMPV 73
9-44803AMPV01 . 73
9-44805AMPV 73
9-4516MR 113
9-4522MR 113
9-4526MR 110
9-4526MRV05 79
9-4527MRV02 80
9-4537MRV 80
9-4557MR 126
9-45VE01MRV 78
9-45VE02MRV 91
9-4827MP 126
9-5575MR 115
9-55VE01MRV 84
9-6010MR 133
9-6010MR01..... 133
9-6314MRV 72
9-6414MP 129
9-6414MPV 81
9-6414SP 129
9-7069CR 110
9-7069CR01 110
9-7069CRV 69
9-7078CR 110
9-7078CR01 110
9-7128PR 126
9-7128PRV 77
9-7537MR 115
9-7540MR 115
9-7560MRV01 80
9-7576MR 125
9-9003MRV01 72
9-90103PP 121
9-90103PP01 121
9-90103PP02 121
9-90103RR 121
9-90104GP 130
9-90106SR 121
9-90109MN 119
9-90111MR 133
9-90113MA 131
9-90114MR 128
9-90115MR 132
9-90118PRV 89
9-90119MRV 82
9-90120MR 132
9-90121MR 130
9-90125MR 132
9-90126MR 130
9-90128SR 111
9-90129CR 112
9-90129CRV 71
9-90131MR 116
9-90135MRV 88
9-90135SRV 88
9-90138CR 112
9-90145CRV 71
9-90154CR 113
9-90154CR01 113
9-90205GN 120
9-90205GN01 120
9-90217GRV 74
9-90220MR 112
9-90220MR01 112
9-90305TQV 89
9-90305TQV01 89
9-90310MR 122
9-90315MR 118
9-90329CR 112
9-90408TQ 125
9-9040SRV 80
9-90413TQV 75
9-9077CRV 69
9-90VE09CRV.....N12
9-91016MR 128
9-91026PR 123
9-91113SRV 90
9-91120MR 119
9-91122MRV 74
9-91124MRV 75
9-91126SRV 71
9-91131MRV 71
9-91190CRV 83
9-91215MRV.....N11
9-91217MRV 75
9-93523MR 115
9-94435MP 125
9-94437MRV 73
9-99430MFV 72
9-99430MFV01 72

90 xxx

901-068MR 99
901-069MR 99
901-073MR 99
902-062MR 102
902-062MRD 102
902-065MR 103
902-065MRD 103
902-068MR 103
902-068MRD 103
902-084MR01 104
902-084MRD01 .. 104
902-084SR 104
902-084SRD 104
902-089MR01 105
902-089MRD01 .. 105
902-103MR 105
902-103MRD 105
902-109MR 106
902-109MRD 106
902-132CR 106
902-132CRD 106
902-164MR 102
902-164MRD 102
90217PQ 444
90217PQ01 444
90217PQ03 444
9033CR 214
90401 245
90402 245
90403 254
9043MR 226
90404 254
90405 254
90405 259
90406 259
9052-001MRV..... 56
9052-001MRV..... 433
9052-002MRV..... 57
9052-002MRV..... 228
90601 245
90602 245
90603 254
90604 254
90605 259
90606 259
90607 254
90608 236
90609 236
9063MR 214
9063MR01 214
908-077CR 107
908-077CRD 107

91 xxx

91000M 192
91038MY01 445
911-000CR 100
911-000CR02 100
911-000CRV 67
911-002CR 100
911-003CR 101
911-003CR01 101
911-004CRV 67
9113PR..... 148
9113PR..... 170
9113PR..... 192
91230 440
91232 386
91333MQ 445
91422 629
91431 471
91431 628
91432 628
91451-01A 289
91451-01A 628
91451-01B 289
91451-01B 628
91451-01F 289
91451-01F 628
91522H 471
91528H 471
91535H 471
91545H 471
91560H 471
91522S 471
91528S 471
91535S 471
91545S 471
91560S 471
919-001CRV 68

92 xxx

92543MR 229
92543MR01 229
9260-13 260
9260-13P 260

93 xxx

932-000MR 96
932-000MRD 96
932-000MR-B 96
932-000MR-G 96
932-008MR 97
932-008MRD 97
932-008MR-B 97
932-008MR-G 97
932-009MR 93
932-009MRD 93
932-009MR-B 93
932-009MR-G 93
932-010MR 94
932-010MRD 94
932-010MR-B 94
932-010MR-G 94
934-001MR 98
934-001MRD 98
934-001MR-B 98
934-001MR-G 98
934-010MRV 63
934-010MRV 518
934-010MRVD..... 63
934-010MRVD.....518
934-010MRV-B.. 63
934-010MRV-B.....518
934-010MRV-G 63
934-010MRV-G.....518
934-011MRV..... 64
934-011MRVD... 64
934-011MRV-B... 64
934-011MRV-G.. 64
934-019MRV 65
934-019MRVD 65
934-019MRV-B … 65
934-019MRV-G … 65
934-086MRVD.....N11
934-235MRV..... 62
934-235MRVD.... 62
934-235MRV-B.... 62
934-235MRV-G.. 62
935-525CRV 66
935-525CRVD 66

94 xxx

941-101MRD 95
941-101MR 95

95 xxx

9519MR50 227
953532M 261
953533M 261
953534M 261
953536M 261
953538M 261
953541M 261
953542M 261
953546M 261
953550M 261
953555M 261
953560M 261
953564S 261
953565M 261
953566S 261
953568S 261
953570M 261
953570S 261
953572S 261
953574S 261
953575M 261
953576S 261
953578S 261
953580M 261
953580S 261
953582S 261
953584S 261
953585M 261
953586S 261
953588S 261
953590M 261
953590S 261
953592S 261
953594S 261
953595M 261
953596S 261
953598S 261
9535A0M 261
9535A0S 261
9535A2S 261
9535A4S 261
9535A5M 261
9535A6S 261
9535A8S 261
9535B0M 261
9535B0S 261
9535B2S 261
9535B4S 261
9535B5M 261
9535B6S 261
9535B8S 261
9535C0M 261
9535C0S 261
9535C2S 261
9535C4S 261
9535C5M 261
9535C6S 261
9535C8S 261
9535D0M 261
9535D0S 261
9535D2S 261
9535D4S 261
9535D5M 261
9535D6S 261
9535D8S 261
9535E0M 261
9535E0S 261
9535E2S 261
9535E4S 261
9535E8S 261
9535F0M 261
9535F2S 261
9535F6S 261
9535G0S 261
9535G4S 261
9535G8S 261
9535J2S 261
9543MR 226
9563MR 214
9563MR01 214

96 xxx

9634-001MR 98
9634-001MR-B 98
9634-001MR-G 98
9634-008MR 97
9634-008MR-B 97
9634-008MR-G 97
9634-009MR 93
9634-009MR-B 93
9634-009MR-G 93
9634-010MR 94
9634-010MR-B 94
9634-010MR-G 94
9634-010MRV 63
9634-010MRV 518
9634-010MRV-B ... 63
9634-010MRV-B ...518
9634-010MRV-G... 63
9634-010MRV-G...518
9634-011MRV 64
9634-011MRV-B.. 64
9634-011MRV-G.. 64
9634-019MRV 65
9634-019MRV-B... 65
9634-019MRV-G... 65
9634-235MRV 62
9634-235MRV-B... 62
9634-235MRV-G... 62
9644-101MR 95

97 xxx

97121PQ 444

98 xxx

9868 260
9868P 260

9A xxx

9A05-062MR 102
9A05-062MR-KB... 102
9A05-065MR 103
9A05-065MR-KB... 103
9A05-068MR 103
9A05-068MR-KB... 103
9A05-084MR01... 104
9A05-084MR01-KB 104
9A05-084SR 104
9A05-084SR-KB 104
9A05-089MR01 105
9A05-089MR01-KB 105
9A05-103MR 105
9A05-103MR-KB... 105
9A05-109MR 106
9A05-109MR-KB... 106
9A05-132CR 106
9A05-132CR-KB.... 106
9A05-164MR 102
9A05-164MR-KB .. 102
9AA11 549
9AA13 549
9AA15 550
9AA16 549
9AA17 550
9AA21 549
9AA25 550
9AA31 550
9AA32 550
9AB11 551
9AB12 551
9AC125-32 552
9AC125-40 552
9AC175-32 552
9AC175-40 552
9AC175-66 552
9AC231-54 552
9AC2315DK 552
9AD11 552
9AE0-6414 558
9AE0-7414 558
9AE1-6414 555
9AE2002 556
9AE2004 556
9AE2016 556
9AE2-10615 555
9AE2-10815 555
9AE2-10818 555
9AE2-6514 555
9AE2-6514..... 556
9AE2-6567..... 555
9AE2-6567 556
9AE2-6606 555
9AE2-6606 556
9AE2-7476 555
9AE2-7608 555
9AE2-7608 555
9AE2-7612 555
9AE2-7614 555
9AE2-7614 556
9AE2-8616 555
9AE2-8618 555
9AE2-9210 555
9AE2-9315 555
9AE2-9315 556
9AE2-9345 556
9AE2-9618 555
9AE2-10615 555
9AE2-10815 555
9AE2-10818 555
9AE221 557
9AE221 560
9AE221 562
9AE31-73 552

Index

9AE31-85 552
9AE31-95 552
9AE31-111 552
9AE31-121 552
9AE31-134 552
9AE31X-120 ..... N23
9AE31X-135 ..... N23
9AE31X-145 ..... N23
9AE32-110 553
9AE32-155 553
9AE33-110 553
9AE33-155 553
9AE42 562
9AE43 562
9AE433 557
9AE433 560
9AE433 562
9AE52 562
9AE52-110 562
9AE53-115 562
9AE6002 559
9AE6030 560
9AE6-6514 558
9AE6-6514 559
9AE6-6514A 558
9AE6-6567 558
9AE6-6567 558
9AE6-6606 558
9AE6-6814 558
9AE6-7314 538
9AE6-7414 558
9AE6-7415 558
9AE6-7476 558
9AE6-7577 558
9AE6-7608 558
9AE6-7612 558
9AE6-7614 558
9AE6-7630 558
9AE6-7815 558
9AE6-8015 558
9AE6-8082 531
9AE6-8414 558
9AE6-8616 558
9AE6-8618 559
9AE6-9015 559
9AE6-9210 559
9AE6-9315 559
9AE6-9336 559
9AE6-9345 559
9AE6-9515 559
9AE6-9618 559
9AE6-10015 559
9AE6-10615 559
9AE6-10815 559
9AE6-10818 563
9AE71-90 563
9AE71-115 563
9AE71-140 563
9AE72 563
9AE8006 561
9AE8-24 561
9AE8-27 561
9AE8-30 561
9AE8-32 561
9AE8-36 561
9AE8-38 563
9AF11-15 563
9AF11-30 563
9AF11-60 563
9AF113 564
9AG11 564
9AG13 565
9AH12 565
9AH025 565
9AH0311 566
9AH0321 566
9AH0331 565
9AH31 566
9AH41 567
9AJ017 566
9AJ3122 566
9AJ3122A 567
9AJ3127 567
9AJ3222 567
9AJ3322 567
9AJ4122 567
9AJ4227 567
9AJ4229 567
9AJ4322 566
9AK11 568
9AK21 568
9AL11 568
9AL12 568
9AM010 568
9AM011 568
9AM012 564
9AN021 567
9AN4128 567
9AN4227 567
9AN43 539
9AP100 569
9AP120 569
9AP160 569
9AR11 569
9AR21 569
9AR29-S 569
9AS11 569
9AT1002E 529
9AT1002E 541
9AT1007E 542
9AT1009E 520
9AT1010E 523
9AT1010E 527
9AT1018E 519
9AT1021E 528
9AT1026E 531
9AT1102E 521
9AT1103E 538
9AT1105E 532
9AT1106E 521
9AT1108E 523
9AT1112E 527
9AT1202 526
9AT1202 543
9AT1206E 542
9AT1306E 547
9AT1406E 531
9AT1506E 547
9AT1606E 525
9AT1706E 525
9AT1-A01 540
9AT1-A02 526
9AT1-A03 536
9AT1-A04 541
9AT1-E01 530
9AT1-E01 534
9AT2004E 538
9AT2004E 543
9AT2005E 538
9AT2005E 543
9AT2006E 519
9AT2006E 529
9AT2006E 533
9AT2008E 535
9AT2008E 537
9AT2008E 544
9AT2010E 540
9AT2011E 532
9AT2012E 539
9AT2106E 522
9AT2106E 534
9AT2106E 544
9AT2107E 524
9AT2-A01 528
9AT2-A01 530
9AT2-A01 533
9AT2-A01 536
9AT2-A01 544
9AT2-C01 532
9AT2-C01 541
9AT2-D01 526
9AT2-D01 534
9AT2-D01 545
9AT2-E01 545
9AT3-A01 545
9AT3-A02 546
9AT3-A03 536
9AT3-A04 546
9AT3-B01 546
9AT3-F01 546
9AT3-F02 546
9AT3-E01 533
9AT3-E02 528
9AT3-E02 530
9AT3-E02 537
9AW4901 571
9AW4911 571

9B xxx

9BA01 479
9BA02 480
9BA03 480
9BA11 571
9BA21 479
9BA21P01 479
9BA21P011 479
9BA21P02 479
9BA21P03 479
9BA21P04 479
9BA21P05 479
9BA21P06 479
9BA21P07 479
9BA22 479
9BA22P01 479
9BA22P011 479
9BA22P02 479
9BA22P04 479
9BA31 480
9BA32 480
9BA33 480
9BA41 572
9BB11 572
9BB12 573
9BB13 573
9BB31 573
9BB42 571
9BC11 574
9BC121 574
9BC124 574
9BC21 574
9BC22 574
9BC23 575
9BC24A 575
9BC251 576
9BC251A01 576
9BC26 576
9BC32 576
9BC32P021 577
9BC41A14 ..... N14
9BC41A22 ..... N14
9BC42A11 ..... N14
9BC42A15 ..... N14
9BC42A20 ..... N14
9BC4A05MP N14
9BC5001MR 577
9BC5107M 577
9BC5108M 577
9BC5109M 577
9BC5110M 577
9BC5111M 577
9BD101 577
9BE11 578
9BE21 578
9BE41 578
9BE42 578
9BE43 578
9BE44 578
9BE45 578
9BE51 579
9BE52 579
9BE62 579
9BE63 579
9BF11 580
9BF21 580
9BF31 580
9BF33 581
9BG11 580
9BK11 581
9BK31 581
9BK32 549
9BK41 581
9BK41-20 581
9BK41-28 581
9BK41-38 581
9BK41-53 581
9BK41-65 581
9BK41-73 582
9BK43 581
9BK43-65 581
9BK7008 587
9BK7009 587
9BK711 587
9BK72 587
9BK72-12 587
9BK72-13 587
9BK72-14 587
9BK72-16 587
9BK72-22 587
9BK72-28 587
9BK73-14 587
9BK73-22 587
9BM120 582
9BM2-01 286
9BM2-01 583
9BM2-02 286
9BM2-02 583
9BM2110 286
9BM2110 583
9BM2111 286
9BM2111 583
9BM2210 286
9BM2210 583
9BM2210A 286
9BM2210A 583
9BM2211 286
9BM2211 583
9BM2211A 286
9BM2211A 583
9BM811 582
9BP11 573
9BP21 573
9BQ01 590
9BQ11 590
9BT250 590
9BT2100 590
9BU111 588
9BU111T 588
9BU112 588
9BU112T 588
9BU1432T 588
9BU241 589
9BU241T 589
9BU242 589
9BU242T 589
9BU251 589
9BU251T 589
9BU252 589
9BU252T 589
9BU41 590
9BU8109 285
9BU8109 589
9BU8112 285
9BU8112 589
9BU8209 285
9BU8209 589
9BU8212 285
9BU8212 589
9BV1420 284
9BV1420T 285
9BW0120 584
9BW0220 284
9BW0221 584
9BW4501 586
9BW4502 586
9BW4801 586

9C xxx

9CD14 595
9CD21 595
9CD31 596
9CF-107 592
9CF110 591
9CF120 591
9CF130 591
9CF131 591
9CF132 591
9CF-207 592
9CF210 591
9CF220 592
9CF230 592
9CF240 592
9CF241 592
9CF-307 592
9CH01 593
9CH212 593
9CI016 595
9CJ013 594
9CJ023 594
9CJ072 ..... N21
9CJ7416 ..... N21
9CJ7432 ..... N21
9CJ033 595
9CJ1112 593
9CJ1120 593
9CJ1130 594
9CJ2112 594
9CJ2120 594
9CJ2212 594
9CJ3104 594
9CJ3105 594
9CJ3106 595
9CJ61-40 595
9CK-101 601
9CM01 593
9CM11 593
9CM209 593
9CM212 593
9CW01 596
9CW11 596
9CW12 596
9CW13 596
9CW21 596
9CW22 596
9CZ101 601
9CZ201-S 489

9D xxx

9DA022 597
9DA103 597
9DA104 597
9DB201 597
9DC22 598
9DC23 597
9DC242 598
9DC243 598
9DC51 599
9DD21 599
9DD22 599
9DH11 599
9DM1361 447
9DM1381 447
9DM1A1 599
9DM2351 448
9DN12 450
9DP1101 600
9DP1301 600
9DP1302 600
9DP2301 600
9DP3201 601
9DT11 601
9DT11-1 601
9DT11-2 601
9DT11-3 601
9DT11-4 601
9DT11-5 601
9DT11-6 601
9DT11-7 601
9DT11-8 601
9DT11-9 601
9DT11-10 601
9DT11-11 601
9DT11-12 601

9H xxx

9HBE083 579
9HBE4-30 578
9HBE4-39 578
9HBE4-47 578
9HBE4-58 578
9HBE4-62 578
9HBE4-67 578
9HBE81 579
9HBL11-05 583
9HBL12-05 583
9HBN01 580

9T xxx

9TA242A 505
9TA242B 505
9TA242D 505
9TA251A 507
9TA251B 507
9TA251D 507
9TA261A 506
9TA261B 506
9TA261D 506
9TA265 506
9TA266 506
9TA267W 502
9TA268A 506
9TA268B 506
9TA268D 506
9TA271 ..... N19
9TA28 511
9TA281 511
9TA33A 508
9TA33B 508
9TA33D 508
9TA34A 508
9TA34B 508
9TA34D 508
9TA34P01 508
9TA42A 513
9TA42B 513
9TA42D 513
9TA44W 503
9TA45A 514
9TA46A 514

Index

9TA48A.....N20
9TA48B.....N20
9TA48C.....N20
9TA52A 510
9TA52B 510
9TA52D 510
9TA53 510
9TA54 509
9TA56 509
9TA71W 504
9TA92WA 504
9TA92WB 504
9TA92WD 504
9TB225 602
9TB500 602
9TBA600 602
9TBA650 602
9TC101 602
9TD014MR 492
9TD033MR.....N20
9TD034MR 491
9TD035MR 491
9TD036MR 491
9TD062 491
9TD064 491
9TD164MR 492
9TD165MR 492
9TD401-06M 492
9TD401-08M 492
9TD401-10M 492
9TD401-12M 492
9TD403-10M 491
9TD403-12M 491
9TD403-13M 491
9TD403-14M 491
9TD403-17M 491
9TD403-19M 491
9TD403-21M 491
9TD403-22M 491
9TD403-23M 491
9TD403-24M 491
9TD403-27M 491
9TD404-0619M 492
9TD601 491
9TD602 491
9TD603 491
9TD604 491
9TE11 486
9TE41 244
9TE41 609
9TG11 609
9TG12 609
9TG21 609
9TH21XL 486
9TH31-XL 486
9TH31-2L 486
9TH41-L 486
9TH41-XL 486
9TH42-XL 486
9TH42-XXL 486
9TH43-XL 486
9TH43-XXL 486
9TH44-XL 487
9TH44-XXL 487
9TH45-XL 487
9TH45-XXL 487
9TK014 603
9TK024 603
9TK034 603
9TK108 603
9TK112 603
9TK118 603
9TK124 603
9TK225A 603
9TK225B 603
9TK236A 603
9TK236B 603
9TK306 603
9TK312 603
9TK316 603
9TK320 603
9TP11 610
9TP12 610
9TP22 610
9TQ02 607
9TQ11 607
9TQ12 607
9TQ21 606
9TQ31 602
9TT11-18 611
9TT21-03 611
9TT31-20 611
9TU11-20 613
9TU21-20 613
9TV13-100 612
9TV21-09 612
9TW21-20.....613
9TZ11-04 489
9TZ11-05 489
9TZ11-06 489
9TZ11-08 489
9TZ11-10 489
9TZ11-12 489

9X xxx

9XAH1 564

A5 xxx

A535041M 262
A535046M 262
A535050M 262
A535051M 262
A535055M 262
A535057M 262
A535060M 262
A535065M 262
A535070M 262
A535075M 262
A535076M 262
A535076S 262
A535077M 262
A535078S 262
A535080M 262
A535080S 262
A535082S 262
A535084S 262
A535085M 262
A535086M 262
A535088S 262
A535090M 262
A535090S 262
A535094S 262
A535095M 262
A535096S 262
A535100M 262
A535100S 262
A535105M 262
A535108S 262
A535110M 262
A535112S 262
A535115M 262
A535120M 262
A535120S 262
A535124S 262
A535125M 262
A535126S 262
A535130M 262
A535132S 262
A535135M 262
A535136S 262
A535138S 262
A535140M 262
A535144S 262
A535145M 262
A535148S 262
A535150M 262
A535155M 262
A535156S 262
A535160M 262
A535160S 262
A535164S 262
A535165M 262
A535168S 262
A535170M 262
A535172S 262
A535175M 262
A535180M 262
A535180S 262
A535184S 262
A535185M 262
A535188S 262
A535190M 262
A535192S 262
A535196S 262
A535200M 262
A535200S 262
A535204S 262
A535208S 262
A535210M 262
A535212S 262
A535215M 262
A535216S 262
A535220S 262
A535224S 262
A535225M 262
A535235M 262
A535240S 262
A535244S 262
A535252S 262
A535256S 262

AD xxx

ADCV-01 627
ADCV-02 627
ADFLAG 627
ADFLAG1 627
ADFLAG2 627
ADSTK21KT 627
ADSTK22KT 627
ADSTK23KT 627
ADSTK31KT 627
ADSTK-C1 627
ADSTK-H2 627
ADVT-02 627
ADVT-031.....N23
ADVT-031.....629
ADVT-032.....N23
ADVT-032.....629
ADVT-033.....N23
ADVT-033.....629
ADVT-034.....N23
ADVT-034.....629
ADVT-035.....N23
ADVT-035.....629
ADVT-036.....N23
ADVT-036.....629
ADVT-037.....N23
ADVT-037.....629
ADVT-038.....N23
ADVT-038.....629
ADVT-039.....N23
ADVT-039.....629
ADVT-04.....N23
ADVT-05.....629

B5 xxx

B535105M 263
B535110M 263
B535115M 263
B535120M 263
B535125M 263
B535130M 263
B535132S 263
B535135M 263
B535136S 263
B535140M 263
B535140S 263
B535144S 263
B535145M 263
B535148S 263
B535150M 263
B535152S 263
B535156S 263
B535160M 263
B535160S 263
B535164S 263
B535165M 263
B535168S 263
B535170M 263
B535172S 263
B535175M 263
B535176S 263
B535180M 263
B535180S 263
B535184S 263
B535185M 263
B535188S 263
B535190M 263
B535192S 263
B535196S 263
B535200M 263
B535200S 263
B535204S 263
B535208S 263
B535210M 263
B535212S 263
B535215M 263
B535216S 263
B535220S 263
B535224S 263
B535225M 263
B535228S 263
B535232S 263
B535235M 263
B535236S 263
B535240S 263
B535244S 263
B535248S 263
B535252S 263
B535256S 263
B535260S 263
B535264S 263
B535268S 263
B535272S 263
B535276S 263
B535280S 263
B535284S 263

SC xxx

SC7083MR 618
SC7096MR 616
SC7010MR 617
SC7396MR 616
SC7510MR 618
SC7583MR 616
SC7596MR 617
SC9043MR 619
SC9543MR 619

ST xxx

ST112012MR 620
ST112014MR 620
ST112017MR 620
ST112019MR 620
ST114512MR 620
ST114514MR 620
ST114517MR 620
ST114519MR 620
ST20109MR 621
ST20203MR 621
ST20203SR 621
ST20208MY 620
ST20209MR 620
ST20213MR 620
ST20219MR 620
ST20219MY 620
ST20419PR 621
ST2346MR 615
ST4028MR 615
ST4028SR 615
ST4528MR 615
ST4528SR 615
ST87432-5B 621
ST87434-7B 621

SY xxx

SY-10A 288
SY-20A 288
SY-210H 288
SY-210M 288
SY-211F 288
SY-211H 288
SY-211M 288
SY-220H 288
SY-221H 288
SY-221M 288
SY-221F 288
SY-230M 288
SY-231M 288
SY-231F 288
SY-260M 288
SY-310H 288
SY-311H 288
SY-320H 288
SY-321H 288
SY-410H 288
SY-411H 288
SY-421M 288

TS xxx

TS00108 622
TS00208 623

WS xxx

WSB012802-5 585
WSB013006-5 585
WSB022701-5 585
WSN043601-5 585
WSN043602-5 585
WSN143601-5 585
WSN143602-5 585

ZS xxx

ZS104 624
ZS107 624
ZS108 624
ZS109-L 626
ZS109-XL 626
ZS109-2L 626
ZS109-3L 626
ZS110 626
ZS112-L 626
ZS112-XL 626
ZS112-2L 626
ZS112-3L 626
ZS115 627
ZS115-1 627
ZS116 625
ZS119 625
ZS120-S.....N22
ZS120-S.....625
ZS141-S 626
ZS141-M 626
ZS141-L 626
ZS141-XL 626
ZS141-2L 626
ZS141-3L 626
ZS142B-S 626
ZS142B-M 626
ZS142B-L 626
ZS142B-XL 626
ZS142B-2L 626
ZS142B-3L 626
ZS142G-S 626
ZS142G-M 626
ZS142G-L 626
ZS142G-XL 626
ZS142G-2L 626
ZS142G-3L 626
ZS142W-S 626
ZS142W-M 626
ZS142W-L 626
ZS142W-XL 626
ZS142W-2L 626
ZS142W-3L 626
ZS146-S 626
ZS146-M 626
ZS146-L 626
ZS146-XL 626
ZS146-2L 626
ZS155 625
ZS155A 625
ZS306 624
ZS402 624
ZS405 624
ZS408 624
ZS409 624
ZS410 624
ZS411 624
ZS417 .....N22
ZS417 625
ZS418K N22
ZS418K.....624
ZS511 625
ZS514 625
ZS517 624
ZS522 625
ZS524 625
ZS533 625
ZS540 625
ZS572 625
ZS606 .....N22
ZS606 625

ZV xxx

ZV011 314
ZV011A 314
ZV011B 314
ZV011D 314
ZV012 314
ZV012A 314
ZV012B 314
ZV012D 314
ZV013 314
ZV013A 314
ZV013B 314
ZV013D 314

Notes .....

KING TONY Tools Corporation

Green Space for The Mind

The tall rich green grasses around us grow and give us a sense of a fresh, free feeling, as the gentle winds blow. As the tall grasses grow to reach the blue sky, so do our desires, minds, and work to reach the highest quality of service.

- KING TONY reserve the revising right to the listing product in this catalogue for improving or technical reasons.
- All products listed in catalogues before this version are null and void unless items confirming remain available by KING TONY.
- Do not copy or extract any listing in the cataloque without our approval.



Quality
Innovation
Health
Enjoyment

KING TONY TOOLS CO.,LTD.

http://www.kingtony.com
service@kingtony.com.tw

facebook YouTube
king tony

Instagram
kingtonytools

CAT2024-0